

Measuring Software Ticket Quality using Quantitative Data Analysis

Andrei-Mihai Nicolae (21473292)

April 19, 2018

ABSTRACT

Software tickets are of valuable importance to the whole computing science field - they guide engineers towards better planning, management and tracking of their progress throughout complex projects. However, there are few studies that investigate what makes for a high quality, valuable ticket. This can lead to multiple issues in a company, such as increased communication friction between developers and end users filing bug reports, as well as increased overall costs due to waste of development effort. In this research paper, we present our findings after investigating a large number of variables surrounding software tickets, such as whether the presence of stack traces influence the time to close for the ticket. Our results show that the presence and type of attachments, comments complexity (i.e. number of comments per ticket and total number of words), summary and description complexity, grammar correctness scores as well as the sentiment drawn from the comments can influence the quality of the ticket. We bring a couple of novel aspects to the research community including one of the largest dataset statistically analysed in the field, as well as state-of-the-art sentiment and grammar correctness analysis.

1. INTRODUCTION

In the past decade, technology has drastically increased its influence on virtually every aspect of our society. Therefore, software projects have inherently become more complex and require increasing number of developers in the team. Due to this, software engineers have created issue tracking systems, a means of planning, managing and tracking work products in the form of *software tickets* or *issues*.

There are multiple platforms for providing such issue tracking systems, among which the most popular are Jira [2] and Bugzilla [21]. For both platforms, the tickets are split into two main categories: feature requests (i.e. feature to be implemented into the system) and bug reports (i.e. issue encountered by an end user or discovered by a developer in the codebase). Regardless of the type of ticket, they possess various information that can be filled in by the reporter (i.e. person who created the ticket; can be both an end user or a developer in the team), providing the developers a detailed view of what is requested or what went wrong.

Even though tickets provide such comprehensive data regarding a specific task, studies have shown that fixing bugs is one of the most common tasks performed by developers [17]. One of the reasons for this is the communication friction between developers and end users [15] as developers might need clarification regarding what information the users have

provided (e.g. cannot reproduce the bug, screenshot is unclear). Another main reason for this waste of effort on solving tickets, according to Just et. al [14] and Zimmermann et. al [28], is the generally poor design of issue tracking systems. This can lead to various issues, including increased costs for the company, wasted development effort, decreased customer satisfaction and overall poor performance.

Therefore, there is a need in the community to find the answer to what makes for a high quality, valuable software ticket that would improve the overall performance of the development team and, inherently, the company. As there are many fields in a ticket, there are numerous unanswered questions, such as whether stack traces have an influence on the quality of a ticket?

In this research paper, we present and discuss our findings after running a quantitative data analysis on over 3200,000 tickets taken from more than 15 open source projects. We have implemented a Go application with multiple commands (i.e. store, analyze, plot, statistics) that can automatically fetch any number of tickets from a Jira instance, analyze them, generate plots and run statistical tests.

During the analysis part, we investigate several variables in correlation with *Time-To-Close*, which we define as the *metric of quality*. *Time-To-Close* represents the period of time between the creation and the closing of a ticket; more specifically, the creation of the ticket is marked when the status of the ticket is set to *Open* and the closing of a ticket is considered when the ticket status is set to *Closed* (or some similar status, such as *Fixed*, *Resolved*). *Time-To-Close* is our dependent variable, and as independent variables (i.e. variables controlled in order to test the effects on the dependent variable) we have set a number of ticket fields.

In order to provide answers to what factors influence quality in a software ticket, we answer the following seven research questions in this paper (Section 5):

- does the presence of attachments and their type (e.g. code snippet, screenshot) influence the *Time-To-Close* for a ticket?
- does the presence of stack traces improve the ticket quality?
- does the presence of steps to reproduce reduce the *Time-To-Close*?
- is there a relationship between the number of comments influence *Time-To-Close*?
- is there a relationship between

This study brings several contributions to the research community:

- an innovative tool was built for the purpose of this project, its strengths lying in its simplicity, speed and extensibility;
- it is one of the few studies in the field that performs a quantitative analysis rather than a qualitative one;
- it is one of the very few research projects that investigates such a large number of tickets (over 300,000) extracted from 38 different projects;
- it is, to our knowledge, the first study to conduct sentiment and grammar correctness analyses on software tickets.

In Section 2 we iterate over state-of-the art studies in the field and then continue with Section 3 where we discuss how the ticket data set was collected and analysed. We continue with describing the data set (Section 4) where we provide insights into various aspects of the data (e.g. size of database, number of tickets with attachments) and then discuss about correlations between the variables (Section 5). Finally, we provide future research directions in Section 6 and present our conclusions in Section 7.

2. RELATED WORK

The study of Bettenburg et. al [3] showed what makes for a valuable bug report through qualitative analysis. After conducting interviews with over 450 developers, one of the main factors behind a quality ticket is grammar correctness in summary and description. Another aspect which was flagged as helpful by the interviewees was the presence of stack traces and steps to reproduce in tickets. A further contribution brought by the authors to the community is the creation of a tool called Cuezilla which is able to automatically predict the quality of a bug report with an accuracy of around 40%.

Another research paper that strengthens the argument that readability is a quality factor in software tickets is the one presented by Hooimeijer et. al [12]. They conducted their analysis on over 25,000 bug reports from the Mozilla project, investigating readability, daily load, submitter reputation, the whole changelog histories and severity. They conclude that not only readability in the textual fields of a ticket influence the *Time-To-Close*, but also that the presence of attachments and the number of comments have a clear effect on the duration of triaging. On the other hand, the patch count and other similar fields did not provide significant value to the quality of tickets.

However, there are other types of information typically included in software tickets which might prove beneficial for developers and subsequently improve the ticket quality. One such type is stack traces and Schroter et. al [23] analyse how quickly tickets are closed when they either have stack traces included in their fields (e.g. description) or not. They collected their data from the Eclipse project using the InfoZilla tool proposed by Bettenburg et. al [5]. Then, they linked the stack traces to changes in source code by mining the Eclipse version controlled repository. The results showed that around 60% of the bugs that contained stack traces in their reports were fixed in one of the methods in the frame.

Moreover, more than 40% of the tickets having stack traces got fixed in the first stack frame.

Software tickets can have duplicates, usually meaning that the most important fields, such as summary or description, describe the same feature request or bug report. Even though one might believe that they cannot bring any value to a software project, the work of Bettenburg et. al [4] shows the contrary. The authors collected large amounts of data from the Eclipse open source project and ran various kind of textual and statistical analysis on the data to find answers. After the results were computed, they concluded that usually bug duplicates contain information that is not present in the master report (i.e. the original report that was filed). Moreover, developers also specified that they have often found value in these duplicate bug reports and that they can even aid automated triaging techniques.

Bettenburg et. al [6] present in their work an application called infoZilla. This tool can parse bug reports and correctly extract stack traces, patches and source code. When evaluated on over 150,000 bug reports, it proved to have a very high rate of over 97% accuracy. We applied some of the techniques shown in the study and successfully managed to retrieve stack traces as well with a great accuracy.

The first information to be filled in by end users or developers on any issue tracking system is the summary field, which holds a small description, usually between 5 and 30 words, of the request or bug being reported. In the study conducted by Rastkar et. al [22], the authors investigated whether tickets could be summarized automatically and efficiently. What that implies is that developers would not be required to look at complete tickets comprised of a large number of fields, but rather at a simple summary of a couple of lines encapsulating the whole information. The authors selected the Mozilla, Eclipse, Gnome and KDE open source projects and then they asked volunteering university students to annotate the tickets in the issue tracking systems. More specifically, they had to write a summary of maximum 250 words using both technical and non-technical terms, depending on their expertise. Then, the study presents Machine Learning algorithms employed to parse these summaries and learn how to efficiently create automated summaries for new bug reports. Afterwards, they asked software developers to rate these auto-generated summaries against the original ones and the conclusion was that existing conversation-based extractive summary generators used for software tickets produce the best results.

The work of Just et. al [14] examines a rather different aspect of quality in tickets - they are investigating the quality of the underlying issue tracking systems instead. The authors ran a survey on 175 developers from Eclipse, Apache and Mozilla. Then, they applied a card sort in order to organize the comments into hierarchies to identify common patterns. Their findings can be summarized in the following top seven suggestions:

- create differentiation between bug report difficulty levels between novices and experiences reporters;
- encourage users to input as much information as possible;
- add ability to merge tickets when needed;
- recognise and reward valuable bug reporters;

- integrate reputation into user profiles to mark experienced reporters;
- to be able to easily and expressively search through tickets.

Having discussed about various factors that can influence the quality in software tickets, we also need to take into account how can we apply this knowledge to solving the issue of poor design in issue tracking systems and how the ticket creation process could be improved. The study conducted by Lamkanfi et. al [16] looks at this aspect and shows how issue tracking systems could be extended in order to automatically generate the severity of a ticket (e.g. assign story points to a Jira issue). The authors conducted their research on the Mozilla, GNOME and Eclipse and projects and split their approach into four steps:

- extract and organize tickets;
- pre-process tickets (i.e. tokenization, stop word removal and stemming);
- train the classifier on two datasets of tickets - 70% training and 30% evaluation;
- apply the trained classifier on the evaluation set.

The conclusions they drew from running the evaluation process were rather interesting:

- terms such as segfault, deadlock, crash, hand or memory typically indicate a severe bug;
- when analyzing the textual description they found that using simple one line summaries resulted in less false positives and increased precision levels;
- the classifier needs a large number of tickets in order to predict correctly;
- depending on how well a software project is modularised, one can use a predictor per module rather than a universal one.

Another overall aspect of software tickets and issue tracking systems that could be improved through determining the quality factors for tickets is automatically assigning a bug report or a feature request to the most suitable developer (or team of developers). Anvik et. al [1] propose a Machine Learning technique that could automatically assign a bug report to the developer with the most expertise in that specific area. Firstly, the algorithm takes as input various types of information from tickets: textual description and summary, operating system used when the bug occurred, developer who owns the source code, which developers have lighter workloads at that point in time etc. After the tool was evaluated, the authors concluded that it can be used in production as it provides a high rate of accuracy when assigning the developers, but it needs more data so that the model is trained properly.

3. BUILDING THE DATA SET

The first step towards building the data set was to create a tool that was able to execute all the commands that we required: fetching the tickets from any Jira instance, storing them into some form of database, analyze the variables of

interest, automatically plot the correlations between them and run statistical analysis on the data. After careful consideration, we decided that Go was the best way to go for various reasons:

- it is designed with simplicity in mind, thus making it easier for others who might join the project to read and understand the codebase;
- it is compiled, statically typed, which implies that it is a much faster candidate than other interpreted languages such as Ruby or Python;
- is designed with concurrency in mind, thus it helps reduce times of execution and computing power considerably;

Throughout the entire application, we tried to apply the UNIX philosophy of creating small applications that do one thing, but do it well. Therefore, we implemented clean and simple packages where we tried to use the standard library as much as possible so that potential contributors coming to the project would find it easy to start working directly on the code. Also, we designed the tool with extensibility in mind, so that other database providers (e.g. CockroachDB) or issue tracking systems (e.g. Bugzilla) could be easily implemented - this was achieved using the elegant Go interfaces and the idea of composition.

We split our tool into four main commands: *store*, *analyse*, *plot* and *stats*. They all follow the flow shown in figure 1 and complete the whole application cycle, in the end producing a database of analysed tickets, as well as plots and statistics for investigating correlations, saved on the filesystem.

In the following three subsections we describe how we designed and implemented the commands mentioned above.

3.1 Fetch and Store

This is the first command implemented in our tool - it is designed to fetch, from any valid Jira URL, any number of tickets and then store everything inside an instance of BoltDB [13], which is a very simple yet powerful key-value pair database. The whole process is parallelized with the possibility of scaling even up to hundreds of goroutines (i.e. lightweight threads) running concurrently.

The decision of choosing Bolt in favor of well tested, more traditional databases such as Postgres or MySQL came naturally when we noticed that we did not need to query the database often, but rather get the whole array of tickets and manipulate them. Moreover, a MongoDB or Postgres DB would have required a running server. Even though the server could have been running on the local machine, Bolt instances are actually files with the extension *db* saved on disk, thus it is trivial to create backups.

We have interacted with the Jira Server REST API which has very good documentation written by the Atlassian team. After getting familiar with all the features the REST API offers, we have opted for getting paginated issues from the server, which means slicing the whole set of tickets into multiple smaller arrays to improve performance and reduce the load on the server. We also specified to Jira exactly what set of issue fields to return and, eventually, while responses were retrieved from the instance, we began storing them into our Bolt DB instance.

The way we chose to store them was to set the issue key (i.e. unique identifier that differentiates a ticket from all

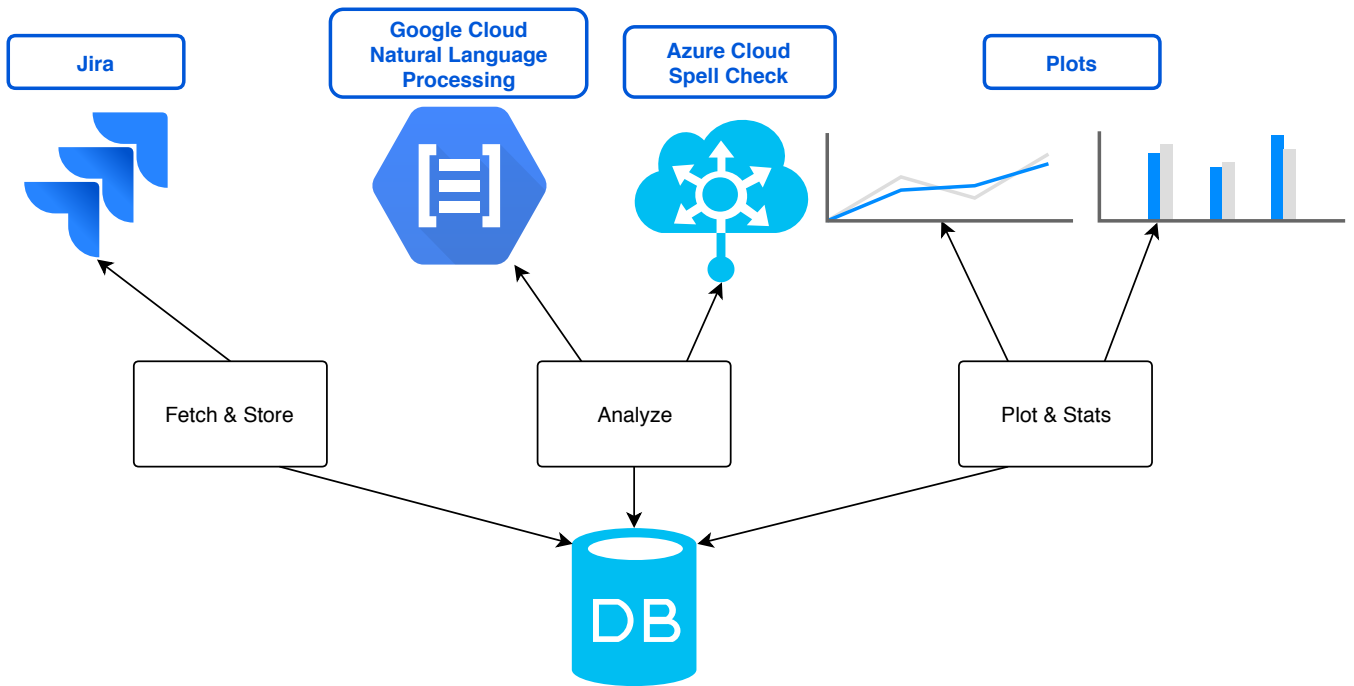


Figure 1: Application flow of the Go tool.

others across all projects inside a Jira instance) as the key of the pair and the value is the JSON representation of the ticket. This helped us reduce the size of the database once we reached hundreds of thousands of tickets.

3.2 Analyse

Once the Bolt DB instance is completely populated with all the tickets we were interested in, the analyze command first fetches all the issues in the database. The next step is to filter out the tickets based on the following criteria:

- tickets are *High Priority* - the ticket status was marked either Blocker, Critical, Major or High;
- tickets were closed and had a maximum *Time-To-Close* value of 27,000 hours (roughly 3 years) (we added the higher bound as well in order to eliminate outliers produced by wrong data retrieved by Jira);
- remove outliers for all categories - some fields for a small number of tickets that had wrong values (e.g. one ticket had over 270,000 comments) introduced by the team behind the project and we needed to exclude them so that the analysis produced correct results.

Then, it runs in parallel the *seven types of analysis* for answering the research questions outlined in Section 1, each in its own separate goroutine in order to speed up the process:

- *attachments* - checks whether attachments influence Time-To-Close and also look at what types of attachments (e.g. screenshots, archive, code snippets) influence quality the most;
- *steps to reproduce* - performs a complex regex to detect steps to reproduce and then checks whether their presence influence the quality of a ticket;

- *stack traces* - runs complex regex for detecting exception stack traces in either summary, description or comments and verifies whether their presence influence Time-To-Close for the ticket; this analysis only inspects projects written in Java as it is the most popular proponent built-in of stack traces;
- *comments complexity* - loops through all comments and counts all words; then, the tool verifies whether the number of words in comments has an impact on the Time-To-Close for the ticket;
- *fields complexity* - same analysis as comments complexity, but only for summary and description wordiness;
- *grammar correctness* - it uses Azure Cloud Bing Spell Check API [19] to perform analysis on summary, description and comments; after concatenating everything and making it compatible with the API allowed formats, the tool receives back in the JSON payload not only the number of flagged tokens (i.e. grammar errors), but also their types (e.g. unknown token, misspell);
- *sentiment* - uses Google Cloud Platform's Natural Language Processing API [10] to retrieve the sentiment score for summary, description and comments; it first concatenates everything and makes it conform to Google's API and then sends the request, receiving a score from -1 to 1 inclusive (-1 means most negative, 1 means most positive);

We needed to be extra cautious when working with Google Cloud Platform and Bing Spell Check APIs, especially regarding rate limiting. Google's NLP APIs have a maximum rate of 10 requests per second, while Microsoft APIs have a

maximum rate of 100 requests per second, thus we needed to conform to their guidelines and restrict our application to send more than allowed, otherwise our IP addresses could have been blacklisted. We also did not want to exceed our free trial credits, therefore we calculated in advance how many requests we had available and computed scores only for those tickets.

The application first checks Bolt for tickets and gets either all of them in memory (easier to parse, but heavy on resource utilization) or slices them into smaller arrays to get processed afterwards (harder to parse as it eventually requires re-creation of the whole array of tickets before inserting back into the database, but it is much lighter on computing power). After having the tickets available, we start looping through them and perform all analysis types mentioned above. Once some sort of value is computed (e.g. grammar correctness score), it gets set in its corresponding field in the ticket struct and is subsequently stored back in the database. We chose this approach because we do not want to run the analysis every time we want to plot correlations between variables, but rather have the data already available there. Moreover, for analysis depending on third party services such as the Google Cloud Platform Natural Processing Language API, we would incur costs, thus having everything saved in the database and running the analysis only if the value has not been already computed allowed us to investigate the tickets without exceeding the free trial credits.

3.3 Plot and Statistical Tests

Afterwards, we have created two extra commands for automatically generating plots (i.e. scatter plots and bar charts) and running statistical tests on the collected data.

For plotting the data, we first connect again to the Bolt database instance and then filter out only the issues that have the variable *Time-To-Close* set (i.e. tickets marked as closed when they were fetched from the Jira instance). In order to compute correct results, we run the same checks on issues as the ones listed in the *analyse* command (e.g. plot only tickets of high priority). Afterwards, we either save scatter plots or bar charts to disk presenting correlations between all the variables we tested.

In terms of technology used for plotting the data, we have used a library called *go-chart* [7] created by Will Charczuk. It is an extensible library with a focus on extensibility - it does not provide the end user a large number of default options, but rather let him/her extend their graphs as much as it is needed (e.g. add specific labels for axes, plot a secondary Y axis).

Also, in order to validate our findings, the *statistics* command fetches all the data from the database and runs two types of tests: Welch's T Test [27] for analysing categorical data (e.g. has/does not have attachments) and Spearman's rank correlation coefficient [25] for investigating continuous data (e.g. how do different grammar correctness scores change *Time-To-Close*). For computing Spearman R Tests we made use of a simple statistics library created by Damian Gryski called *onlinestats* [11], while for Welch T Tests we created our own custom types and functions.

They have both been created with extensibility in mind - we believe that in the future work we proposed to conduct on the project, we might need to use other statistical tests as well, such as Mann-Whitney U tests [18]. Also, before

we ran both statistical tests and the plotting command, we tested them thoroughly and checked whether the libraries compute stable and robust results.

4. CHARACTERISING THE DATA SET

The data that we collected is stored, as previously mentioned, in a Bolt database instance which is around 6 GB in size. All tickets are stored as key-value pairs, where the key is the ticket's unique ID (e.g. KAFKA-100) and the value is the JSON encoded representation of the ticket. The tickets stored have the following fields available for investigation:

- attachments - files or images attached to tickets;
- summary - short description of the ticket;
- description - more detailed information regarding what is requested or what bug was encountered;
- time estimate - estimated number of hours to complete the task (set by triagers or developers);
- time spent - time period between opening the ticket and a specific point in time;
- created timestamp;
- issue status - jira specific statuses, including Open, Closed, Awaiting Review, Patch Submitted;
- due date - optional deadline for when the ticket should get closed;
- comments - discussion around the ticket conducted by developers, end users, triagers;
- priority - it can range from low priority (minor) to critical/blocker;
- issue type - specific Jira field that specifies whether the ticket is either a bug, a feature request or a general task.

Another component of issues that we stored and proved to be crucial in our analysis is changelog histories together with their corresponding items. They represent the whole history of a ticket and can show status transitions, story points modifications, summary/description editing etc. What made them useful for our study was that we needed to see when tickets were marked closed and, as Jira does not provide this in a separate field, we looped through all changelog history items and saved when the transition to Closed or a similar status was made.

There are other fields that can be configured inside Jira, including custom fields, but we did not collect them as they would not have been helpful in conducting the analysis. However, in addition to the fields we saved, we also stored grammar correctness scores, sentiment scores, whether they have steps to reproduce, if stack traces are present and number of words in comments, summary and description. Even though all of them, apart from grammar and sentiment scores, can be computed locally, we store them because of performance issues due to the very large size of the database.

In total, we have collected 303,138 tickets spanned across 38 projects from the Apache Software Foundation: Impala, Eagle, Groovy, Lucene, Hadoop, Kafka, Apache Infrastructure project, Tika, Solr, ActiveMQ, ZooKeeper, Velocity,

Tez, Storm, Stratos, CouchDB, Cassandra, Beam, Aurora, Bigtop, Camel, CarbonData, Cloudstack, Flex, Flink, Ignite, HBase, Mesos, Ambari, Cordova, Avalon, Atlas, Cactus, Flume, Felix, Geode, Ivy and Phoenix. These projects are using a large varieties of programming languages, ranging from Java, C, Go to Python and Ruby [9]. Moreover, in terms of contributors, the projects we selected range from small teams of people such as Tika to large numbers of developers spread across the globe, such as the people working on Kafka. We came to this final number and range of tickets and projects because of a couple of reasons:

- the study needed as much diversity as possible in order to correctly analyse and validate the data;
- these are the most important, up-to-date and contributed to Apache projects by the open source world;
- Apache is one of the few companies/foundations that use Jira exclusively for their projects and it is public (they do provide a Bugzilla alternative, but it is rarely updated compared to Jira).

More specifically, we computed the following numbers for the tickets we collected:

- out of the 303,138 tickets, 236,383 tickets have been closed (i.e. marked Closed, Resolved, Done or Completed) by the time we fetched them from the Jira instance;
- 287,120 tickets are of high priority (i.e. marked as Blocker, Critical, Major or High);
- 103,397 tickets have attachments which we split in the following categories:
 - 4,082 have code attachments (e.g. Go, Java, Python);
 - 7,171 have image attachments (e.g. png, jpg/jpeg, gif);
 - 164 have video attachments (e.g. mkv, avi, mp4);
 - 13,990 have text attachments (e.g. txt, md, doc(x));
 - 918 have config attachments (e.g. json, xml, yaml);
 - 2,491 have archive attachments (e.g. zip, tar.gz, rar, 7z);
 - 280 have spreadsheet attachments (e.g. csv, xlsx);
 - 80,015 have other attachments (i.e. any file extension not pre-defined by us in one of the above categories).
- 270,907 tickets have comments;
- 39,988 tickets have steps to reproduce (i.e. sequence of steps specified by the bug reporter that would reproduce a certain bug);
- 1,942 tickets have Java stack traces - we have applied the technique described by Bettenburg et. al [5] for extracting structured data from bug reports and even though the method proved to be efficient, the total number of stack traces is so small due to the fact that many projects are actually written in languages other than Java;

- 133,689 tickets have grammar correctness scores (i.e. number of grammar mistakes inside summary, description and comments) - they have been collected using Microsoft Azure Bing Spell Check API which is one of the best grammar checking tool in the industry;
- 157,047 tickets have sentiment scores (i.e. positive/negative sentiment on a scale from -1 to 1 drawn from summary, description and comments) - they have been collected using Google Cloud Platform Natural Language Processing APIs.

All these numbers are also stored inside the database in a different bucket for easier access in the future. Moreover, the statistical tests we ran on the tickets are saved as well in the database.

5. CORRELATIONS

In this section we present our results to the research questions we set to answer. We have computed charts for all independent variables using either scatter plots for continuous variables (e.g. number of comments/time-to-close) or bar charts for categorical variables (e.g. presence of attachments). We also computed statistical analysis for all variables to test their significance and rank correlation coefficient and we will present each of them in their corresponding subsection. Lastly, we also discuss possible reasons why certain correlations occurred.

5.1 Attachments

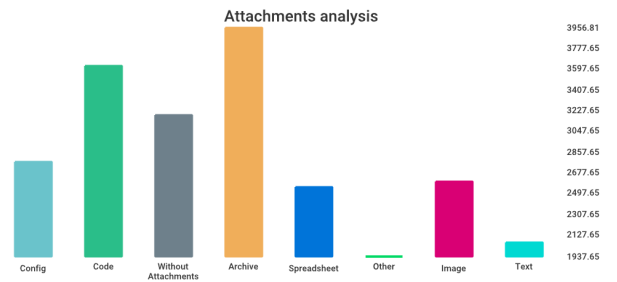


Figure 2: Attachments analysis.

Attachments are, as mentioned previously, files attached to software tickets that can take any form - from code snippets written in Java to tar archives. We have analyzed all tickets that were both of high priority tickets and were marked as Closed by the time we collected the data. Then we split all these tickets into two main categories: with attachments and without attachments. Furthermore, the tickets that were marked as having attachments were split into the categories specified in Section 4.

Using the plot package in our Go tool, we automatically generated the bar chart shown in Figure 2. As it can be seen, various types of attachments can produce completely different *times-to-close*. For tickets with archive we can see the longest time-to-close mean while tickets having text attachments are at the other end of the spectrum. The smallest mean is for other attachments, which is represented by any file that does not have an extension specified in one of the other categories.

We assume that image attachments are screenshots attached to the ticket in order to help developers see and subsequently reproduce the bug. Thus, we can clearly see that the difference between the means of time-to-close for tickets without attachments and tickets with screenshots is significantly in favor of the latter. This can indicate that developers indeed find screenshots helpful in solving the ticket faster.

Another insightful result is the fact that having text, config and spreadsheet attachments significantly reduces the time-to-close for the ticket. This can imply that developers find value in various steps to reproduce, config values used by users when the bug encountered or data in a spreadsheet format (e.g. csv) that can be found in such files and helps them lower the time-to-close for the ticket.

On the other hand, having no attachments does not necessarily mean that the ticket will get closed after a longer period of time. As it can be seen in the figure, the mean time-to-close value for tickets without attachments is somewhat neutral in the entire data set.

A Welch T Test was computed to test the difference between tickets with attachments and those without attachments. The analysis revealed significant difference with $p > 0.01$ with an average of 1380.551 hours for tickets with attachments and an average of 3180.882 hours for tickets without attachments.

Thus, our analysis shows that having attachments in most formats, ranging from markdown files to PNG screenshots and snippets of code, can help developers solve the tickets faster. We believe that the solution of making attachments provide the most value to the software project would be if issue tracking systems would make explicit to the reporters that uploading a screenshot or a code snippet can help reduce the time-to-close for the ticket.

5.2 Steps to Reproduce

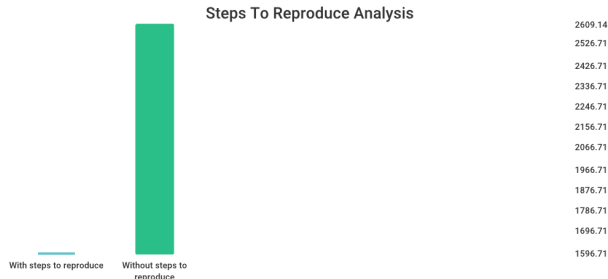


Figure 3: Steps to reproduce analysis.

Steps to reproduce are a means of specifying to the developers what actions they need to undergo in order to reproduce a certain bug. They can take various forms, but as Jira uses a wiki style markdown format for their description and comments fields, they can be inserted as a bullet point list which can be easily extracted with a regular expression.

Figure 3 shows the bar chart representing all closed, high priority tickets with or without steps to reproduce in either the description field or in any of the comments.

As it can be shown in the figure, having steps to reproduce can significantly reduce the time-to-close for the ticket. Even

though the data collected does not have such many tickets with steps to reproduce (39,988 compared to the total number of 238,286 closed tickets), it is still a valuable finding which shows that steps to reproduce are indeed a quality factor for software tickets.

What we can infer from this result is that steps to reproduce reduce the communication friction between the reporters and the developers - in the case of a bug which is harder to reproduce (e.g. maybe the bug occurs only on Linux and the developer is running MacOS, but the reporter did not specify his/her operating system in the ticket), the developer might need to contact the reported either directly or through commenting on the issue. What this implies is waiting time until the reporter comes back on the issue tracking system or sees the notification that he/she received a new message, which subsequently makes the ticket remain open for a longer period of time.

A Welch T Test was computed to test the difference between tickets with steps to reproduce and those without steps to reproduce. The analysis revealed significant difference with $p < 0.01$ with an average of 1596.714 for tickets with steps to reproduce and an average of 2609.142 for tickets without steps to reproduce.

Thus, the answer to our research question is that the presence of steps to reproduce in tickets has a positive influence on the time-to-close. One solution that we propose for maximizing their benefit is that issue tracking systems should include hints on the ticket creation form specifying that steps to reproduce should be included as developers would be able to fix the bug faster. Moreover, issue tracking systems could also automatically add a new system field (like summary or description) for any project created and the project maintainers or administrators could make them mandatory for when a ticket is created by reporters.

5.3 Stack Traces



Figure 4: Stack traces analysis.

Stack traces are active stack frames at a certain point in time while the program is executing. Many programming languages provide stack traces through their standard libraries, but the most popular proponents are Java and C#. As Java is the main programming language used throughout the Apache Software Foundation projects (231 projects [9]), many of the projects we collected (22) are also written in Java, thus we had a considerable chunk of data to analyze.

For this analysis, we only looked at tickets of high priority, closed and the project they correspond is written in Java. We then ran a complex regular expression derived from the

works of Bettenburg et. al [6] and Moreno et. al [20] and collected all the tickets that have stack traces. In the end, we got a total number of 256 tickets that had at least an exception stack trace attached in either summary, description or any of the comments.

As shown in Figure 4, we can see that the presence of exception stack traces can reduce the time-to-close of a ticket in orders of magnitude. This could imply that stack traces help developers working on the project localise the code that is running exceptions

We computed a Welch T Test to test the difference between tickets with stack traces and tickets that do not have stack traces. The analysis revealed significant difference with $p < 0.01$ with an average of 1475.074 for tickets with stack traces and an average of 2441.877 for tickets without them.

5.4 Comments

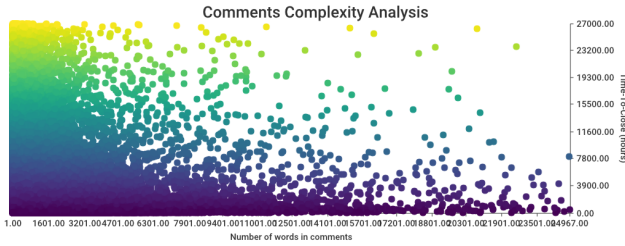


Figure 5: Comments complexity analysis.

A correlational analysis revealed a weak positive/negative (one of them, depending on context) relationship with $r = \dots$, $p = \dots$.

5.5 Summary and Description

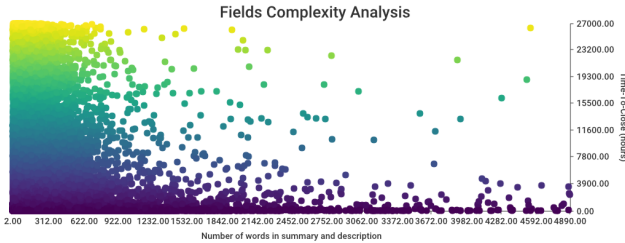


Figure 6: Fields complexity analysis.

A correlational analysis revealed a weak positive/negative (one of them, depending on context) relationship with $r = \dots$, $p = \dots$.

5.6 Grammar Correctness

A correlational analysis revealed a weak positive/negative (one of them, depending on context) relationship with $r = \dots$, $p = \dots$.

5.7 Sentiment Scores

A correlational analysis revealed a weak positive/negative (one of them, depending on context) relationship with $r = \dots$, $p = \dots$.

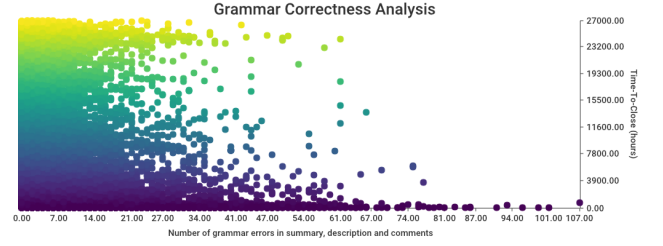


Figure 7: Grammar correctness score analysis.

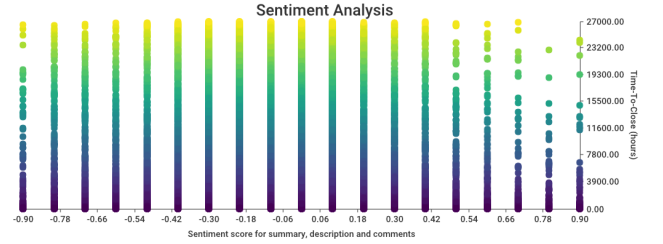


Figure 8: Sentiment score analysis.

6. FUTURE WORK

The first extension to the Go tool we created would be to add support for Bugzilla. We already achieved this when we were first prototyping the application, but we decided to proceed exclusively with Jira mainly because the APIs proved to be more reliable and also versatile in terms of what data you could collect. Another reason was that we were time retracted, thus we wanted to have first a well tested and stable solution for Jira and only after add support for other issue tracking systems. However, we already prepared for other potential systems by adding interfaces for tickets and REST clients, making Bugzilla, Manuscript, YouTrack or any other issue tracking system straightforward to add to the application.

Another extension to the app could be adding the possibility of selecting what database provider to use for storing tickets. As we previously mentioned, we currently provide only Bolt DB support, but adding others is again straightforward, mainly because we already store tickets as arrays of bytes representing the JSON encoded value. Thus, if we add a new database provider, if they allow us to store items as raw bytes (which most DBs already do), then the necessary code changes would be minimal.

One other improvement to the application could be adding more robust support for statistical analysis. At the moment, our tool uses our own custom types and functions for generating Welch T Test and Spearman R Test results, and even if it produces the expected p and r coefficient values, end users of the application might want to analyse even more possible correlations. As the Go community lacks native libraries to perform statistical tests, the users of our tool might miss the simplicity of running such tests in R. A solution can be to integrate the Roger library [24] inside the stats package, which basically allows any Go application to communicate with R via TCP.

There is also room for future work in terms of the data col-

lected. Even though the database we collected is large, there is never enough tickets to analyse. Thus, the store command of the tool could be run against other Jira instances apart from Apache's and collect tickets from other projects, thus improving the diversity and the total number of tickets to be analysed. As we did not have access to any cluster or virtual machines in the cloud, we ran all our analyses on local machines (laptops) and it could still take well over two hours to complete with over 10 GB of RAM and 70% CPU in usage.

Furthermore, the project could greatly benefit from having access to closed source repositories in addition to the open source ones. Most closed source projects have much more structured planning, tracking and management activities - as Crowston et. al [8] present in their study, open source projects lack organized coordination which, in the context of our study, means that people do not invest much effort into properly creating tickets in issue tracking systems, triaging efficiently, planning the work and tracking it. On the other hand, closed source projects follow more strict guidelines: standard working hours (would make tracking and linking the source code changes to tickets easier), adding story points (i.e. adding estimated difficulty or time to complete) and properly planning tickets before work starts on the task, tickets properly distributed to developers based on availability and expertise etc. These benefits of closed source projects would prove helpful for our analysis.

Another aspect that could be improved is having access to funds in order to buy Google Cloud Platform credits. This would be required to use the Natural Language Processing APIs on large amounts of data. We used the credits provided in the free trial but quickly ran out completely after only 160,000 tickets. Also, credits on Microsoft Azure would prove useful as their Spell Check API is the most efficient at the moment.

A major future work candidate is availability of a technique to calculate the difficulty of a ticket based on the information inside it. Unfortunately, at the moment, the research community has not come up with such an approach. Vijayakumar et. al [26] proposed a method of predicting how much effort is required for fixing a bug, but after running it on our data, it did not prove successful. After such a technique becomes available, we could incorporate it inside our tool and group the tickets compared in all analysis types based on their difficulty in order to have better results.

7. CONCLUSIONS

Software tickets are a vital part of every software project's lifecycle. Even though there might be other means of planning, managing and tracking work for a software team, issue tracking systems are deployed in virtually any company that provides a computer application or service.

Deriving a quality score only from textual information and other non-structured data such as images is not trivial. However, in this study we managed to create an application that can automatically fetch and store tickets from any Jira instance, analyse them and compute statistical tests and graphs.

We managed to answer all seven research questions and find factors that can positively or negatively affect the quality of a ticket. All of our results are statistically significant and we can summarise them as follows:

- the presence of steps to reproduce increases the quality of a ticket;
- the presence of stack traces increases the quality of a ticket;
- the presence of attachments increases the quality of a ticket - more specifically tickets with screenshots, config files or text files have lower times-to-complete than tickets without attachments;
- higher numbers of grammar errors imply lower quality scores for a ticket;
- higher sentiment scores imply higher quality scores for a ticket;
- higher numbers of words in comments imply lower quality scores for a ticket;
- higher number of words in description and summary imply lower quality scores for a ticket.

We intend to continue work on the project and implement the points we have listed in Section 6. We believe that by open sourcing the application and making the data publicly available, we can provide a valuable starting point for other studies investigating this particular field of software engineering.

Acknowledgments. I would first like to thank Dr. Storer for the amazing work he has put in helping me go through with finishing this project. I would definitely not have been able to achieve what we've achieved with any other supervisor, so thank you, Tim, for all the support, kindness and advice you have given me throughout this academic year. I would also like to thank you for being the lecturer who has taught me the most throughout all my years at the university and whose advice and ideas I have applied at all my work places and my personal projects.

The next huge thank you would have to go to my parents, the most amazing family in the world! Without them I would not be here and I wouldn't have had anything of what I have now, both personally and professionally. I will always treasure the unconditional support you have always offered me! Thank you for being my parents, Mom and Dad!

And last but not least, I want to thank my partner in crime and in life, Corina! Without her, I would not be who I am today. You have been with me through thick and thin, in both bad moments (such as the endless nights working on ticket statistics) and best moments in my life! Thank you for everything! I will always love you!

8. REFERENCES

- [1] J. Anvik and G. C. Murphy. Reducing the effort of bug report triage: Recommenders for development-oriented decisions. *ACM Transactions on Software Engineering and Methodology (TOSEM)*, 20(3):10, 2011.
- [2] Atlassian. Jira. <https://www.atlassian.com/software/jira>. [Online; accessed 02-April-2018].
- [3] N. Bettenburg, S. Just, A. Schröter, C. Weiss, R. Premraj, and T. Zimmermann. What makes a good bug report? pages 308–318, 2008.

- [4] N. Bettenburg, R. Premraj, T. Zimmermann, and S. Kim. Duplicate bug reports considered harmful? pages 337–345, 2008.
- [5] N. Bettenburg, R. Premraj, T. Zimmermann, and S. Kim. Extracting structural information from bug reports. pages 27–30, 2008.
- [6] N. Bettenburg, S. W. Thomas, and A. E. Hassan. Using fuzzy code search to link code fragments in discussions to source code. pages 319–328, 2012.
- [7] W. Charczuk. Go-Chart. <https://github.com/wcharczuk/go-chart>. [Online; accessed 02-February-2018].
- [8] K. Crowston, K. Wei, J. Howison, and A. Wiggins. Free/libre open-source software development: What we know and what we do not know. *ACM Computing Surveys (CSUR)*, 44(2):7, 2012.
- [9] A. S. Foundation. Apache Projects. <https://projects.apache.org/projects.html?language>. [Online; accessed 12-March-2018].
- [10] Google. GCP Natural Language Processing API. <https://cloud.google.com/natural-language>. [Online; accessed 05-March-2018].
- [11] D. Gryski. Go-Onlinestats. <https://github.com/dgryski/go-onlinestats>. [Online; accessed 02-February-2018].
- [12] P. Hooimeijer and W. Weimer. Modeling bug report quality. pages 34–43, 2007.
- [13] B. Johnson. Bolt. <https://github.com/boltdb/bolt>. [Online; accessed 19-February-2018].
- [14] S. Just, R. Premraj, and T. Zimmermann. Towards the next generation of bug tracking systems. pages 82–85, 2008.
- [15] M. Korkala and F. Maurer. Waste identification as the means for improving communication in globally distributed agile software development. *The Journal of Systems and Software*, 95:122–140, 2014.
- [16] A. Lamkanfi, S. Demeyer, E. Giger, and B. Goethals. Predicting the severity of a reported bug. pages 1–10, 2010.
- [17] T. D. LaToza, G. Venolia, and R. DeLine. Maintaining mental models: a study of developer work habits. In *Proceedings of the 28th international conference on Software engineering*, pages 492–501. ACM, 2006.
- [18] H. B. Mann and D. R. Whitney. On a test of whether one of two random variables is stochastically larger than the other. *The annals of mathematical statistics*, pages 50–60, 1947.
- [19] Microsoft. Bing Spell Check API. <https://azure.microsoft.com/services/cognitive-services/spell-check>. [Online; accessed 05-March-2018].
- [20] L. Moreno, J. J. Treadway, A. Marcus, and W. Shen. On the use of stack traces to improve text retrieval-based bug localization. In *Software Maintenance and Evolution (ICSME), 2014 IEEE International Conference on*, pages 151–160. IEEE, 2014.
- [21] Mozilla. Bugzilla. <https://www.bugzilla.org/>. [Online; accessed 02-April-2018].
- [22] S. Rastkar, G. C. Murphy, and G. Murray. Summarizing software artifacts: a case study of bug reports. pages 505–514, 2010.
- [23] A. Schroter, A. Schröter, N. Bettenburg, and R. Premraj. Do stack traces help developers fix bugs? pages 118–121, 2010.
- [24] Senseye. Roger. <https://github.com/senseyeio/roger>. [Online; accessed 21-March-2018].
- [25] C. Spearman. The proof and measurement of association between two things. *The American journal of psychology*, 15(1):72–101, 1904.
- [26] K. Vijayakumar and V. Bhuvaneswari. How much effort needed to fix the bug? a data mining approach for effort estimation and analysing of bug report attributes in firefox. In *Intelligent Computing Applications (ICICA), 2014 International Conference on*, pages 335–339. IEEE, 2014.
- [27] B. L. Welch. The generalization of student’s problem when several different population variances are involved. *Biometrika*, 34(1/2):28–35, 1947.
- [28] T. Zimmermann, R. Premraj, J. Sillito, and S. Breu. Improving bug tracking systems. In *Software Engineering-Companion Volume, 2009. ICSE-Companion 2009. 31st International Conference on*, pages 247–250. IEEE, 2009.