```
(base) PS C:\Users\B-TECH> cd .\Desktop\
(base) PS C:\Users\B-TECH\Desktop> cd .\python\
(base) PS C:\Users\B-TECH\Desktop\python> cd .\simple_ptoject\
(base) PS C:\Users\B-TECH\Desktop\python\simple_ptoject>  python -u "C:\Users\B-TECH\Desktop\python\simple_ptoject\main.py"
Could not find platform independent libraries <prefix>
Python path configuration:
  PYTHONHOME = (not set)
```

```
n\
.\simple_ptoject\
le_ptoject>  python -u "C:\Users\B-TECH\Desktop\python\simple_ptoject\main.py"
 <prefix>
```

```
(base) PS C:\Users\B-TECH\Desktop\python\simple_ptoject> C:/ProgramData/anaconda3/Scripts/activate
(base) PS C:\Users\B-TECH\Desktop\python\simple_ptoject> C:/ProgramData/anaconda3/Scripts/activate
(base) PS C:\Users\B-TECH\Desktop\python\simple_ptoject> conda activate base
```

```
n\simple_ptoject> C:/ProgramData/anaconda3/Scripts/activate
n\simple_ptoject> C:/ProgramData/anaconda3/Scripts/activate
n\simple_ptoject> conda activate base
```

```
(base) PS C:\Users\B-TECH\Desktop\python\simple_ptoject> python -m django --version
5.2.2
(base) PS C:\Users\B-TECH\Desktop\python\simple_ptoject> python -m django startproject mypro
(base) PS C:\Users\B-TECH\Desktop\python\simple_ptoject>
(base) PS C:\Users\B-TECH\Desktop\python\simple_ptoject>
```

```
imple_ptoject> python -m django startproject mypro
imple_ptoject>
imple_ptoject>
```

```
(base) PS C:\Users\B-TECH\Desktop\python\simple_ptoject>
(base) PS C:\Users\B-TECH\Desktop\python\simple_ptoject> cd .\mypro\
(base) PS C:\Users\B-TECH\Desktop\python\simple_ptoject\mypro> python manage.py startapp newapp
(base) PS C:\Users\B-TECH\Desktop\python\simple_ptoject\mypro>
```

```
simple_ptoject> cd .\mypro\
simple_ptoject\mypro> python manage.py startapp newapp
simple_ptoject\mypro>
```

```
n\simple_ptoject\mypro> python manage.py startapp newapp
n\simple_ptoject\mypro> python manage.py runserver
```

```
Watching for file changes with StatReloader
Performing system checks...

System check identified no issues (0 silenced).

You have 18 unapplied migration(s). Your project may not work properly until you apply the migrations for app(s
uth, contenttypes, sessions.
Run 'python manage.py migrate' to apply them.
June 10, 2025 - 10:30:05
Django version 5.2.2, using settings 'mypro.settings'
Starting development server at http://127.0.0.1:8000/
Quit the server with CTRL-BREAK.

WARNING: This is a development server. Do not use it in a production setting. Use a production WSGI or ASGI ser

For more information on production servers see: https://docs.djangoproject.com/en/5.2/howto/deployment/
```



The install worked successfully! Congratulations!

View release notes for Django 5.2

You are seeing this page because DEBUG=True is in your settings file and you have not configured any URLs.

simple_ptoject

EXPLORER

OPEN EDITORS
- main.py
- settings.py mypro\...

SIMPLE_PTOJECT
- .notebook
- mypro
  - mypro
    - __pycache__
    - __init__.py
    - asgi.py
    - settings.py
    - urls.py
    - wsgi.py
  - newapp
    - migrations
    - __init__.py
    - admin.py
    - apps.py
    - models.py
    - tests.py
    - views.py
  - db.sqlite3
  - manage.py
- ~$cumentation.docx
- documentation.docx
- main.py

main.py | settings.py

mypro > mypro > settings.py > ...

```python
# Quick-start development settings - unsuitable for production
# See https://docs.djangoproject.com/en/5.2/howto/deployment/ch

# SECURITY WARNING: keep the secret key used in production secr
SECRET_KEY = "django-insecure-nj($4p6hxnj*z#3^^dpf#qlu@n$#l0flv

# SECURITY WARNING: don't run with debug turned on in productio
DEBUG = True

ALLOWED_HOSTS = []


# Application definition

INSTALLED_APPS = [
    "django.contrib.admin",
    "django.contrib.auth",
    "django.contrib.contenttypes",
    "django.contrib.sessions",
    "django.contrib.messages",
    "django.contrib.staticfiles",
]

MIDDLEWARE = [
    "django.middleware.security.SecurityMiddleware",
    "django.contrib.sessions.middleware.SessionMiddleware",
    "django.middleware.common.CommonMiddleware",
```

PROBLEMS 6 | OUTPUT | DEBUG CONSOLE | TERMINAL | powershell

```
PS C:\Users\B-TECH\Desktop\python\simple_ptoject>
```

OUTLINE

- settings.py
- urls.py
- wsgi.py
- newapp
  - migrations
  - __init__.py
  - admin.py
  - apps.py
  - models.py
  - tests.py
  - views.py
- db.sqlite3

```python
    1. Add an import:  from other_app.views import Home
    2. Add a URL to urlpatterns:  path('', Home.as_view(), name
Including another URLconf
    1. Import the include() function: from django.urls import i
    2. Add a URL to urlpatterns:  path('blog/', include('blog.u
"""

from django.contrib import admin
from django.urls import path

urlpatterns = [
    path("admin/", admin.site.urls),
]
```

copy

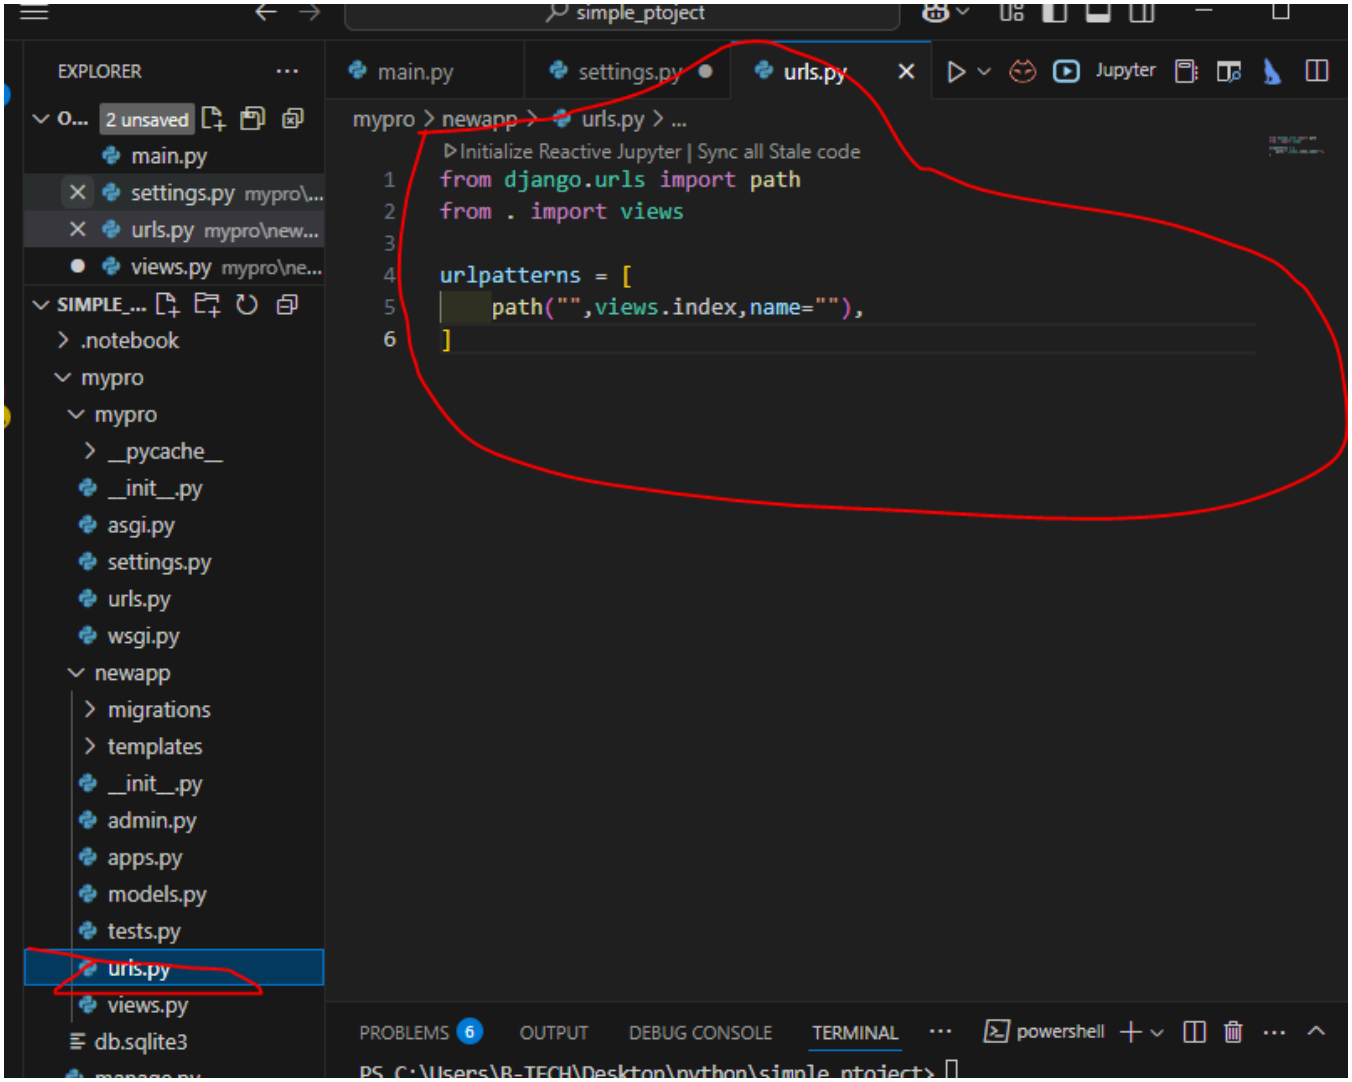
simple_ptoject
EXPLORER
main.py
settings.py
urls.py
Jupyter
mypro > newapp > urls.py > ...
Initialize Reactive Jupyter | Sync all Stale code
from django.urls import path
from . import views
urlpatterns = [
path("",views.index,name=""),
]
2 unsaved
main.py
settings.py mypro\...
urls.py mypro\new...
views.py mypro\ne...
SIMPLE_...
.notebook
mypro
mypro
__pycache__
__init__.py
asgi.py
settings.py
urls.py
wsgi.py
newapp
migrations
templates
__init__.py
admin.py
apps.py
models.py
tests.py
urls.py
views.py
db.sqlite3
PROBLEMS 6
OUTPUT
DEBUG CONSOLE
TERMINAL
powershell

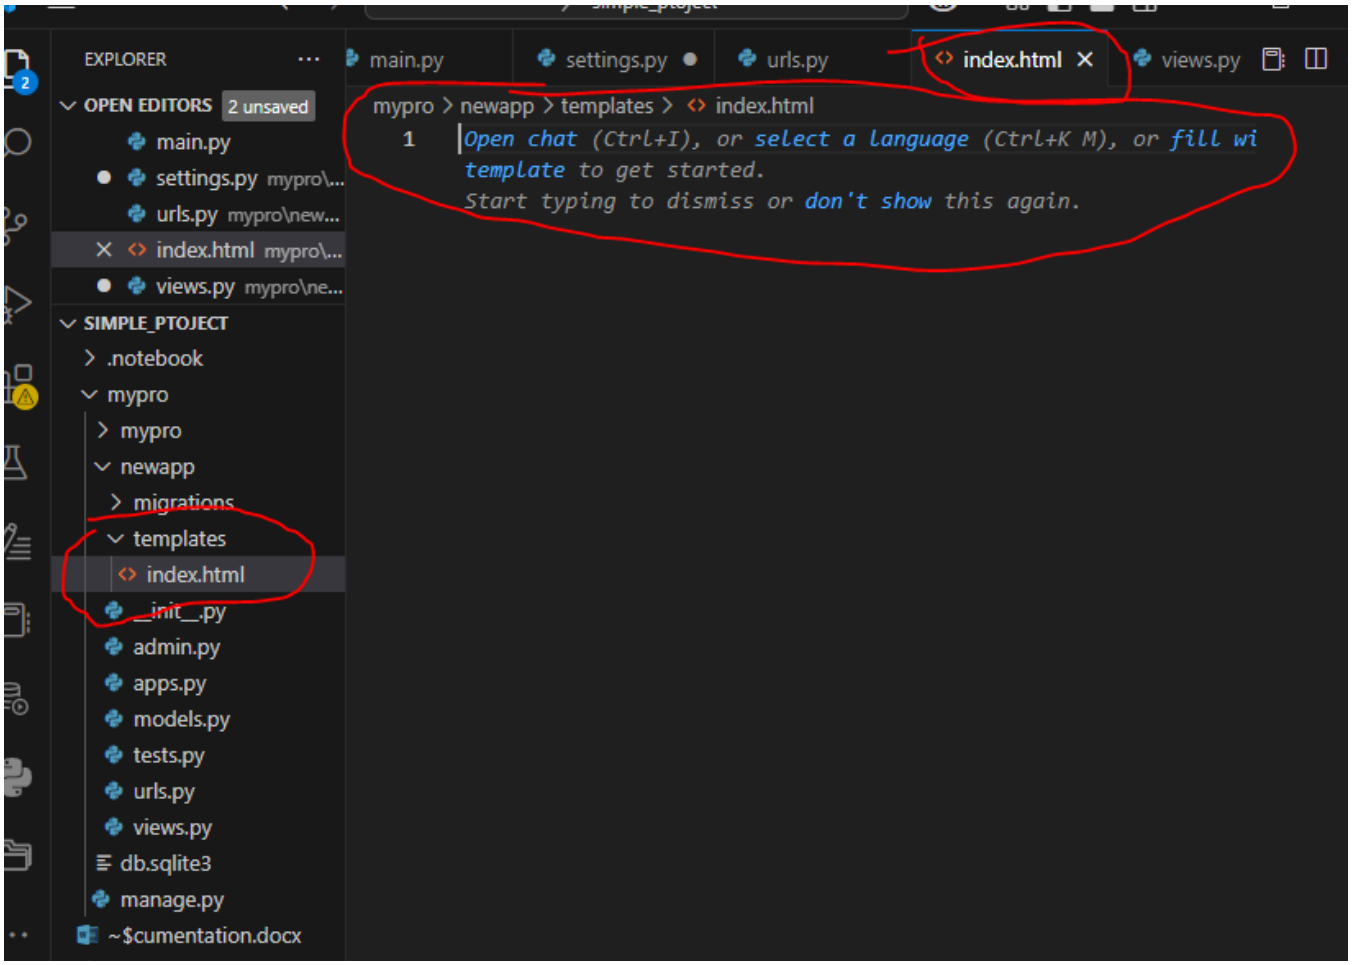
EXPLORER
OPEN EDITORS 2 unsaved
main.py
settings.py mypro\...
urls.py mypro\new...
index.html mypro\...
views.py mypro\ne...
SIMPLE_PTOJECT
.notebook
mypro
mypro
newapp
migrations
templates
index.html
__init__.py
admin.py
apps.py
models.py
tests.py
urls.py
views.py
db.sqlite3
manage.py
~$cumentation.docx
main.py
settings.py
urls.py
index.html
views.py
mypro > newapp > templates > index.html
1 Open chat (Ctrl+I), or select a language (Ctrl+K M), or fill wi
template to get started.
Start typing to dismiss or don't show this again.

EXPLORER

OPEN EDITORS
- views.py mypro\ne...
- urls.py mypro\new...
- index.html mypro\...
- urls.py mypro\mypro
- settings.py mypro\...

SIMPLE_PTOJECT
- .notebook
- mypro
  - mypro
    - __pycache__
    - __init__.py
    - asgi.py
    - settings.py
    - urls.py
    - wsgi.py
  - newapp
    - __pycache__
    - migrations
    - templates
      - index.html
    - __init__.py
    - admin.py
    - apps.py
    - models.py
    - tests.py
    - urls.py
    - views.py
  - db.sqlite3

index.html | urls.py ...\mypro | settings.py | Jupyter

mypro > mypro > settings.py > ...

```
    "django.middleware.clickjacking.XFrameOptionsMiddleware",
]

ROOT_URLCONF = "mypro.urls"

TEMPLATES = [
    {
        'BACKEND': 'django.template.backends.django.DjangoTempla
        'DIRS': [],  # you can add a global template dir here if
        'APP_DIRS': True,   # <-- THIS MUST BE TRUE (it is in yo
        'OPTIONS': {
            'context_processors': [
                'django.template.context_processors.request',
                'django.contrib.auth.context_processors.auth',
                'django.contrib.messages.context_processors.mess
            ],
        },
    },
]


WSGI_APPLICATION = "mypro.wsgi.application"


# Database
# https://docs.djangoproject.com/en/5.2/ref/settings/#databases
```

PROBLEMS 8 | OUTPUT | DEBUG CONSOLE | TERMINAL | PORTS

```
B-TECH@DESKTOP-6UMGDD0 MINGW64 ~/Desktop/python/simple_ptoject
$ python manage.py runserver
C:\Program Files\Python312\python.exe: can't open file 'C:\\Users\\B-T
ECH\\Desktop\\python\\simple_ptoject\\manage.py': [Errno 2] No such fi
```

powershell
bash

```python
from django.db import models

class Member(models.Model):
    firstname=models.CharField(max_length=100)
    lastname=models.CharField(max_length=100)
    country=models.CharField(max_length=100)
```

```
rver. Do not use it in a production setting. Use a production W
n servers see: https://docs.djangoproject.com/en/5.2/howto/depl
\python\simple_ptoject\mypro> python manage.py makemigrations
C:\Program Files\Python312\python.exe: can't open file 'C:\\Users\\B-T
ECH\\Desktop\\python\\simple_ptoject\\manage.py': [Errno 2] No such fi
le or directory
```

```
Migrations for 'newapp':
  newapp\migrations\0001_initial.py
    + Create model Member
(base) PS C:\Users\B-TECH\Desktop\python\simple_ptoject\mypro>
```

```
(base) PS C:\Users\B-TECH\Desktop\python\simple_ptoject\mypro> python manage.py migrate
Operations to perform:
  Apply all migrations: admin, auth, contenttypes, newapp, sessions
Running migrations:
  Applying contenttypes.0001_initial... OK
  Applying auth.0001_initial... OK
  Applying admin.0001_initial... OK
  Applying admin.0002_logentry_remove_auto_add... OK
  Applying admin.0003_logentry_add_action_flag_choices... OK
  Applying contenttypes.0002_remove_content_type_name... OK
```

```html
<table id="customers" border="1">
    <thead>
        <th>Country</th>
        <th colspan="2" id="mid">Action</th>
    </thead>
    {% for x in mem %}
    <tr>
        <td>{{x.id}}</td>
        <td>{{x.firstname}}</td>
        <td>{{x.lastname}}</td>
        <td>{{x.country}}</td>
        <td>
            <a href=""><button>update</button></a>
        </td>
        <td>
            <a href=""><button>delete</button></a>
        </td>

    </tr>
    {% endfor %}
</table>
```

Document

127.0.0.1:8000

http://www.brd.rw/... BRD :: Education Fin... Umwizerwa Chary |... in

Members

Id	First Name	Last Name	Country	Action

Add Member

```
Username (leave blank to use 'b-tech'): root
Email address: root@gmail.com
Password:
Password (again):
```

```
EOFError
(base) PS C:\Users\B-TECH\Desktop\python\simple_ptoject\mypro> python manage.py createsuperuser
Username (leave blank to use 'b-tech'): root
Email address: root@gmail.com
Password:
```

```
(base) PS C:\Users\B-TECH\Desktop\python\simple_ptoject\mypro> python manage.py createsuperuser
Username (leave blank to use 'b-tech'): root
Email address: root@gmail.com
Password:
Password (again):
Superuser created successfully.
(base) PS C:\Users\B-TECH\Desktop\python\simple_ptoject\mypro>
```

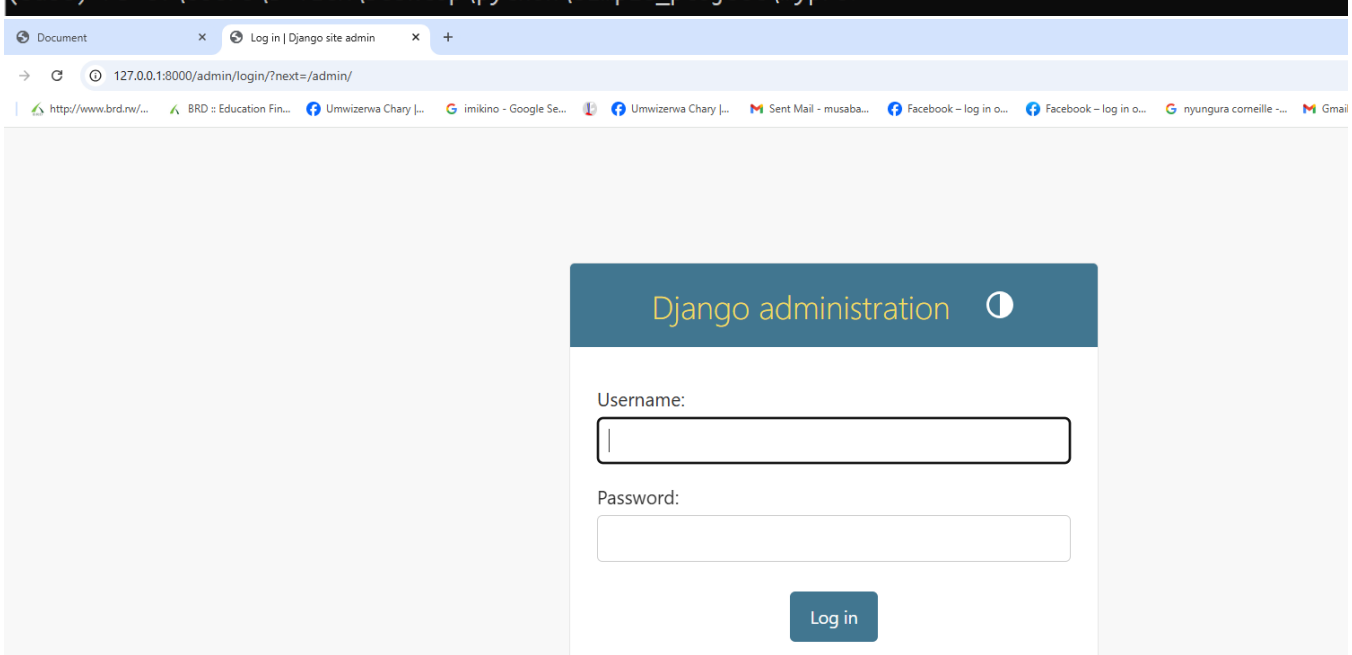

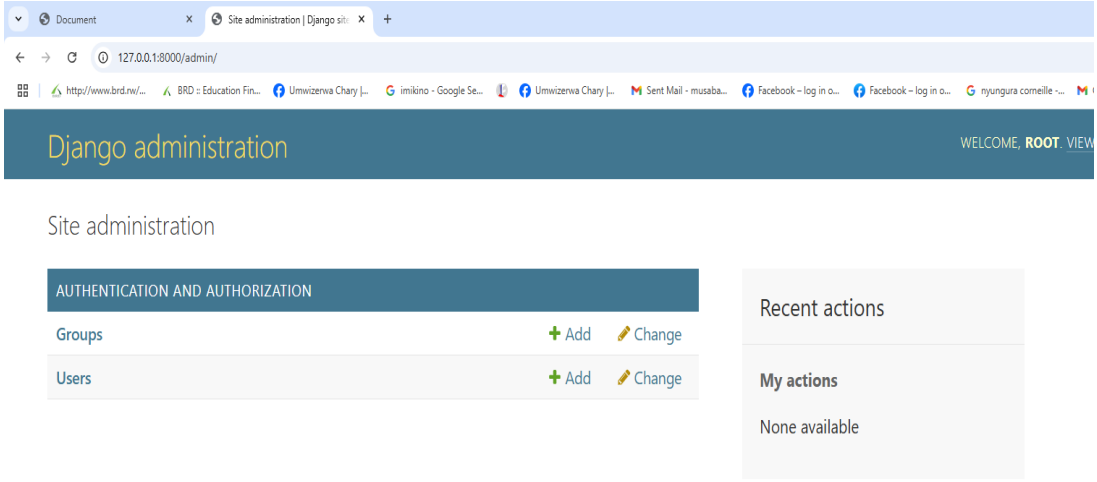


```
yment/
(base) PS C:\Users\B-TECH\Desktop\python\simple_ptoject\mypro> python manage.py runserver
Entering debug mode. Use h or ? for help.

At C:\Program Files\WindowsPowerShell\Modules\PSReadline\2.0.0\PSReadLine.psm1:5 char:1
+ }
+ ~
```

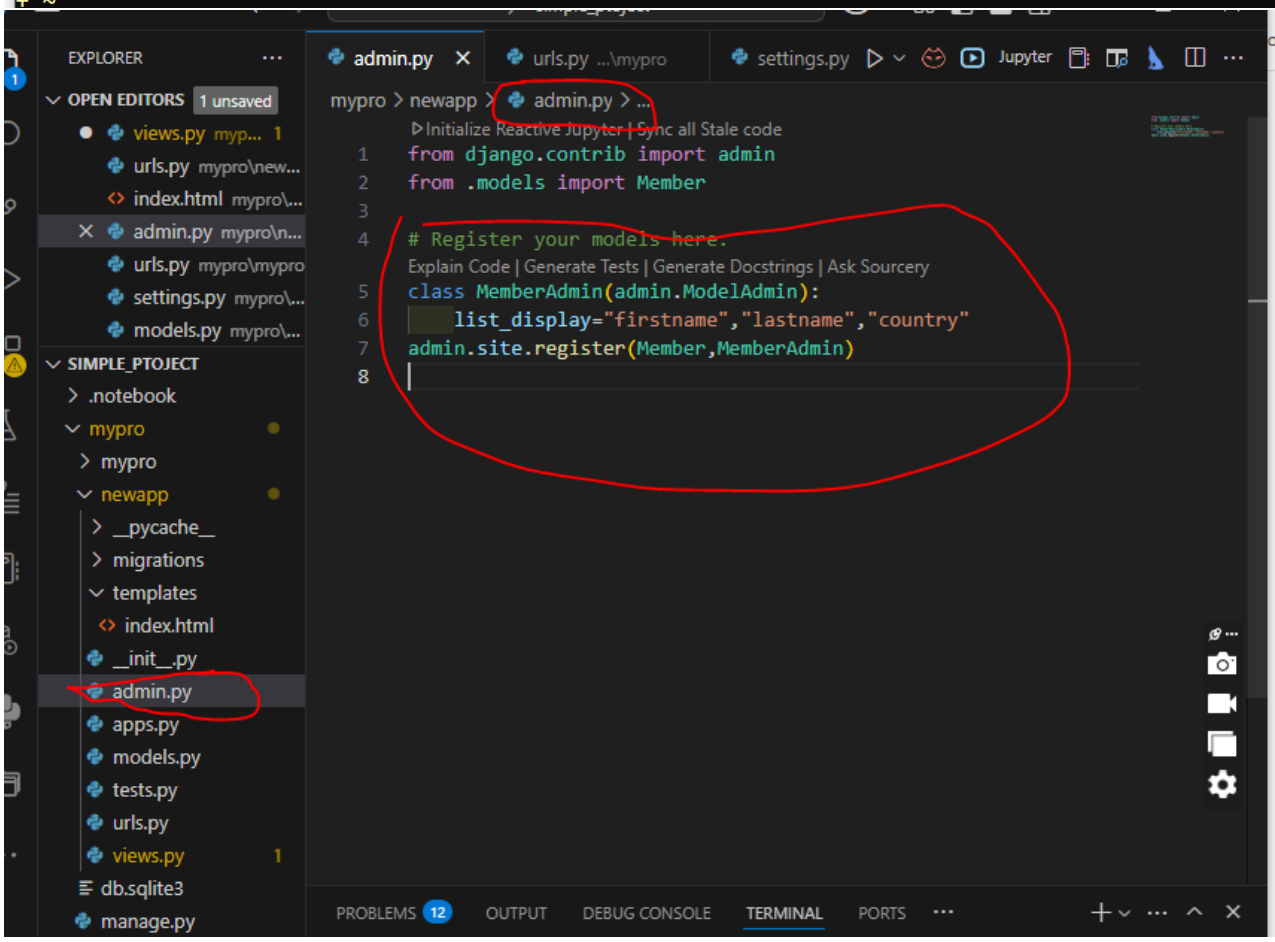

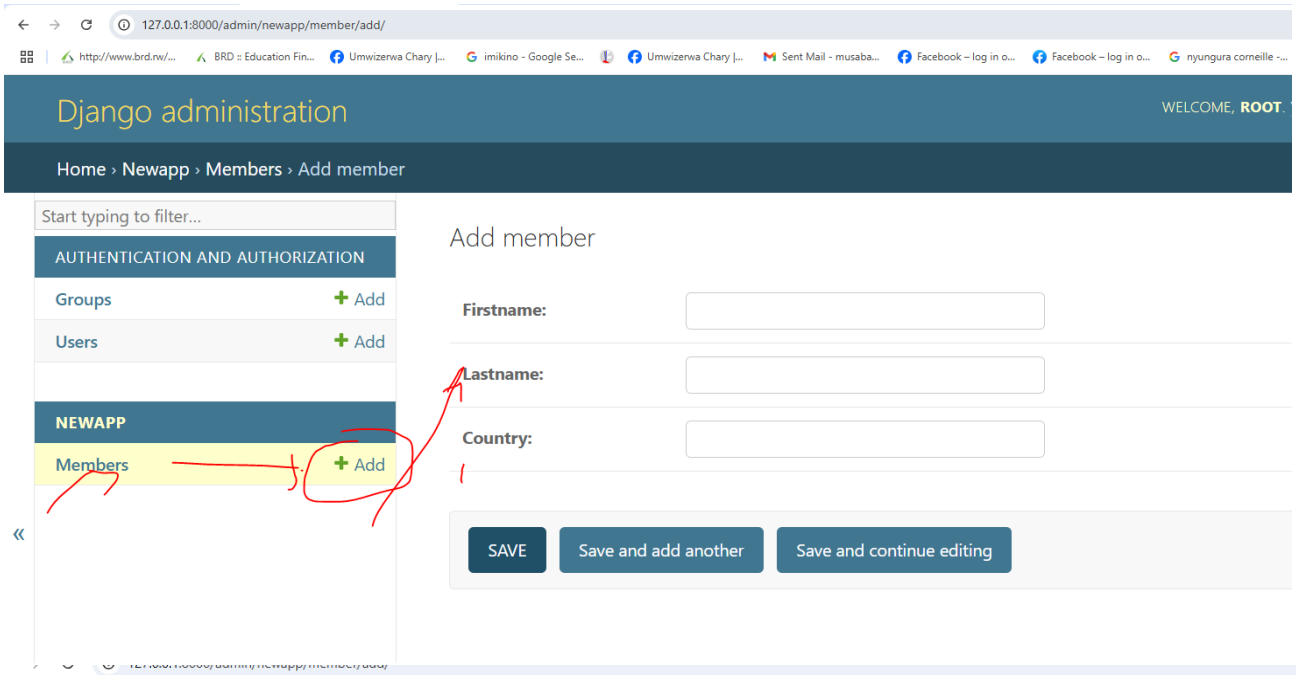
127.0.0.1:8000/admin/newapp/member/add/
Django administration
WELCOME, ROOT.
Home › Newapp › Members › Add member
Start typing to filter...
AUTHENTICATION AND AUTHORIZATION
Groups + Add
Users + Add
NEWAPP
Members + Add
Add member
Firstname:
Lastname:
Country:
SAVE
Save and add another
Save and continue editing

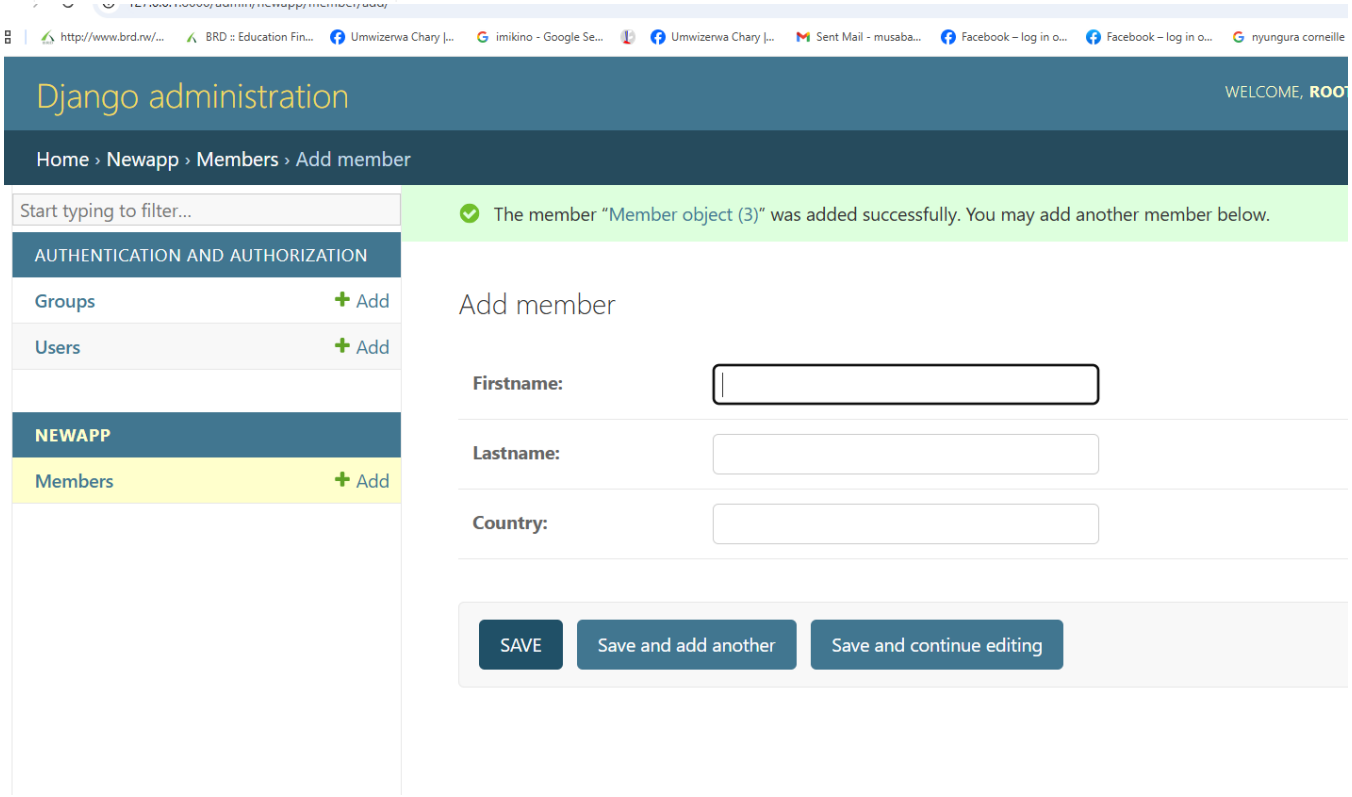
Django administration
WELCOME, ROOT
Home › Newapp › Members › Add member
Start typing to filter...
AUTHENTICATION AND AUTHORIZATION
Groups + Add
Users + Add
NEWAPP
Members + Add
The member "Member object (3)" was added successfully. You may add another member below.
Add member
Firstname:
Lastname:
Country:
SAVE
Save and add another
Save and continue editing

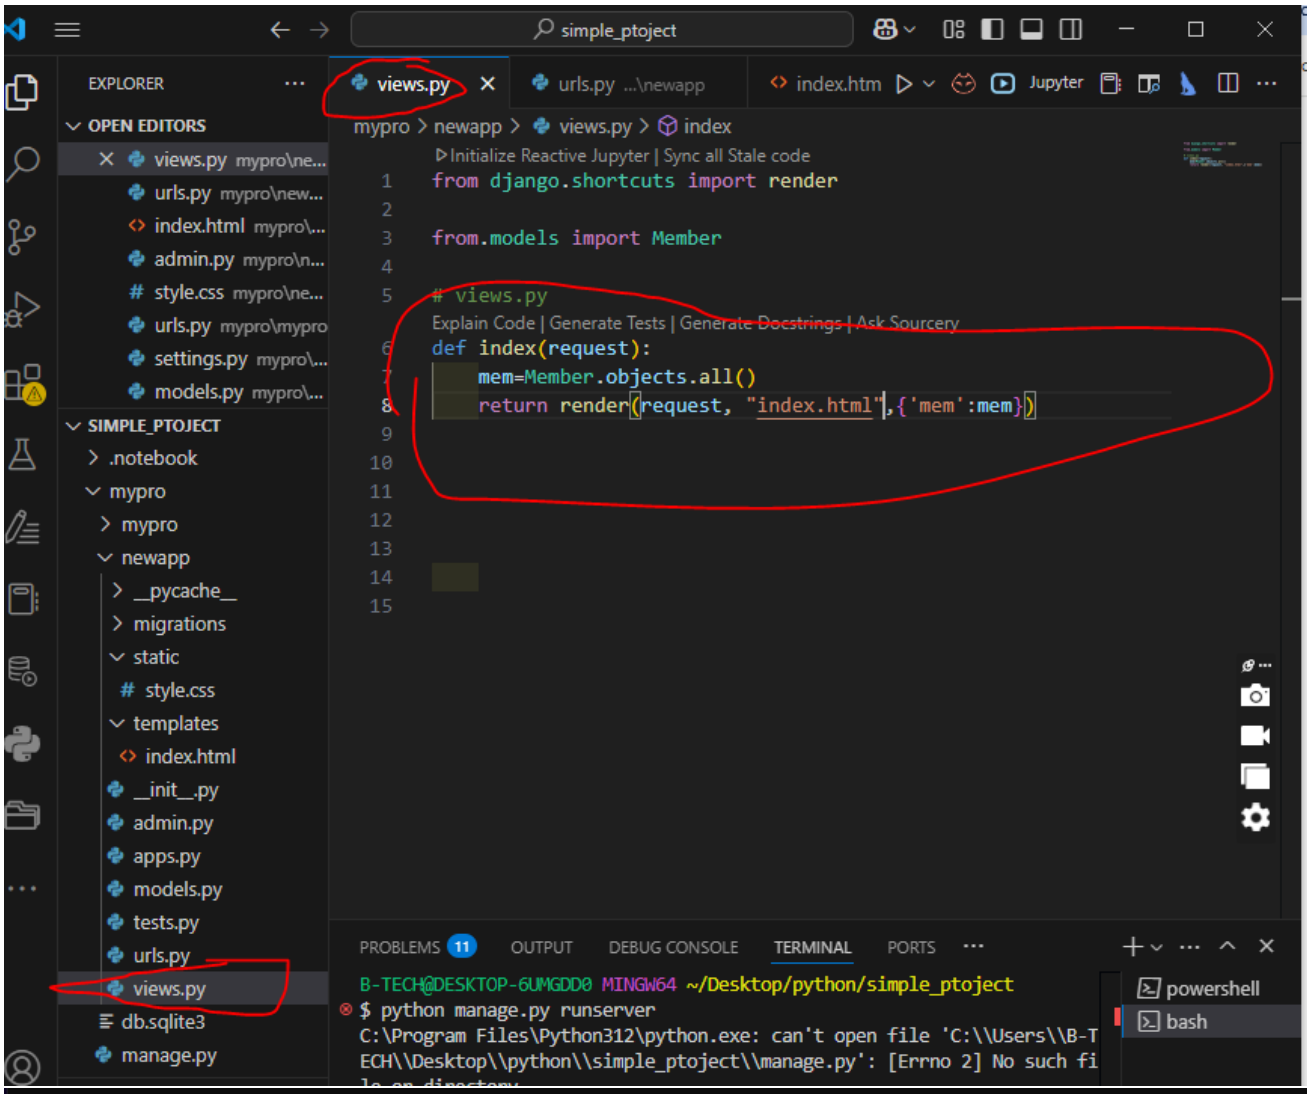


```
(base) C:\Users\B-TECH\Desktop\python\simple_ptoject\mypro>python manage.py ru
nserver
Watching for file changes with StatReloader
Performing system checks...

System check identified no issues (0 silenced).
June 10, 2025 - 14:01:17
Django version 5.2.2, using settings 'mypro.settings'
Starting development server at http://127.0.0.1:8000/
Quit the server with CTRL-BREAK.
```



Members

Id	First Name	Last Name	Country	Action	
1	Jean	SAFARI	Rwanda	update	delete
2	jean	claude	Rwanda	update	delete
3	eric	kagabo	uganda	update	delete

Add Member

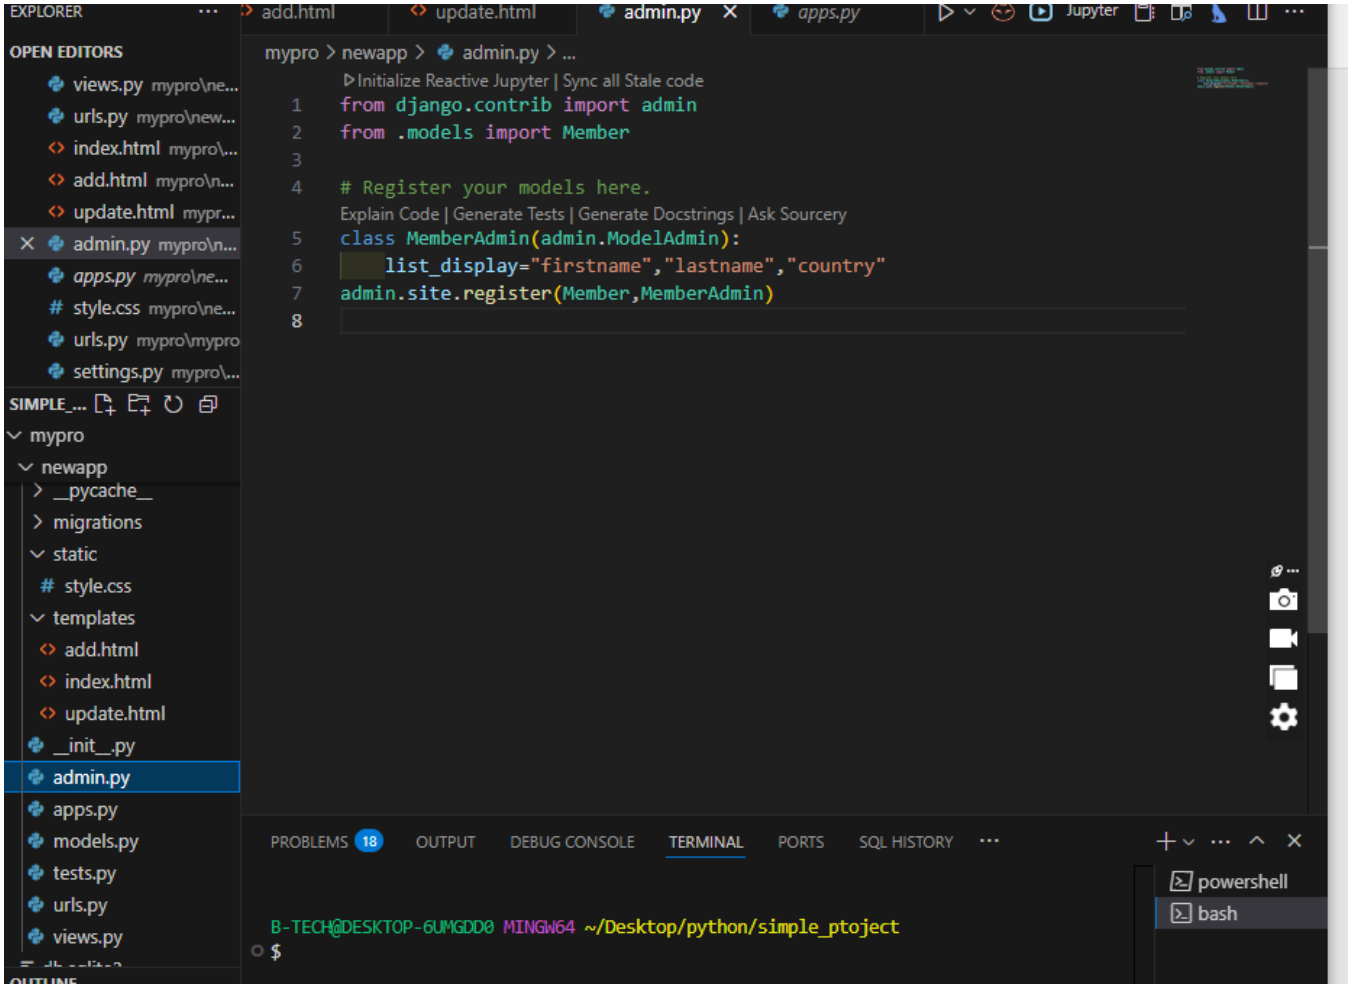
EXPLORER
add.html
update.html
admin.py
apps.py
Jupyter
OPEN EDITORS
views.py mypro\ne...
urls.py mypro\new...
index.html mypro\...
add.html mypro\n...
update.html mypr...
admin.py mypro\n...
apps.py mypro\ne...
style.css mypro\ne...
urls.py mypro\mypro
settings.py mypro\...
SIMPLE_...
mypro
newapp
__pycache__
migrations
static
style.css
templates
add.html
index.html
update.html
__init__.py
admin.py
apps.py
models.py
tests.py
urls.py
views.py
mypro > newapp > admin.py > ...
Initialize Reactive Jupyter | Sync all Stale code
from django.contrib import admin
from .models import Member
# Register your models here.
Explain Code | Generate Tests | Generate Docstrings | Ask Sourcery
class MemberAdmin(admin.ModelAdmin):
list_display="firstname","lastname","country"
admin.site.register(Member,MemberAdmin)
PROBLEMS 18
OUTPUT
DEBUG CONSOLE
TERMINAL
PORTS
SQL HISTORY
powershell
bash
B-TECH@DESKTOP-6UMGDD0 MINGW64 ~/Desktop/python/simple_ptoject
$

EXPLORER

OPEN EDITORS

- urls.py mypro\new...
- index.html mypro\...
- add.html mypro\n...
- update.html mypr...
- admin.py mypro\n...
- apps.py mypro\ne...
- style.css mypro\ne...
- urls.py mypro\mypro
- settings.py mypro\...
- models.py mypro\...

SIMPLE_PTOJECT

- mypro
  - newapp
    - __pycache__
    - migrations
    - static
      - style.css
    - templates
      - add.html
      - index.html
      - update.html
    - __init__.py
    - admin.py
    - apps.py
    - models.py
    - tests.py
    - urls.py
    - views.py

OUTLINE

yle.css | urls.py ...\mypro | settings.py | models.py | Jupyter

mypro > newapp > models.py > ...

Initialize Reactive Jupyter | Sync all Stale code

```python
from django.db import models

Explain Code | Generate Tests | Generate Docstrings | Ask Sourcery
class Member(models.Model):
    firstname=models.CharField(max_length=100)
    lastname=models.CharField(max_length=100)
    country=models.CharField(max_length=100)
```

PROBLEMS 18 | OUTPUT | DEBUG CONSOLE | TERMINAL | PORTS | SQL HISTORY

powershell | bash

```
B-TECH@DESKTOP-6UMGDD0 MINGW64 ~/Desktop/python/simple_ptoject
$
```

E-Recruitment - Rwanda Recru | DJANGO CRUD | Add member | Django site adm

127.0.0.1:8000/admin/newapp/member/add/

Finish update

http://www.brd.rw/... | BRD :: Education Fin... | Umwizerwa Chary |... | imikino - Google Se... | Umwizerwa Chary |... | Sent Mail - musaba... | Facebook – log in o... | Facebook – log in o... | nyungura corneille -... | Gmail | YouTube | Maps | All Bookm

Django administration

WELCOME, **ROOT**. VIEW SITE / CHANGE PASSWORD / LOG OUT

Home › Newapp › Members › Add member

Start typing to filter...

AUTHENTICATION AND AUTHORIZATION

- Groups + Add
- Users + Add

NEWAPP

- Members + Add

Add member

USER: ROSE
Email: rose@gmail.com
PSW: Clouded2@

Firstname:

Lastname:

Country:

SAVE | Save and add another | Save and continue editing

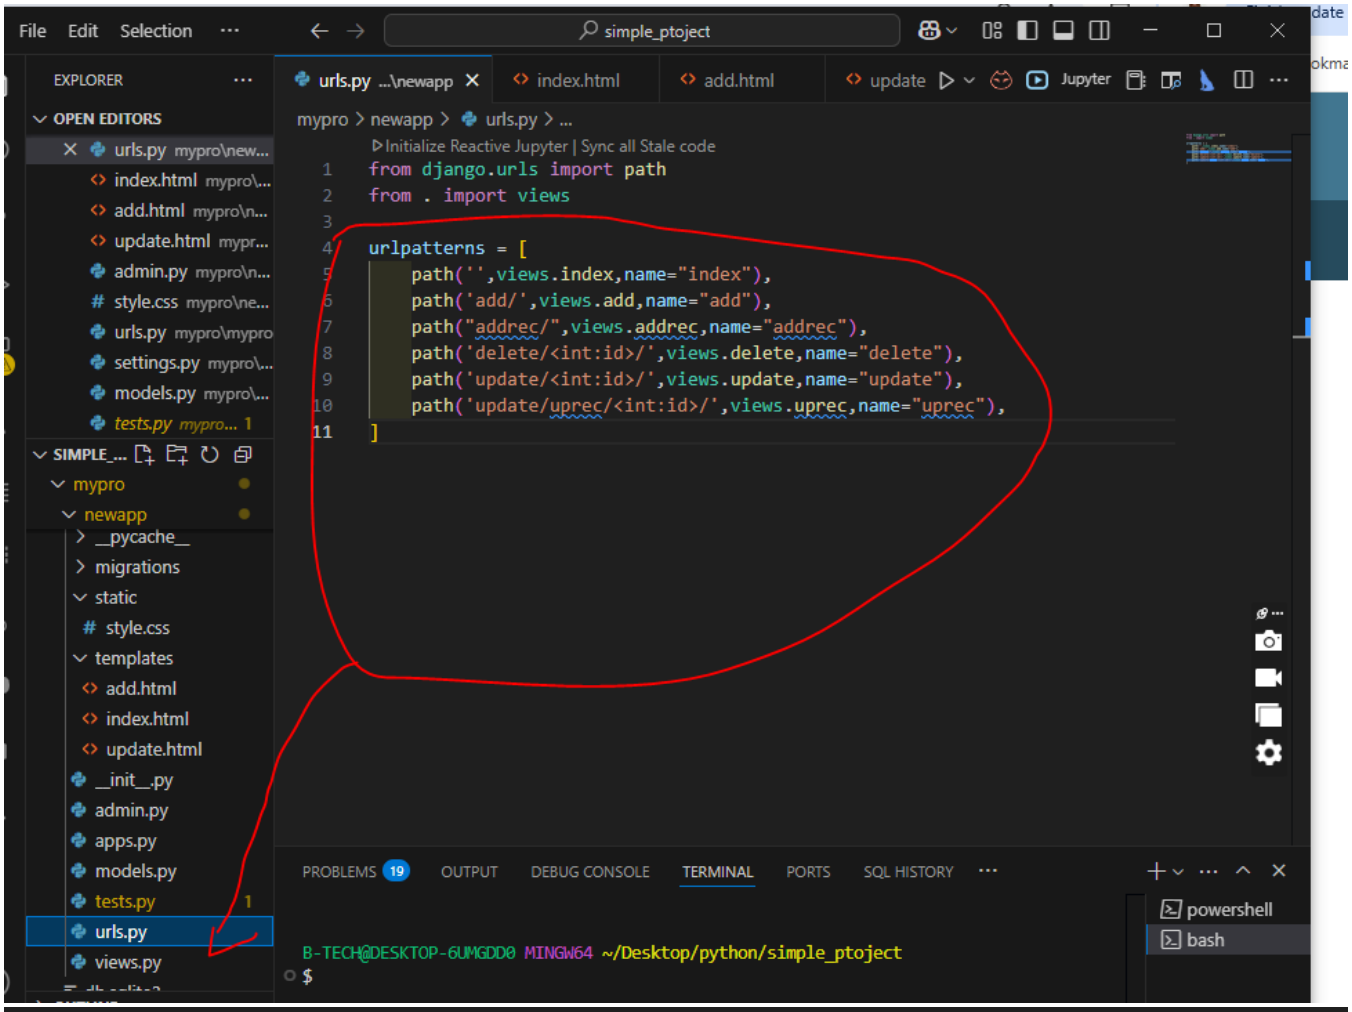

Initialize Reactive Jupyter | Sync all Stale code

```
from django.urls import path
from . import views

urlpatterns = [
    path('',views.index,name="index"),
    path('add/',views.add,name="add"),
    path("addrec/",views.addrec,name="addrec"),
    path('delete/<int:id>/',views.delete,name="delete"),
    path('update/<int:id>/',views.update,name="update"),
    path('update/uprec/<int:id>/',views.uprec,name="uprec"),
]
```

```
▷ Initialize Reactive Jupyter | Sync all Stale code
from django.urls import path
from . import views

urlpatterns = [
    path('',views.index,name="index"),
    path('add/',views.add,name="add"),
    path("addrec/",views.addrec,name="addrec"),
    path('delete/<int:id>/',views.delete,name="delete"),
    path('update/<int:id>/',views.update,name="update"),
    path('update/uprec/<int:id>/',views.uprec,name="uprec"),
]
```

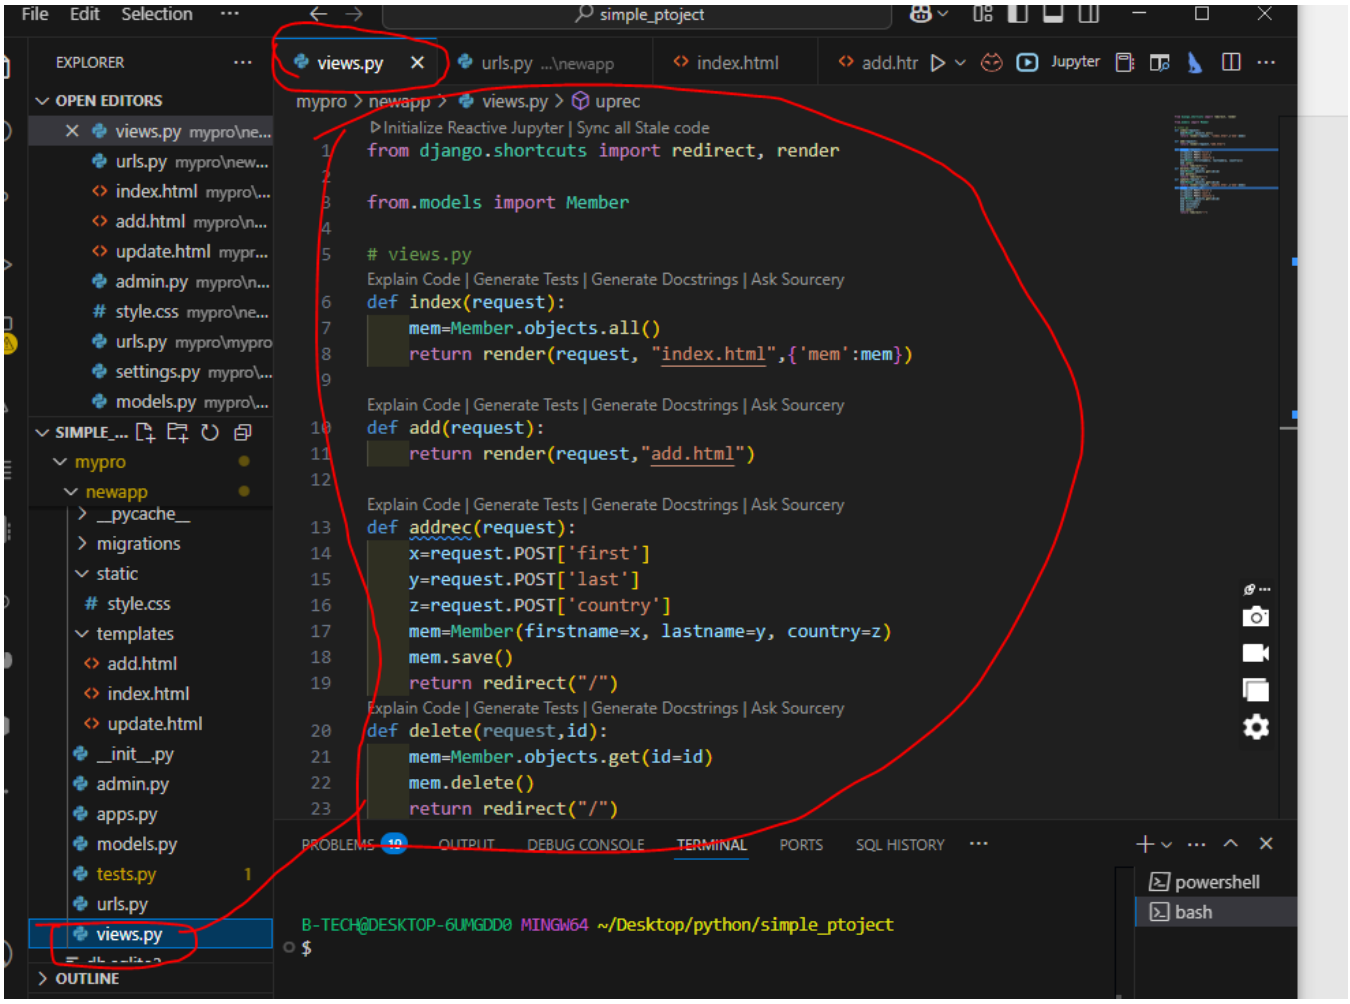

views.py × urls.py ...\newapp index.html add.htr

mypro > newapp > views.py > uprec

```python
def addrec(request):
    mem=Member(firstname=x, lastname=y, country=z)
    mem.save()
    return redirect("/")
```

Explain Code | Generate Tests | Generate Docstrings | Ask Sourcery

```python
def delete(request,id):
    mem=Member.objects.get(id=id)
    mem.delete()
    return redirect("/")
```

Explain Code | Generate Tests | Generate Docstrings | Ask Sourcery

```python
def update(request,id):
    mem=Member.objects.get(id=id)
    return render(request,'update.html',{'mem':mem})
```

Explain Code | Generate Tests | Generate Docstrings | Ask Sourcery

```python
def uprec(request,id):
    x=request.POST['first']
    y=request.POST['last']
    z=request.POST['country']
    mem=Member.objects.get(id=id)
    mem.firstname=x
    mem.lastname=y
    mem.country=z
    mem.save()
    return redirect("/")
```

views.py × urls.py ...\newapp index.html add.htr Jup

mypro > newapp > views.py > uprec

Initialize Reactive Jupyter | Sync all Stale code

```python
from django.shortcuts import redirect, render

from.models import Member

# views.py
```

Explain Code | Generate Tests | Generate Docstrings | Ask Sourcery

```python
def index(request):
    mem=Member.objects.all()
    return render(request, "index.html",{'mem':mem})
```

Explain Code | Generate Tests | Generate Docstrings | Ask Sourcery

```python
def add(request):
    return render(request,"add.html")
```

Explain Code | Generate Tests | Generate Docstrings | Ask Sourcery

```python
def addrec(request):
    x=request.POST['first']
    y=request.POST['last']
    z=request.POST['country']
    mem=Member(firstname=x, lastname=y, country=z)
    mem.save()
    return redirect("/")
```

Explain Code | Generate Tests | Generate Docstrings | Ask Sourcery

```python
def delete(request,id):
    mem=Member.objects.get(id=id)
    mem.delete()
    return redirect("/")
```

PROBLEMS 19 OUTPUT DEBUG CONSOLE TERMINAL PORTS SQL HISTORY ...

simple_ptoject

views.py | urls.py ...\newapp | index.html | add.html | update.html

mypro > newapp > templates > index.html

```html
<head>
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>DJANGO CRUD</title>
</head>
{% load static %}
<link rel="stylesheet" href="{% static 'style.css' %}">

<body>
    <div class="container">
        <h1>Members</h1>
        <table id="customers" border="1">
            <thead>
                <th>Id</th>
                <th>First Name</th>
                <th>Last Name</th>
                <th>Country</th>
                <th colspan="2" id="mid">Action</th>
            </thead>
            {% for x in mem %}
            <tr>
                <td>{{x.id}}</td>
                <td>{{x.firstname}}</td>
                <td>{{x.lastname}}</td>
                <td>{{x.country}}</td>
                <td>
                    <a href="update/{{x.id}}"><button id="up">update</button
                </td>
```

PROBLEMS 18 | OUTPUT | DEBUG CONSOLE | TERMINAL | PORTS | SQL HISTORY

powershell

```
<tr>
    <td>{{x.id}}</td>
    <td>{{x.firstname}}</td>
    <td>{{x.lastname}}</td>
    <td>{{x.country}}</td>
    <td>
        <a href="update/{{x.id}}"><button id="up">update</button></a>
    </td>
    <td>
        <a href="delete/{{x.id}}"><button id="del">delete</button></a>
    </td>

</tr>
{% endfor %}
table>
r><br>
 href="{% url 'add' %}"><button id="new3">Add Member</button></a>
```

views.py | urls.py ...\newapp | index.html | add.html | update.html

ypro > newapp > templates > add.html

```html

<head>
    <meta charset="UTF-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>DJANGO CRUD</title>
</head>
{% load static %}
<link rel="stylesheet" href="{% static 'style.css' %}">

<body>
    <div class="contain er1">
        <h1>Add Member</h1>
        <form action="{% url 'addrec' %}" method="post">
            {% csrf_token %}
            <label for="">First Name</label><br><br>
            <input type="text" name="first"><br><br>
            <label for="">Last Name</label><br><br>
            <input type="text" name="last"><br><br>
            <label for="">Country</label><br><br>
            <input type="text" name="country"><br><br>
            <button type="submit" id="new">Submit</button>
        </form>
    </div>
</body>

</html>
```

views.py | urls.py ...\newapp | index.html | add.html | update.html

ypro > newapp > templates > update.html

```
4
5   <head>
6       <meta charset="UTF-8">
7       <meta http-equiv="X-UA-Compatible" content="IE=edge">
8       <meta name="viewport" content="width=device-width, initial-scale=1.0">
9       <title>DJANGO CRUD</title>
10  </head>
11  {% load static %}
12  <link rel="stylesheet" href="{% static 'style.css' %}">
13
14  <body>
15      <div class="container2">
16          <h1>Update Member</h1>
17          <form action="{% url 'uprec' mem.id %}" method="post">
18              {% csrf_token %}
19              <label for="">First name</label><br><br>
20              <input type="text" name="first" value="{{mem.firstname}}"><br><b
21              <label for="">Last name</label><br><br>
22              <input type="text" name="last" value="{{mem.lastname}}"><br><br>
23              <label for="">Country</label><br><br>
24              <input type="text" name="country" value="{{mem.country}}"><br><b
25              <button type="submit" id="new1">Update</button>
26          </form>
27
28      </div>
29  </body>
```

File Edit Selection ... simple_ptoject

EXPLORER

OPEN EDITORS
- views.py mypro\ne...
- urls.py mypro\new...
- index.html mypro\...
- add.html mypro\n...
- update.html mypr...
- admin.py mypro\n...
- apps.py mypro\ne...
- style.css mypro\ne...
- urls.py mypro\mypro
- settings.py mypro\...

SIMPLE_PTOJECT
- .notebook
- mypro
  - mypro
  - newapp
    - __pycache__
    - migrations
    - static
      - style.css
    - templates
      - add.html
      - index.html
      - update.html
    - __init__.py
    - admin.py
    - apps.py
    - models.py
    - tests.py

OUTLINE

TIMELINE

NOTEBOOK TAGS

views.py | urls.py ...\newapp | index.html | add.html | update.html

mypro > newapp > templates > index.html

```
13
14  lass="container">
16  able id="customers" border="1">
17    <thead>
18        <th>Id</th>
19        <th>First Name</th>
20        <th>Last Name</th>
21        <th>Country</th>
22        <th colspan="2" id="mid">Action</th>
23    </thead>
24    {% for x in mem %}
25    <tr>
26        <td>{{x.id}}</td>
27        <td>{{x.firstname}}</td>
28        <td>{{x.lastname}}</td>
29        <td>{{x.country}}</td>
30        <td>
31            <a href="update/{{x.id}}"><button id="up">update</button></a>
32        </td>
33        <td>
34            <a href="delete/{{x.id}}"><button id="del">delete</button></a>
35        </td>
36
37    </tr>
38    {% endfor %}
39  table>
40  r><br>
```

PROBLEMS 18 | OUTPUT | DEBUG CONSOLE | TERMINAL | PORTS | SQL HISTORY

```
B-TECH@DESKTOP-6UMGDD0 MINGW64 ~/Desktop/python/simple_ptoject
$ python manage.py runserver
C:\Program Files\Python312\python.exe: can't open file 'C:\\Users\\B-T
ECH\\Desktop\\python\\simple_ptoject\\manage.py': [Errno 2] No such fi
le or directory

B-TECH@DESKTOP-6UMGDD0 MINGW64 ~/Desktop/python/simple_ptoject
```

powershel
bash

Launchpad ⊗ 0 ⚠ 0 ⓘ 18 Sourcery Analytics Ln 8, Col 31 Spaces: 4 UTF-8 CRLF {} Django Template Jupyter Go Live

File Edit Selection View Go Run Terminal Help

simple_ptoject

EXPLORER

OPEN EDITORS

- views.py mypro\ne...
- urls.py mypro\new...
- index.html mypro\...
- add.html mypro\n...
- update.html mypr...
- admin.py mypro\n...
- apps.py mypro\ne...
- style.css mypro\ne...
- urls.py mypro\mypro
- settings.py mypro\...
- models.py mypro\...

SIMPLE_...

- .notebook
- mypro
  - mypro
    - __pycache__
    - __init__.py
    - asgi.py
    - settings.py
    - urls.py
    - wsgi.py
  - newapp
    - __pycache__
    - migrations
    - static
    - templates
      - add.html
      - index.html
      - update.html
    - __init__.py
    - admin.py
    - apps.py
    - models.py
    - tests.py
    - urls.py
    - views.py
  - db.sqlite3
  - manage.py
- ~$cumentation.docx

views.py | urls.py ...\newapp | index.html | add.html | update.html | admin.py | apps.py | style.css

mypro > newapp > templates > index.html

```html
<body>
    <div class="container">
        <table id="customers" border="1">
            <thead>
                <th>Id</th>
                <th>First Name</th>
                <th>Last Name</th>
                <th>Country</th>
                <th colspan="2" id="mid">Action</th>
            </thead>
            {% for x in mem %}
            <tr>
                <td>{{x.id}}</td>
                <td>{{x.firstname}}</td>
                <td>{{x.lastname}}</td>
                <td>{{x.country}}</td>
                <td>
                    <a href="update/{{x.id}}"><button id="up">update</button></a>
                </td>
                <td>
                    <a href="delete/{{x.id}}"><button id="del">delete</button></a>
                </td>

            </tr>
            {% endfor %}
        </table>
        <br><br>
        <a href="{% url 'add' %}"><button id="new3">Add Member</button></a>

    </div>
</body>

</html>
```

PROBLEMS 18 | OUTPUT | DEBUG CONSOLE | TERMINAL | PORTS | SQL HISTORY | TASK MONITOR | SPELL CHECKER 18 | POLYGLOT NOTEBOOK

```
B-TECH@DESKTOP-6UMGDD0 MINGW64 ~/Desktop/python/simple_ptoject
$ python manage.py runserver
C:\Program Files\Python312\python.exe: can't open file 'C:\\Users\\B-T
ECH\\Desktop\\python\\simple_ptoject\\manage.py': [Errno 2] No such fi
```