

Blocking: An R Package for Blocking of Records for Record Linkage and Deduplication

by Maciej Beręsewicz and Adam Struzik

Abstract Entity resolution (probabilistic record linkage, deduplication) is essential for estimation based on multiple sources. It aims to link records without common identifiers that refer to the same entity (e.g., person, company). Without identifiers, researchers must specify which records to compare to calculate matching probability and reduce computational complexity. Traditional deterministic blocking uses common variables like names or dates of birth, but assumes error-free, complete data. To address this limitation, we developed the R package **blocking**, which uses approximate nearest neighbour search and graph algorithms to reduce number of comparisons. This paper presents the package design, functionalities, and two case studies.

1 Introduction

1.1 Blocking for record linkage

Entity resolution (probabilistic record linkage, deduplication) is essential for estimation based on multiple sources (for recent review see [Binette and Steorts \(2022\)](#)). The goal is to link records without common identifiers that refer to the same entity (e.g., person, company). This situation is often observed in administrative records, in particular for foreign-born populations. For instance in the The Social Insurance Institution register in Poland at the end of 2023 included 1,206 mln records which refereed to possibly 1,105 mln individuals out of which about 10% had missing information in the personal identifier (PESEL) and about 50% cases missing address details. Please note that the exact number after individuals will be certainly lower than 1,105 mln as the 10% of may include duplicates.

This drives a need to link records without identifiers but often requires certain assumptions such as how to reduce large number of possible comparisons as it is not possible to compare all pairs of records in a large dataset (e.g., for the mentioned example this would lead to over 600 bln comparisons). That is why *blocking* methods are applied to reduce number of comparisons prior the final record linkage / deduplication stage not only because of computational reasons but also clerical review workload.

Blocking is a method of reducing number of possible comparisons by assuming that certain variables should be exactly met. For instance, standard methods is based on assuming that sex or age (or some other combination) should match exactly while other characteristics of the records could be varying. Another standard method is to use phonetic algorithms such as SOUNDEX or its improvements for non-English languages. Further, due to use large language models one may also consider using embeddings to search for closest neighbour and threat this as a possible pair. For review of blocking methods see [Steorts et al. \(2014\)](#) or [Papadakis et al. \(2020\)](#) and in the Section 2.1.2 we will discuss R packages that implement blocking methods.

Reducing number of pairs has its costs: missing comparisons which lead to an increasing false positive rate (FPR) and false negative rate (FNR) of the linkage study. In order to assess this error a subset of pairs or simulation studies should be applied. Alternatively, one may consider approaches proposed by [Dasylva and Goussanou \(2021\)](#) and [Dasylva and Goussanou \(2022\)](#) who proposed methods to estimate FPR and FNR without access to the audit sample.

1.2 Existing software and our contribution

This paper presents the **blocking** package that aims to make the linkage and deduplication easier by creating the..

The following should be underlined:

- reduce number of comparisons
- reduce FNR and other errors
- reduce workload on clerical review

1.3 Outline of article

The paper has the following structure. In the section 2.2 we provide description of the main functionalities of the blocking package and how we can assess the result. In the section 2.3 we provide two case studies: probabilistic record linkage and deduplication. These examples show how our package can improve pipeline of entity resolution and work with existing R packages.

2 Blocking of records using blocking function

2.1 The main function

2.2 Assessment of results

In the package we have implemented several measures that can be used to assess the results

Reduction Ratio: Provides necessary details about the reduction in comparison pairs if the given blocks are applied to a further record linkage or deduplication procedure. For deduplication:

$$RR_{\text{deduplication}} = 1 - \frac{\sum_{i=1}^k \binom{|B_i|}{2}}{\binom{n}{2}},$$

where k is the total number of blocks, n is the total number of records in the dataset, and $|B_i|$ is the number of records in the i -th block. $\sum_{i=1}^k \binom{|B_i|}{2}$ is the number of comparisons after blocking, while $\binom{n}{2}$ is the total number of possible comparisons without blocking. For record linkage the reduction ratio is defined as follows

$$RR_{\text{record_linkage}} = 1 - \frac{\sum_{i=1}^k |B_{i,x}| \cdot |B_{i,y}|}{(m \cdot n)},$$

where m and n are the sizes of datasets X and Y , and k is the total number of blocks. The term $|B_{i,x}|$ is the number of unique records from dataset X in the i -th block, while $|B_{i,y}|$ is the number of unique records from dataset Y in the i -th block. The expression $\sum_{i=1}^k |B_{i,x}| \cdot |B_{i,y}|$ is the number of comparisons after blocking.

Confusion matrix presents results in comparison to ground-truth blocks in a pairwise manner (e.g., one true positive pair occurs when both records from the comparison pair belong to the same predicted block and to the same ground-truth block in the evaluation data frame).

- True Positive (TP): Record pairs correctly matched in the same block.
- False Positive (FP): Records pairs identified as matches that are not true matches in the same block.

- True Negative (TN): Record pairs correctly identified as non-matches (different blocks)
- False Negative (FN): Records identified as non-matches that are true matches in the same block.

Metric	Formula	Metric	Formula
Recall	$\frac{TP}{TP+FN}$	Accuracy	$\frac{TP+TN}{TP+TN+FP+FN}$
Precision	$\frac{TP}{TP+FP}$	Specificity	$\frac{TN}{TN+FP}$
F1 Score	$2 \cdot \frac{\text{Precision} \times \text{Recall}}{\text{Precision} + \text{Recall}}$	False Positive Rate	$\frac{FP}{FP+TN}$
False Negative Rate	$\frac{FN}{FN+TP}$		

Table: Evaluation Metrics

3 Case studies

3.1 Record linkage example

Let us first load the required packages.

```
library(blocking)
library(data.table)
```

We demonstrate the use of blocking function for record linkage on the foreigners dataset included in the package. This fictional representation of the foreign population in Poland was generated based on publicly available information, preserving the distributions from administrative registers. It contains 110,000 rows with 100,000 entities. Each row represents one record, with the following columns:

- fname – first name,
- sname – second name,
- surname – surname,
- date – date of birth,
- region – region (county),
- country – country,
- true_id – person ID.

```
data(foreigners)
head(foreigners)
```

```
#>   fname sname  surname      date region country true_id
#>   <char> <char>   <char>   <char> <char>  <char>  <num>
#> 1:  emin      imanov 1998/02/05      031      0
#> 2: nurlan    suleymanli 2000/08/01      031      1
#> 3:  amio    maharrsmov 1939/03/08      031      2
#> 4:  amik    maharramof 1939/03/08      031      2
#> 5:  amil    maharramov 1993/03/08      031      2
#> 6:  gadir   jahangirov 1991/08/29      031      3
```

We split the dataset into two separate files: one containing the first appearance of each entity in the foreigners dataset, and the other containing its subsequent appearances.

```
foreigners_1 <- foreigners[!duplicated(foreigners$true_id), ]
foreigners_2 <- foreigners[duplicated(foreigners$true_id), ]
```

Now in both datasets we remove slashes from the date column and create a new string column that concatenates the information from all columns (excluding true_id) in each row.

```

foreigners_1[, date := gsub("/", "", date)]
foreigners_1[, txt := paste0(fname, sname, surname, date, region, country)]
foreigners_2[, date := gsub("/", "", date)]
foreigners_2[, txt := paste0(fname, sname, surname, date, region, country)]
head(foreigners_1)

#>      fname sname      surname      date region country true_id
#>   <char> <char>   <char>   <char> <char>  <char>  <num>
#> 1:   emin          imanov 19980205          031      0
#> 2: nurlan      suleymanli 20000801          031      1
#> 3:   amio      maharrsmov 19390308          031      2
#> 4:  gadir      jahangirov 19910829          031      3
#> 5:   zaur      bayramova 19961006 01261      031      4
#> 6:   asif      mammadov 19970726          031      5
#>
#>              txt
#>              <char>
#> 1:      eminimanov19980205031
#> 2:  nurlansuleymanli20000801031
#> 3:   amiomaharrsmov19390308031
#> 4:   gadirjahangirov19910829031
#> 5: zaurbayramova1996100601261031
#> 6:      asifmammadov19970726031

```

General use

We use the newly created columns in the blocking function, which relies on the default [rnnDESCENT](#) (Nearest Neighbor Descent) algorithm based on cosine distance. Additionally, we set `verbose = 1` to monitor progress. Note that a default parameter of the blocking function is `seed = 2023`, which sets the random seed.

```

result_reclin <- blocking(x = foreigners_1$txt,
                        y = foreigners_2$txt,
                        verbose = 1)

#> ===== creating tokens =====
#> ===== starting search (nnd, x, y: 100000, 10000, t: 1232) =====
#> ===== creating graph =====

```

Now we examine the results of record linkage.

- We have created 6,470 blocks.
- The blocking process utilized 1,232 columns (2 character shingles).
- We have 3,920 blocks of 2 elements, 1,599 blocks of 3 elements,..., 2 blocks of 7 elements.

```

result_reclin

#> =====
#> Blocking based on the nnd method.
#> Number of blocks: 6470.
#> Number of columns used for blocking: 1232.
#> Reduction ratio: 0.9999.
#> =====
#> Distribution of the size of the blocks:
#>   2   3   4   5   6   7
#> 3920 1599 928  19   2   2

```

Structure of the object is as follows:

- `result` – a `data.table` with identifiers and block IDs,
- `method` – name of the ANN algorithm used,
- `deduplication` – whether deduplication was applied,
- `representation` – whether shingles or vectors were used,
- `metrics` – metrics for quality assessment (here `NULL`),
- `confusion` – confusion matrix (here `NULL`),
- `colnames` – column names used for the comparison,
- `graph` – an `igraph` object, mainly for visualization (here `NULL`).

```
str(result_reclin, 1)
```

```
#> List of 8
#> $ result      :Classes 'data.table' and 'data.frame': 10000 obs. of  4 variables:
#> ..- attr(*, ".internal.selfref")=<externalptr>
#> $ method      : chr "nnd"
#> $ deduplication : logi FALSE
#> $ representation: chr "shingles"
#> $ metrics      : NULL
#> $ confusion    : NULL
#> $ colnames     : chr [1:1232] "0a" "0b" "0c" "0m" ...
#> $ graph        : NULL
#> - attr(*, "class")= chr "blocking"
```

The resulting `data.table` has four columns:

- `x` – reference dataset (i.e. `foreigners_1`) – this may not contain all units of `foreigners_1`,
- `y` – query (each row of `foreigners_2`) – this may not contain all units of `foreigners_2`,
- `block` – block ID,
- `dist` – distance between objects.

```
head(result_reclin$result)
```

```
#>      x      y block      dist
#>   <int> <int> <num>   <num>
#> 1:     3     1     1 0.2216882
#> 2:     3     2     1 0.2122737
#> 3:    21     3     2 0.1172652
#> 4:    57     4     3 0.1863238
#> 5:    57     5     3 0.1379310
#> 6:    61     6     4 0.2307692
```

Let's examine the first pair. Obviously, there are typos in the `fname` and `surname`. Nevertheless, the pair is a match.

```
cbind(t(foreigners_1[3, 1:6]), t(foreigners_2[1, 1:6]))
```

```
#>      [,1]      [,2]
#> fname  "amio"    "amik"
#> sname   ""       ""
#> surname "maharrsmov" "maharramof"
#> date    "19390308"  "19390308"
#> region  ""         ""
#> country "031"      "031"
```

Now we use the `true_id` values to evaluate our approach.

```

matches <- merge(x = foreigners_1[, .(x = 1:N, true_id)],
                 y = foreigners_2[, .(y = 1:N, true_id)],
                 by = "true_id")
matches[, block := rleid(x)]
head(matches)

```

```

#> Key: <true_id>
#>   true_id     x     y block
#>   <num> <int> <int> <int>
#> 1:      2      3      1      1
#> 2:      2      3      2      1
#> 3:     20     21      3      2
#> 4:     56     57      4      3
#> 5:     56     57      5      3
#> 6:     60     61      6      4

```

We have 10,000 matched pairs. We use the `true_blocks` parameter in the blocking function to specify the true block assignments. We obtain the quality metrics for the assessment of record linkage.

```

result_2_reclin <- blocking(x = foreigners_1$txt,
                           y = foreigners_2$txt,
                           verbose = 1,
                           true_blocks = matches[, .(x, y, block)])

```

```

#> ===== creating tokens =====
#> ===== starting search (nnd, x, y: 100000, 10000, t: 1232) =====
#> ===== creating graph =====

```

```

result_2_reclin

```

```

#> =====
#> Blocking based on the nnd method.
#> Number of blocks: 6470.
#> Number of columns used for blocking: 1232.
#> Reduction ratio: 0.9999.
#> =====
#> Distribution of the size of the blocks:
#>    2    3    4    5    6    7
#> 3920 1599  928   19    2    2
#> =====
#> Evaluation metrics (standard):
#>   recall  precision      fpr      fnr  accuracy specificity
#>   96.7532   78.6700   0.0038   3.2468   99.9957   99.9962
#>   f1_score
#>   86.7795

```

For example, our approach results in a 3.25% false negative rate (FNR). To improve this, we can increase the `epsilon` parameter of the NND method from 0.1 to 0.5. To do so, we configure the `control_ann` parameter in the blocking function using the `controls_ann` and `control_nnd` functions.

```

result_3_reclin <- blocking(x = foreigners_1$txt,
                           y = foreigners_2$txt,
                           verbose = 1,
                           true_blocks = matches[, .(x, y, block)],
                           control_ann = controls_ann(nnd = control_nnd(epsilon = 0.5)))

```

```
#> ===== creating tokens =====
#> ===== starting search (nnd, x, y: 100000, 10000, t: 1232) =====
#> ===== creating graph =====

result_3_reclin

#> =====
#> Blocking based on the nnd method.
#> Number of blocks: 6394.
#> Number of columns used for blocking: 1232.
#> Reduction ratio: 0.9999.
#> =====
#> Distribution of the size of the blocks:
#>   2   3   4   5   7
#> 3800 1615 954  21   4
#> =====
#> Evaluation metrics (standard):
#>      recall  precision      fpr      fnr  accuracy specificity
#>    96.8776    80.0500    0.0036    3.1224    99.9960    99.9964
#>    f1_score
#>    87.6636
```

That decreases the FNR to 3.12%.

3.2 Deduplication example

We demonstrate deduplication using the blocking function on the RLdata500 dataset from the [RecordLinkage](#) package. Note that the dataset is included in the blocking package. It contains artificial personal data. Fifty records have been duplicated with randomly generated errors. Each row represents one record, with the following columns:

- fname_c1 – first name, first component,
- fname_c2 – first name, second component,
- lname_c1 – last name, first component,
- lname_c2 – last name, second component,
- by – year of birth,
- bm – month of birth,
- bd – day of birth,
- rec_id – record id,
- ent_id – entity id.

```
data(RLdata500)
head(RLdata500)
```

```
#>   fname_c1 fname_c2 lname_c1 lname_c2   by   bm   bd rec_id ent_id
#>   <char>  <char>  <char>  <char> <int> <int> <int> <int> <int>
#> 1:  CARSTEN          MEIER      1949    7   22     1    34
#> 2:   GERD          BAUER      1968    7   27     2    51
#> 3:  ROBERT      HARTMANN      1930    4   30     3   115
#> 4:  STEFAN          WOLFF      1957    9    2     4   189
#> 5:   RALF      KRUEGER      1966    1   13     5    72
#> 6: JUERGEN      FRANKE      1929    7    4     6   142
```

We create a new column (id_count) that indicates how many times a given unit occurs and then add leading zeros to the bm and bd columns. Finally, we create a new string column that concatenates the information from all columns (excluding rec_id, ent_id and id_count) in each row.

```

RLdata500[, id_count :=.N, ent_id]
RLdata500[, bm:=sprintf("%02d", bm)]
RLdata500[, bd:=sprintf("%02d", bd)]
RLdata500[, txt:=tolower(
  paste0(fname_c1,fname_c2,lname_c1,lname_c2,by,bm,bd))]
head(RLdata500)

#>   fname_c1 fname_c2 lname_c1 lname_c2   by   bm   bd rec_id ent_id
#>   <char>  <char>  <char>  <char> <int> <char> <char> <int> <int>
#> 1:  CARSTEN             MEIER      1949   07   22     1     34
#> 2:    GERD             BAUER      1968   07   27     2     51
#> 3:  ROBERT          HARTMANN      1930   04   30     3    115
#> 4:  STEFAN             WOLFF      1957   09   02     4    189
#> 5:    RALF          KRUEGER      1966   01   13     5     72
#> 6: JUERGEN          FRANKE      1929   07   04     6    142
#>   id_count          txt
#>   <int>          <char>
#> 1:      1 carstenmeier19490722
#> 2:      2   gerdbauer19680727
#> 3:      1 roberthartmann19300430
#> 4:      1 stefanwolff19570902
#> 5:      1 ralfkrueger19660113
#> 6:      1 juergenfranke19290704

```

As in the previous example, we use the txt column in the blocking function. This time, we set `ann = hnsw` to use the Hierarchical Navigable Small World (HNSW) algorithm from the **RcppHNSW** package and `graph = TRUE` to obtain an **igraph** object for visualization.

```

result_dedup_hnsw <- blocking(x = RLdata500$txt,
                             ann = "hnsw",
                             graph = TRUE,
                             verbose = 1)

#> ===== creating tokens =====
#> ===== starting search (hnsw, x, y: 500, 500, t: 429) =====
#> ===== creating graph =====

```

The results are as follows.

```

result_dedup_hnsw

#> =====
#> Blocking based on the hnsw method.
#> Number of blocks: 133.
#> Number of columns used for blocking: 429.
#> Reduction ratio: 0.9916.
#> =====
#> Distribution of the size of the blocks:
#>  2  3  4  5  6  7  8  9 10 11 12 17
#> 46 35 23  8  6  6  2  3  1  1  1  1

head(result_dedup_hnsw$result)

#>      x      y block      dist
#>   <int> <int> <num>   <num>
#> 1:     1    64    35 0.47379863

```



```
#> 2:      2      43      1 0.08074522
#> 3:      2     486      1 0.41023219
#> 4:      3     450     88 0.43263358
#> 5:      4      50     13 0.52565831
#> 6:      5     128      2 0.51333570
```

Now we visualize connections using the obtained graph.

```
plot(result_dedup_hnsw$graph, vertex.size = 1, vertex.label = NA)
```

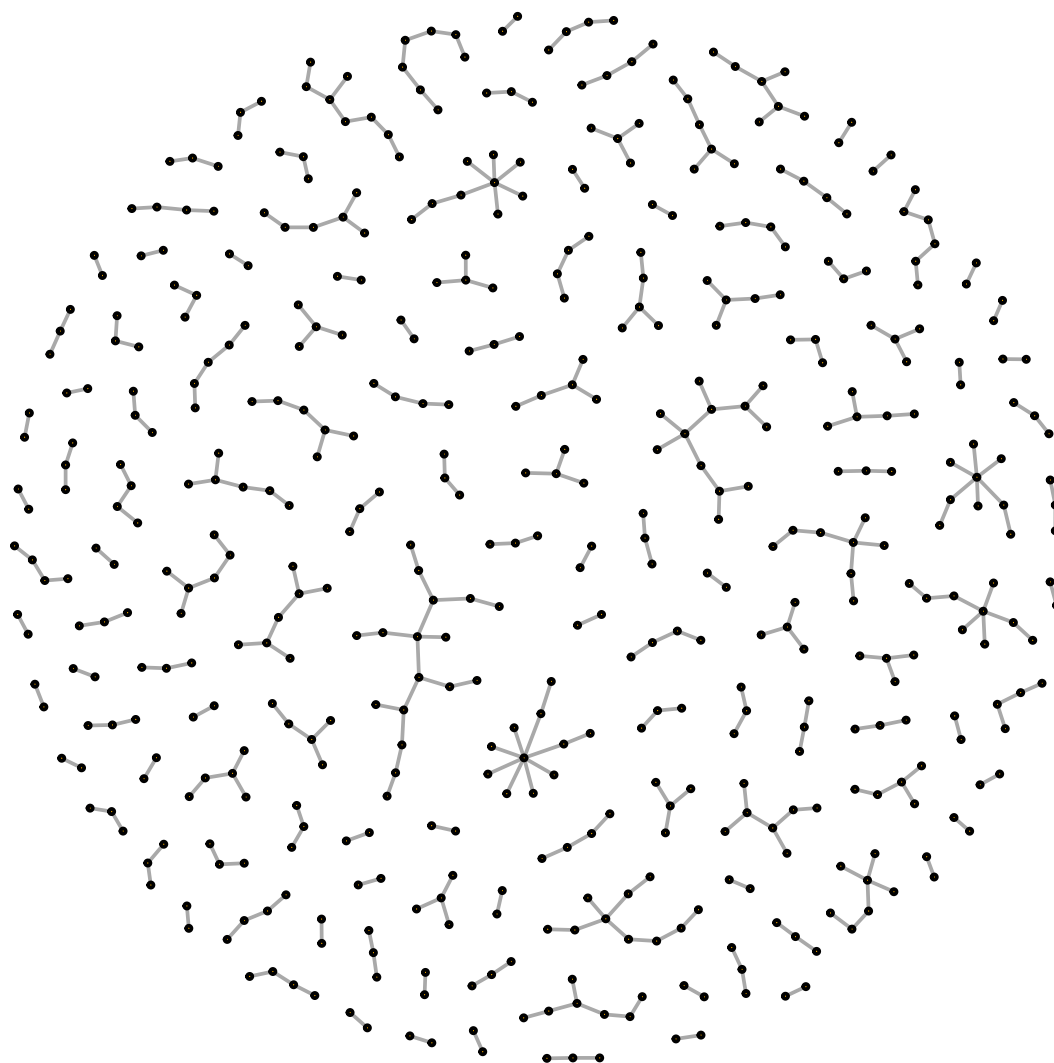


Figure 1: Connection graph

We create a long data.table with information on blocks and units from the original dataset.

```
df_block_melted <- melt(result_dedup_hnsw$result, id.vars = c("block", "dist"))
df_block_melted_rec_block <- unique(df_block_melted[, .(rec_id=value, block)])
head(df_block_melted_rec_block)
```

```
#>   rec_id block
#>   <int> <num>
#> 1:     1    35
#> 2:     2     1
```

```
#> 3:      3      88
#> 4:      4      13
#> 5:      5       2
#> 6:      6      35
```

We add the block information to the final dataset.

```
RLdata500[df_block_melted_rec_block, on = "rec_id", block_id := i.block]
head(RLdata500)
```

```
#>   fname_c1 fname_c2 lname_c1 lname_c2   by   bm   bd rec_id ent_id
#>   <char>   <char>   <char>   <char> <int> <char> <char> <int> <int>
#> 1:  CARSTEN                MEIER      1949   07   22     1     34
#> 2:    GERD                BAUER      1968   07   27     2     51
#> 3:  ROBERT            HARTMANN      1930   04   30     3    115
#> 4:  STEFAN                WOLFF      1957   09   02     4    189
#> 5:    RALF            KRUEGER      1966   01   13     5     72
#> 6: JUERGEN            FRANKE      1929   07   04     6    142
#>   id_count                txt block_id
#>   <int>                <char>   <num>
#> 1:      1  carstenmeier19490722      35
#> 2:      2   gerdbauer19680727       1
#> 3:      1 roberthartmann19300430      88
#> 4:      1  stefanwolff19570902      13
#> 5:      1  ralfkrueger19660113       2
#> 6:      1  juergenfranke19290704      35
```

We can check in how many blocks the same entities (ent_id) are observed. In our example, all the same entities are in the same blocks.

```
RLdata500[, .(uniq_blocks = uniqueN(block_id)), .(ent_id)][, .N, uniq_blocks]
```

```
#>   uniq_blocks   N
#>   <int> <int>
#> 1:      1  450
```

Now we can visualize the distances between the units stored in the result_dedup_hnsw\$result dataset. Clearly we have a mixture of two groups: matches (close to 0) and non-matches (close to 1).

```
hist(result_dedup_hnsw$result$dist, xlab = "Distances",
      ylab = "Frequency", breaks = "fd",
      main = "Distances calculated between units")
```

Distances calculated between units

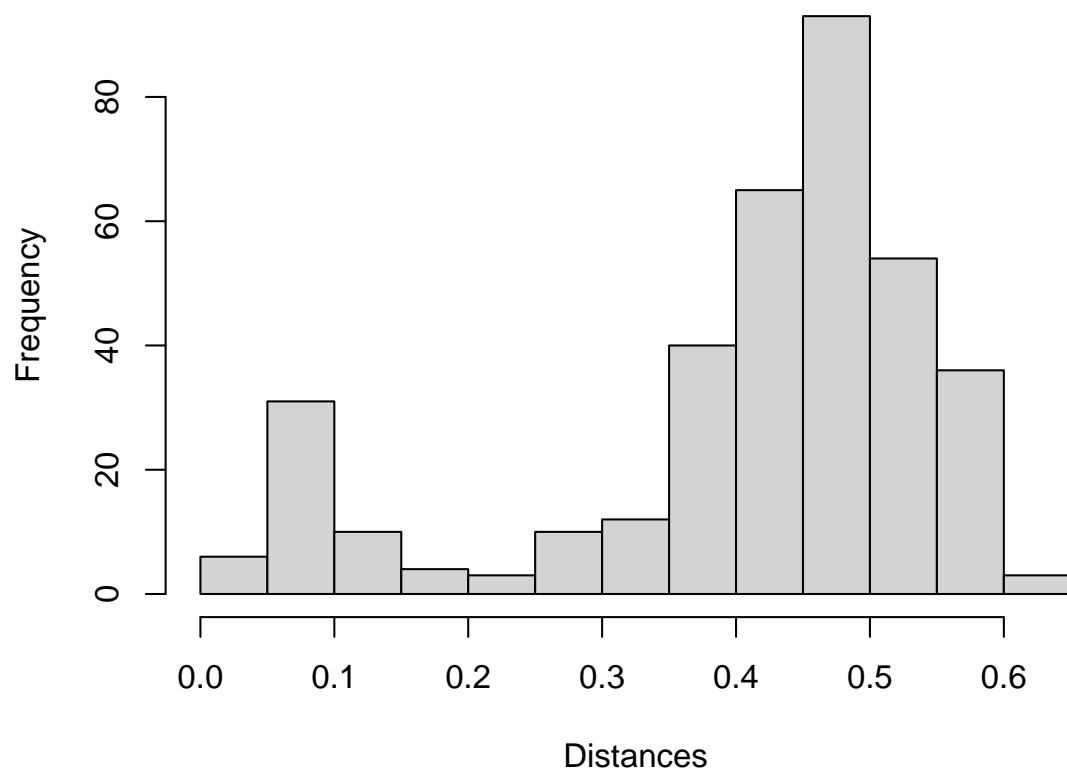


Figure 2: Distances calculated between units

Finally, we visualize the result based on the information whether a block contains matches or not.

```
df_for_density <- copy(df_block_melted[block %in% RLdata500$block_id])
df_for_density[, match:= block %in% RLdata500[id_count == 2]$block_id]

plot(density(df_for_density[match==FALSE]$dist),
     col = "blue", xlim = c(0, 0.8),
     main = "Distribution of distances between\n
clusters type (match=red, non-match=blue)")
lines(density(df_for_density[match==TRUE]$dist),
      col = "red", xlim = c(0, 0.8))
```

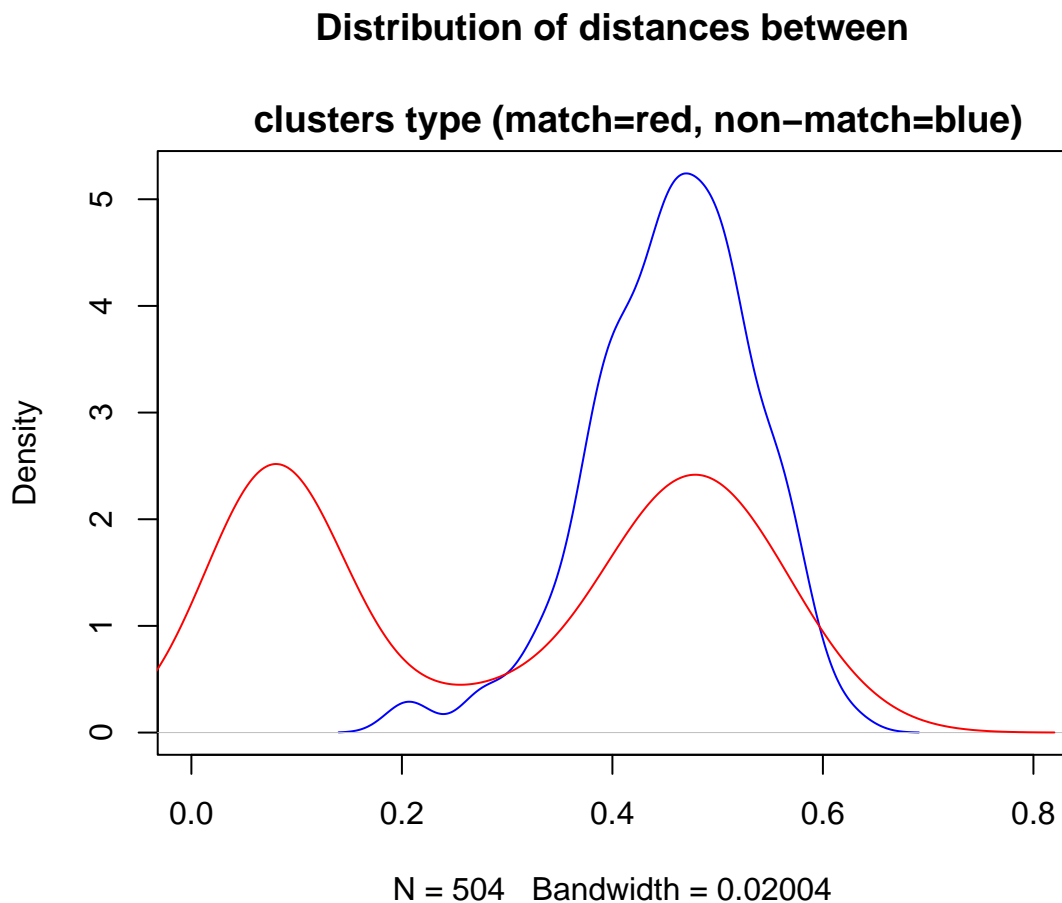


Figure 3: Distribution of distances between clusters type

Now we compare the evaluation metrics across all ANN algorithms supported by the blocking function, i.e. NND, HNSW, Approximate Nearest Neighbors Oh Yeah (Annoy, from the [RcppAnnoy](#) package), Locality-sensitive hashing (LSH, from the [mlpack](#) package), and k-Nearest Neighbors (kNN – denoted as "kd", from the [mlpack](#) package). We use the `rec_id` and `ent_id` columns from the `RLdata500` dataset to specify the true blocks and then calculate evaluation metrics for all algorithms. Additionally, we assess blocking using the `klsh` function from the [klsh](#) package, configured to create 10 blocks and 100 blocks, respectively. In both settings, we use 20 random projections and 2-character shingles. The results are as follows (`klsh_10` and `klsh_100` refer to the `klsh` algorithm with 10 blocks and 100 blocks, respectively).

```
true_blocks <- RLdata500[, c("rec_id", "ent_id"), with = FALSE]
setnames(true_blocks, old = c("rec_id", "ent_id"), c("x", "block"))
eval_metrics <- list()
ann <- c("nnd", "hns", "annoy", "lsh", "kd")
for (algorithm in ann) {
  eval_metrics[[algorithm]] <- blocking(x = RLdata500$txt,
                                       ann = algorithm,
                                       true_blocks = true_blocks)$metrics
}

set.seed(2025)
blocks_klsh_10 <- klsh::klsh(
  r.set = RLdata500[, c("fname_c1", "fname_c2", "lname_c1",
                        "lname_c2", "by", "bm", "bd")],
  p = 20,
  num.blocks = 10,
```

```

k = 2)
klsh_10_metrics <- klsh::confusion.from.blocking(
  blocking = blocks_klsh_10,
  true_ids = RLdata500$ent_id)[-1]
klsh_10_metrics$f1_score <- 2 * klsh_10_metrics$precision *
  klsh_10_metrics$recall /
  (klsh_10_metrics$precision + klsh_10_metrics$recall)
eval_metrics$klsh_10 <- unlist(klsh_10_metrics)
blocks_klsh_100 <- klsh::klsh(
  r.set = RLdata500[, c("fname_c1", "fname_c2", "lname_c1",
    "lname_c2", "by", "bm", "bd")],
  p = 20,
  num.blocks = 100,
  k = 2)
klsh_100_metrics <- klsh::confusion.from.blocking(
  blocking = blocks_klsh_100,
  true_ids = RLdata500$ent_id)[-1]
klsh_100_metrics$f1_score <- 2 * klsh_100_metrics$precision *
  klsh_100_metrics$recall /
  (klsh_100_metrics$precision + klsh_100_metrics$recall)
eval_metrics$klsh_100 <- unlist(klsh_100_metrics)

do.call(rbind, eval_metrics) * 100

#>      recall precision      fpr fnr accuracy specificity f1_score
#> nnd      100 5.1706308 0.7353649  0 99.26493   99.26464 9.832842
#> hns      100 4.7573739 0.8027265  0 99.19760   99.19727 9.082652
#> annoy    100 4.8030740 0.7947073  0 99.20561   99.20529 9.165903
#> lsh      98 1.0403397 3.7377706  2 96.26293   96.26223 2.058824
#> kd      100 5.1921080 0.7321572  0 99.26814   99.26784 9.871668
#> klsh_10   82 0.3290794 9.9582999 18 90.03848   90.04170 0.655528
#> klsh_100  86 3.4649476 0.9607057 14 99.03407   99.03929 6.661503

```

4 Summary

In this paper we have demonstrated the basic use cases of the **blocking** package. We believe that the software will be useful for researchers working in various fields where integration of multiple sources is an important aspect.

5 Acknowledgements

Work on this package is supported by the National Science Centre, OPUS 20 grant no. 2020/39/B/HS4/00941. We also thank participants of the uRos 2024 conference for valuable comments and discussion.

We also have developed a python version of the package [BlockingPy] that is available through the PiPy. It has the similar structure but offers more ANN algorithms (e.g. FAISS) or usage of embeddings. For more details see: Strojny, T., & Beręsewicz, M. (2025). BlockingPy: approximate nearest neighbours for blocking of records for entity resolution. arXiv preprint arXiv:2504.04266.

References

O. Binette and R. C. Steorts. (almost) all of entity resolution. *Science Advances*, 8(12):eabi8021, 2022. doi: 10.1126/sciadv.abi8021. URL <https://www.science.org/doi/abs/10.1126/>

[sciadv.abi8021](#). [p1]

- A. Dasyilva and A. Goussanou. Estimating the false negatives due to blocking in record linkage. *Survey Methodology*, 47(2):299–312, 2021. [p1]
- A. Dasyilva and A. Goussanou. On the consistent estimation of linkage errors without training data. *Japanese Journal of Statistics and Data Science*, 5(1):181–216, 2022. [p1]
- G. Papadakis, D. Skoutas, E. Thanos, and T. Palpanas. Blocking and filtering techniques for entity resolution: A survey. *ACM Comput. Surv.*, 53(2), Mar. 2020. ISSN 0360-0300. doi: 10.1145/3377455. URL <https://doi.org/10.1145/3377455>. [p1]
- R. C. Steorts, S. L. Ventura, M. Sadinle, and S. E. Fienberg. A comparison of blocking methods for record linkage. In J. Domingo-Ferrer, editor, *Privacy in Statistical Databases*, pages 253–268, Cham, 2014. Springer International Publishing. ISBN 978-3-319-11257-2. [p1]

Maciej Beręsewicz

University of Economics and Business Statistical Office in Poznań

Department of Statistics, Poznań, Poland

Centre for the Methodology of Population Studies

<https://maciejberesewicz.com>

ORCID: 0000-0002-8281-4301

maciej.beresewicz@poznan.pl

Adam Struzik

Adam Mickiewicz University Statistical Office in Poznań

Department of Mathematics, Poznań, Poland

Centre for Urban Statistics

adastr5@st.amu.edu.pl