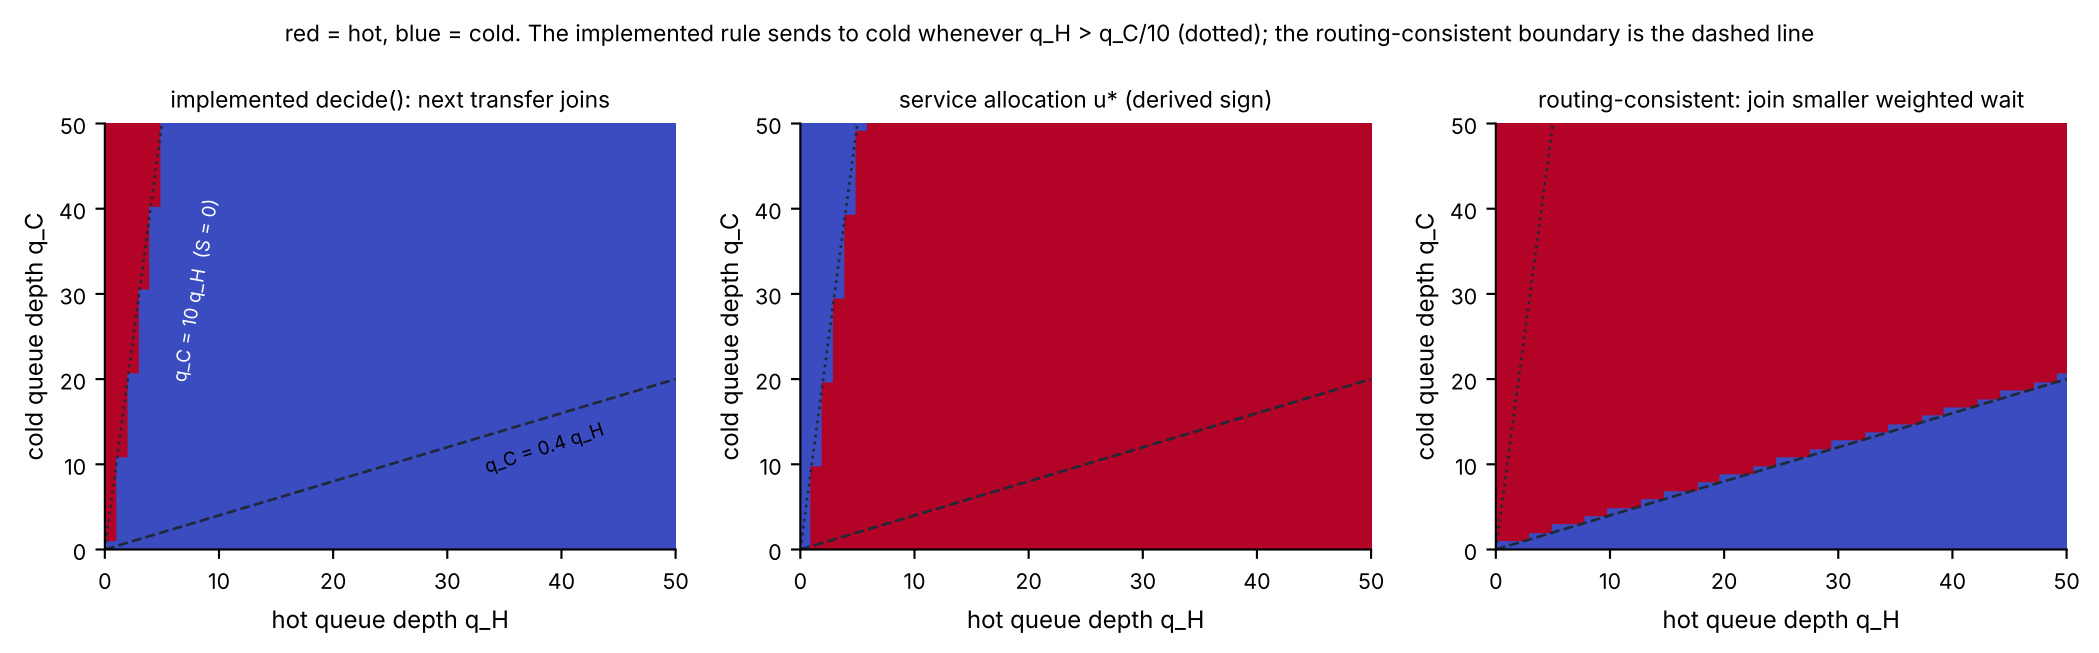
red = hot, blue = cold. The implemented rule sends to cold whenever q_H > q_C/10 (dotted); the routing-consistent boundary is the dashed line
implemented decide(): next transfer joins
service allocation u* (derived sign)
routing-consistent: join smaller weighted wait
cold queue depth q_C
hot queue depth q_H
q_C = 10 q_H (S = 0)
q_C = 0.4 q_H
0
10
20
30
40
50