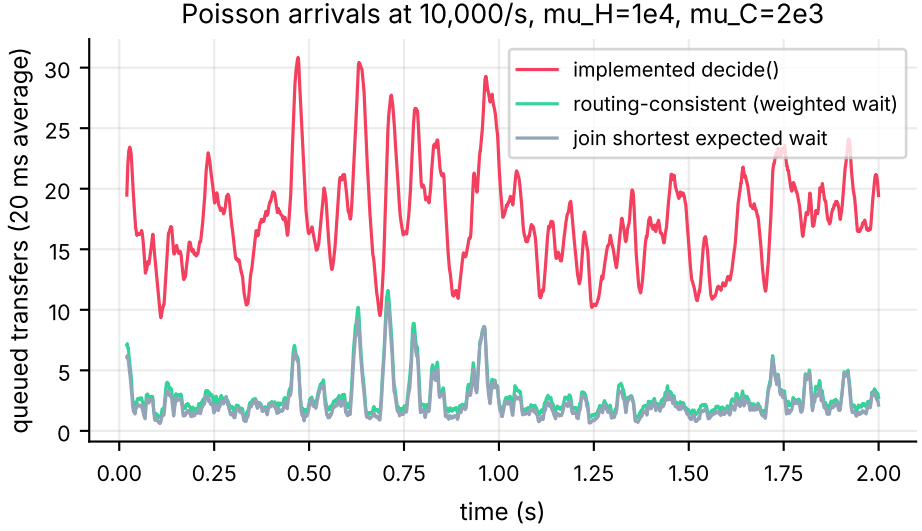
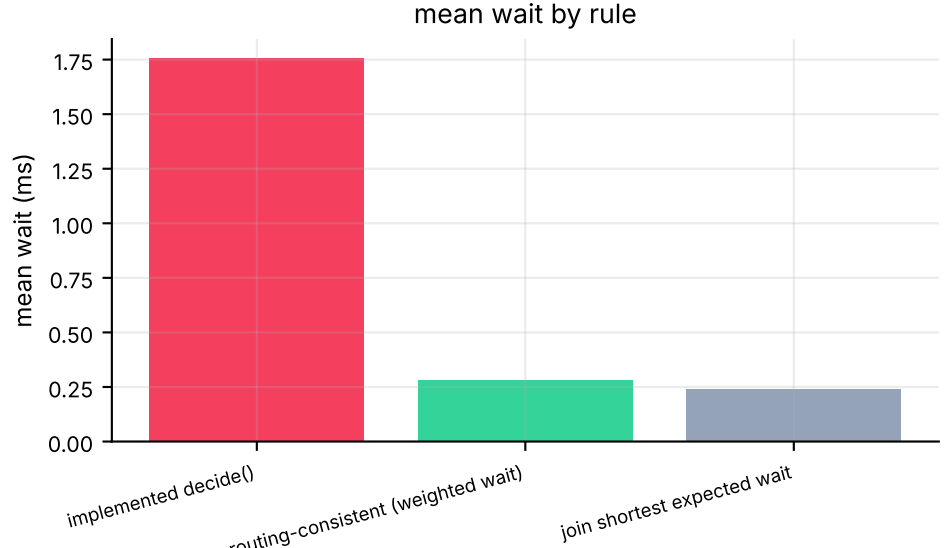

Poisson arrivals at 10,000/s, mu_H=1e4, mu_C=2e3
implemented decide()
routing-consistent (weighted wait)
join shortest expected wait
queued transfers (20 ms average)
0
5
10
15
20
25
30
0.00
0.25
0.50
0.75
1.00
1.25
1.50
1.75
2.00
time (s)


mean wait by rule
mean wait (ms)
0.00
0.25
0.50
0.75
1.00
1.25
1.50
1.75
implemented decide()
routing-consistent (weighted wait)
join shortest expected wait