

ROBERT SEDGEWICK | KEVIN WAYNE

<http://algs4.cs.princeton.edu>

5.2 TRIES

- ▶ *R-way tries*
- ▶ *ternary search tries*
- ▶ *character-based operations*

Summary of the performance of symbol-table implementations

Order of growth of the frequency of operations.

implementation	typical case			ordered operations	operations on keys
	search	insert	delete		
red-black BST	$\log N$	$\log N$	$\log N$	yes	<code>compareTo()</code>
hash table	$1 \dagger$	$1 \dagger$	$1 \dagger$	no	<code>equals()</code> <code>hashCode()</code>

† under uniform hashing assumption

Q. Can we do better?

A. Yes, if we can avoid examining the entire key, as with string sorting.

String symbol table basic API

String symbol table. Symbol table specialized to string keys.

```
public class StringST<Value>

    StringST()
        create an empty symbol table

    void put(String key, Value val)
        put key-value pair into the symbol table

    Value get(String key)
        return value paired with given key

    void delete(String key)
        delete key and corresponding value

    :
```

Goal. Faster than hashing, more flexible than BSTs.

3

String symbol table implementations cost summary

implementation	character accesses (typical case)					dedup	
	search hit	search miss	insert	space (references)	moby.txt	actors.txt	
red-black BST	$L + c \lg^2 N$	$c \lg^2 N$	$c \lg^2 N$	$4N$	1.40	97.4	
hashing (linear probing)	L	L	L	$4N \text{ to } 16N$	0.76	40.6	

Parameters

- N = number of strings
- L = length of string
- R = radix

file	size	words	distinct
moby.txt	1.2 MB	210 K	32 K
actors.txt	82 MB	11.4 M	900 K

Challenge. Efficient performance for string keys.

4

Algorithms

ROBERT SEDGEWICK | KEVIN WAYNE

<http://algs4.cs.princeton.edu>

5.2 TRIES

- ▶ *R-way tries*
- ▶ *ternary search tries*
- ▶ *character-based operations*


Tries

Tries. [from **retrieval**, but pronounced "try"]

- Store characters in nodes (not keys).
- Each node has R children, one for each possible character.
- For now, we do not draw null links.

for now we do not
draw null links

key	value
by	4
sea	6
sells	1
she	0
shells	3
shore	7
the	5

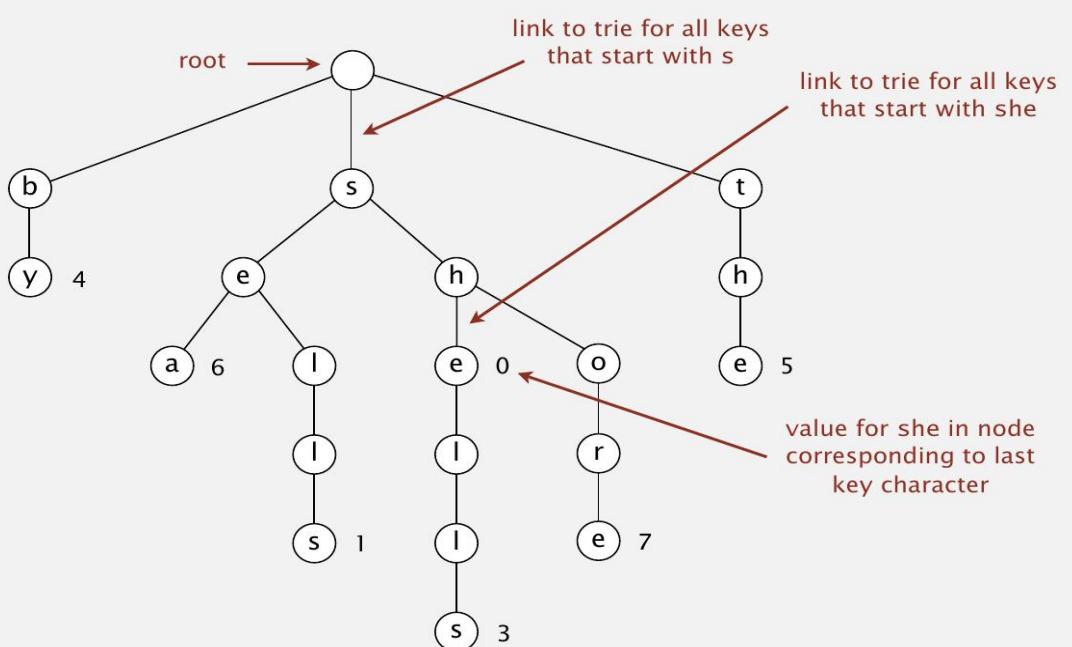


Search in a trie

Follow links corresponding to each character in the key.

- **Search hit:** node where search ends has a non-null value.
- **Search miss:** reach null link or node where search ends has null value.

get("shells")

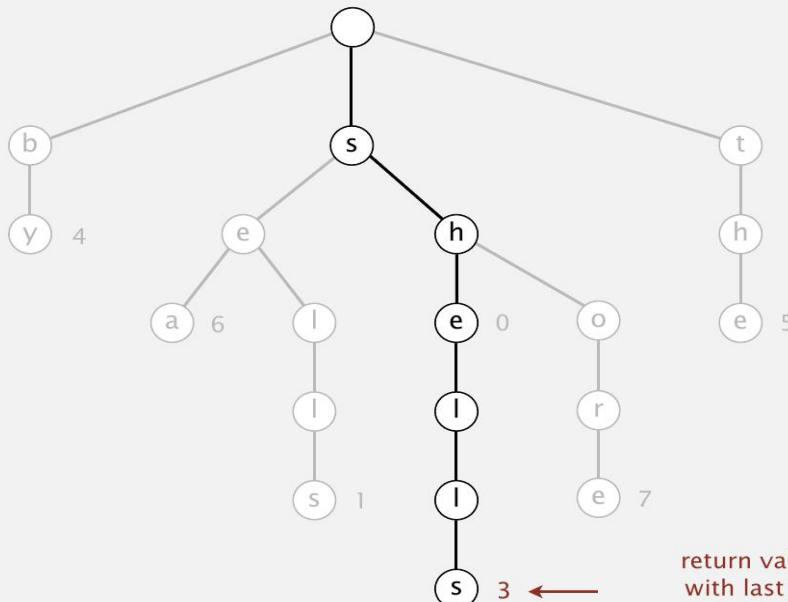


7

Search in a trie

Follow links corresponding to each character in the key.

- **Search hit:** node where search ends has a non-null value.
- **Search miss:** reach null link or node where search ends has null value.

get("she")

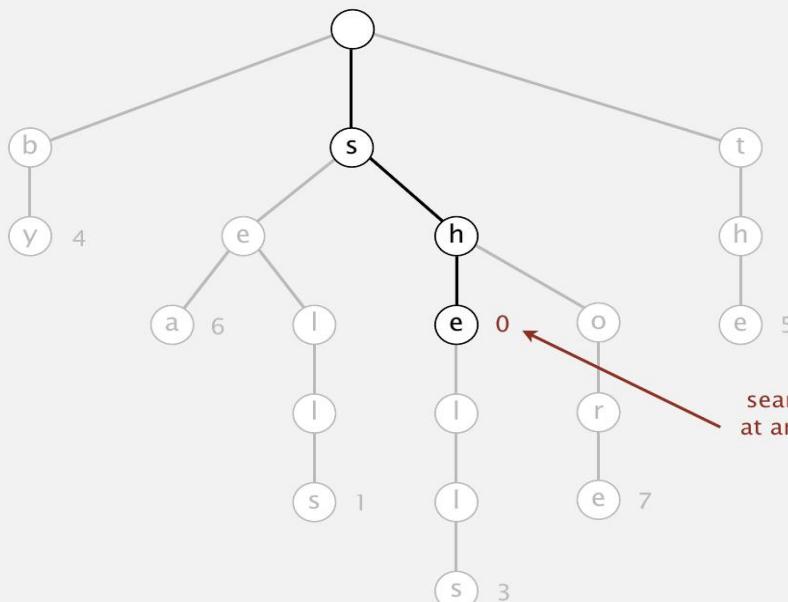


8

Search in a trie

Follow links corresponding to each character in the key.

- Search hit: node where search ends has a non-null value.
- **Search miss:** reach null link or node where search ends has null value.

get("shell")

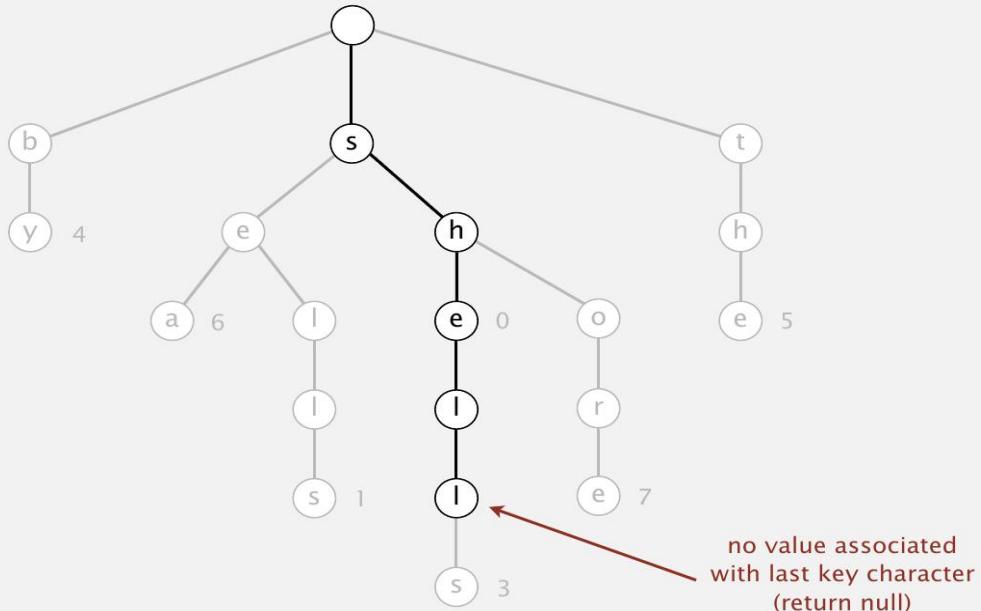


9

Search in a trie

Follow links corresponding to each character in the key.

- Search hit: node where search ends has a non-null value.
- **Search miss:** reach null link or node where search ends has null value.

get("shelter")

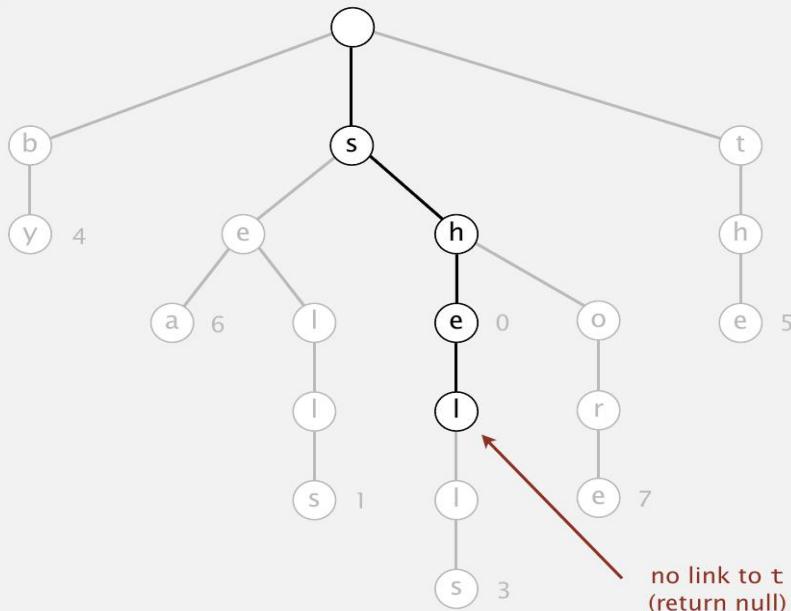


10

Insertion into a trie

Follow links corresponding to each character in the key.

- Encounter a null link: create new node.
- Encounter the last character of the key: set value in that node.

`put("shore", 7)`

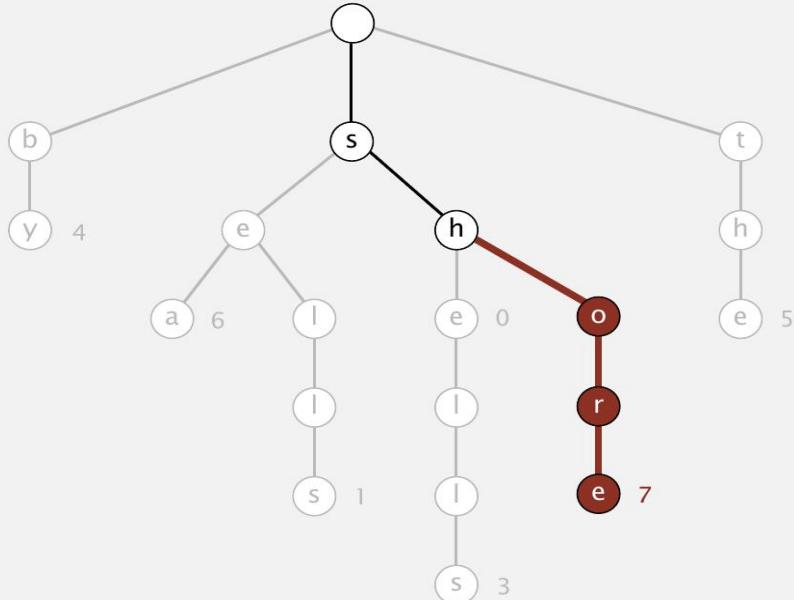

11


Trie construction demo

`trie`



Trie construction demo

trie

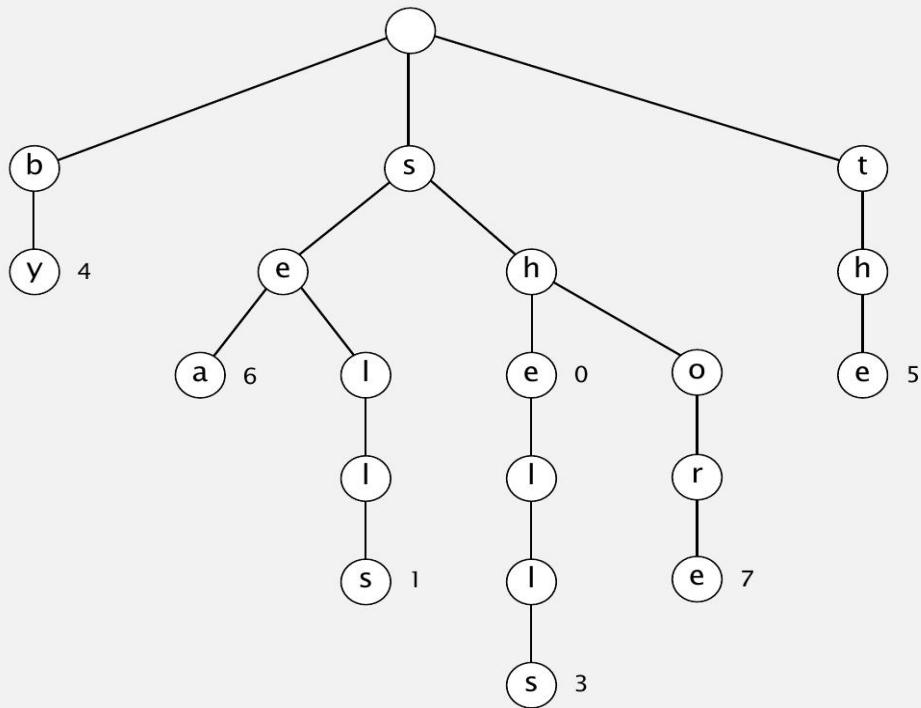


Trie representation: Java implementation

Node. A value, plus references to R nodes.

```
private static class Node
{
    private Object value;
    private Node[] next = new Node[R];
}
```

use Object instead of Value since no generic array creation in Java

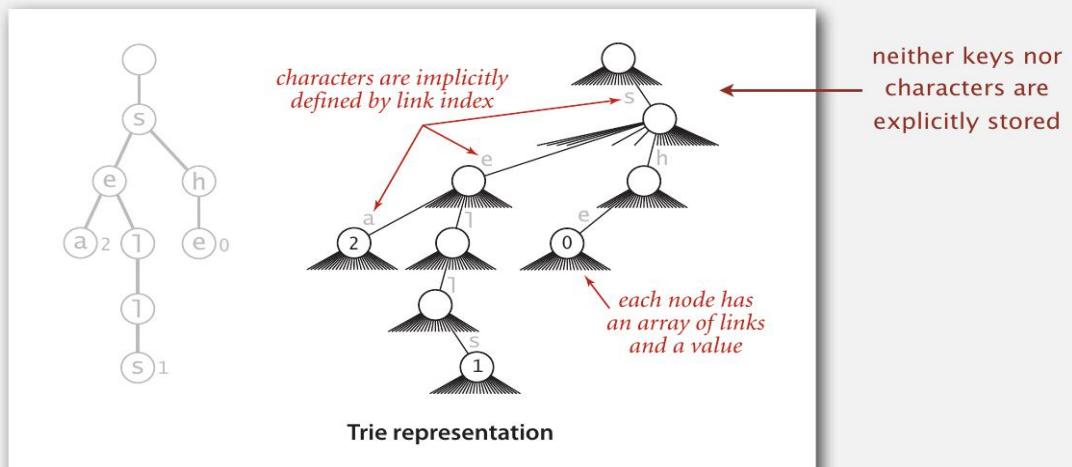

R-way trie: Java implementation

```
public class TrieST<Value>
{
    private static final int R = 256;      ← extended ASCII
    private Node root = new Node();

    private static class Node
    { /* see previous slide */ }

    public void put(String key, Value val)
    { root = put(root, key, val, 0); }

    private Node put(Node x, String key, Value val, int d)
    {
        if (x == null) x = new Node();
        if (d == key.length()) { x.val = val; return x; }
        char c = key.charAt(d);
        x.next[c] = put(x.next[c], key, val, d+1);
        return x;
    }

    ...
}
```

15

R-way trie: Java implementation (continued)

```
:
public boolean contains(String key)
{ return get(key) != null; }

public Value get(String key)
{
    Node x = get(root, key, 0);
    if (x == null) return null;
    return (Value) x.val;   ← cast needed
}

private Node get(Node x, String key, int d)
{
    if (x == null) return null;
    if (d == key.length()) return x;
    char c = key.charAt(d);
    return get(x.next[c], key, d+1);
}

}
```

16

Trie performance


Search hit. Need to examine all L characters for equality.

Search miss.

- Could have mismatch on first character.
- Typical case: examine only a few characters (sublinear).

Space. R null links at each leaf.

(but sublinear space possible if many short strings share common prefixes)

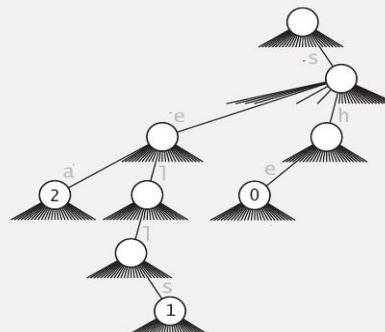

Bottom line. Fast search hit and even faster search miss, but wastes space.

17


Popular interview question

Goal. Design a data structure to perform efficient spell checking.

ace
ago
and
bet
cab
caw
cue
dim
dug
egg
fee
few
for
gig
hut
ilk
jam
jay
jot
joy
men
nob
now
owl
rap
sky
sob
tag
tap
tar
tip
wad
was
wee

Solution. Build a 26-way trie (key = word, value = bit).

English-language text

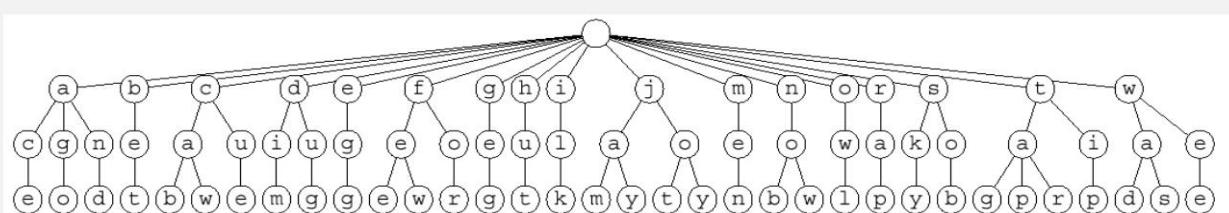


18

Deletion in an R-way trie

To delete a key-value pair:

- Find the node corresponding to key and set value to null.
- If node has null value and all null links, remove that node (and recur).

delete("shells")

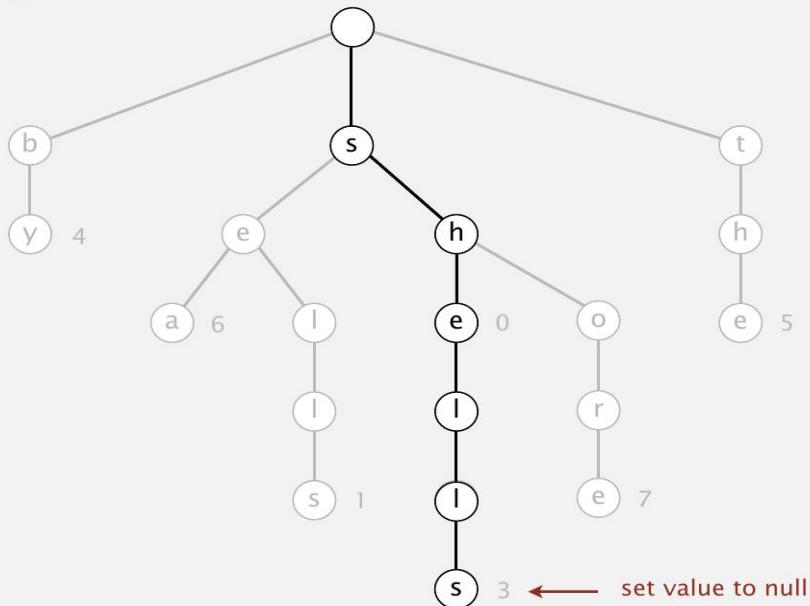


19

Deletion in an R-way trie

To delete a key-value pair:

- Find the node corresponding to key and set value to null.
- If node has null value and all null links, remove that node (and recur).

delete("shells")

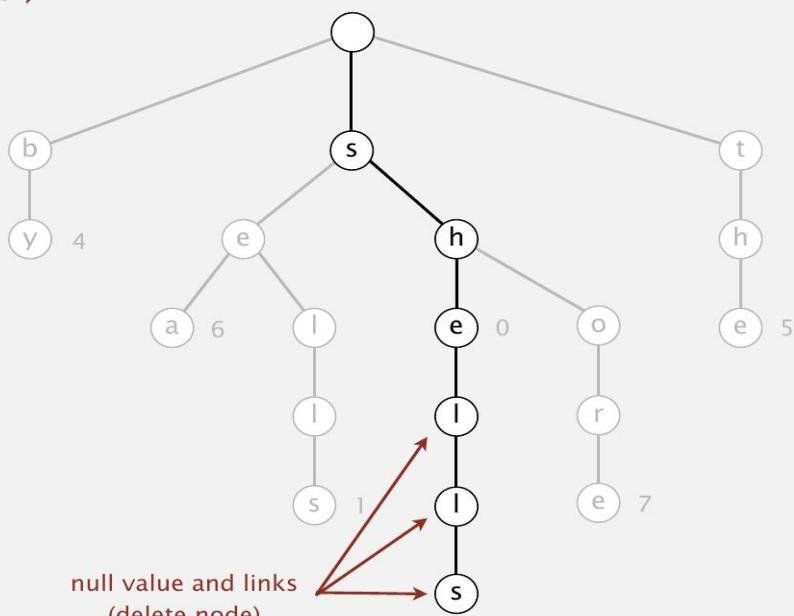

20

String symbol table implementations cost summary


implementation	character accesses (typical case)				dedup	
	search hit	search miss	insert	space (references)	moby.txt	actors.txt
red-black BST	$L + c \lg^2 N$	$c \lg^2 N$	$c \lg^2 N$	$4N$	1.40	97.4
hashing (linear probing)	L	L	L	4N to 16N	0.76	40.6
R-way trie	L	$\log_R N$	L	$(R+1) N$	1.12	out of memory

R-way trie.

- Method of choice for small R .
- Too much memory for large R .

Challenge. Use less memory, e.g., 65,536-way trie for Unicode!

21

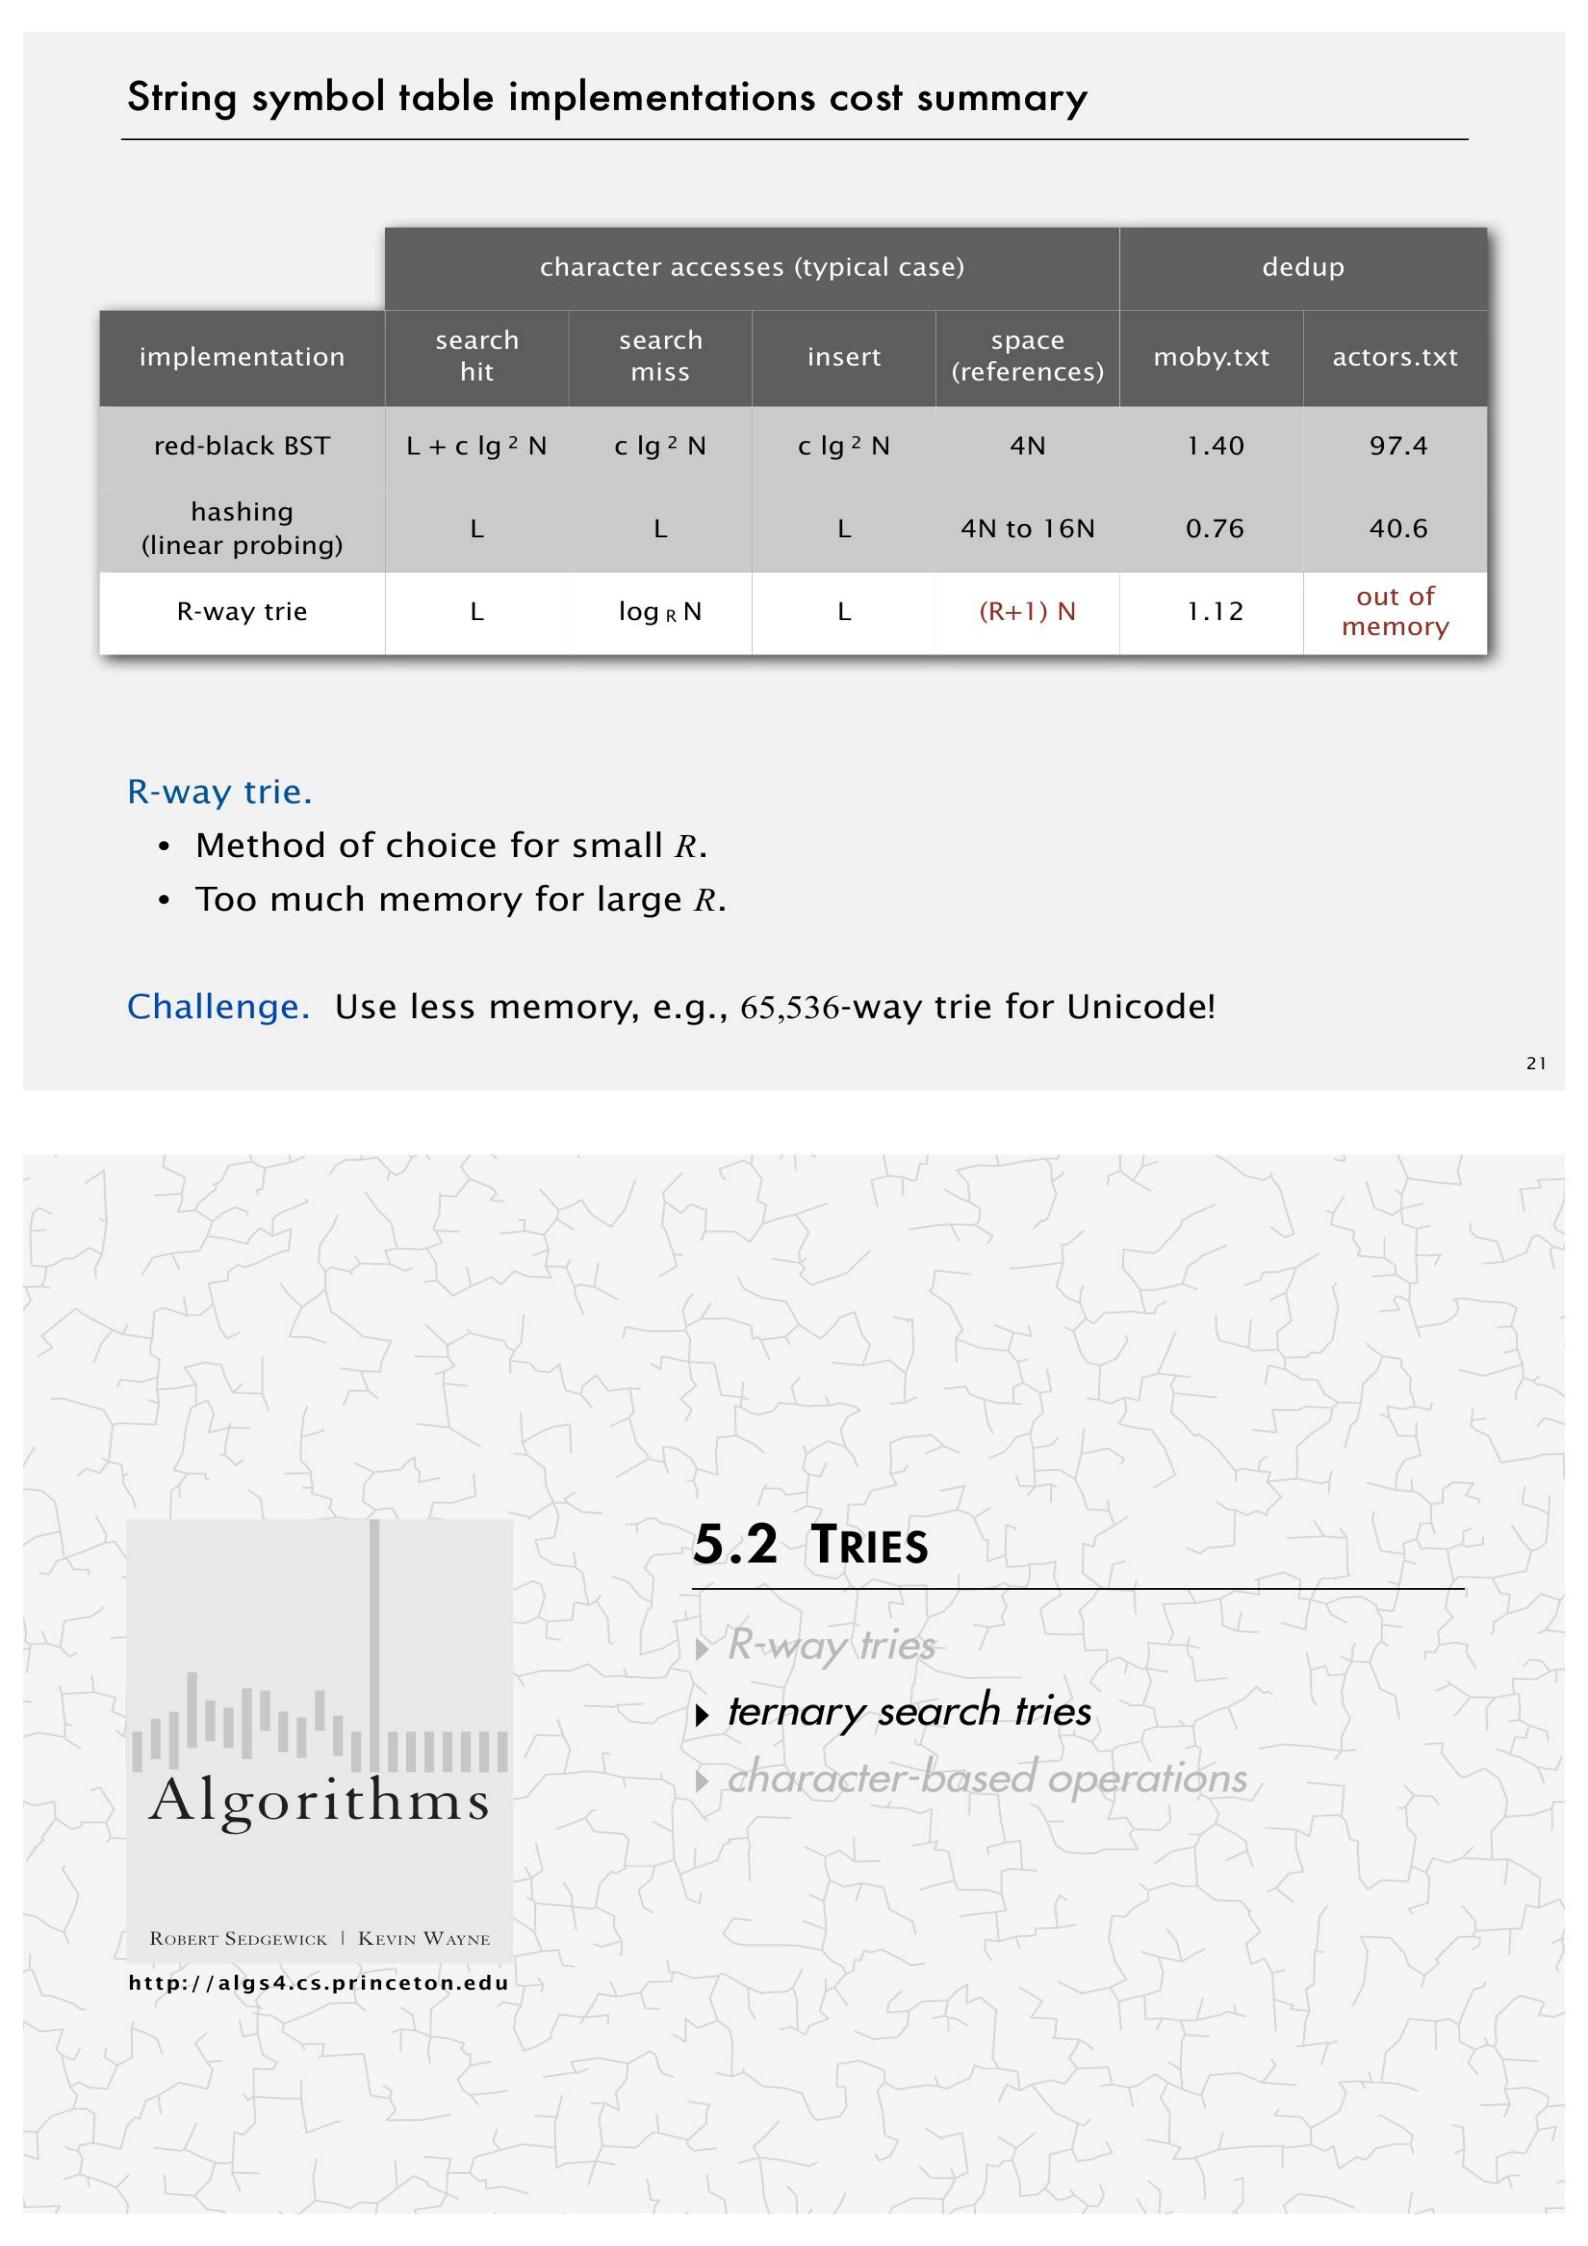

Algorithms

5.2 TRIES

► R-way tries

► ternary search tries


► character-based operations

ROBERT SEDGEWICK | KEVIN WAYNE

<http://algs4.cs.princeton.edu>

Ternary search tries


- Store characters and values in nodes (not keys).
- Each node has 3 children: smaller (left), equal (middle), larger (right).

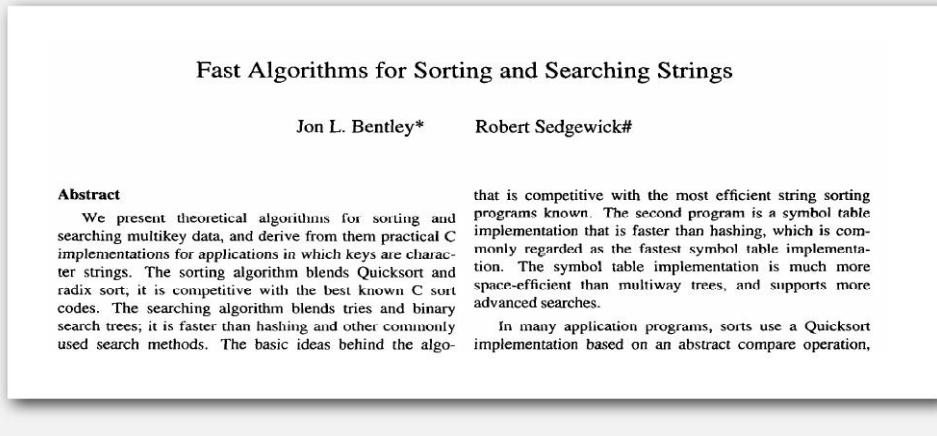

24

Ternary search tries

- Store characters and values in nodes (not keys).
- Each node has 3 children: smaller (left), equal (middle), larger (right).

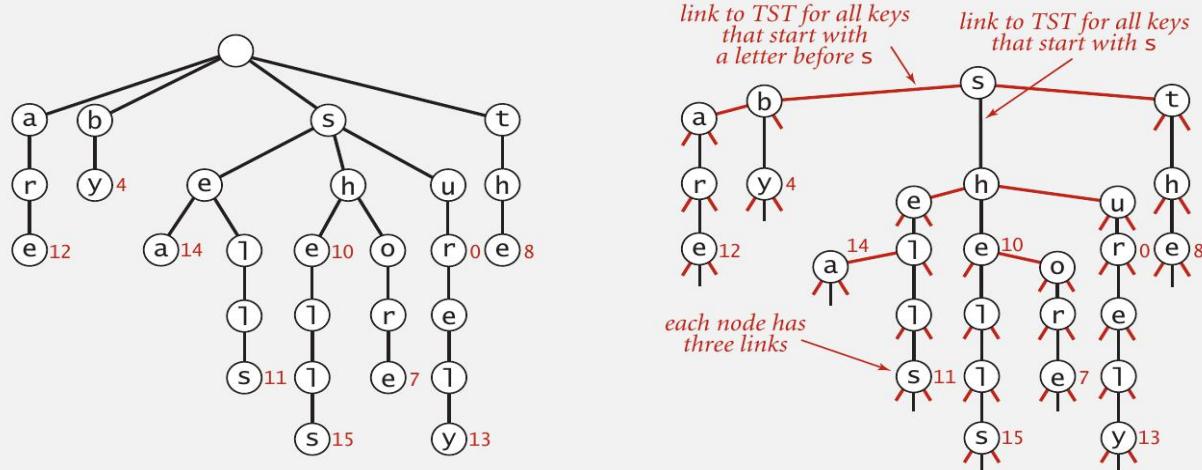

TST representation of a trie

25


Search in a TST

Follow links corresponding to each character in the key.

- If less, take left link; if greater, take right link.
- If equal, take the middle link and move to the next key character.

Search hit. Node where search ends has a non-null value.


Search miss. Reach a null link or node where search ends has null value.

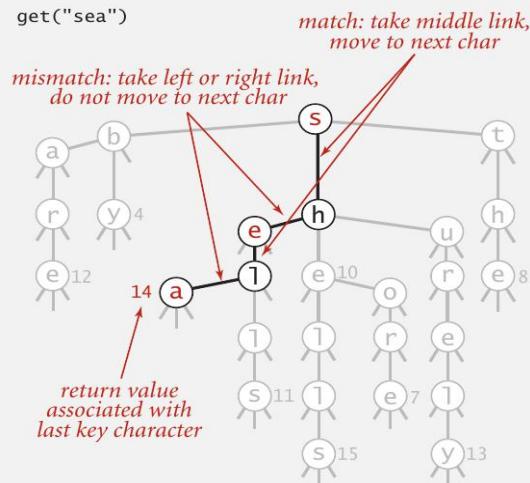

26

Search hit in a TST


get("sea")

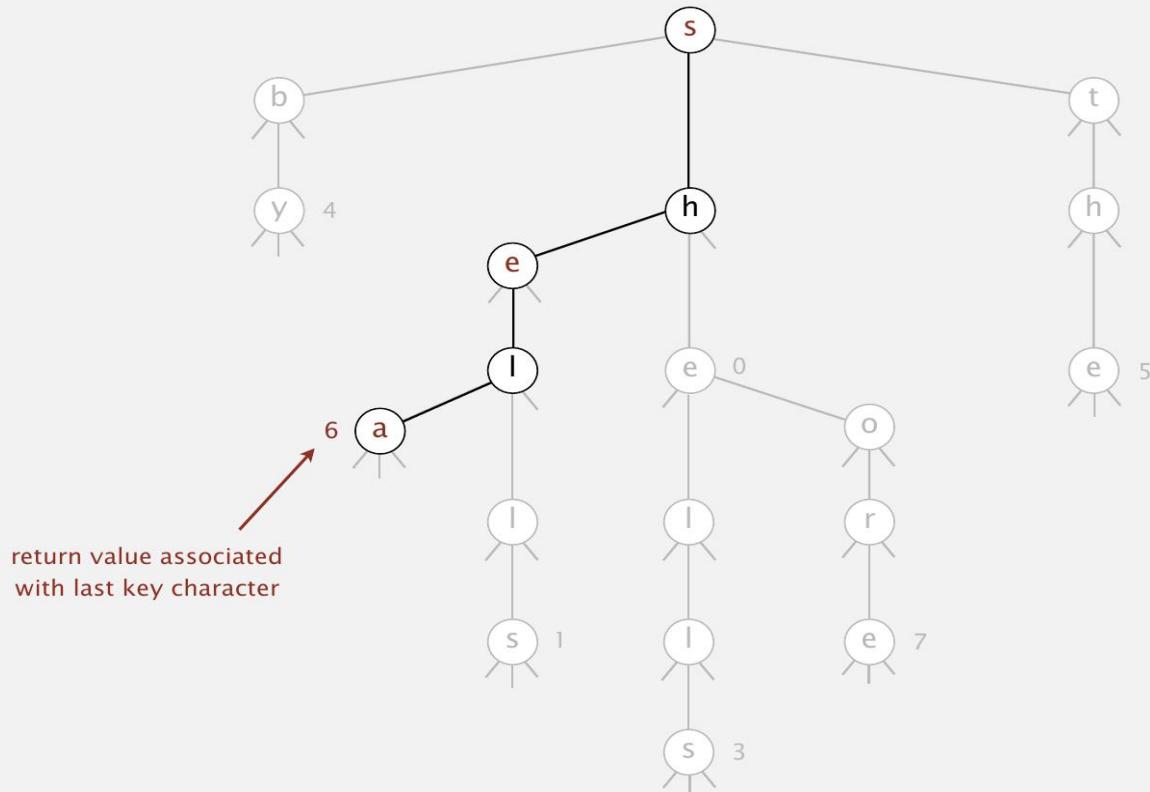

27

Search miss in a TST


get("shelter")

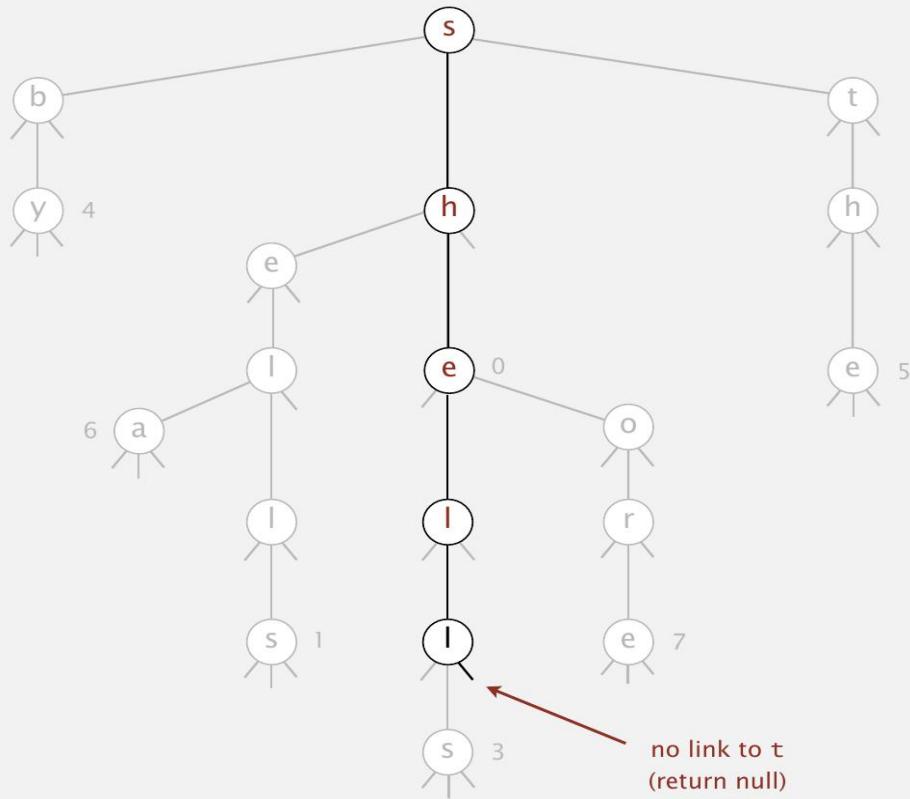

28

Ternary search trie construction demo


ternary search trie

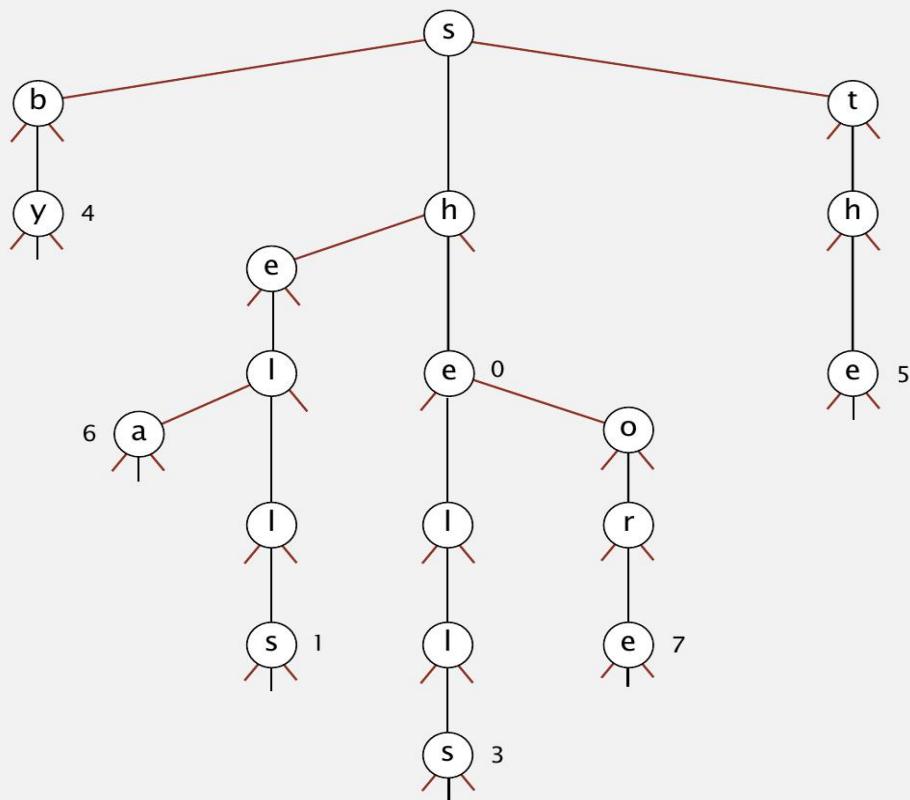

30


26-way trie vs. TST

26-way trie. 26 null links in each leaf.

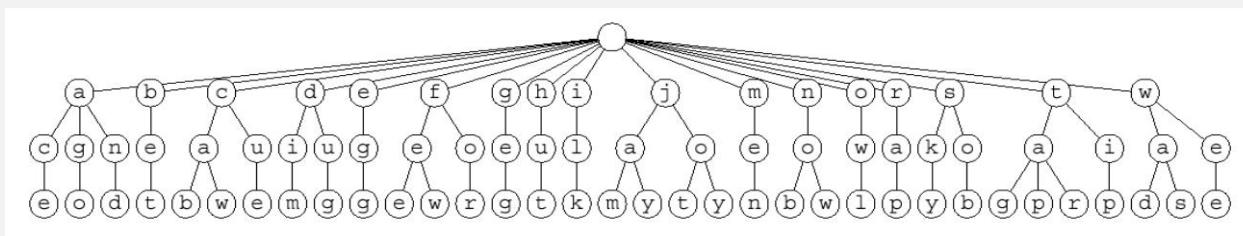

26-way trie (1035 null links, not shown)

TST. 3 null links in each leaf.

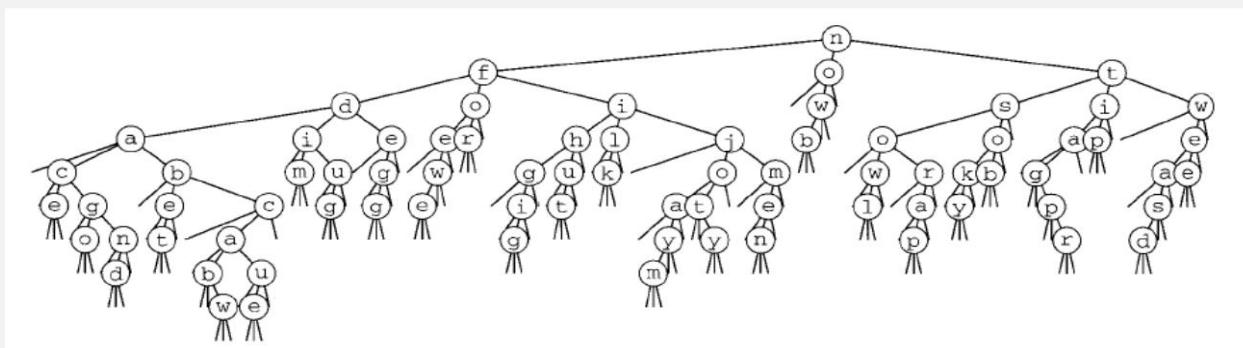

TST (155 null links)

now
for
tip
ilk
dim
tag
jot
sob
nob
sky
hut
ace
bet
men
egg
few
jay
owl
joy
rap
gig
wee
was
cab
wad
caw
cue
fee
tap
ago
tar
jam
dug
and


31

TST representation in Java

A TST node is five fields:

- A value.
- A character c .
- A reference to a left TST.
- A reference to a middle TST.
- A reference to a right TST.

```
private class Node
{
    private Value val;
    private char c;
    private Node left, mid, right;
}
```

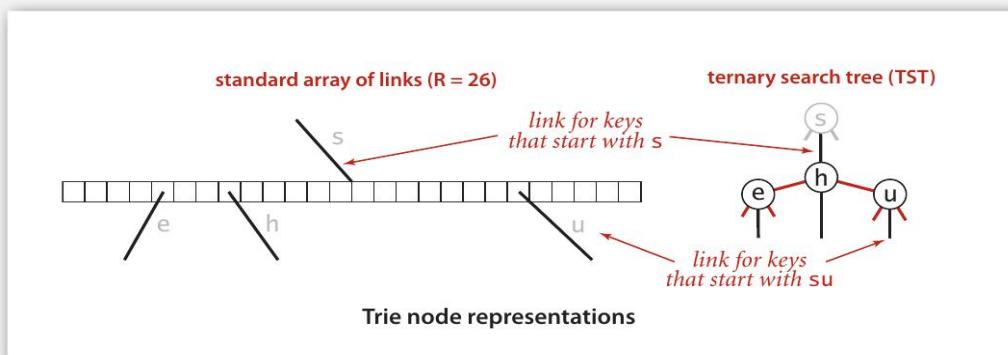

32

TST: Java implementation

```
public class TST<Value>
{
    private Node root;

    private class Node
    { /* see previous slide */ }

    public void put(String key, Value val)
    { root = put(root, key, val, 0); }

    private Node put(Node x, String key, Value val, int d)
    {
        char c = key.charAt(d);
        if (x == null) { x = new Node(); x.c = c; }
        if (c < x.c)           x.left  = put(x.left,  key, val, d);
        else if (c > x.c)      x.right = put(x.right, key, val, d);
        else if (d < key.length() - 1) x.mid   = put(x.mid,   key, val, d+1);
        else                      x.val   = val;
        return x;
    }

    ...
}
```

33

TST: Java implementation (continued)

```
...
public boolean contains(String key)
{ return get(key) != null; }

public Value get(String key)
{
    Node x = get(root, key, 0);
    if (x == null) return null;
    return x.val;
}

private Node get(Node x, String key, int d)
{
    if (x == null) return null;
    char c = key.charAt(d);
    if (c < x.c)           return get(x.left,  key, d);
    else if (c > x.c)      return get(x.right, key, d);
    else if (d < key.length() - 1) return get(x.mid,   key, d+1);
    else                      return x;
}
```

34

String symbol table implementation cost summary

implementation	character accesses (typical case)					dedup	
	search hit	search miss	insert	space (references)	moby.txt	actors.txt	
red-black BST	$L + c \lg^2 N$	$c \lg^2 N$	$c \lg^2 N$	$4 N$	1.40	97.4	
hashing (linear probing)	L	L	L	$4 N \text{ to } 16 N$	0.76	40.6	
R-way trie	L	$\log_R N$	L	$(R + 1) N$	1.12	out of memory	
TST	$L + \ln N$	$\ln N$	$L + \ln N$	$4 N$	0.72	38.7	

Remark. Can build balanced TSTs via rotations to achieve $L + \log N$ worst-case guarantees.


Bottom line. TST is as fast as hashing (for string keys), space efficient.

35

TST with R^2 branching at root

Hybrid of R-way trie and TST.

- Do R^2 -way branching at root.
- Each of R^2 root nodes points to a TST.

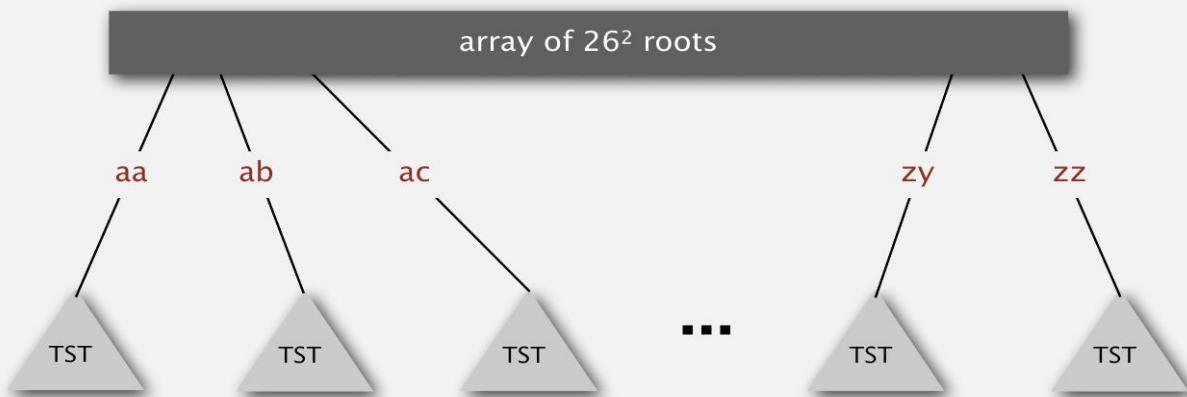

Q. What about one- and two-letter words?

36

String symbol table implementation cost summary

implementation	character accesses (typical case)				dedup	
	search hit	search miss	insert	space (references)	moby.txt	actors.txt
red-black BST	$L + c \lg^2 N$	$c \lg^2 N$	$c \lg^2 N$	$4 N$	1.40	97.4
hashing (linear probing)	L	L	L	$4 N \text{ to } 16 N$	0.76	40.6
R-way trie	L	$\log_R N$	L	$(R + 1) N$	1.12	out of memory
TST	$L + \ln N$	$\ln N$	$L + \ln N$	$4 N$	0.72	38.7
TST with R^2	$L + \ln N$	$\ln N$	$L + \ln N$	$4 N + R^2$	0.51	32.7

Bottom line. Faster than hashing for our benchmark client.

37

TST vs. hashing

Hashing.

- Need to examine entire key.
- Search hits and misses cost about the same.
- Performance relies on hash function.
- Does not support ordered symbol table operations.

TSTs.

- Works only for strings (or digital keys).
- Only examines just enough key characters.
- Search miss may involve only a few characters.
- Supports ordered symbol table operations (plus others!).

Bottom line. TSTs are:

- Faster than hashing (especially for search misses).
- More flexible than red-black BSTs. [stay tuned]

38



ROBERT SEDGEWICK | KEVIN WAYNE

<http://algs4.cs.princeton.edu>

5.2 TRIES

- ▶ *R-way tries*
- ▶ *ternary search tries*
- ▶ *character-based operations*

String symbol table API

Character-based operations. The string symbol table API supports several useful character-based operations.

key	value
by	4
sea	6
sells	1
she	0
shells	3
shore	7
the	5

Prefix match. Keys with prefix sh: she, shells, and shore.

Wildcard match. Keys that match .he: she and the.

Longest prefix. Key that is the longest prefix of shellsort: shells.

String symbol table API

public class StringST<Value>	
StringST()	<i>create a symbol table with string keys</i>
void put(String key, Value val)	<i>put key-value pair into the symbol table</i>
Value get(String key)	<i>value paired with key</i>
void delete(String key)	<i>delete key and corresponding value</i>
:	
Iterable<String> keys()	<i>all keys</i>
Iterable<String> keysWithPrefix(String s)	<i>keys having s as a prefix</i>
Iterable<String> keysThatMatch(String s)	<i>keys that match s (where . is a wildcard)</i>
String longestPrefixOf(String s)	<i>longest key that is a prefix of s</i>


Remark. Can also add other ordered ST methods, e.g., `floor()` and `rank()`.

42

Warmup: ordered iteration

To iterate through all keys in sorted order:

- Do inorder traversal of trie; add keys encountered to a queue.
- Maintain sequence of characters on path from root to node.

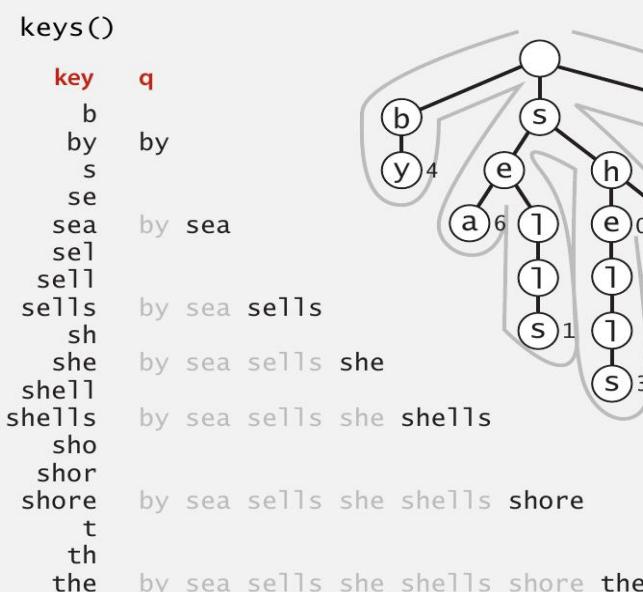

43

Ordered iteration: Java implementation

To iterate through all keys in sorted order:

- Do inorder traversal of trie; add keys encountered to a queue.
- Maintain sequence of characters on path from root to node.

```
public Iterable<String> keys()
{
    Queue<String> queue = new Queue<String>();
    collect(root, "", queue);
    return queue;
}

private void collect(Node x, String prefix, Queue<String> q)
{
    if (x == null) return;
    if (x.val != null) q.enqueue(prefix);
    for (char c = 0; c < R; c++)
        collect(x.next[c], prefix + c, q);
}
```

sequence of characters
on path from root to x


44

Prefix matches

Find all keys in a symbol table starting with a given prefix.

Ex. Autocomplete in a cell phone, search bar, text editor, or shell.


- User types characters one at a time.
- System reports all matching strings.

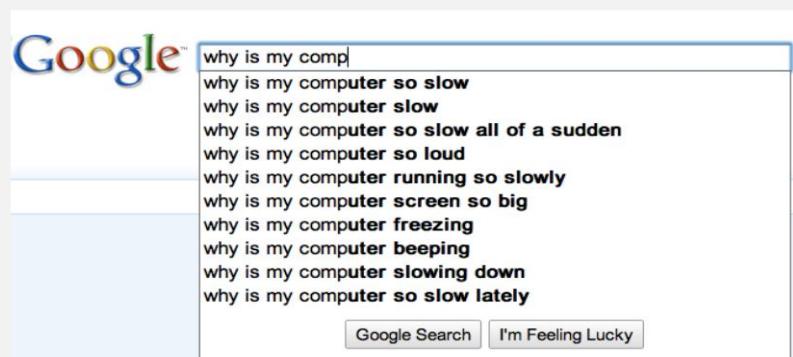

45

Prefix matches in an R-way trie

Find all keys in a symbol table starting with a given prefix.

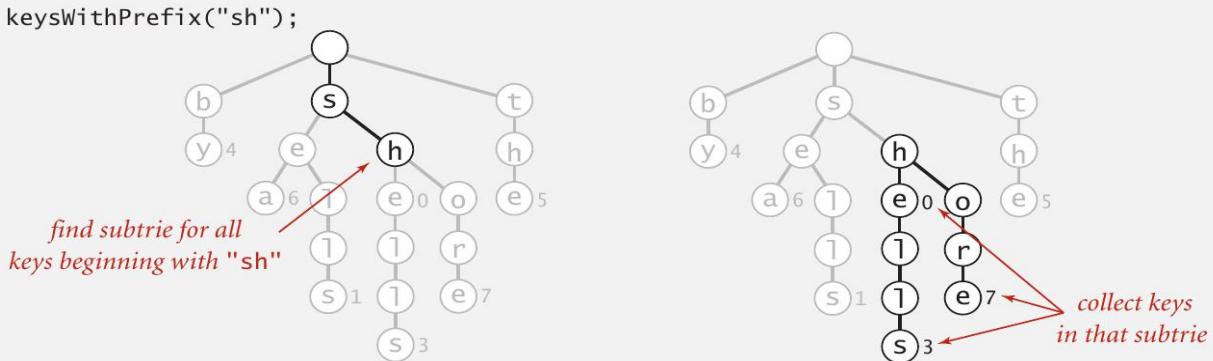

```
public Iterable<String> keysWithPrefix(String prefix)
{
    Queue<String> queue = new Queue<String>();
    Node x = get(root, prefix, 0);
    collect(x, prefix, queue);
    return queue;
}
```

key	queue
sh	she
she	
shel	
shell	
shells	she shells
sho	
shor	
shore	she shells shore

46

Longest prefix

Find longest key in symbol table that is a prefix of query string.

Ex. To send packet toward destination IP address, router chooses IP address in routing table that is longest prefix match.

"128" ← represented as 32-bit binary number for IPv4 (instead of string)

"128.112"

"128.112.055"

"128.112.055.15"

"128.112.136"

"128.112.155.11"

"128.112.155.13"

"128.222"

"128.222.136"

longestPrefixOf("128.112.136.11") = "128.112.136"
longestPrefixOf("128.112.100.16") = "128.112"
longestPrefixOf("128.166.123.45") = "128"


Note. Not the same as floor: floor("128.112.100.16") = "128.112.055.15"

47

Longest prefix in an R-way trie

Find longest key in symbol table that is a prefix of query string.

- Search for query string.
- Keep track of longest key encountered.

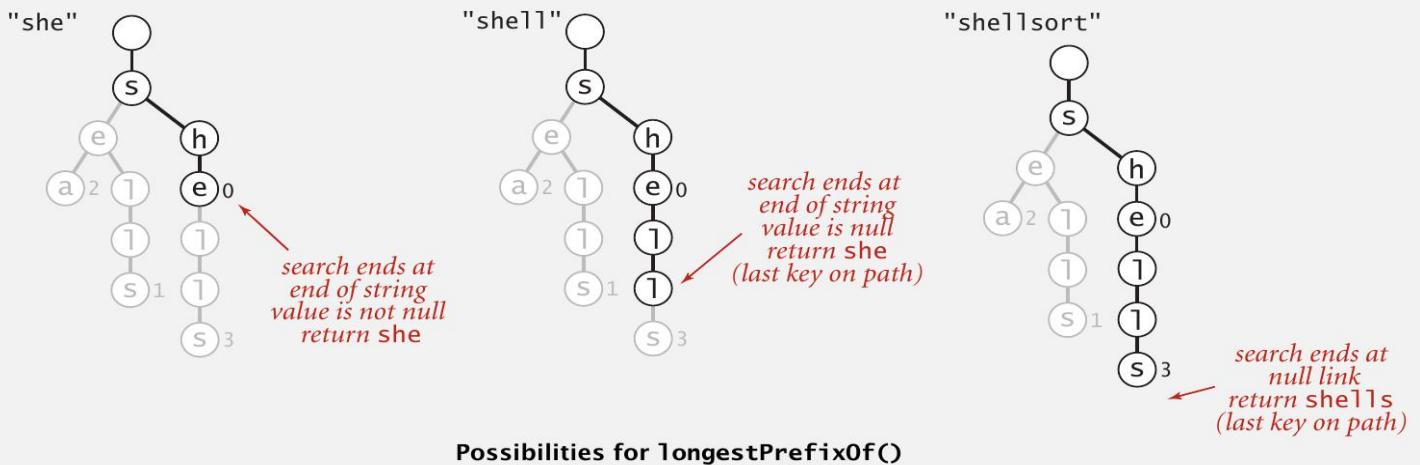

48

Longest prefix in an R-way trie: Java implementation

Find longest key in symbol table that is a prefix of query string.

- Search for query string.
- Keep track of longest key encountered.

```
public String longestPrefixOf(String query)
{
    int length = search(root, query, 0, 0);
    return query.substring(0, length);
}

private int search(Node x, String query, int d, int length)
{
    if (x == null) return length;
    if (x.val != null) length = d;
    if (d == query.length()) return length;
    char c = query.charAt(d);
    return search(x.next[c], query, d+1, length);
}
```

49

T9 texting

Goal. Type text messages on a phone keypad.

Multi-tap input. Enter a letter by repeatedly pressing a key until the desired letter appears.


T9 text input.

"a much faster and more fun way to enter text"

- Find all words that correspond to given sequence of numbers.
- Press 0 to see all completion options.

Ex. hello

- Multi-tap: 4 4 3 3 5 5 5 5 5 6 6 6
- T9: 4 3 5 5 6

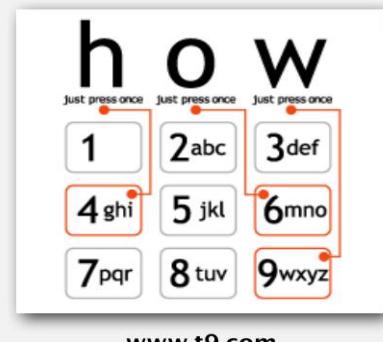

Q. How to implement?

www.t9.com

50

A letter to t9.com

To: info@t9support.com
Date: Tue, 25 Oct 2005 14:27:21 -0400 (EDT)

Dear T9 texting folks,

I enjoyed learning about the T9 text system from your webpage, and used it as an example in my data structures and algorithms class. However, one of my students noticed a bug in your phone keypad


<http://www.t9.com/images/how.gif>

Somehow, it is missing the letter s. (!)

Just wanted to bring this information to your attention and thank you for your website.

Regards,

Kevin

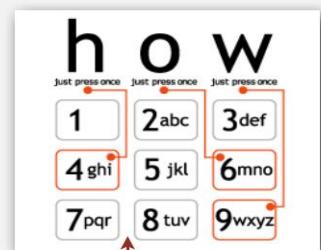

where the @#\$% is the "s" ???

51

A world without 's' ?

To: "'Kevin Wayne'" <wayne@CS.Princeton.EDU>
Date: Tue, 25 Oct 2005 12:44:42 -0700

Thank you Kevin.

I am glad that you find T9 o valuable for your cla. I had not noticed thi before. Thank for writing in and letting u know.

Take care,

Brooke nyder
OEM Dev upport
AOL/Tegic Communication
1000 Dexter Ave N. uite 300
eattle, WA 98109


ALL INFORMATION CONTAINED IN THIS EMAIL IS CONSIDERED CONFIDENTIAL AND PROPERTY OF AOL/TEGIC COMMUNICATIONS

52

Patricia trie

Patricia trie. [Practical Algorithm to Retrieve Information Coded in Alphanumeric]

- Remove one-way branching.
- Each node represents a sequence of characters.
- Implementation: one step beyond this course.

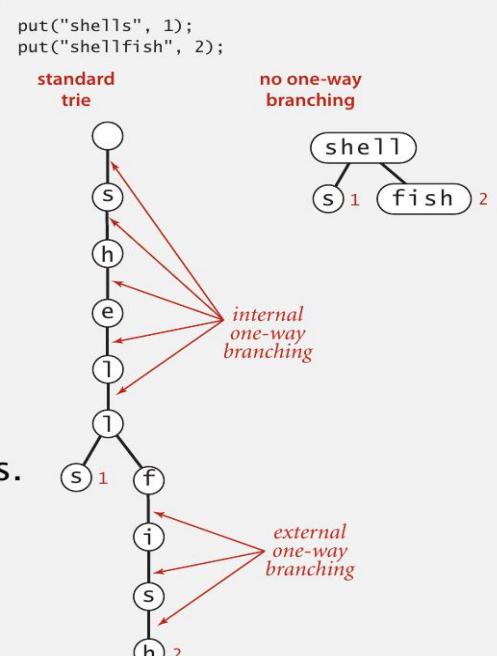

Applications.

- Database search.
- P2P network search.
- IP routing tables: find longest prefix match.
- Compressed quad-tree for N-body simulation.
- Efficiently storing and querying XML documents.

Also known as: crit-bit tree, radix tree.


53

Suffix tree

Suffix tree.

- Patricia trie of suffixes of a string.
- Linear-time construction: beyond this course.

suffix tree for BANANAS

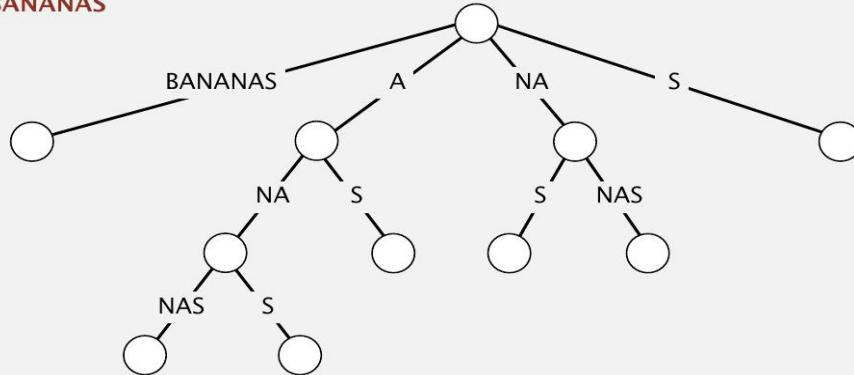

Applications.

- Linear-time: longest repeated substring, longest common substring, longest palindromic substring, substring search, tandem repeats,
- Computational biology databases (BLAST, FASTA).

54

String symbol tables summary

A success story in algorithm design and analysis.

Red-black BST.

- Performance guarantee: $\log N$ key compares.
- Supports ordered symbol table API.

Hash tables.

- Performance guarantee: constant number of probes.
- Requires good hash function for key type.

Tries. R-way, TST.

- Performance guarantee: $\log N$ **characters** accessed.
- Supports character-based operations.

Bottom line. You can get at anything by examining 50-100 bits (!!)

55