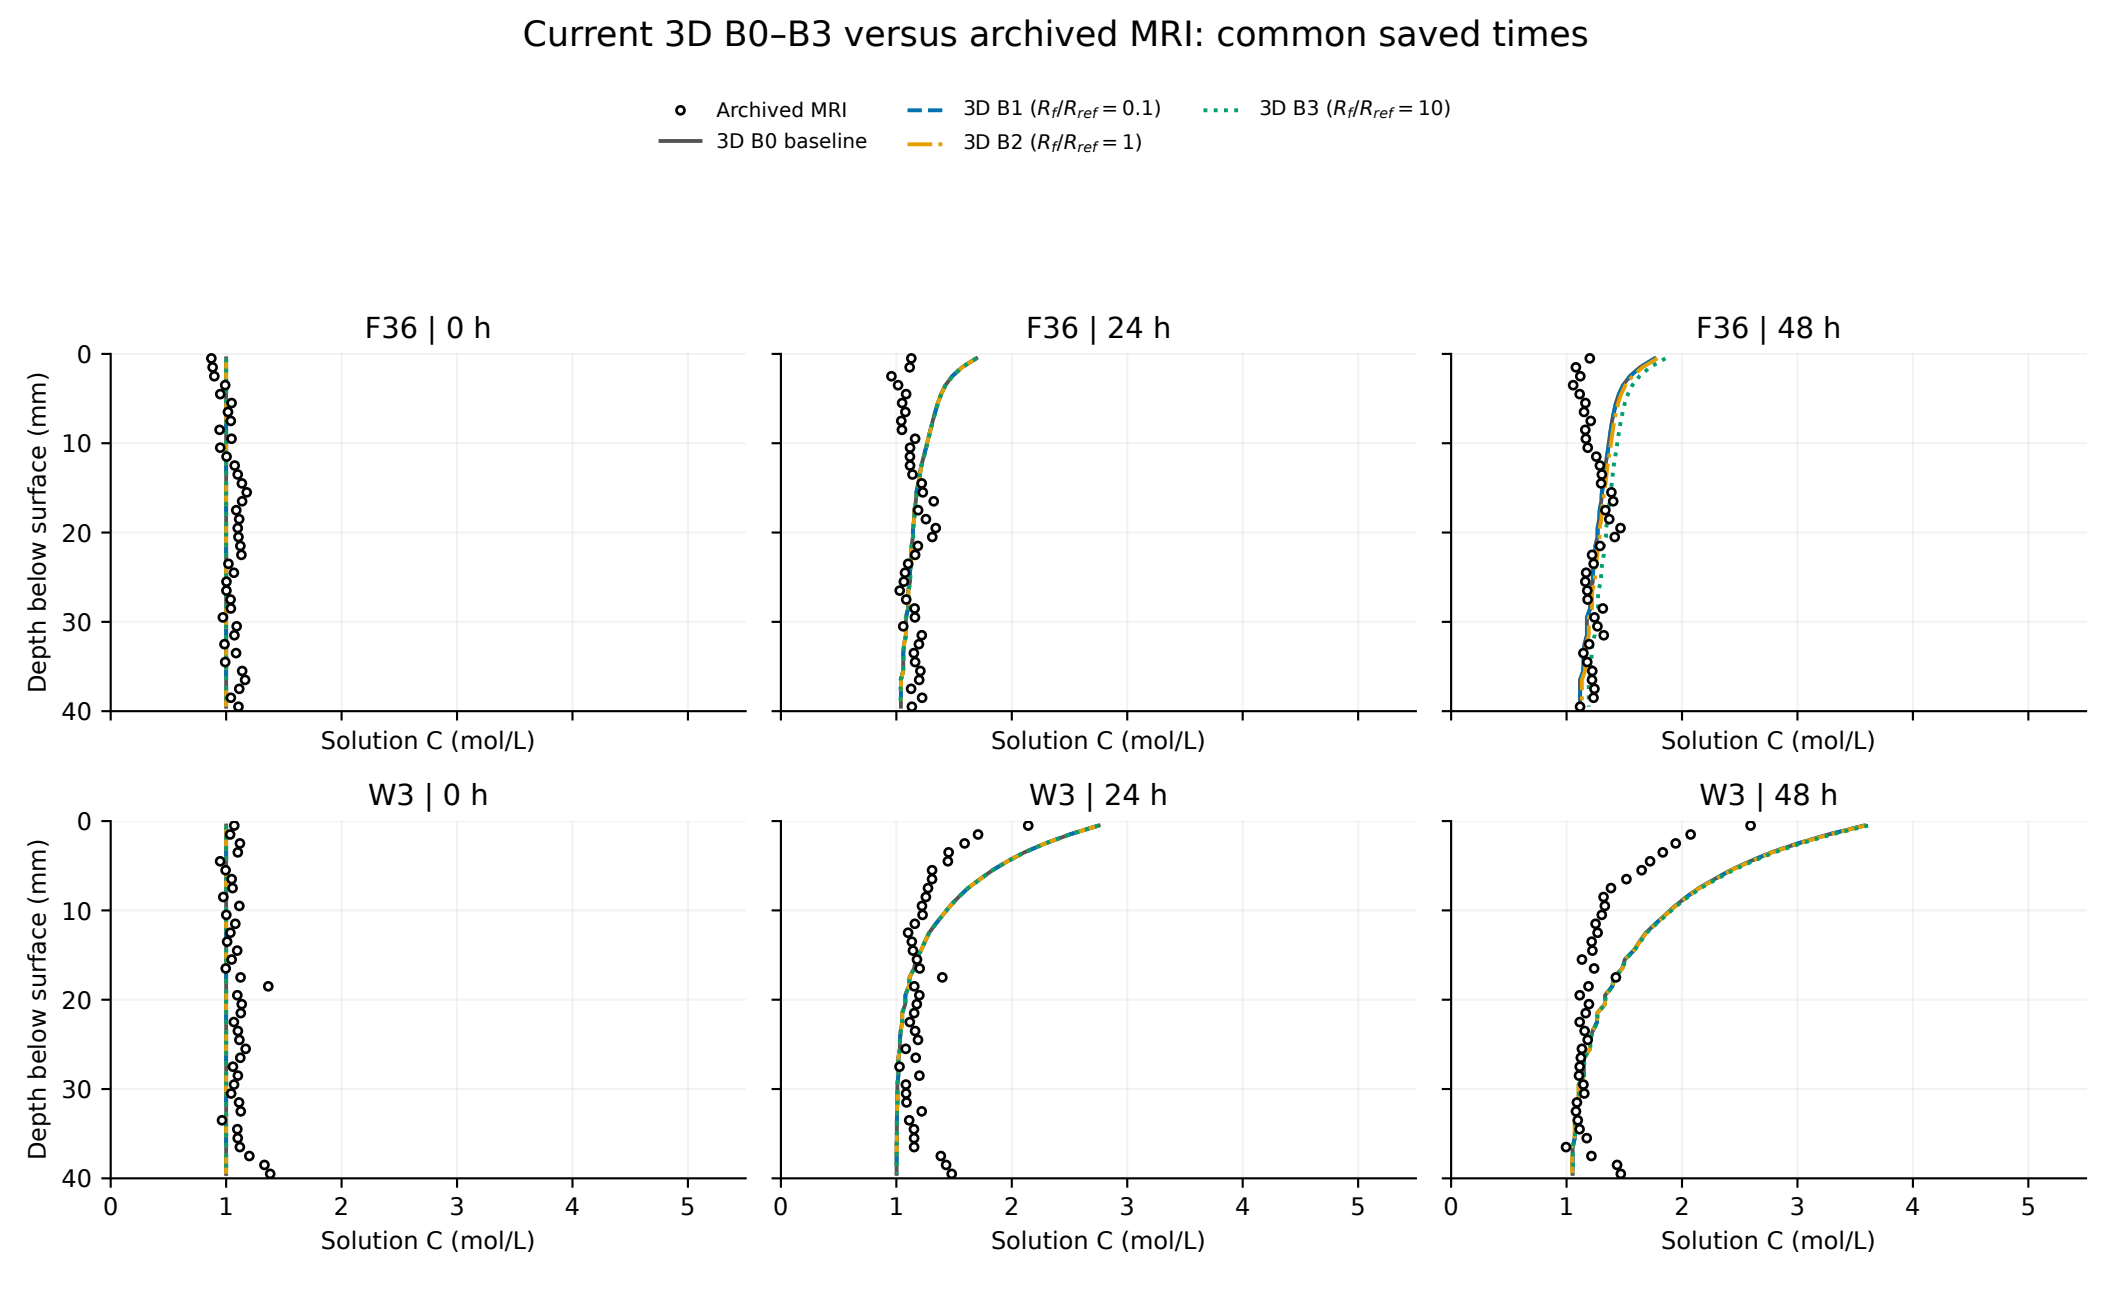
Current 3D B0–B3 versus archived MRI: common saved times
Archived MRI
3D B0 baseline
3D B1 ($R_f/R_{ref} = 0.1$)
3D B2 ($R_f/R_{ref} = 1$)
3D B3 ($R_f/R_{ref} = 10$)
F36 | 0 h
F36 | 24 h
F36 | 48 h
W3 | 0 h
W3 | 24 h
W3 | 48 h
Depth below surface (mm)
Solution C (mol/L)
0
10
20
30
40
1
2
3
4
5
Whole-half profiles; actual saved 0/24/48 h states; nominal MRI clock; no interpolation or onset inference.

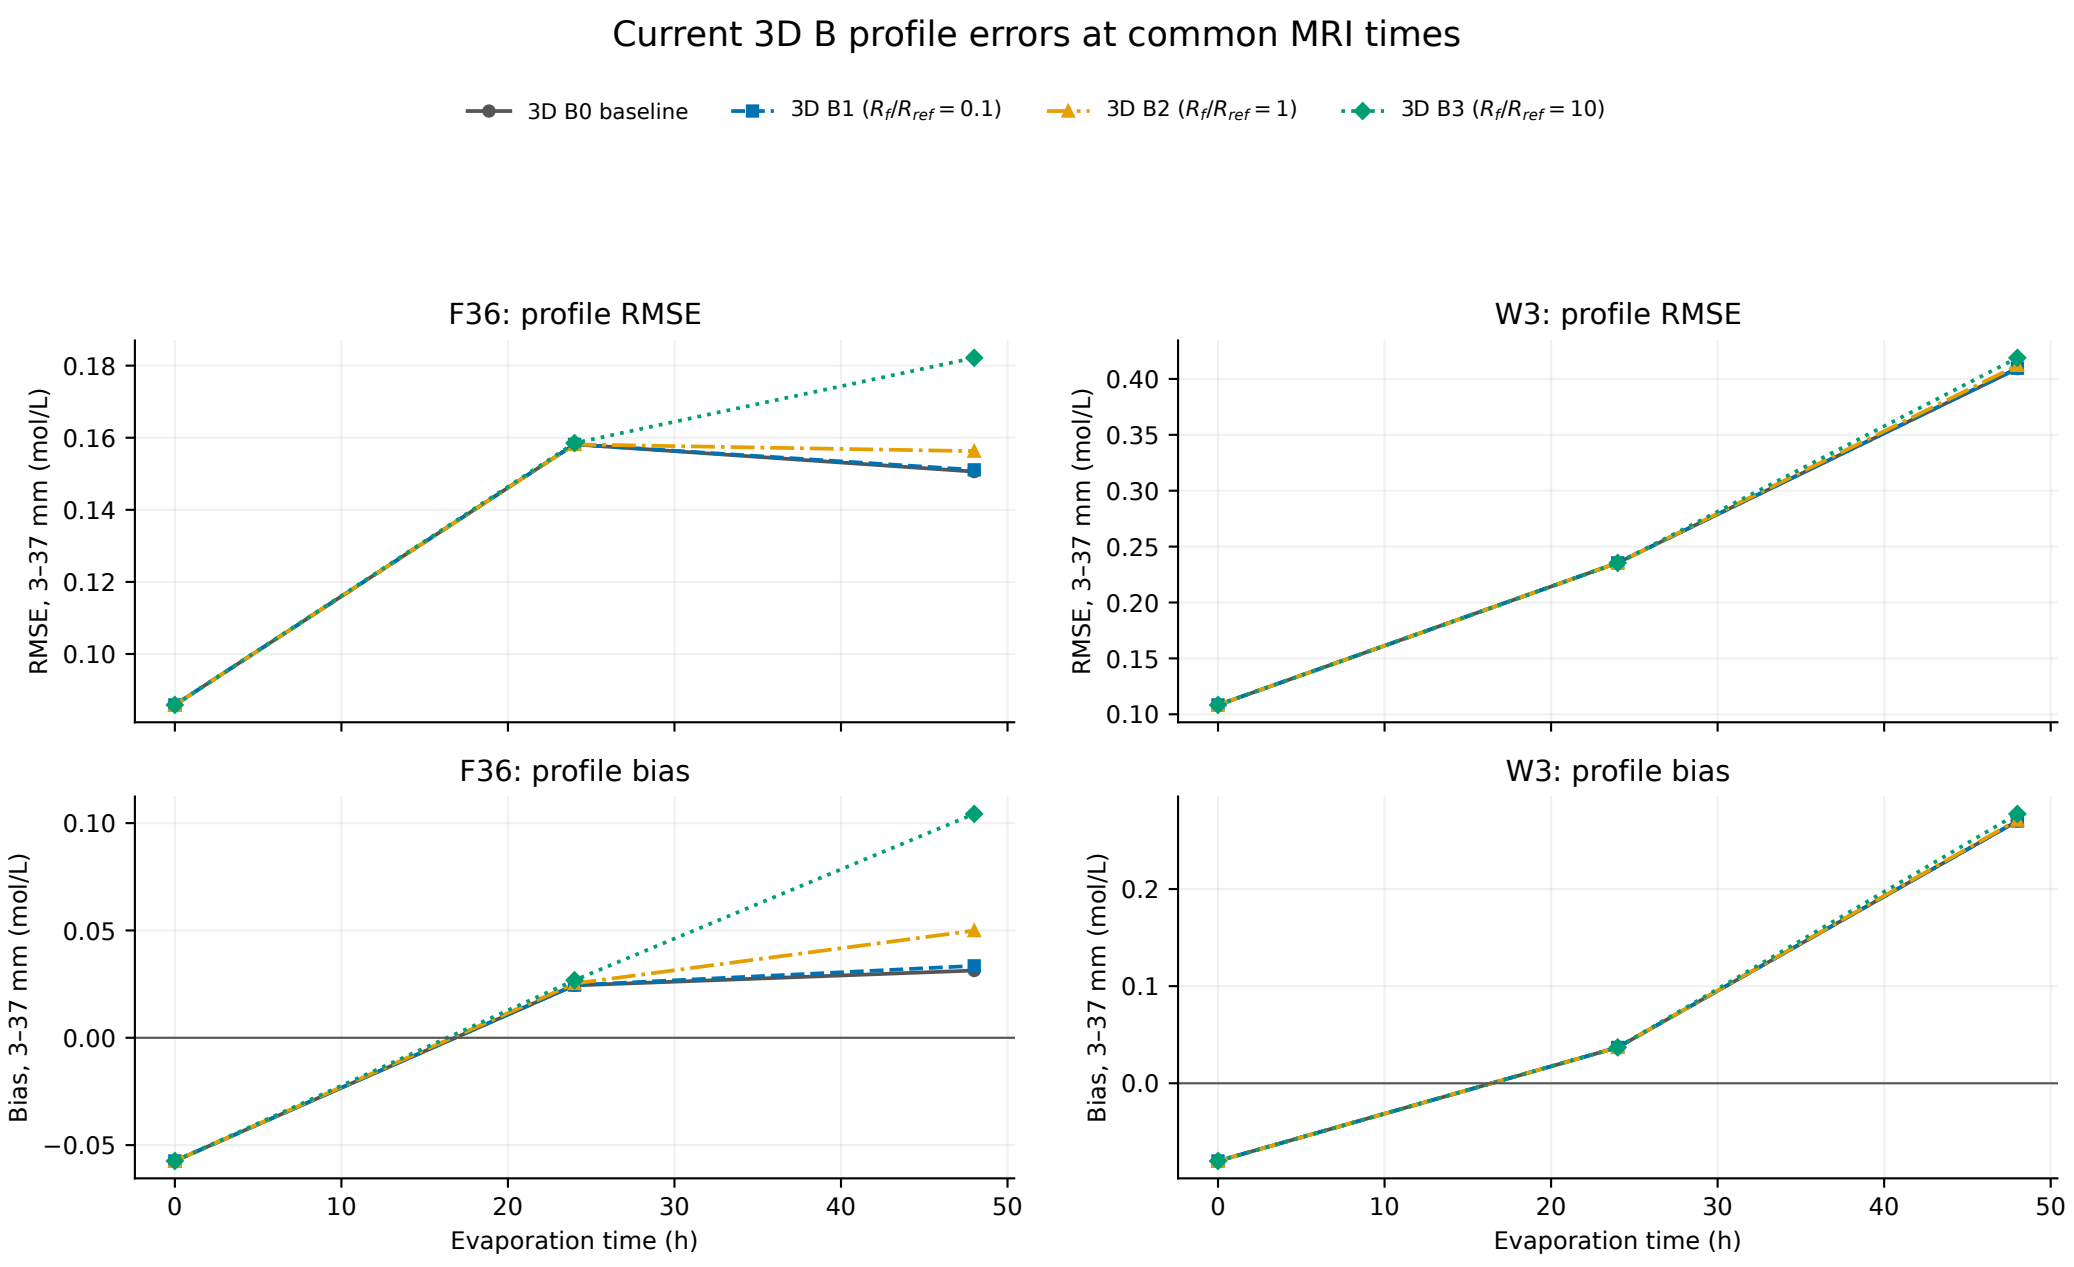
Current 3D B profile errors at common MRI times
3D B0 baseline
3D B1 ($R_f/R_{ref} = 0.1$)
3D B2 ($R_f/R_{ref} = 1$)
3D B3 ($R_f/R_{ref} = 10$)
F36: profile RMSE
W3: profile RMSE
F36: profile bias
W3: profile bias
RMSE, 3–37 mm (mol/L)
Bias, 3–37 mm (mol/L)
Evaporation time (h)
Three nominal-time comparisons only; no uncertainty model or full-window validation.

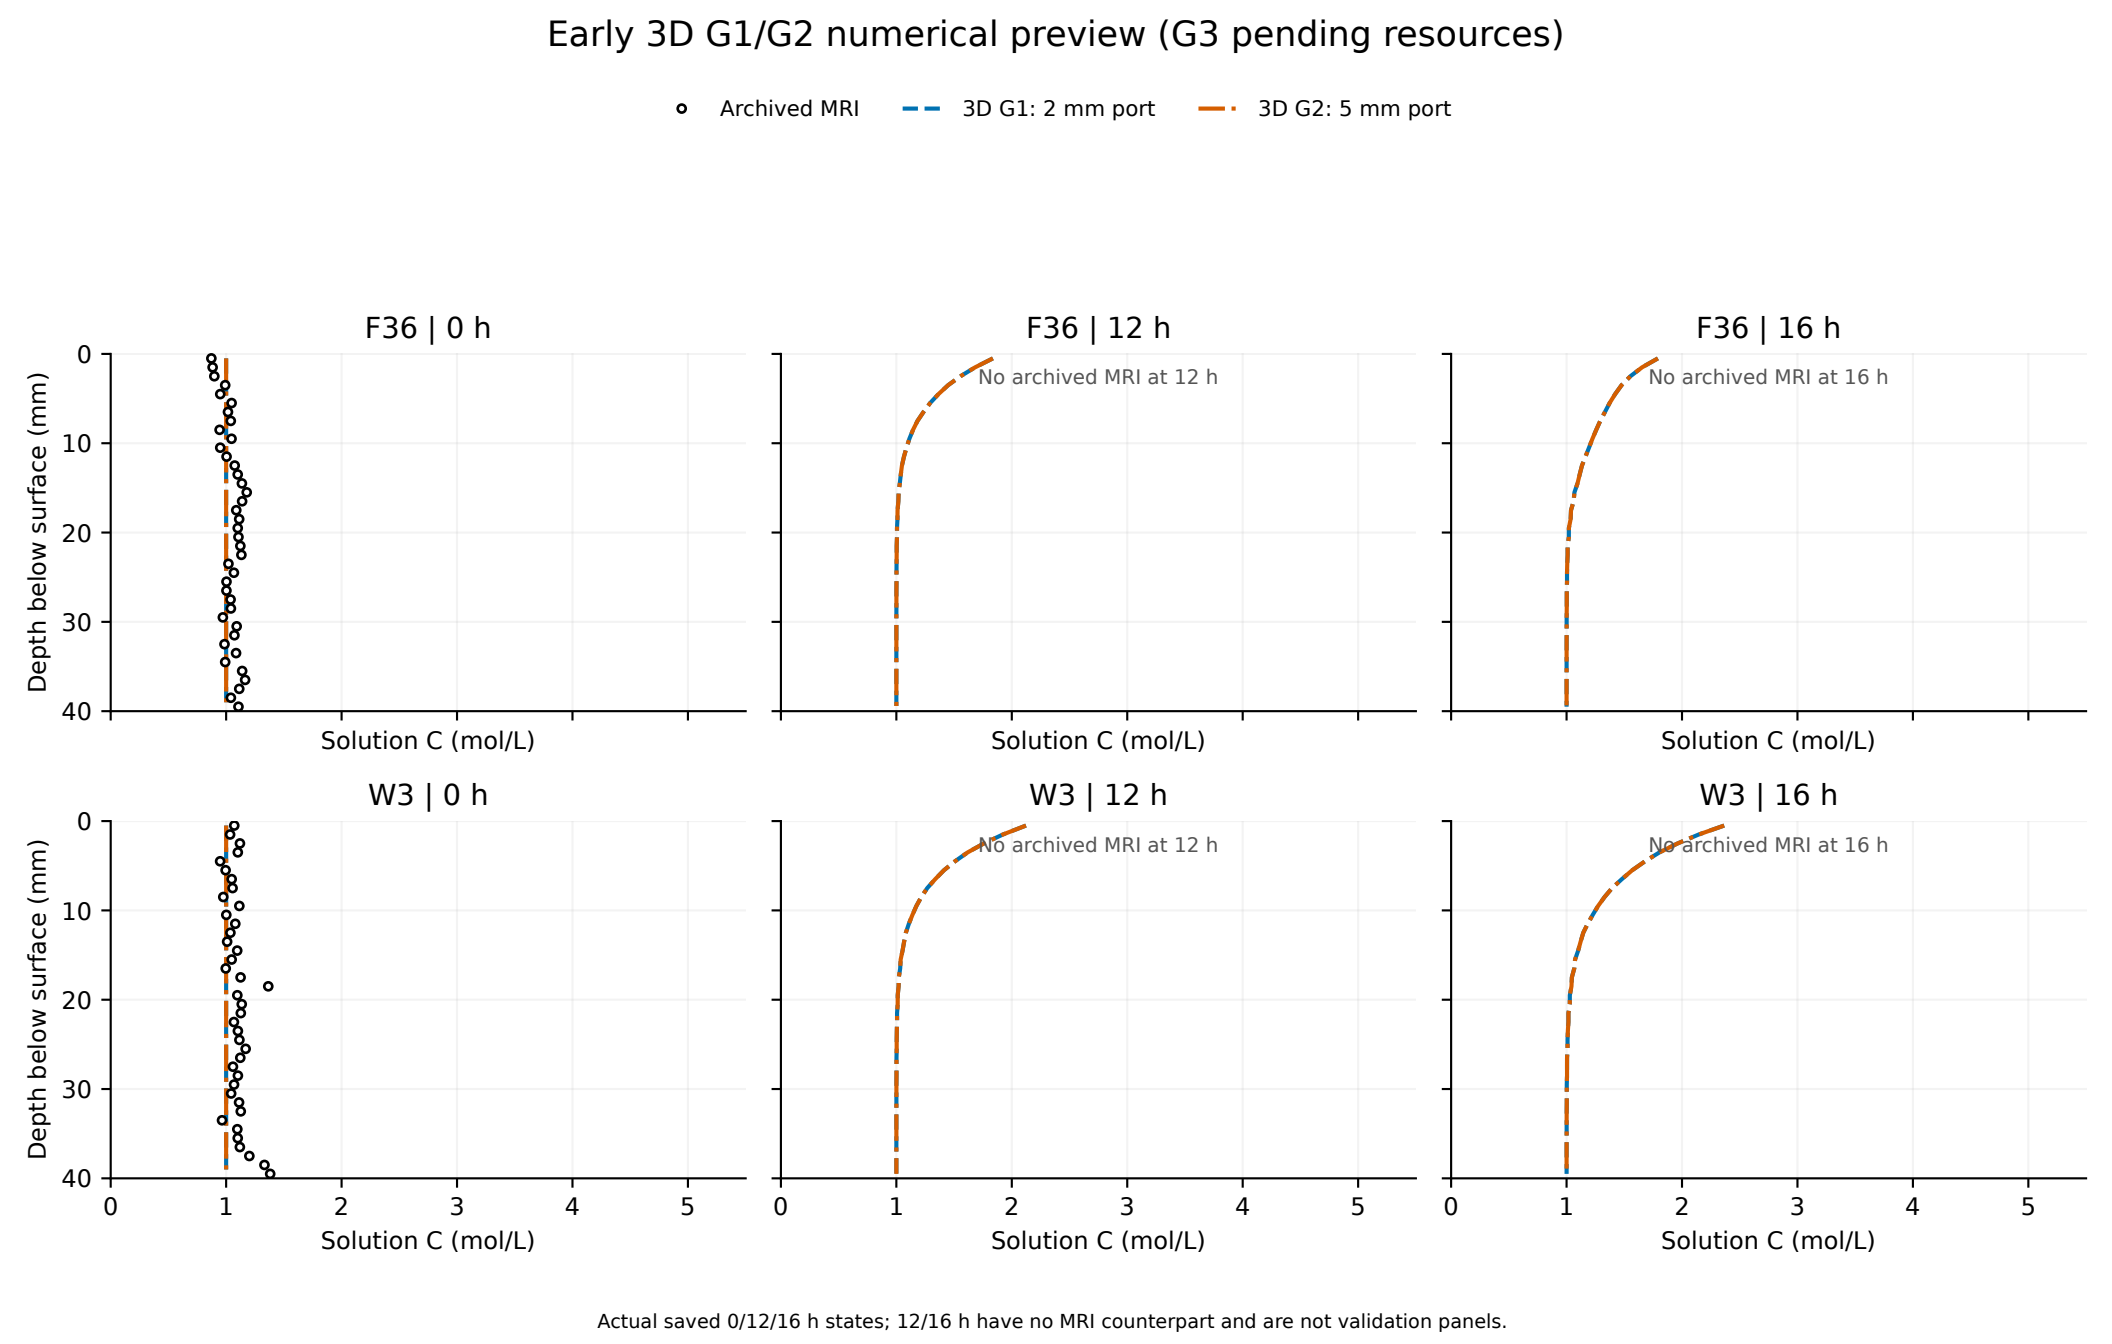
Early 3D G1/G2 numerical preview (G3 pending resources)
Archived MRI
3D G1: 2 mm port
3D G2: 5 mm port
F36 | 0 h
F36 | 12 h
F36 | 16 h
W3 | 0 h
W3 | 12 h
W3 | 16 h
No archived MRI at 12 h
No archived MRI at 16 h
Depth below surface (mm)
Solution C (mol/L)
0
10
20
30
40
1
2
3
4
5
Actual saved 0/12/16 h states; 12/16 h have no MRI counterpart and are not validation panels.