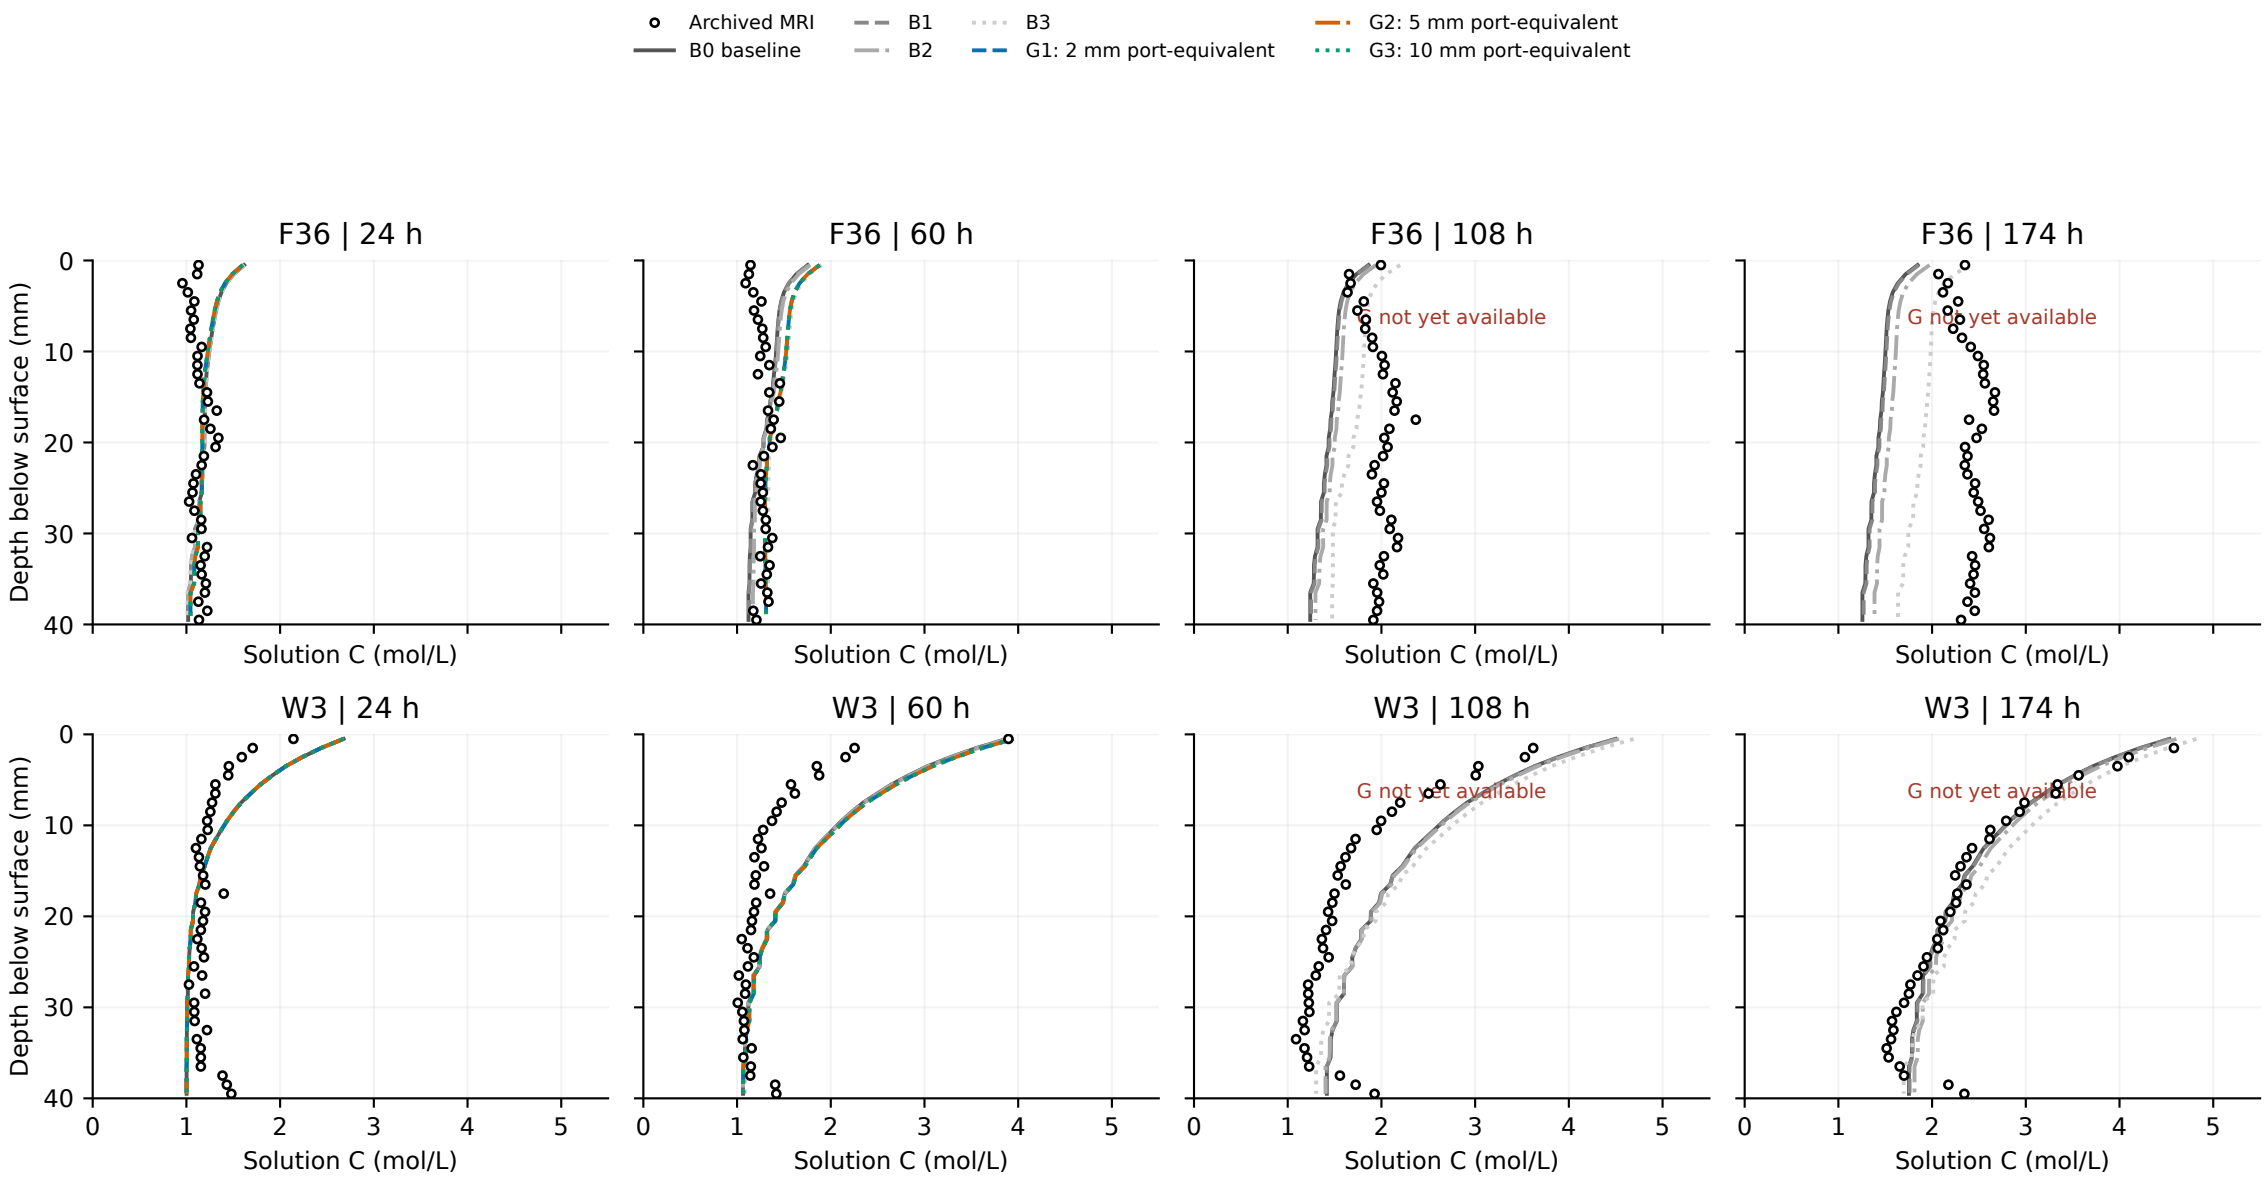
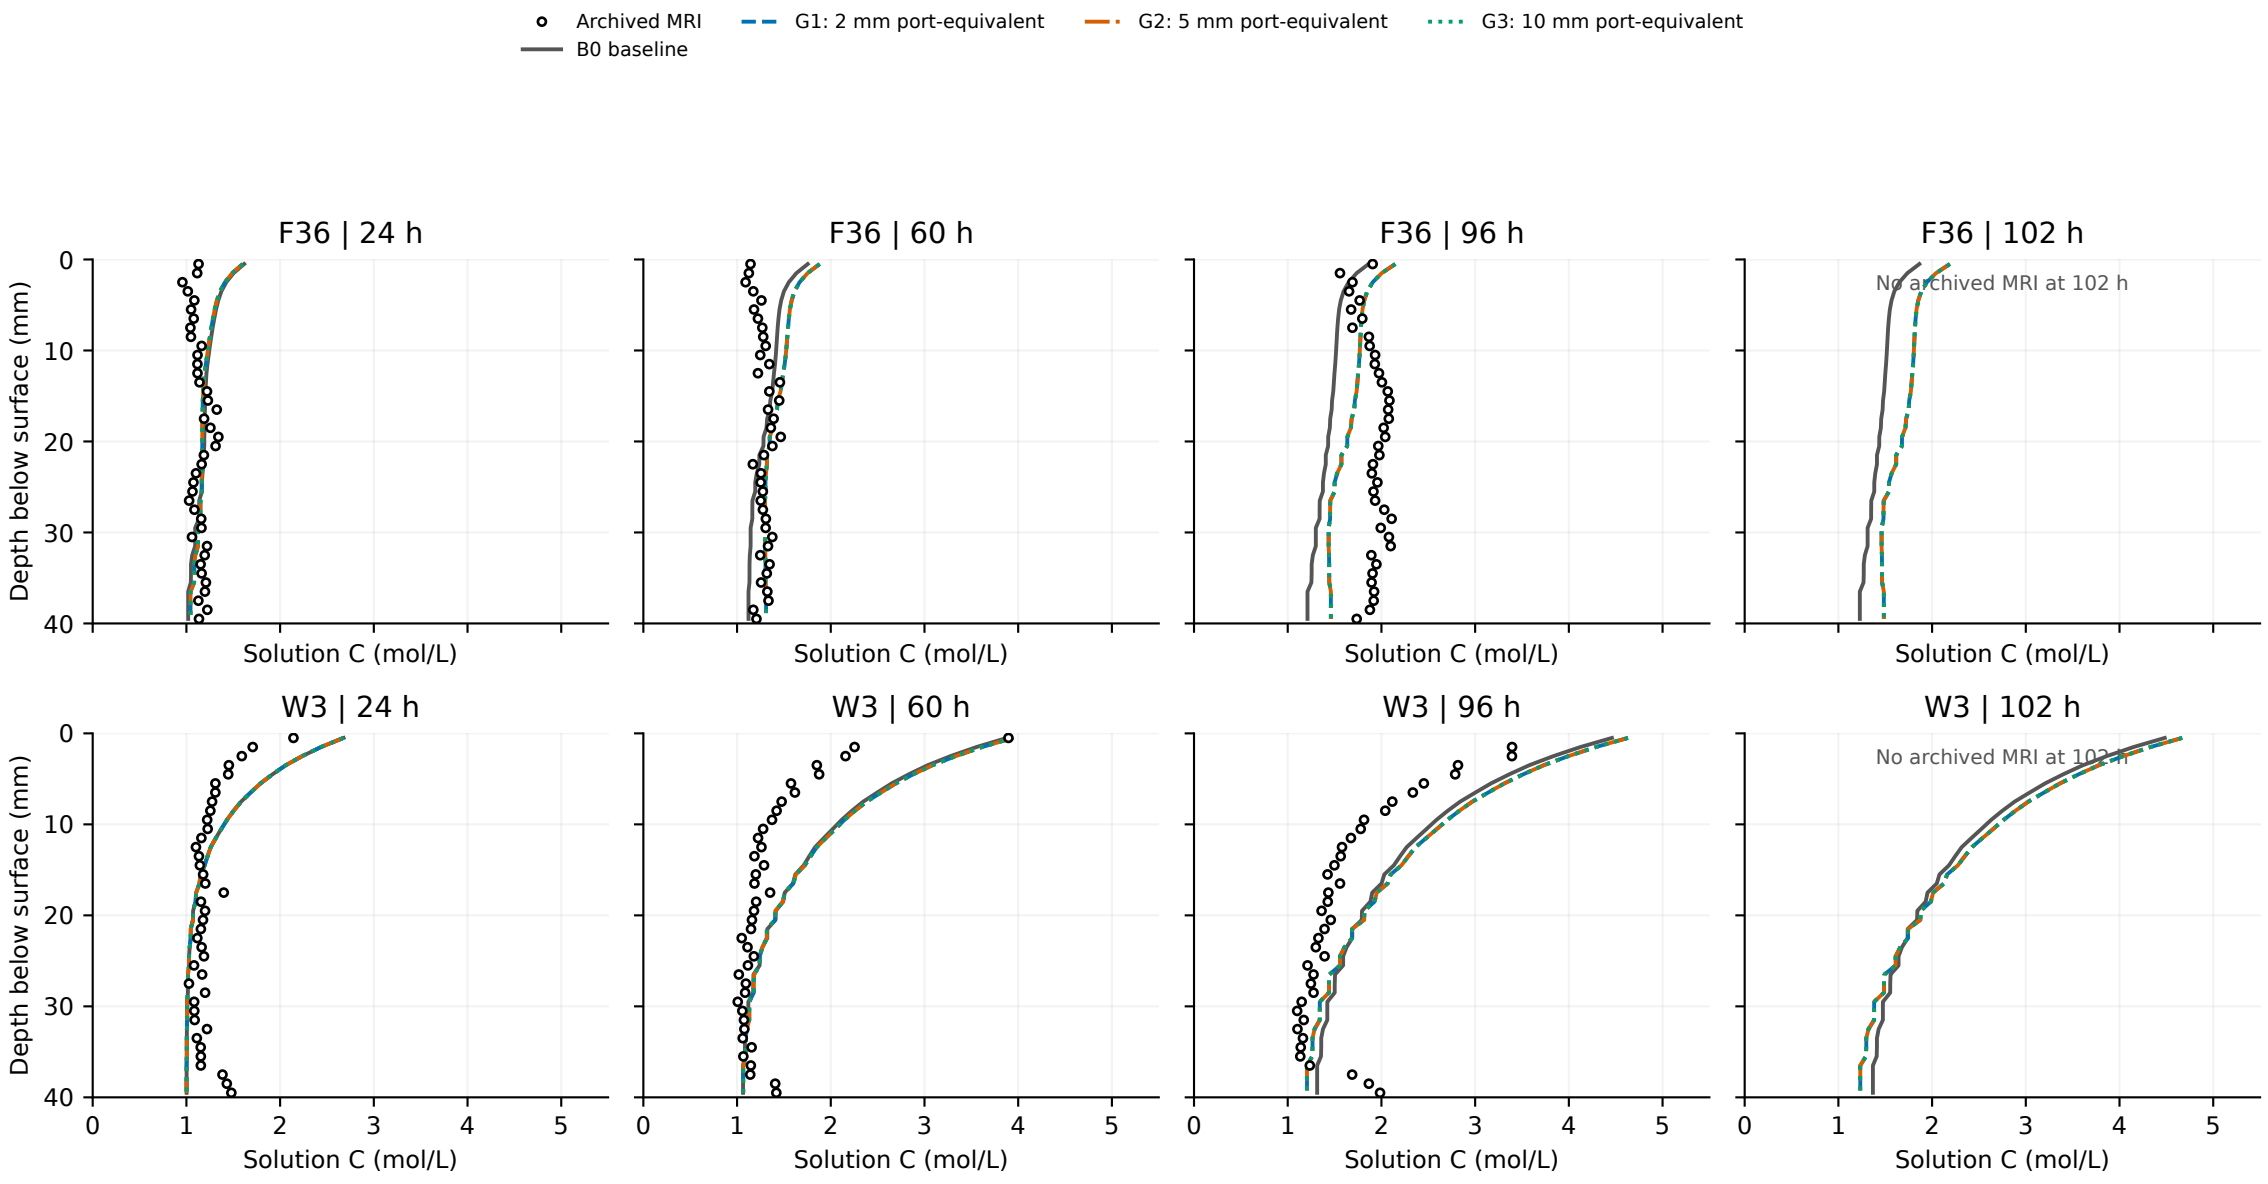
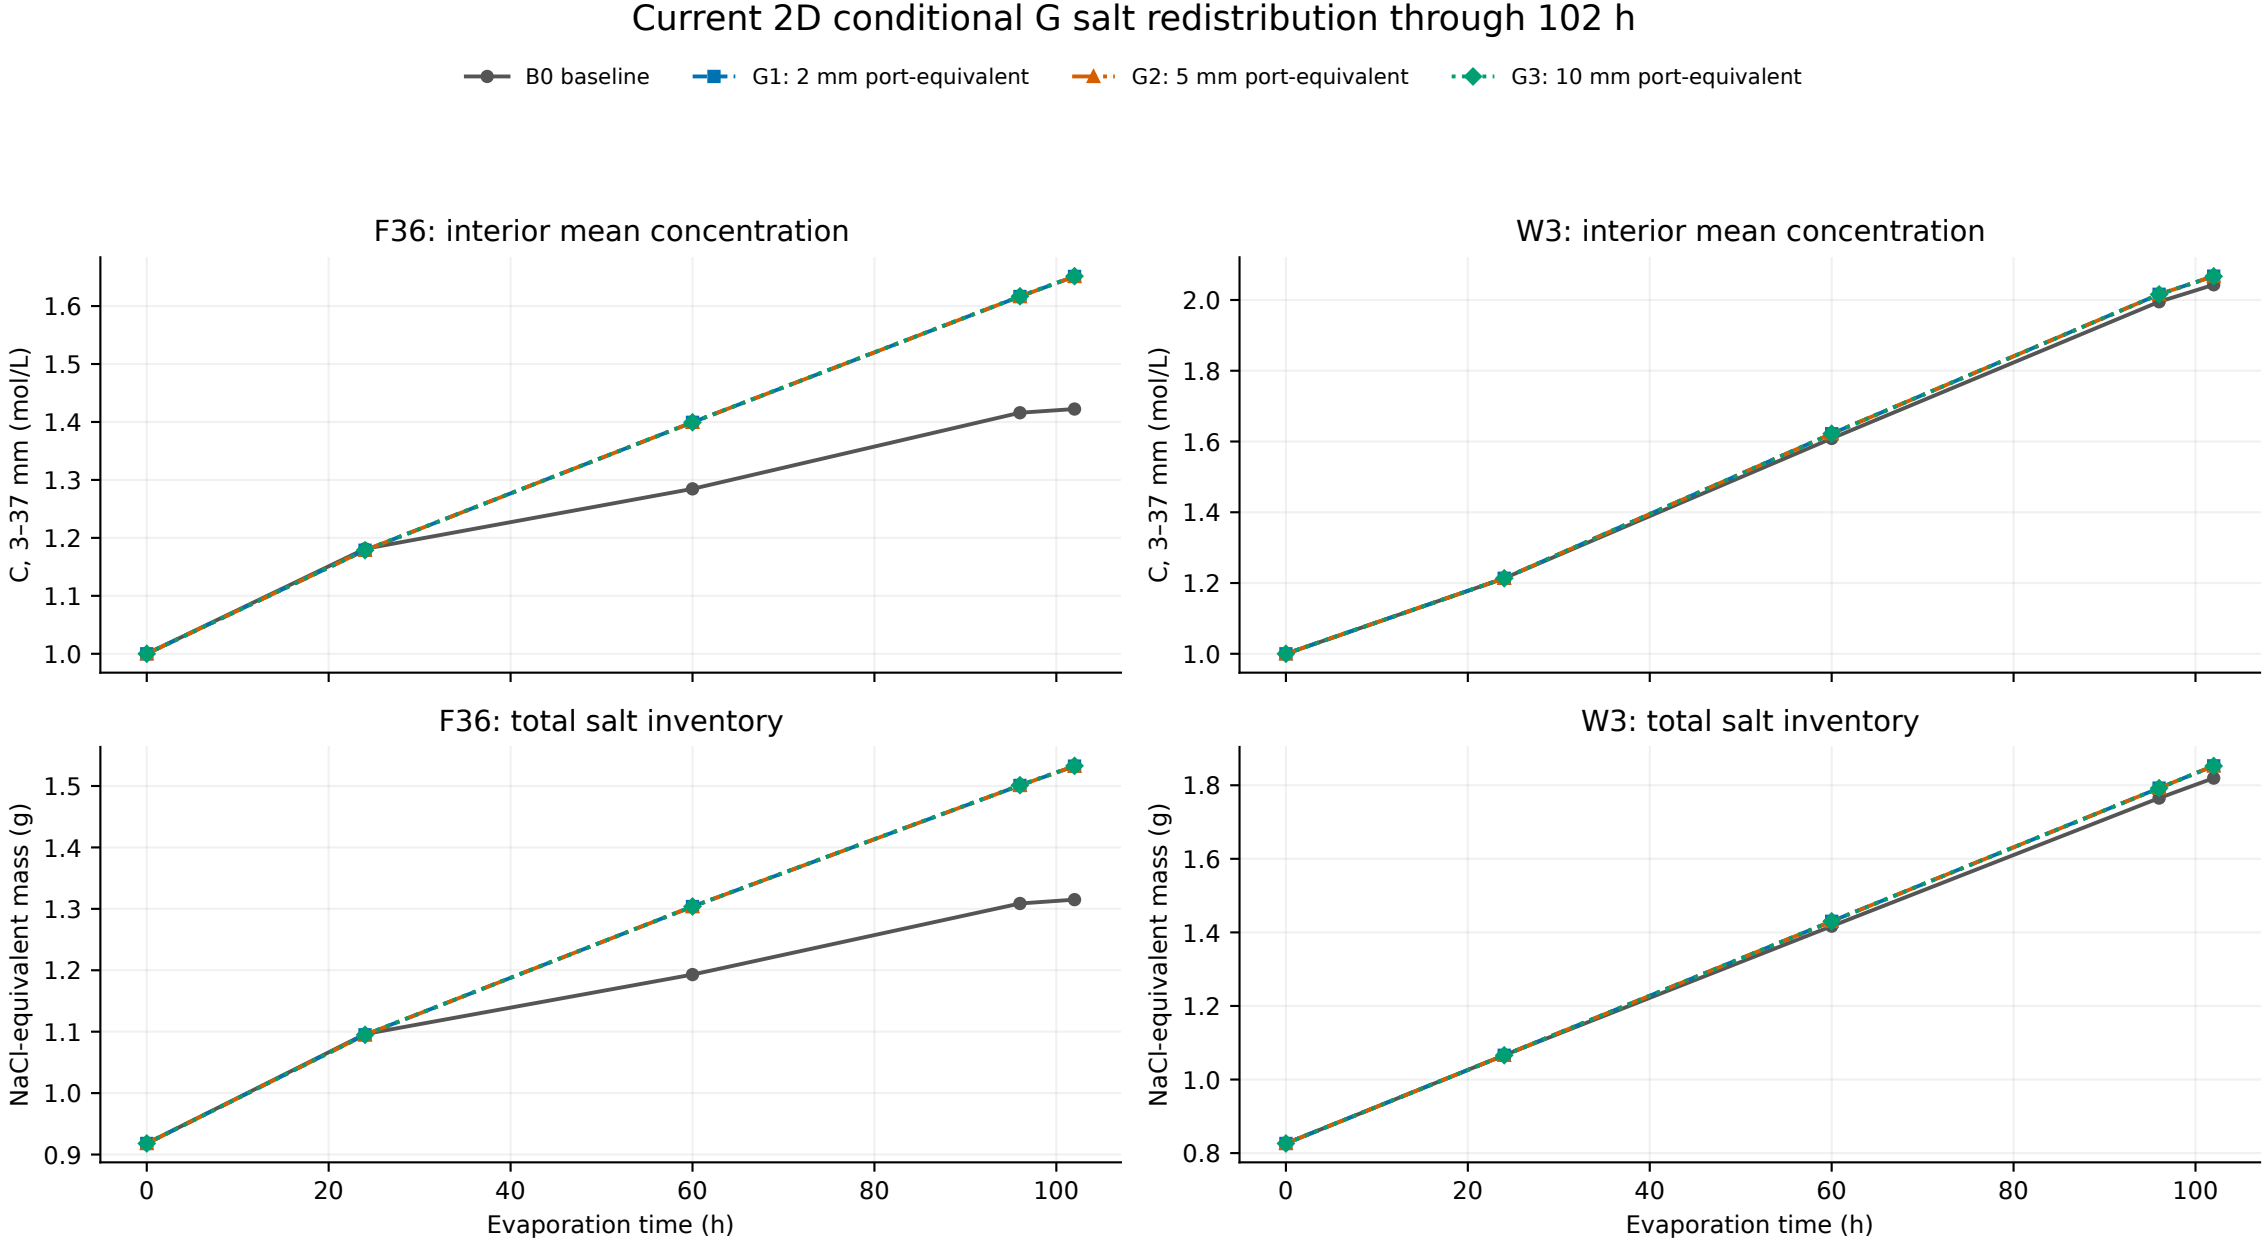
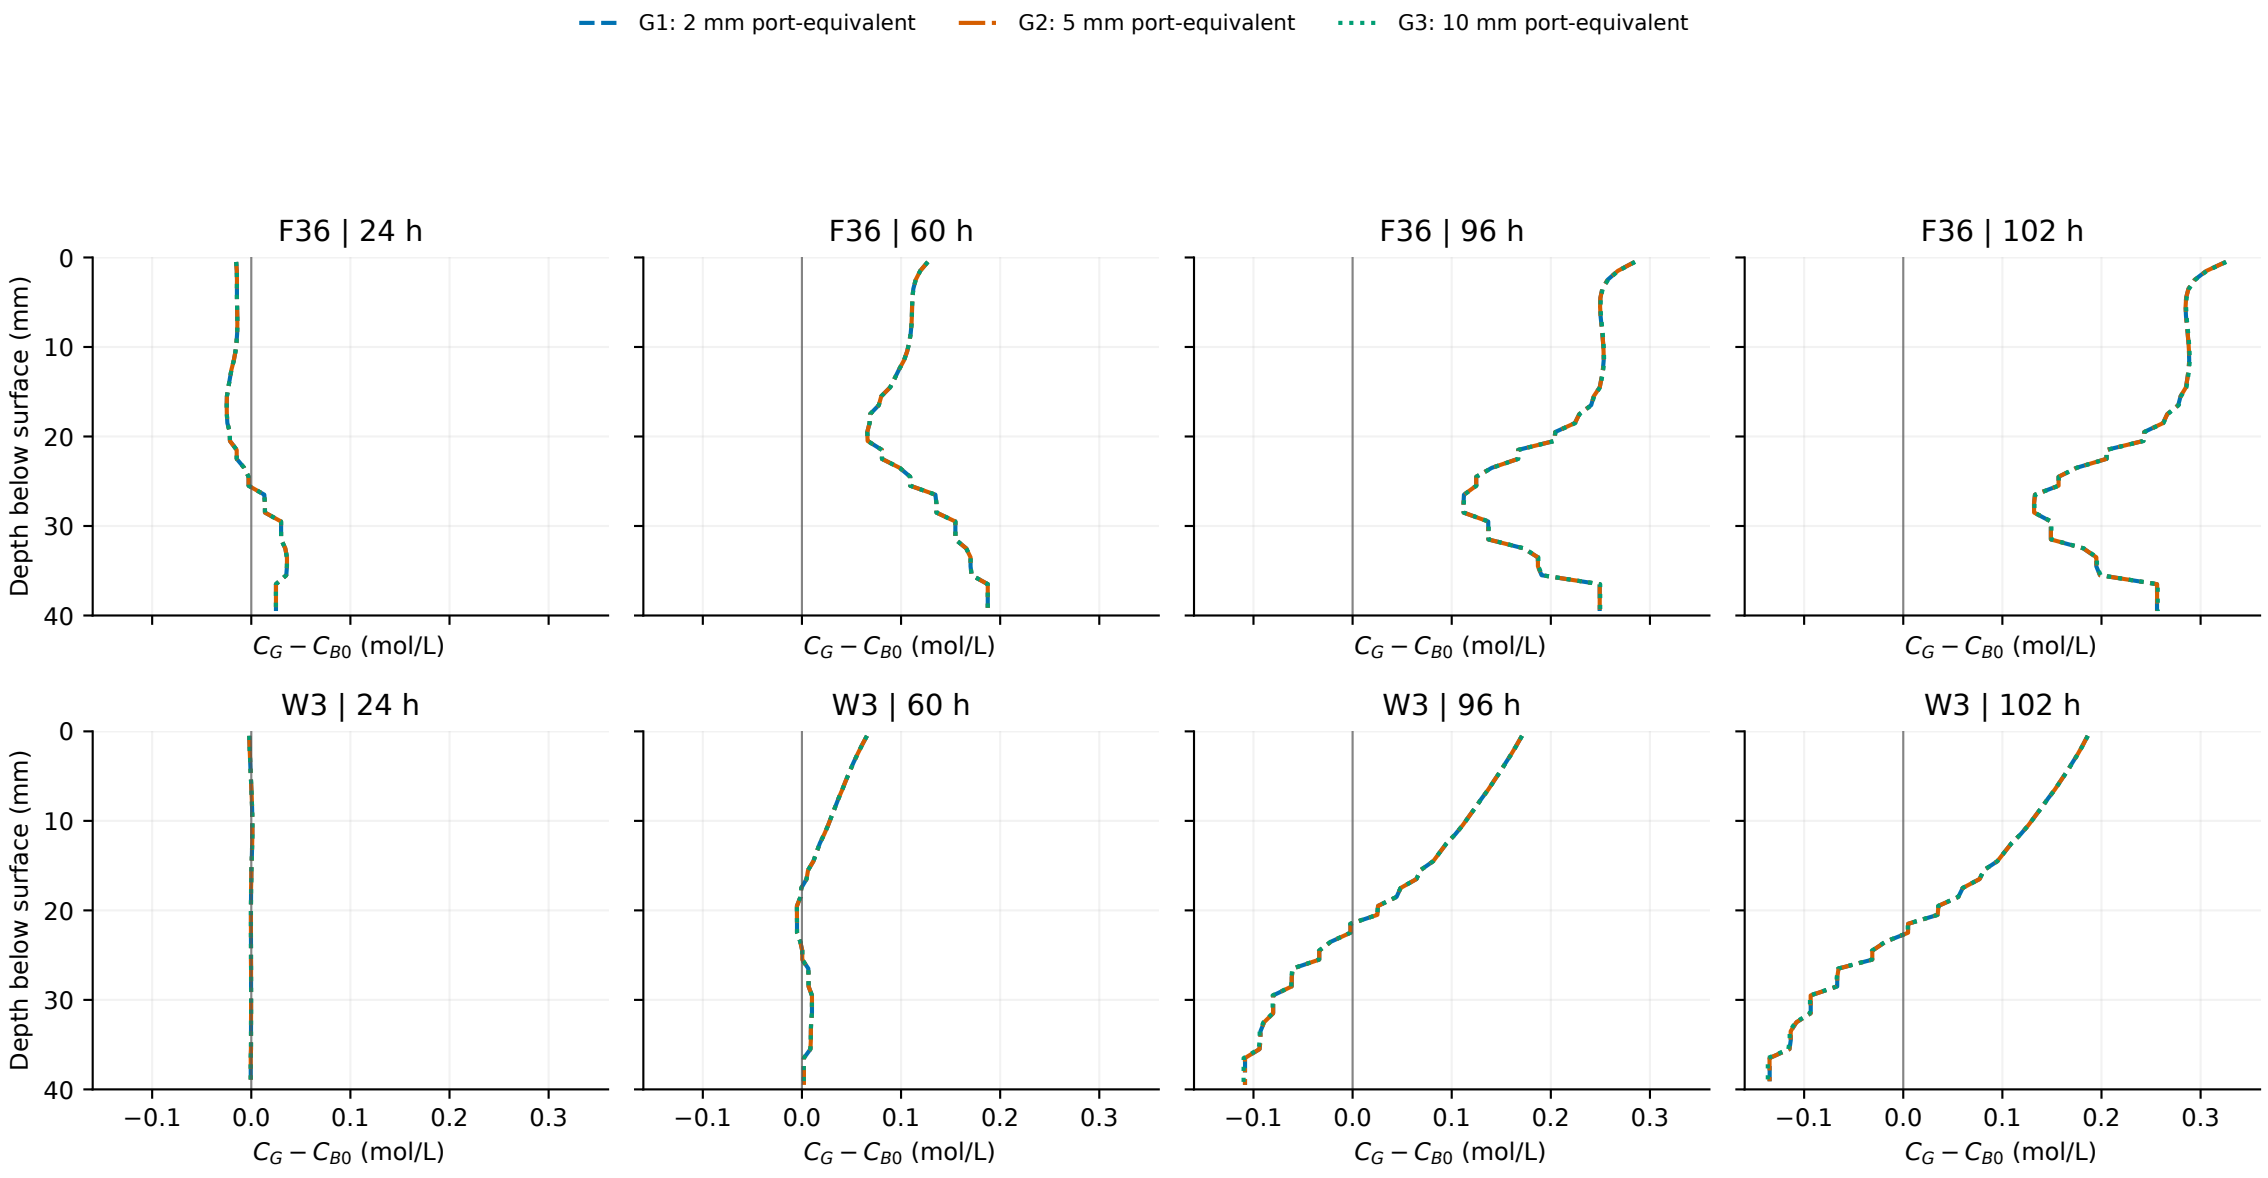


G1–G3 are conditional sensitivity runs; the refined-grid gate failed. Missing G times are gaps, not interpolation. MRI uses nominal clock.


Current conditional G snapshot through 102 h (B0 reference)
Archived MRI
G1: 2 mm port-equivalent
G2: 5 mm port-equivalent
G3: 10 mm port-equivalent
B0 baseline
F36 | 24 h
F36 | 60 h
F36 | 96 h
F36 | 102 h
No archived MRI at 102 h
W3 | 24 h
W3 | 60 h
W3 | 96 h
W3 | 102 h
No archived MRI at 102 h
Depth below surface (mm)
Solution C (mol/L)
0
10
20
30
40
1
2
3
4
5
G1–G3 are conditional sensitivity runs; the refined-grid gate failed. Missing G times are gaps, not interpolation. MRI uses nominal clock.


Current 2D conditional G salt redistribution through 102 h
B0 baseline
G1: 2 mm port-equivalent
G2: 5 mm port-equivalent
G3: 10 mm port-equivalent
F36: interior mean concentration
W3: interior mean concentration
C, 3–37 mm (mol/L)
F36: total salt inventory
W3: total salt inventory
NaCl-equivalent mass (g)
Evaporation time (h)
Saved-state values only (0/24/60/96/102 h); lines guide the eye. Conditional G, not grid-accepted evidence.


Conditional G concentration change relative to 2D B0
G1: 2 mm port-equivalent
G2: 5 mm port-equivalent
G3: 10 mm port-equivalent
F36 | 24 h
F36 | 60 h
F36 | 96 h
F36 | 102 h
W3 | 24 h
W3 | 60 h
W3 | 96 h
W3 | 102 h
Depth below surface (mm)
0
10
20
30
40
−0.1
0.0
0.1
0.2
0.3
$C_G - C_{B0}$ (mol/L)
Common x scale across panels; actual saved states only. Overlap among G curves indicates weak port-size sensitivity at this scale.