

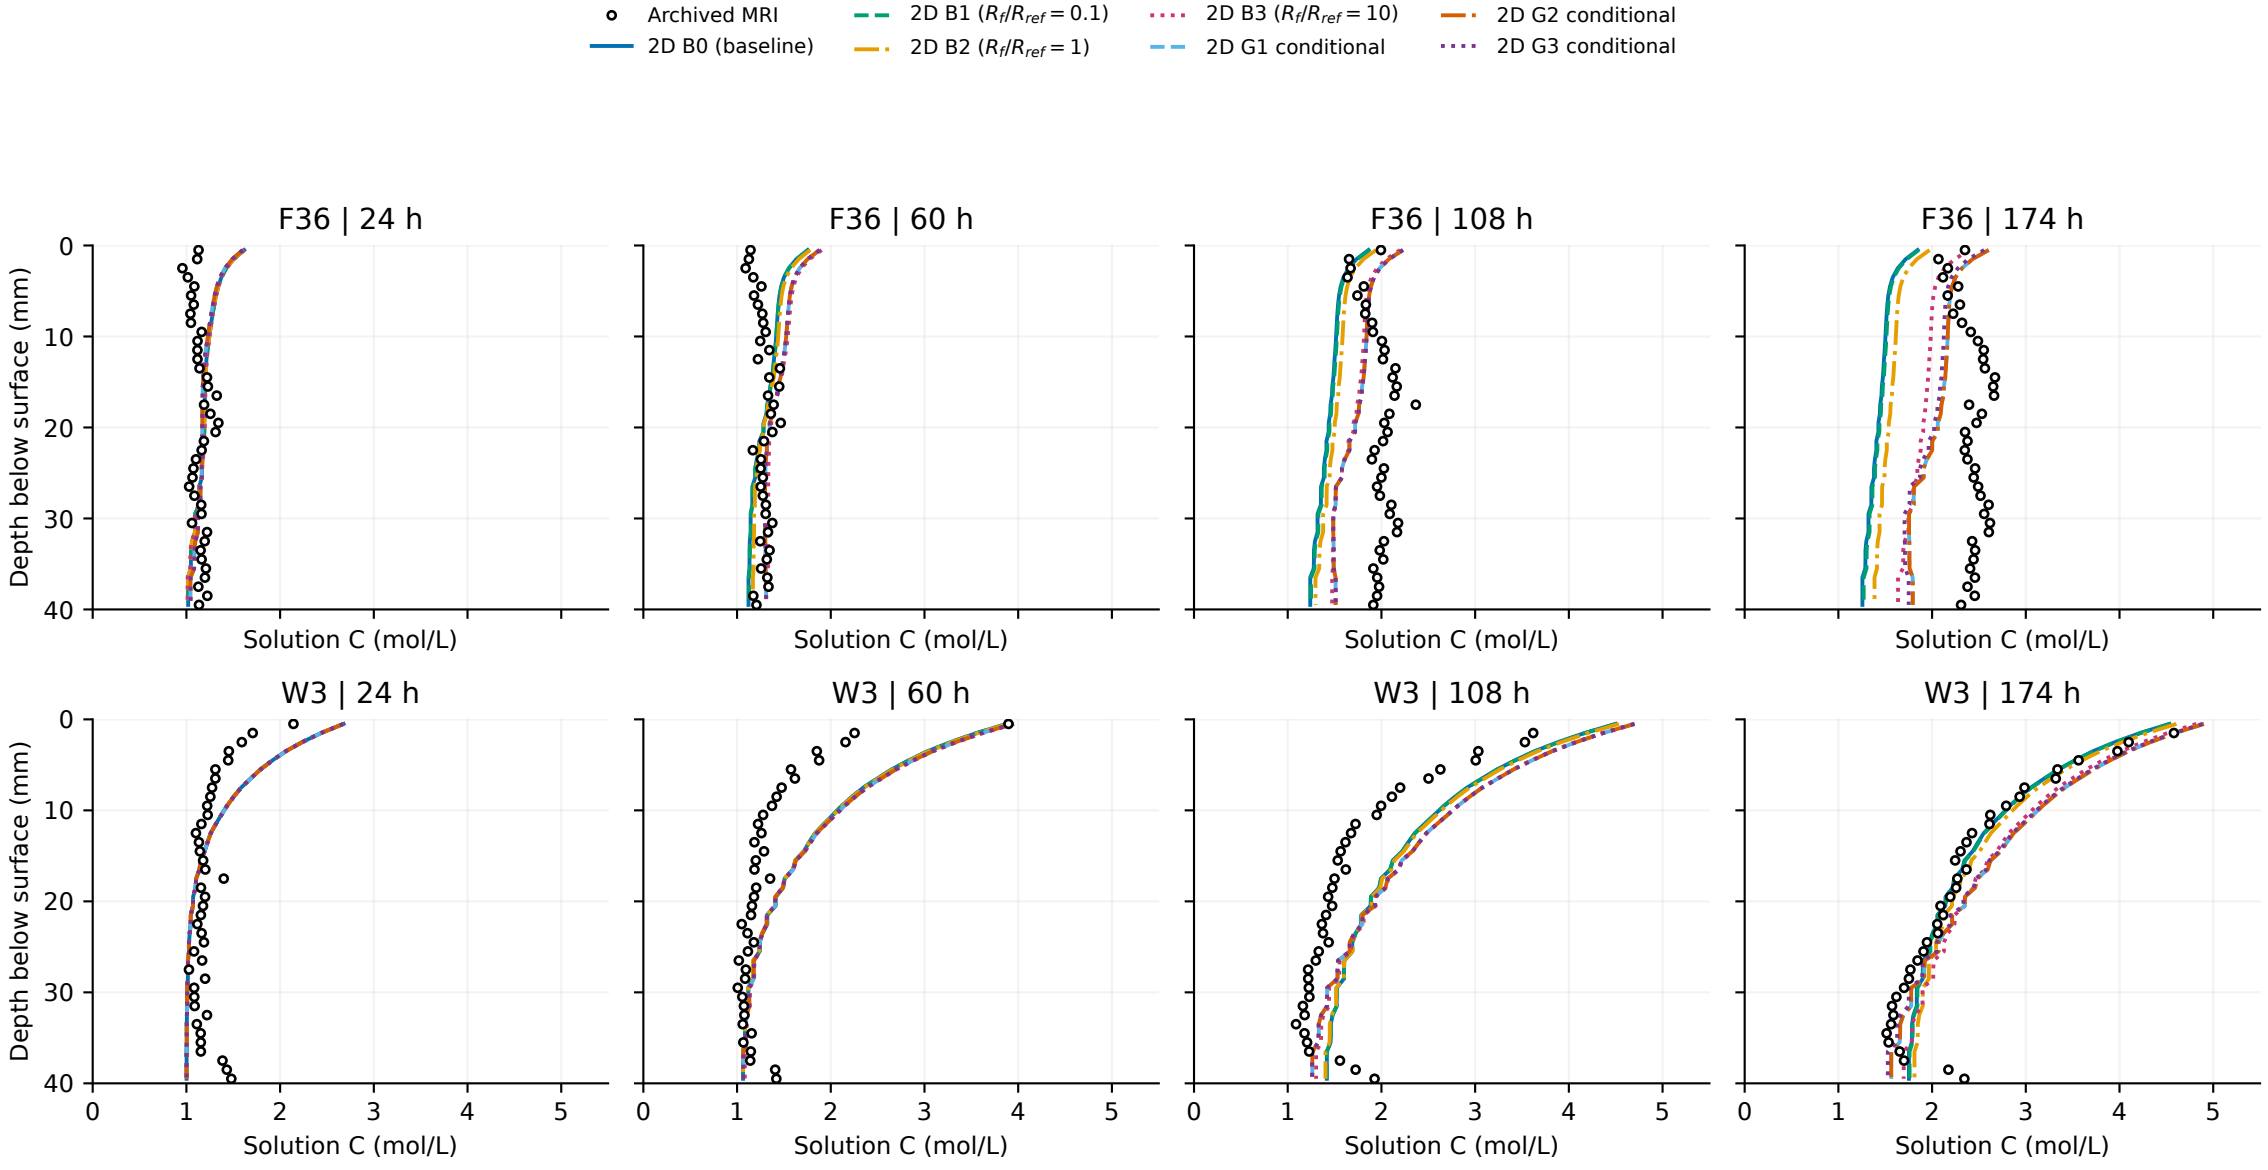



G1–G3 are conditional sensitivity runs: the original refined-grid gate remains failed. Archived MRI uses nominal clock; no crystallization-time inference.

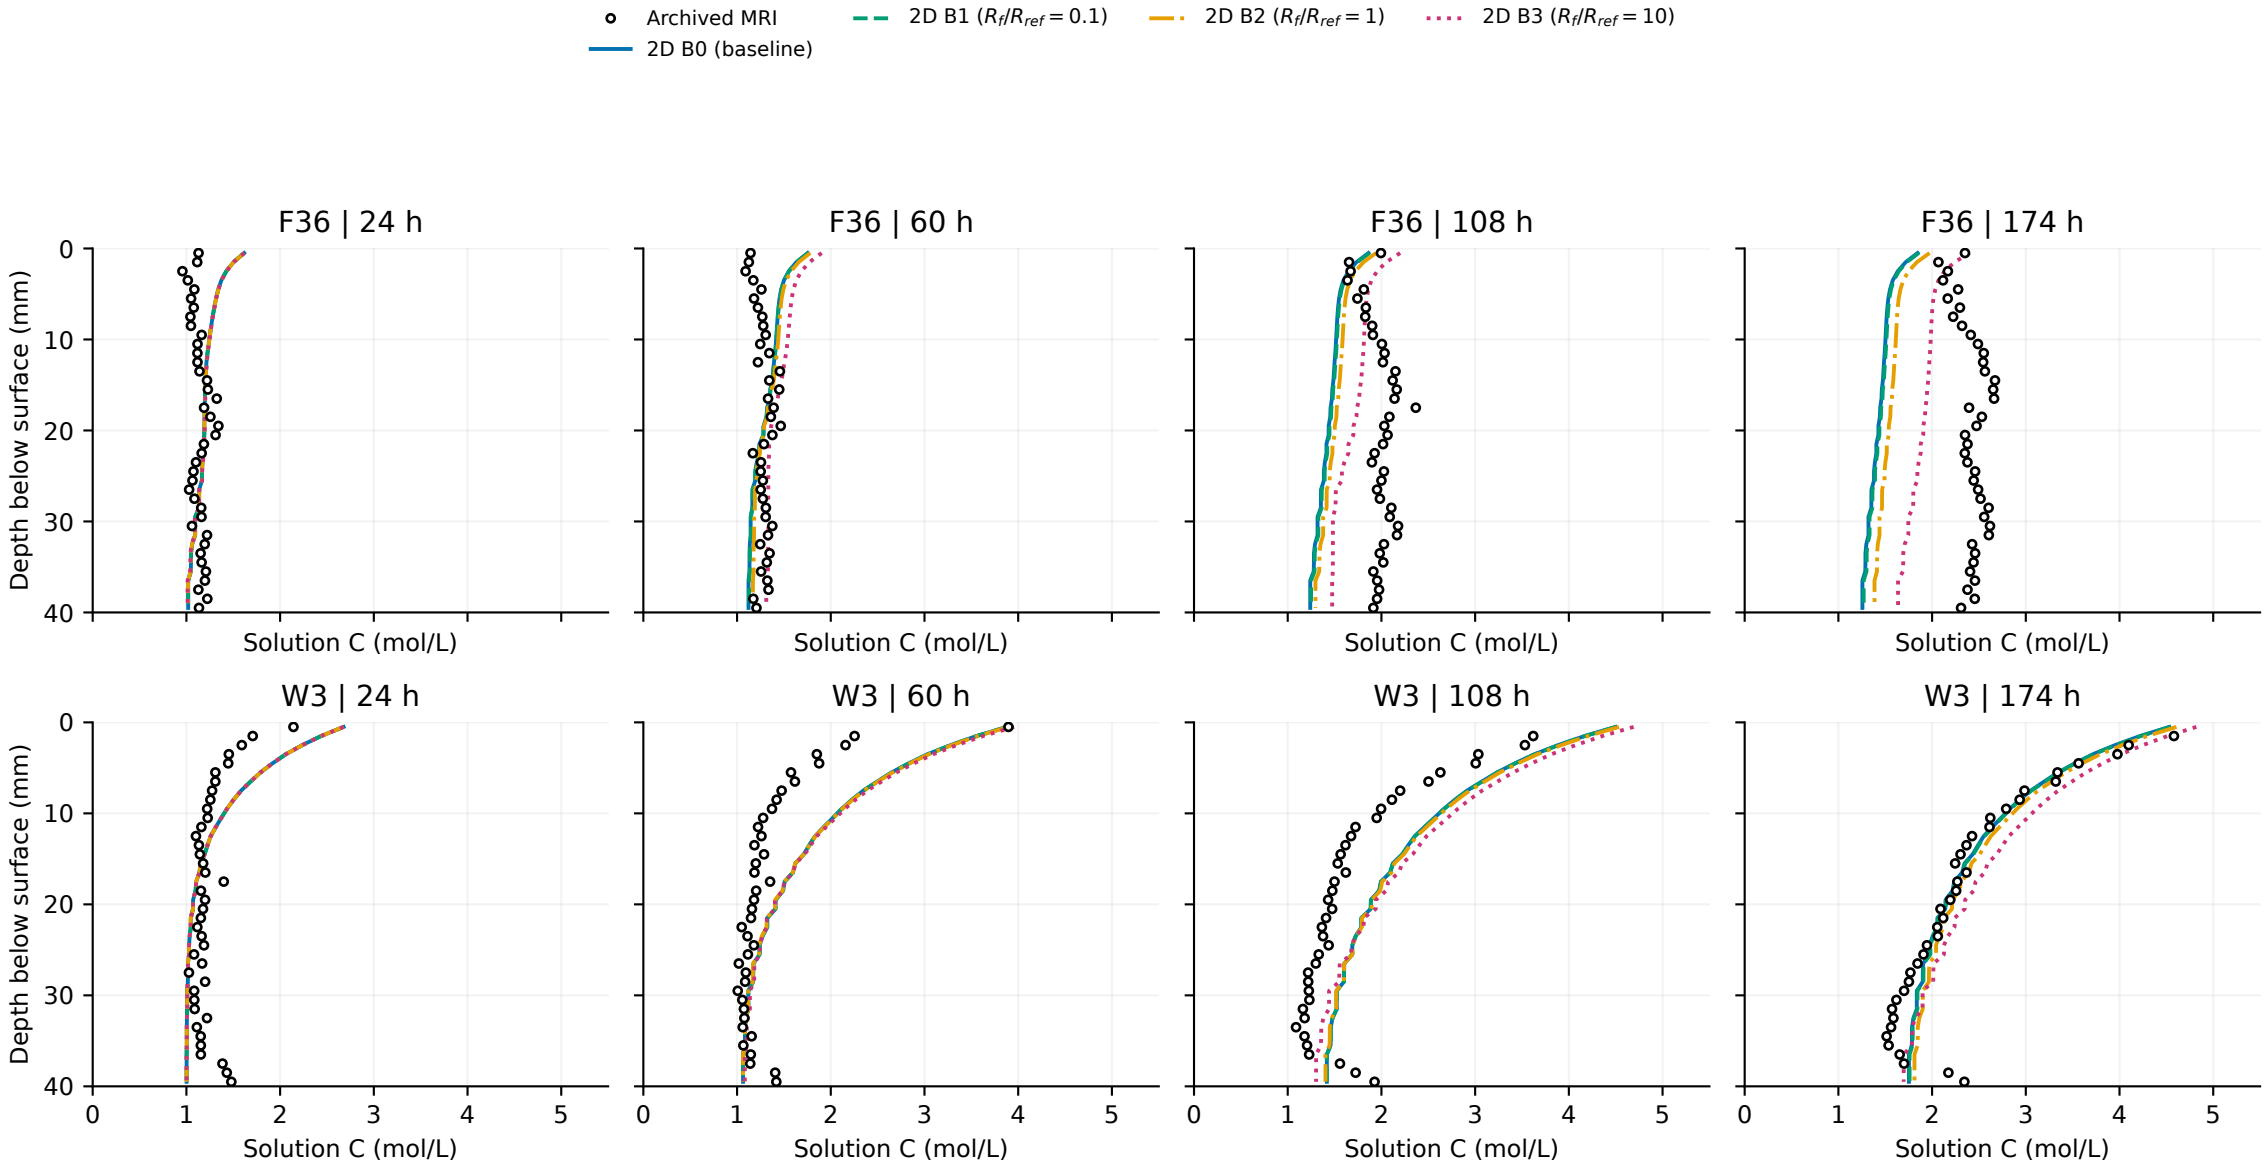


G1–G3 are conditional sensitivity runs: the original refined-grid gate remains failed. Archived MRI uses nominal clock; no crystallization-time inference.

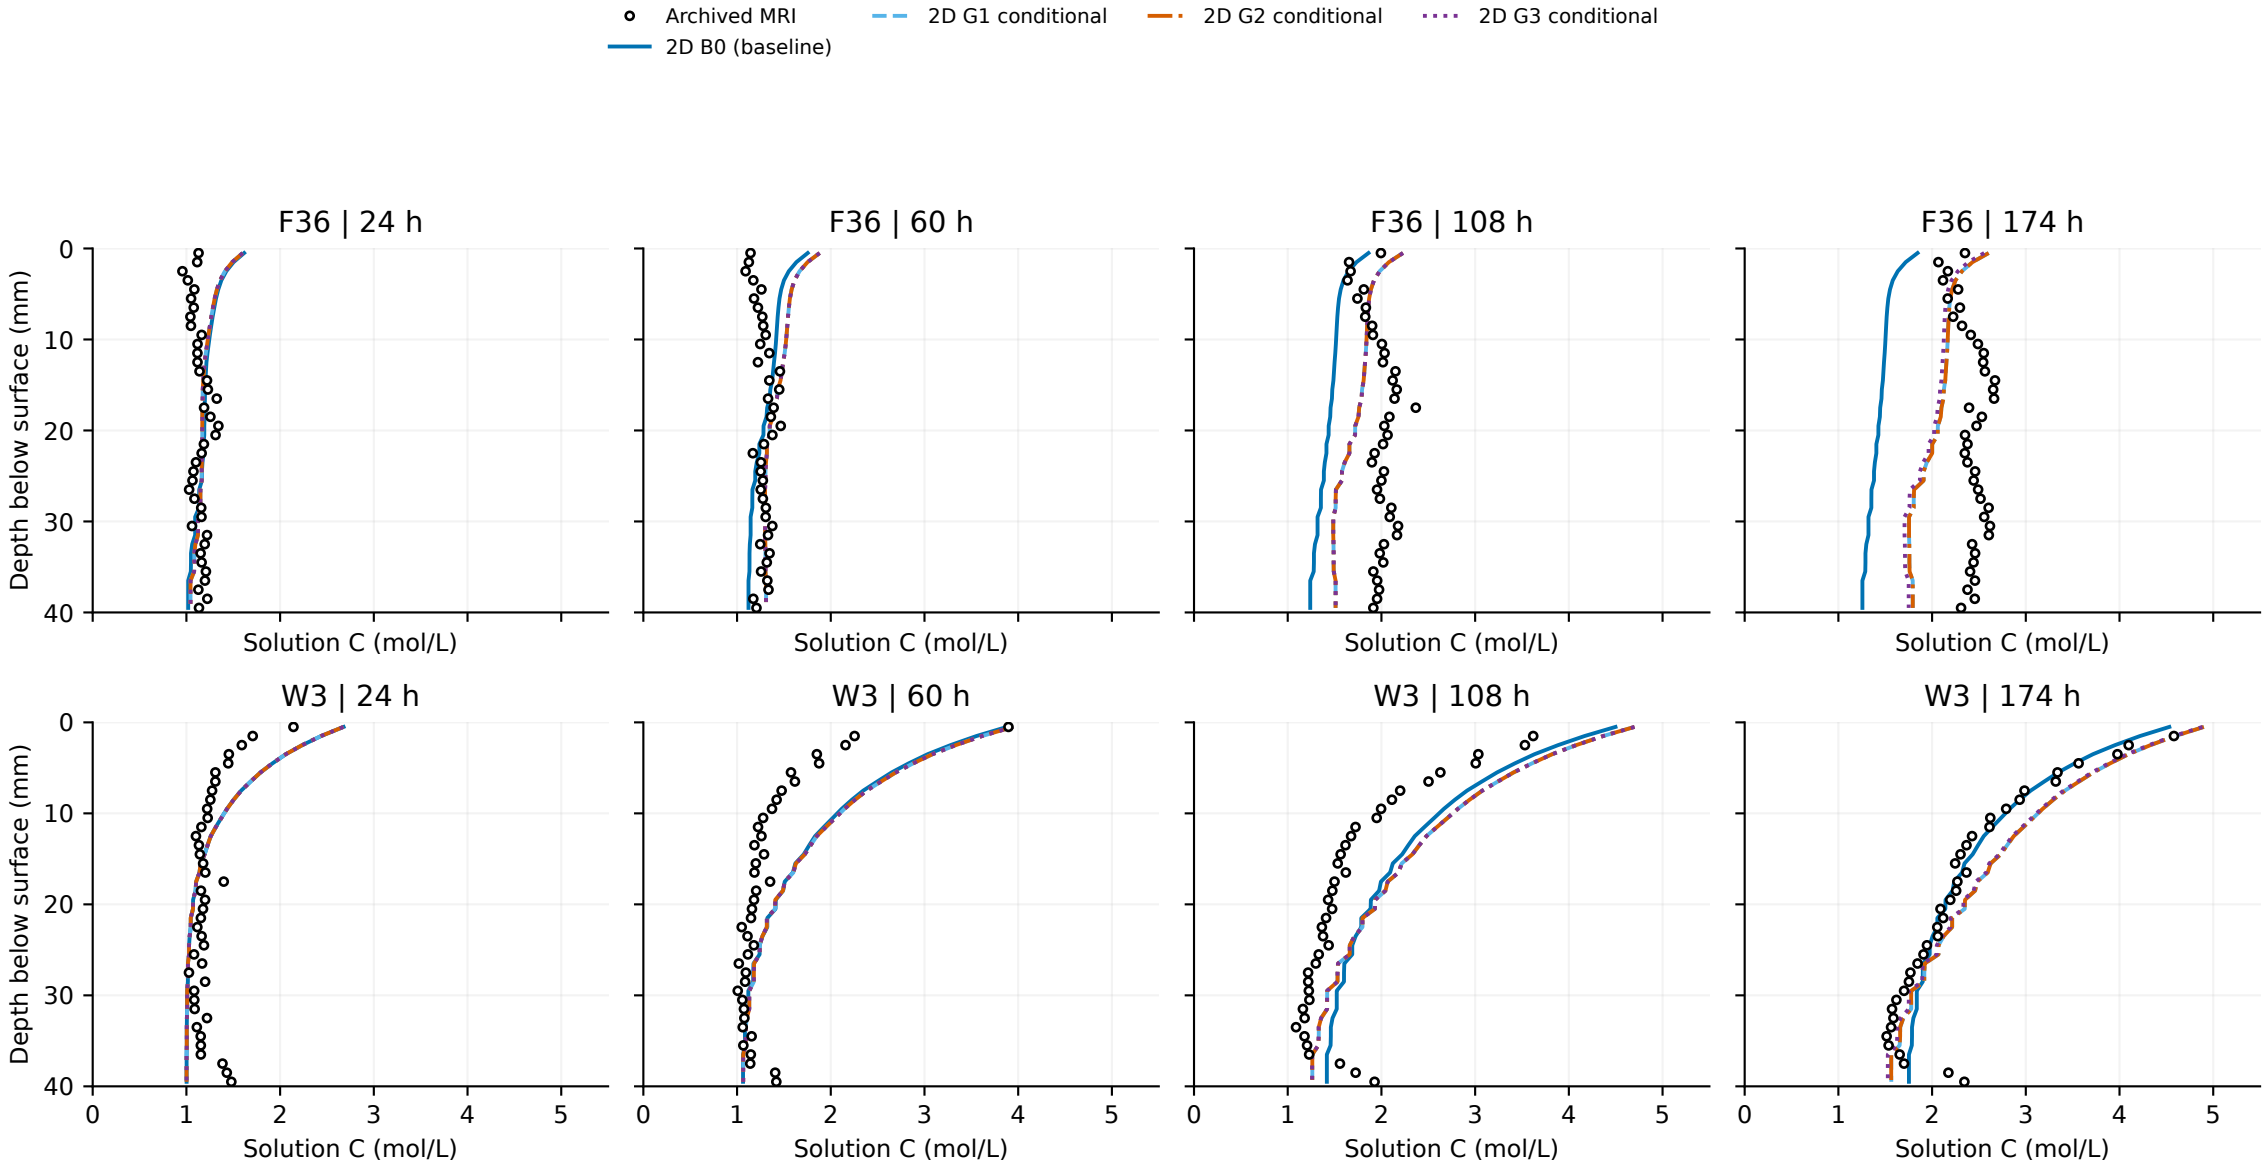


G1–G3 are conditional sensitivity runs: the original refined-grid gate remains failed. Archived MRI uses nominal clock; no crystallization-time inference.

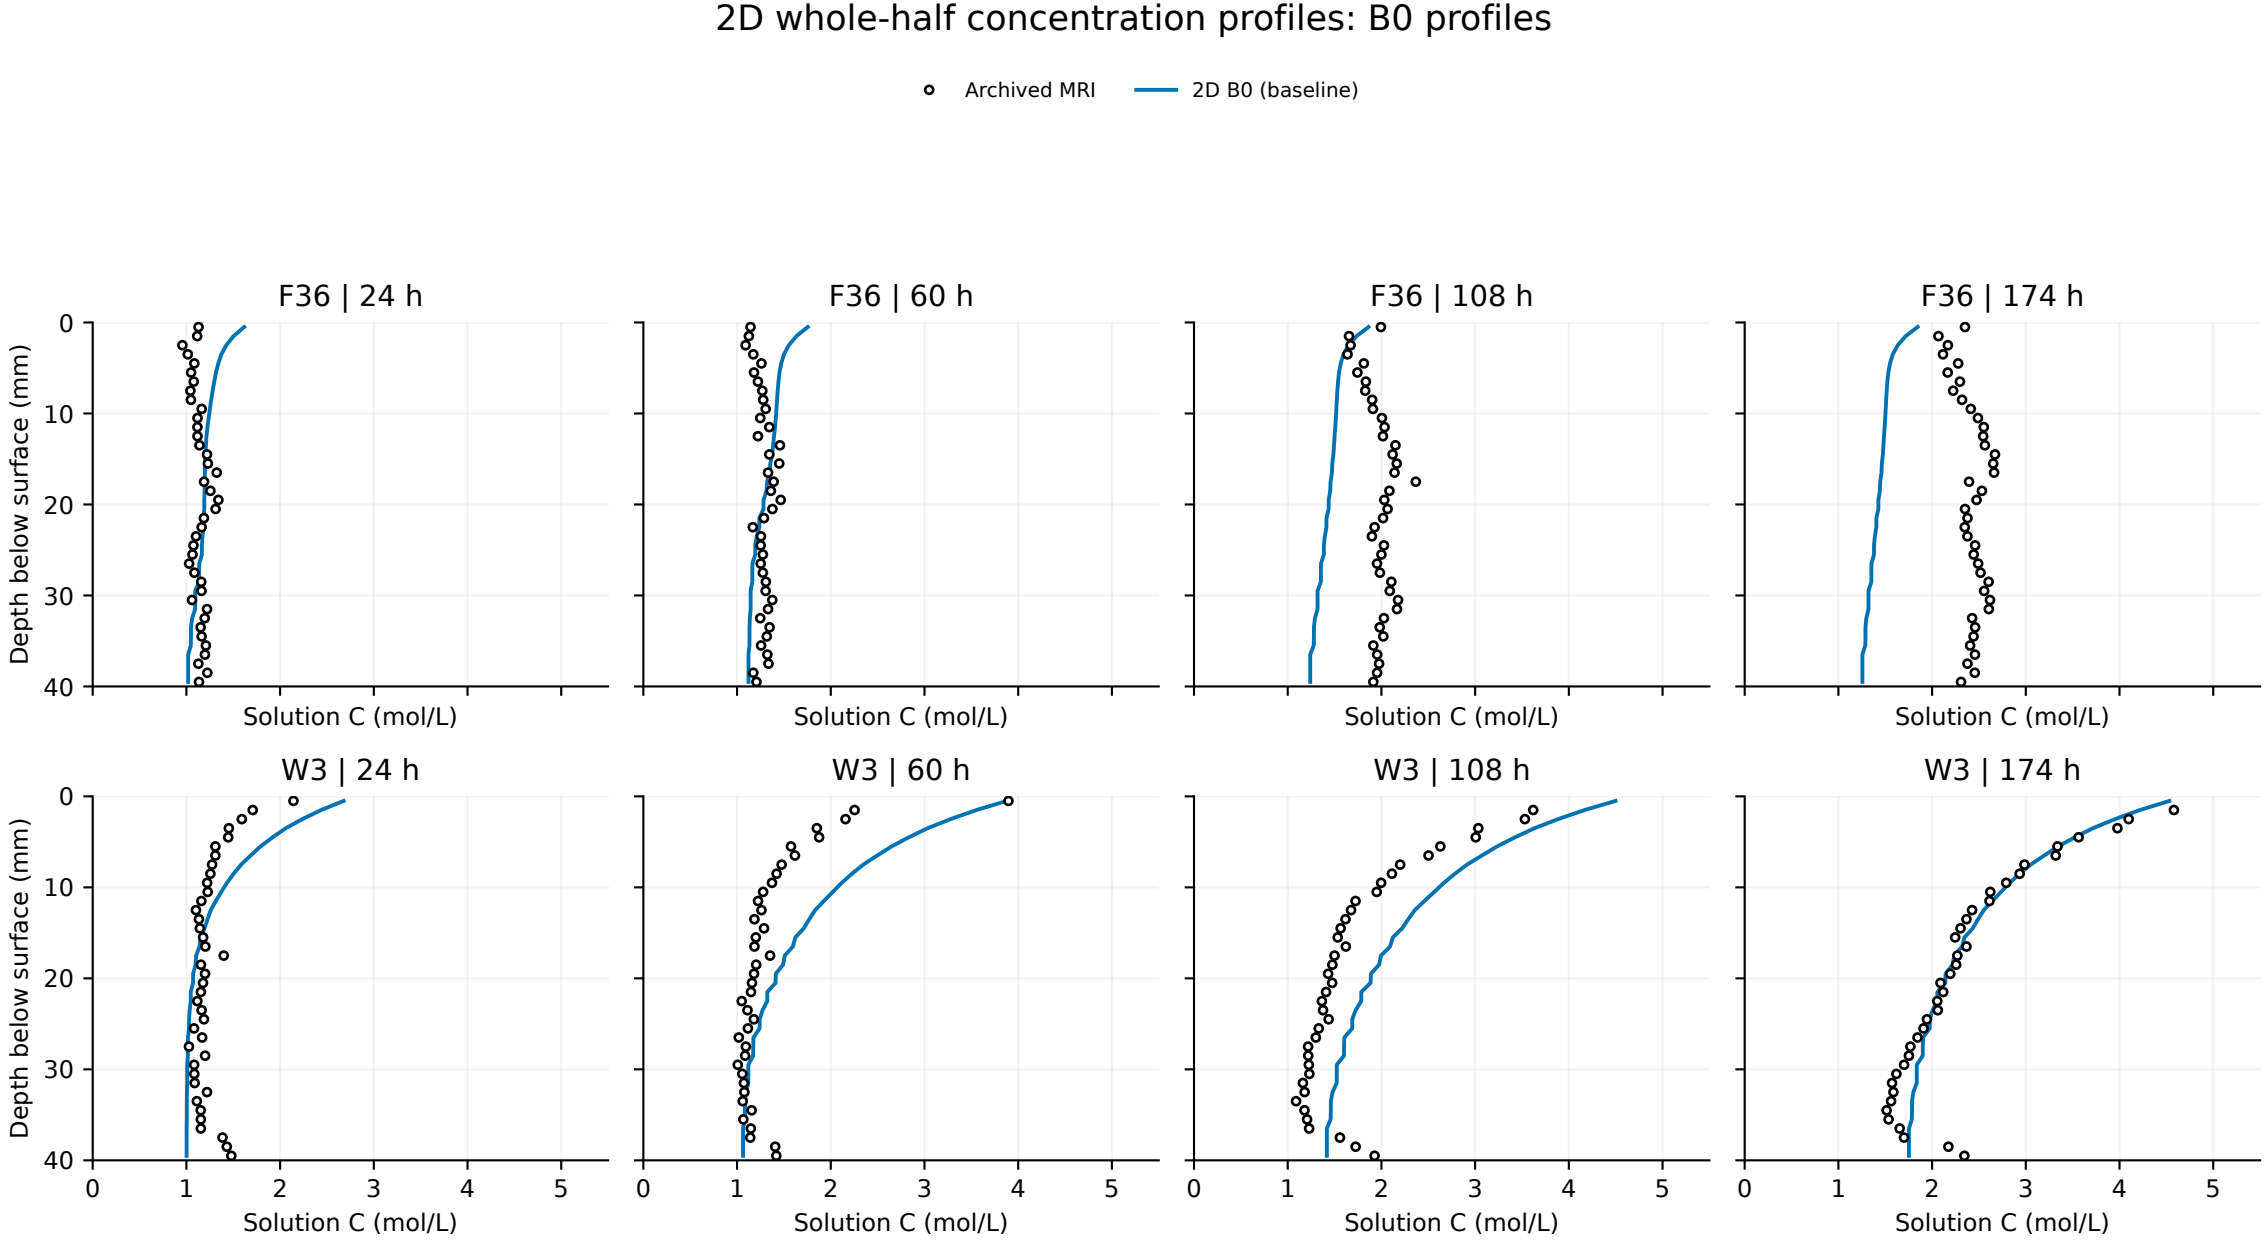


G1–G3 are conditional sensitivity runs: the original refined-grid gate remains failed. Archived MRI uses nominal clock; no crystallization-time inference.

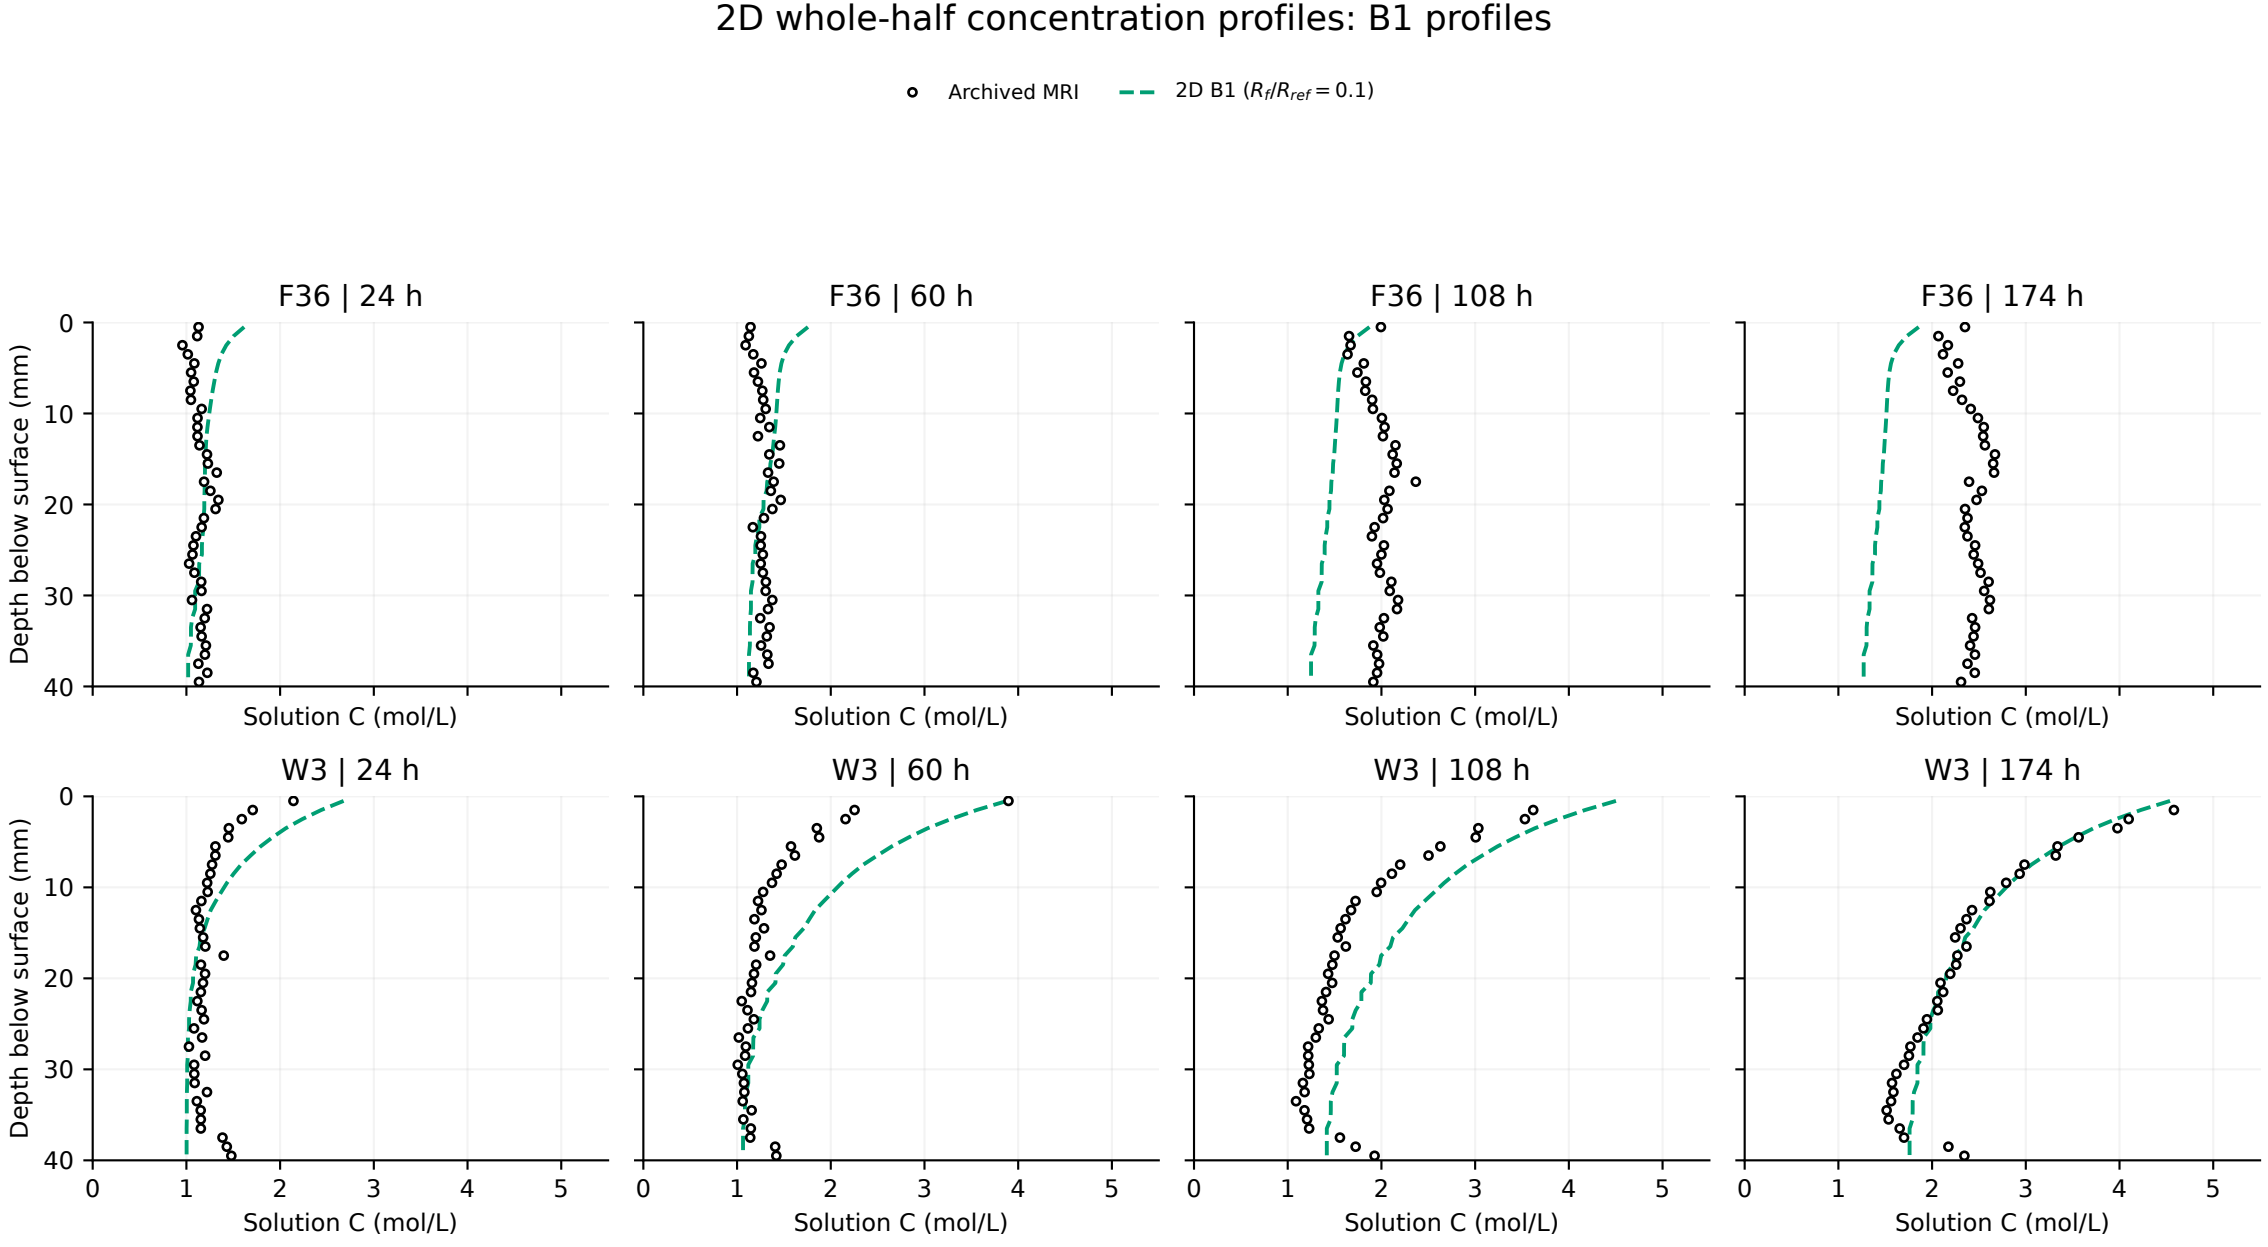


G1–G3 are conditional sensitivity runs: the original refined-grid gate remains failed. Archived MRI uses nominal clock; no crystallization-time inference.

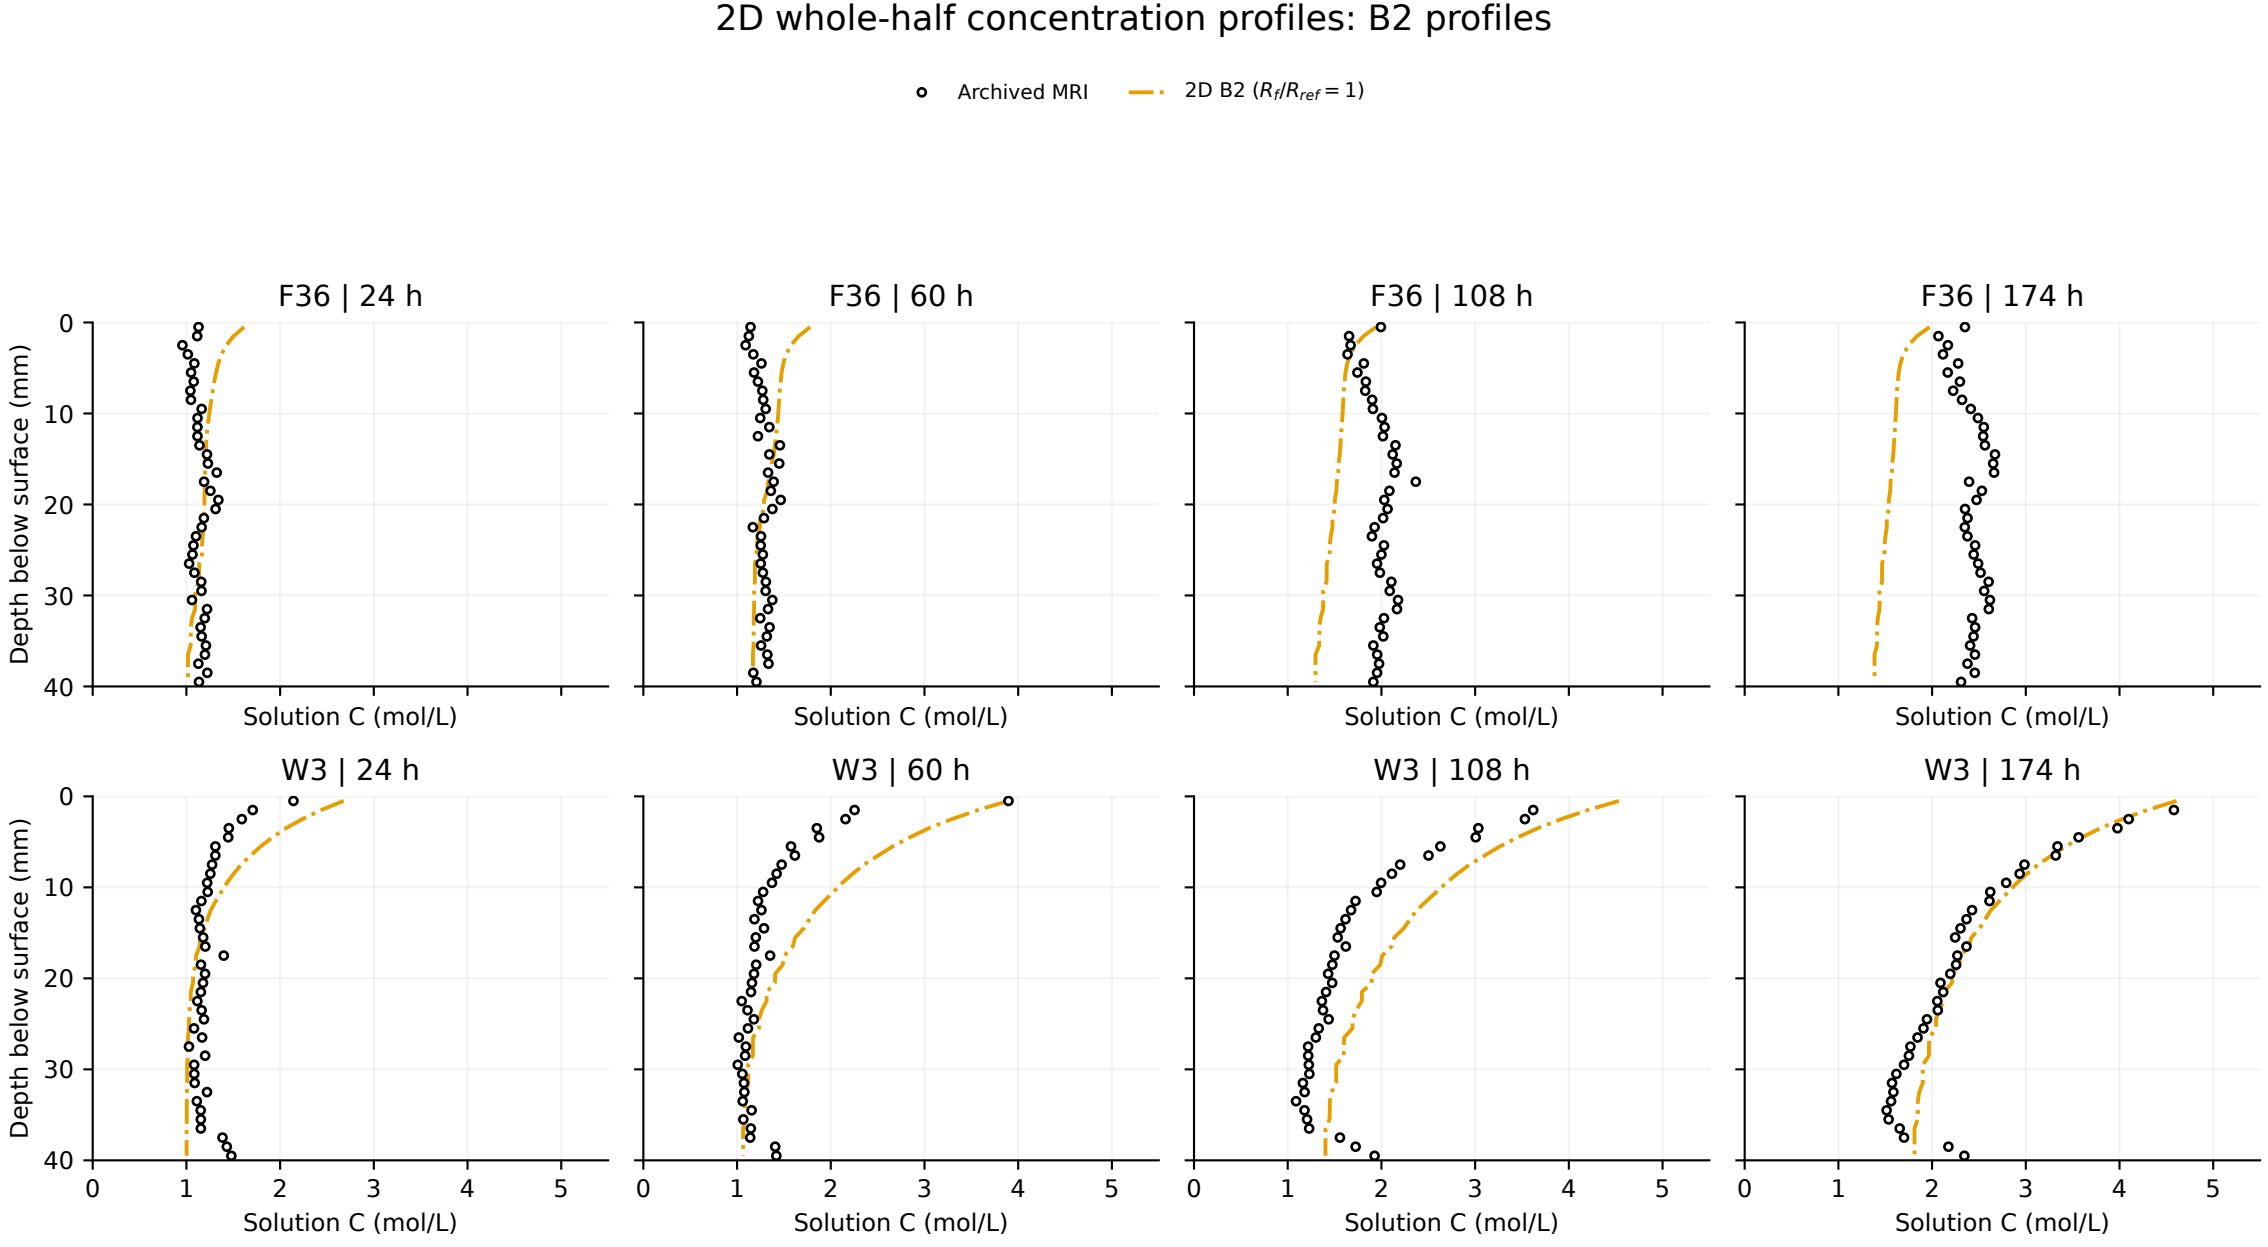


G1–G3 are conditional sensitivity runs: the original refined-grid gate remains failed. Archived MRI uses nominal clock; no crystallization-time inference.

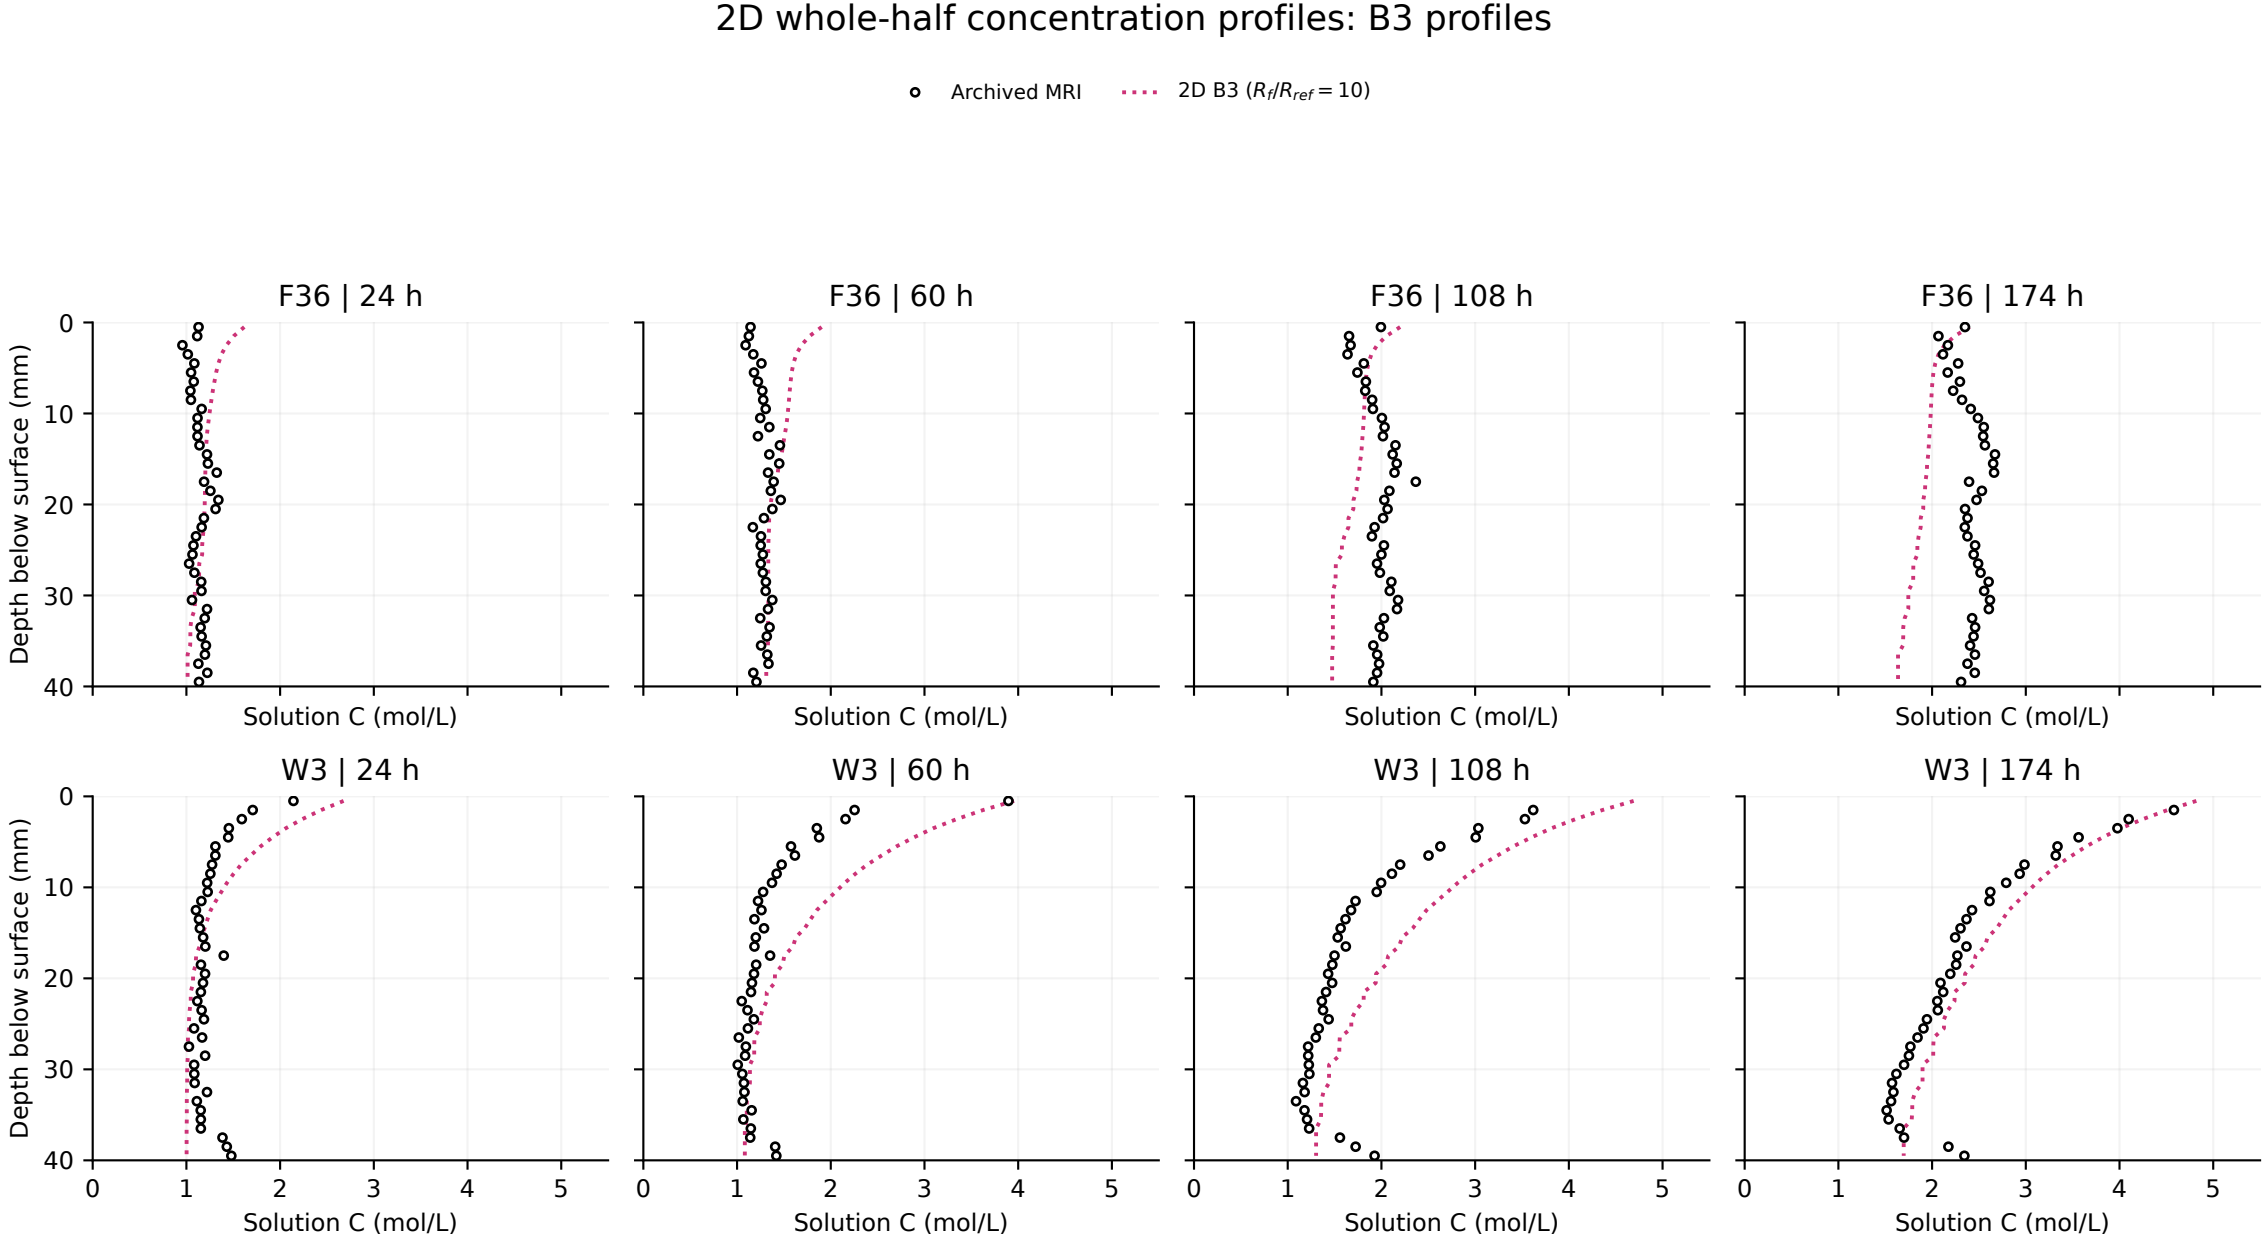


G1–G3 are conditional sensitivity runs: the original refined-grid gate remains failed. Archived MRI uses nominal clock; no crystallization-time inference.

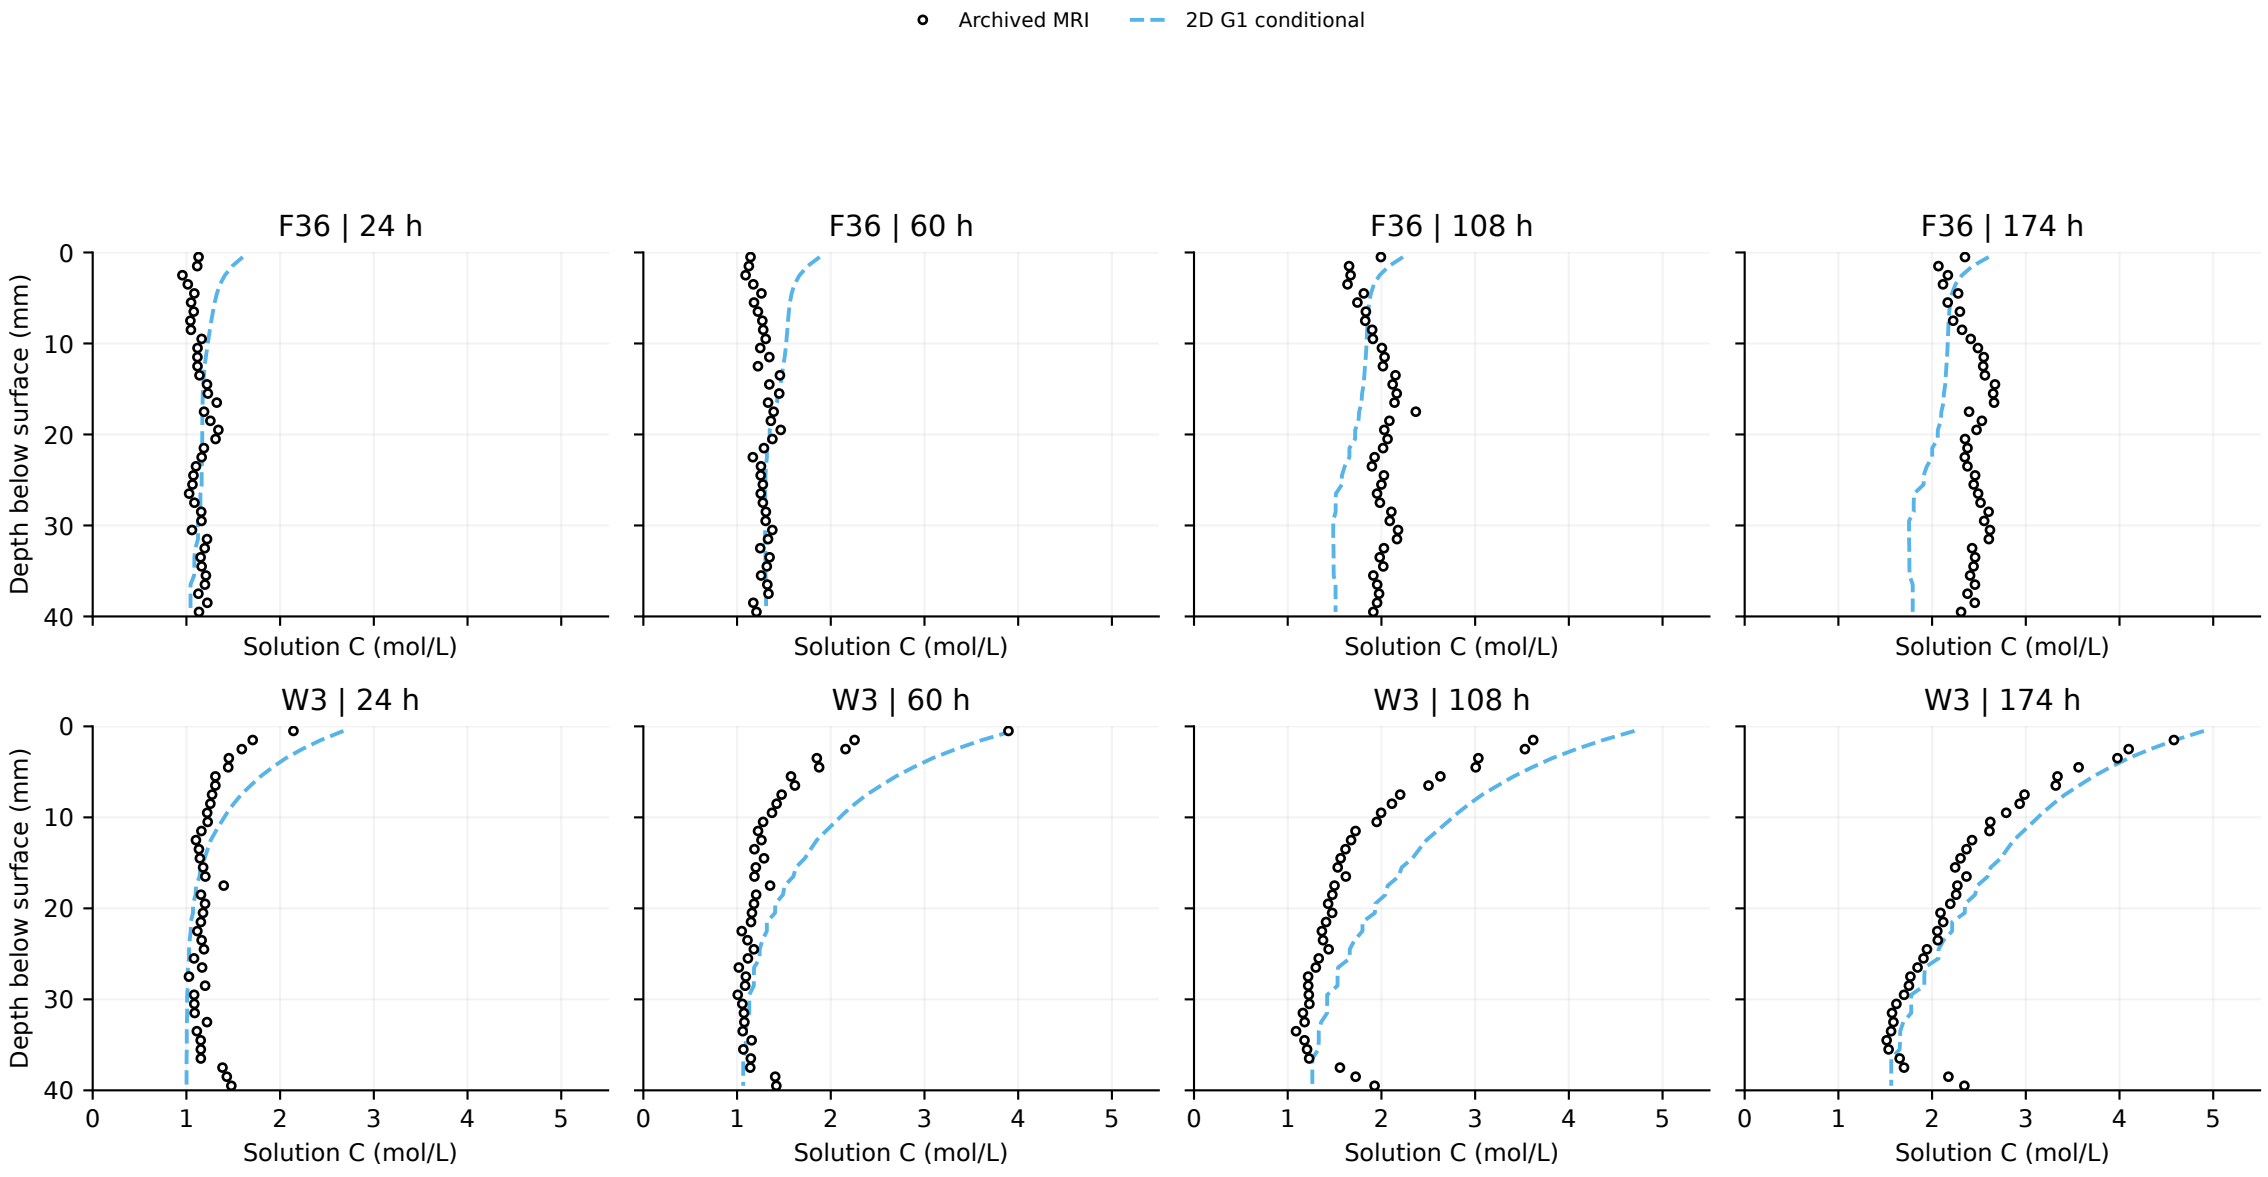

G1–G3 are conditional sensitivity runs: the original refined-grid gate remains failed. Archived MRI uses nominal clock; no crystallization-time inference.

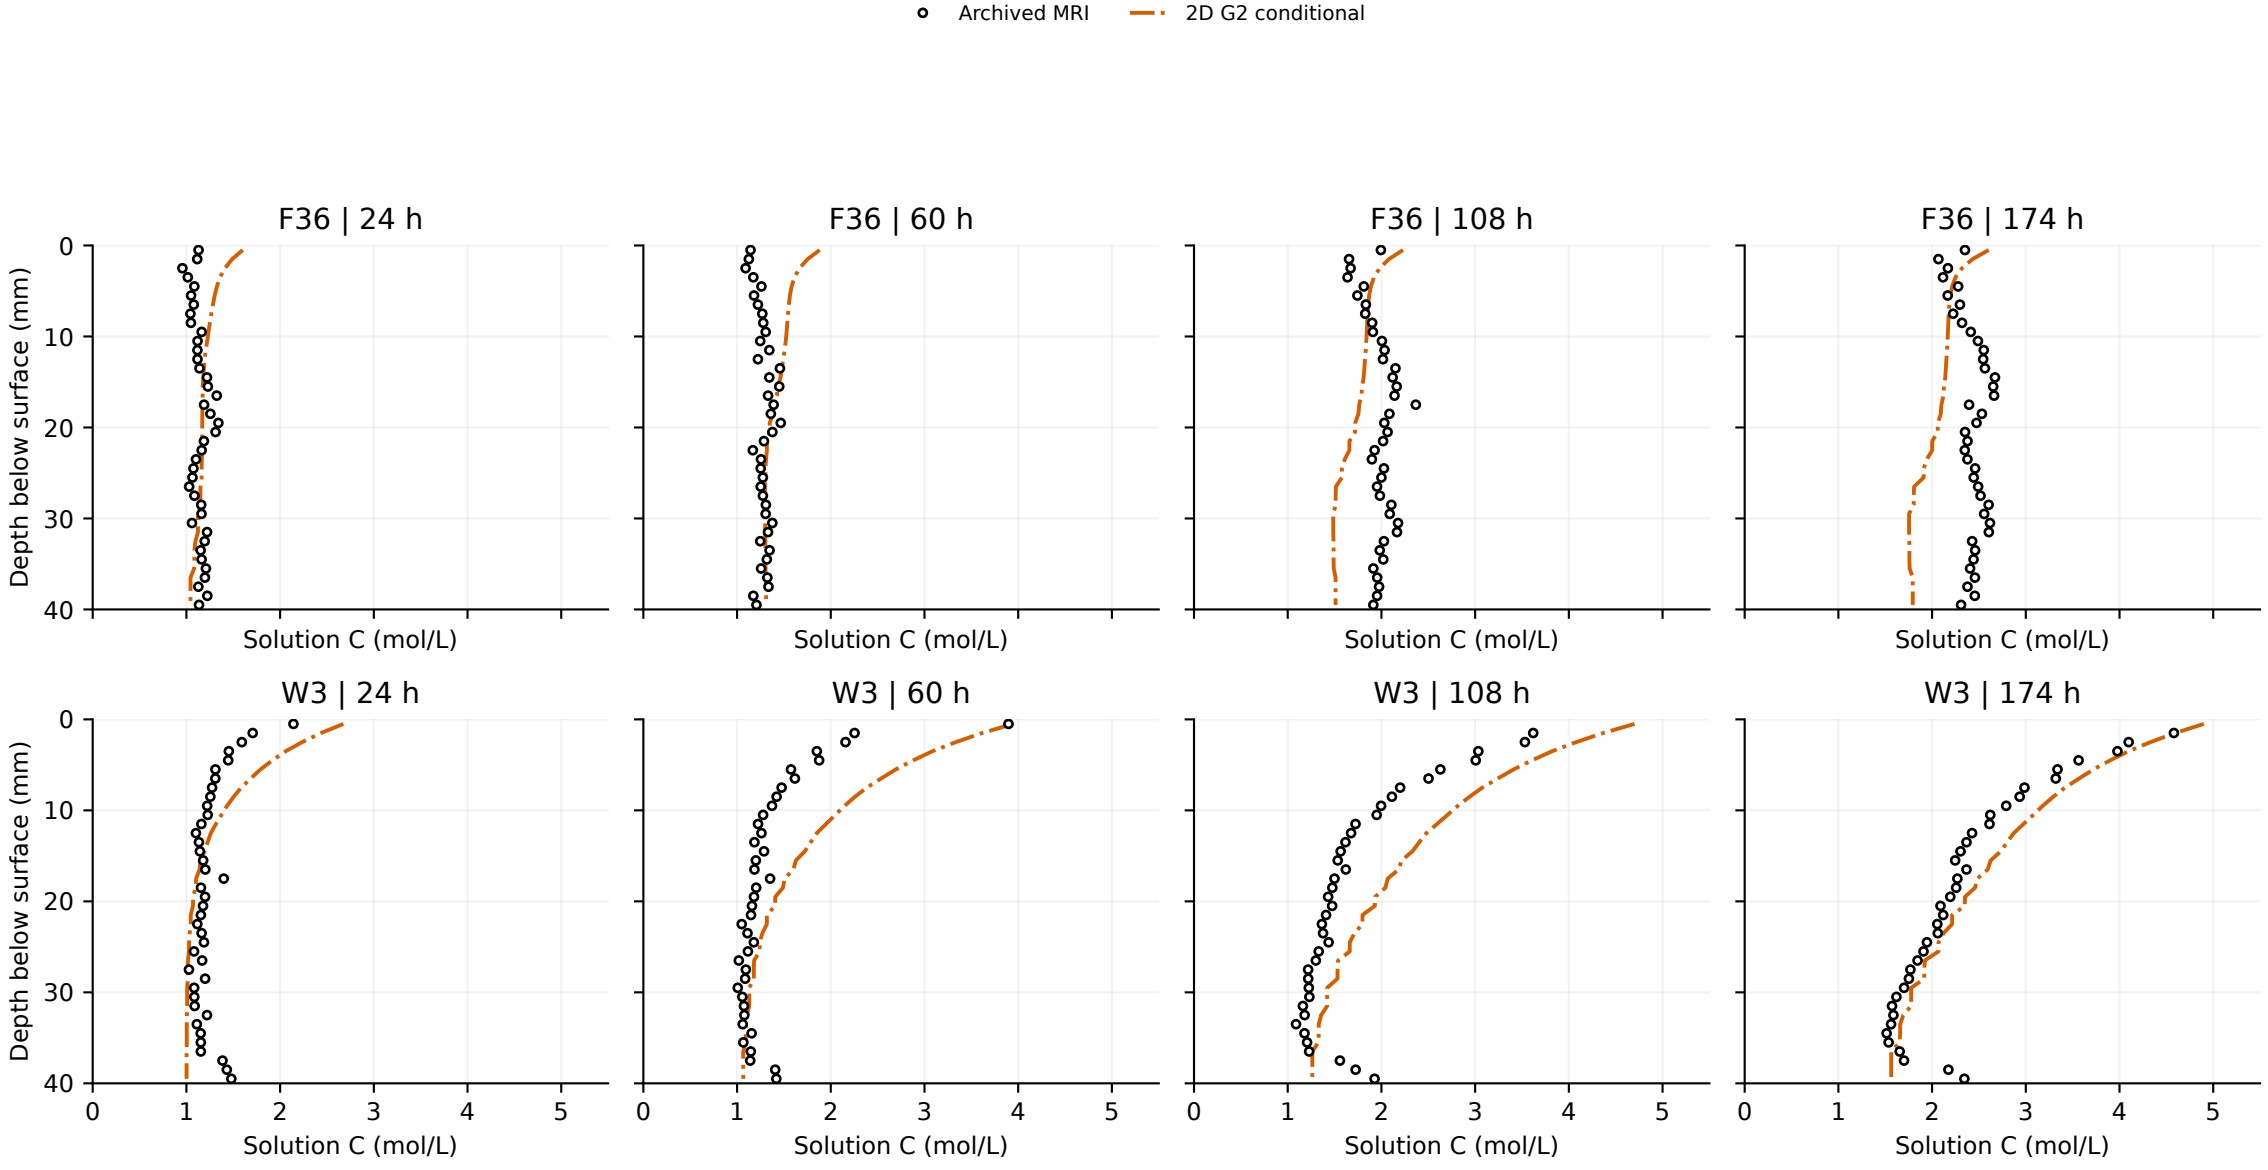

G1–G3 are conditional sensitivity runs: the original refined-grid gate remains failed. Archived MRI uses nominal clock; no crystallization-time inference.

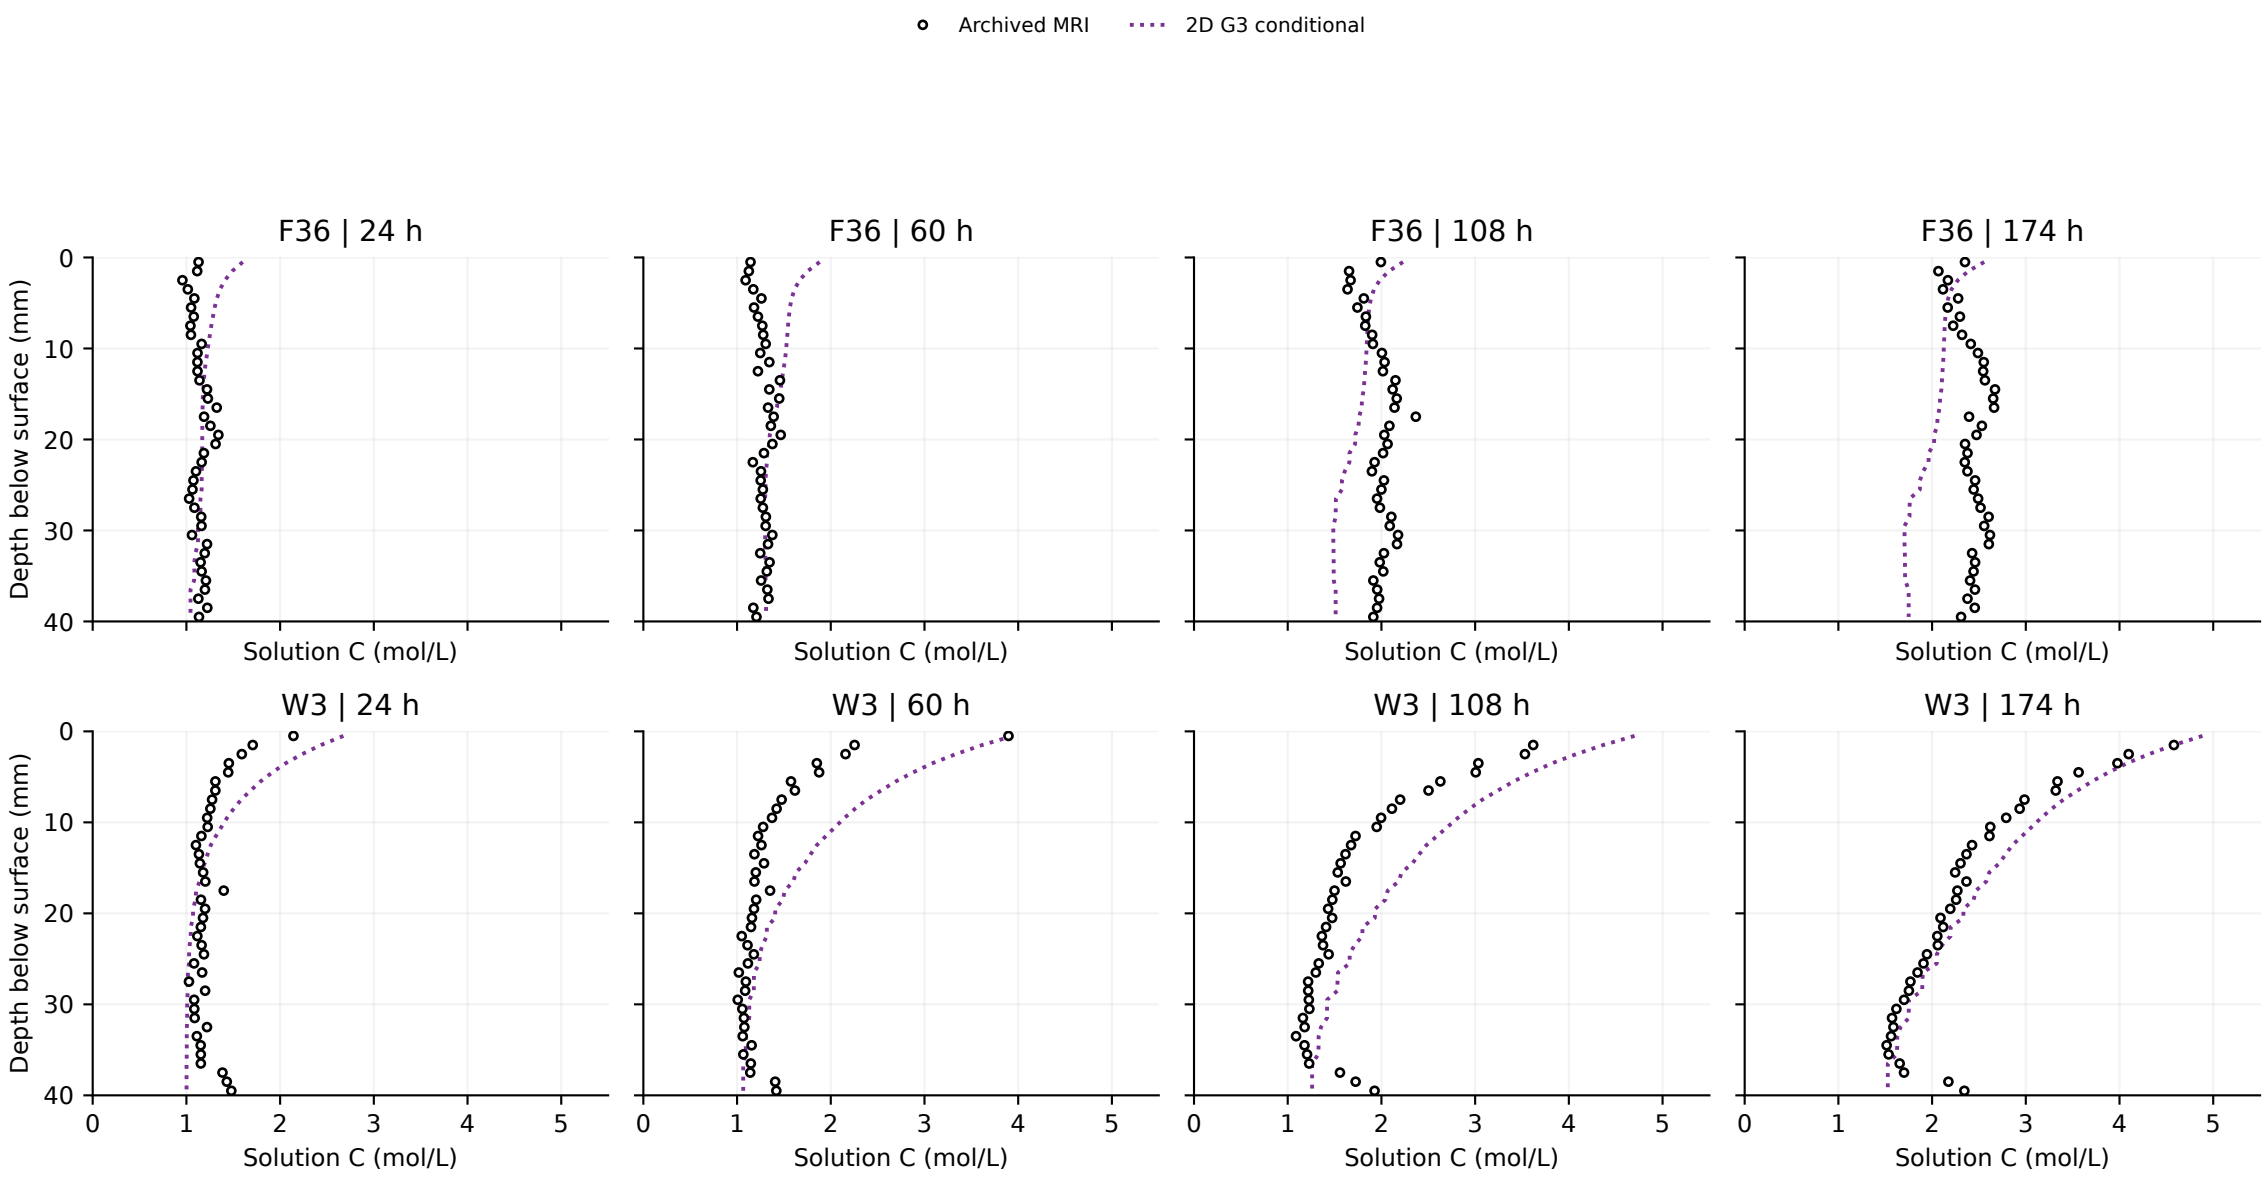

G1–G3 are conditional sensitivity runs: the original refined-grid gate remains failed. Archived MRI uses nominal clock; no crystallization-time inference.