



UNIVERSITÀ
POLITECNICA
DELLE MARCHE

2026 Projects

Luca Spalazzi

Dipartimento di Ingegneria dell'Informazione



CRiSPY

CENTRO DI RICERCA E SERVIZIO
PER LA PRIVACY E LA CYBERSECURITY



ini
Cybersecurity
National Lab

GRUPPO DI INGEGNERIA INFORMATICA - ING-INF/05






Zero Trust Architecture


- Gruppi da 4-5 persone
- Usare Envoy, OPA, Splunk, NFTables, Snort
- Usare MongoDB (oppure in alternativa usare ProxySQL + MySQL)



Zero Trust Architecture

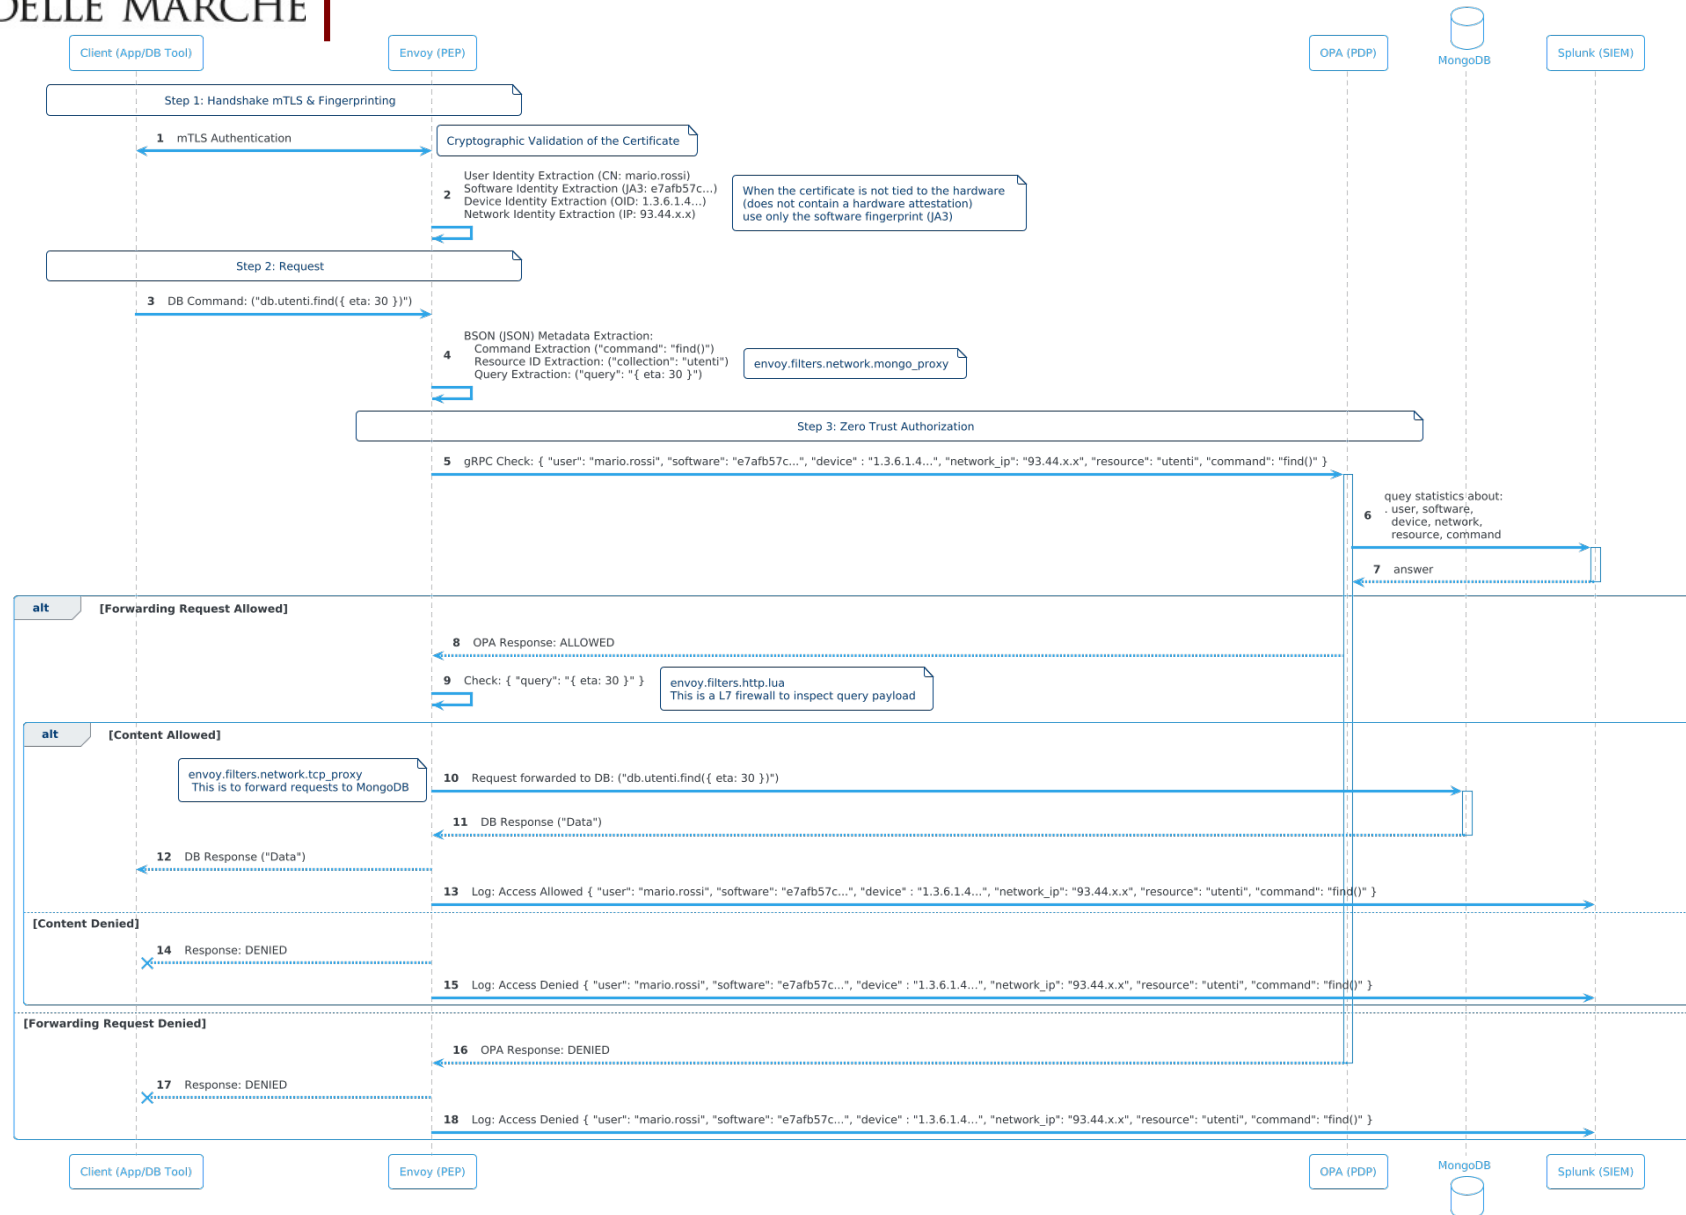


Zero Trust Architecture

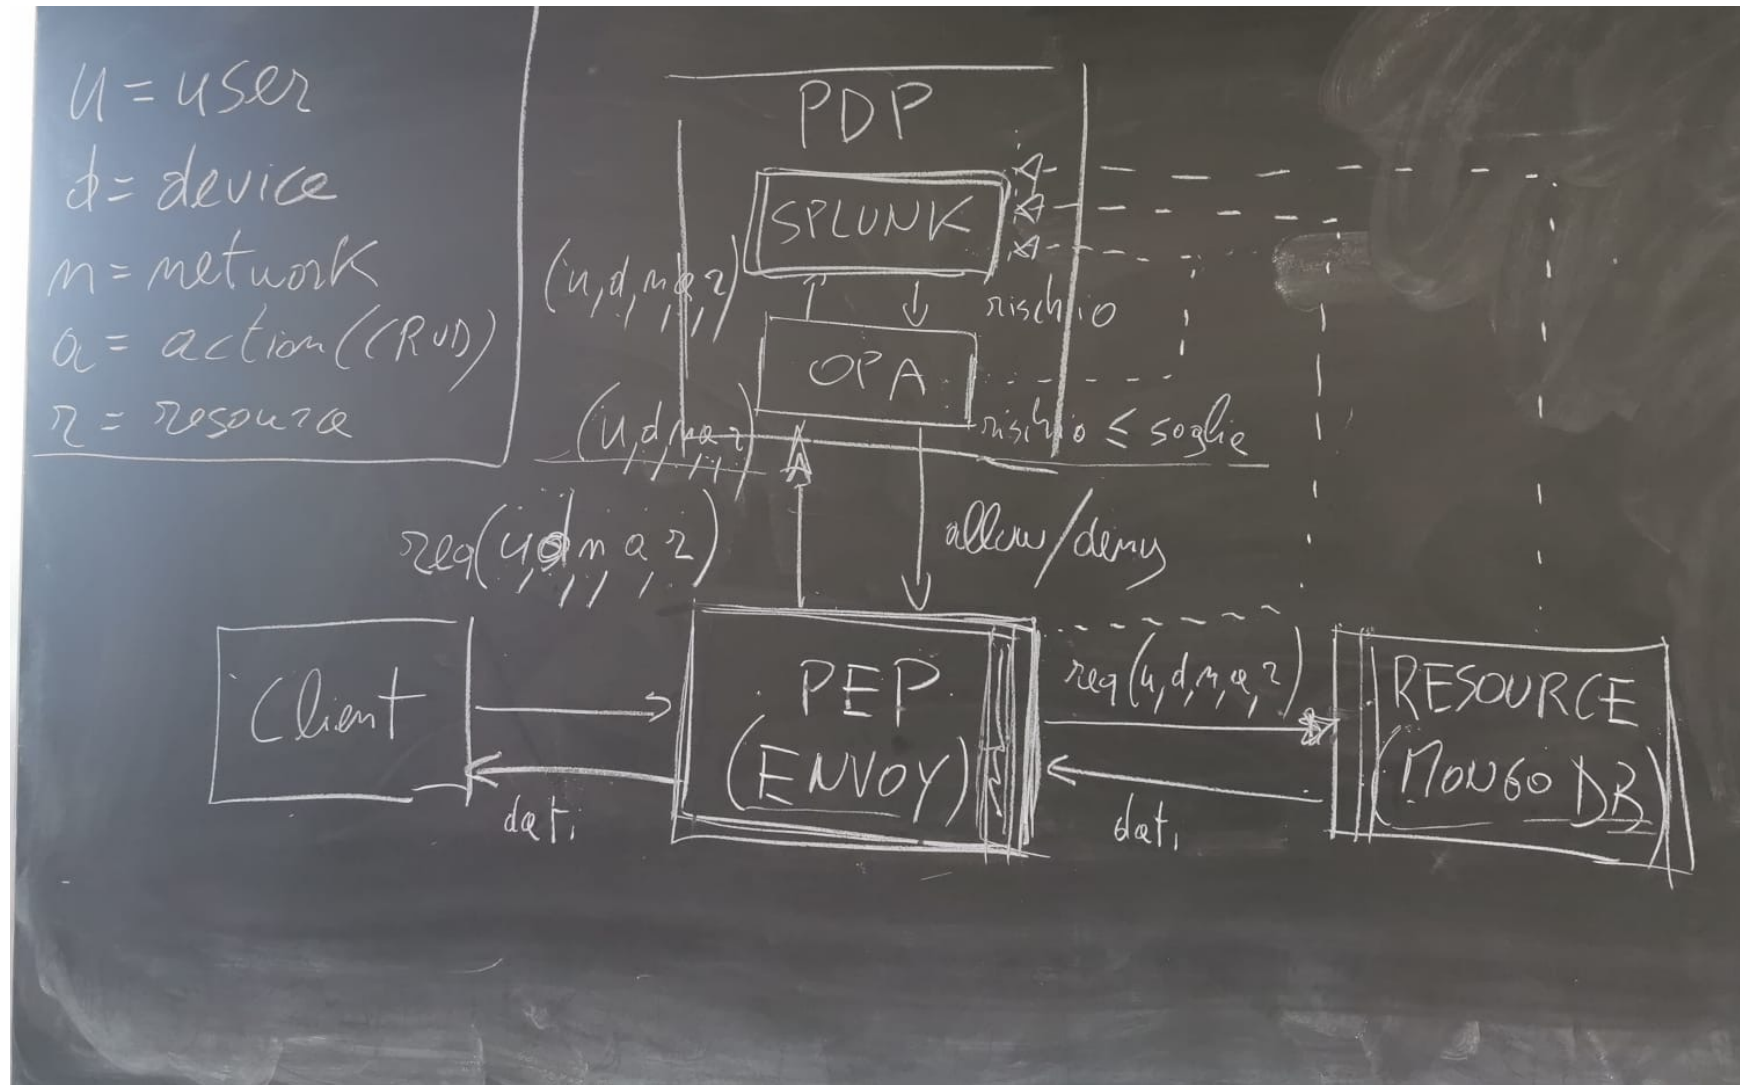




Zero Trust Architecture

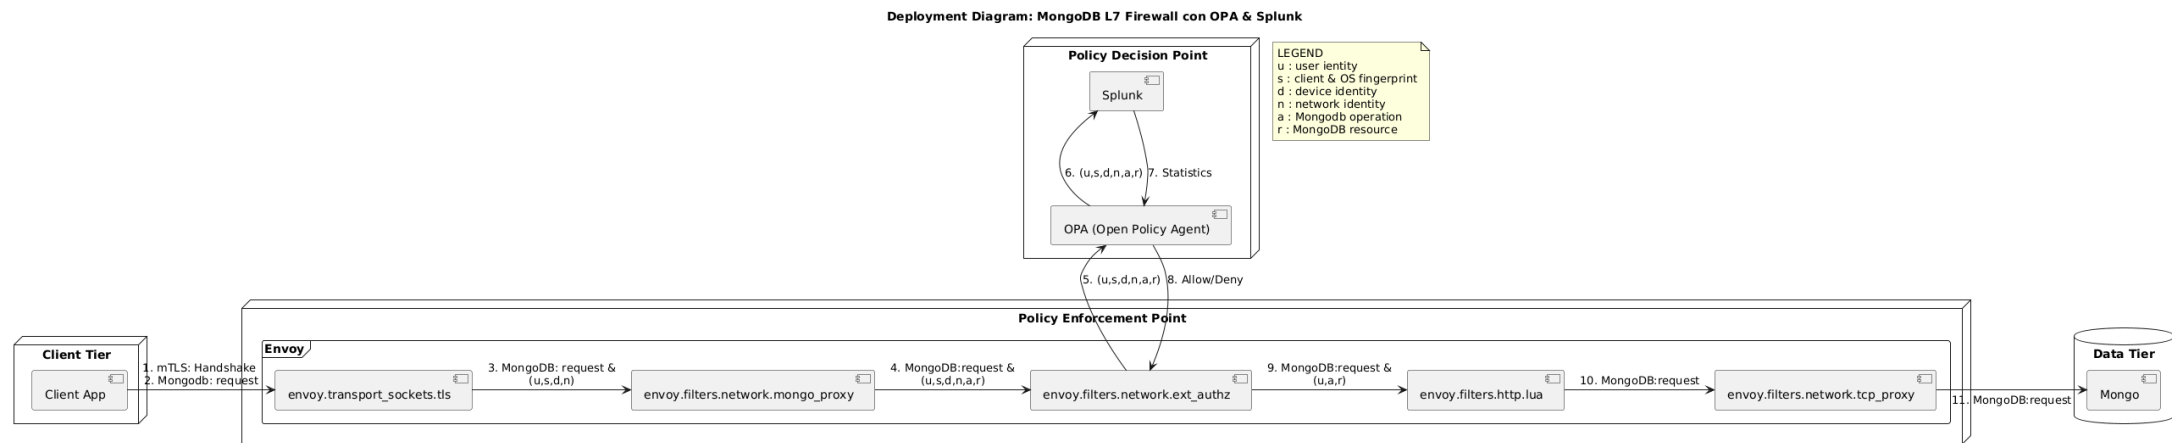

Zero Trust Architecture

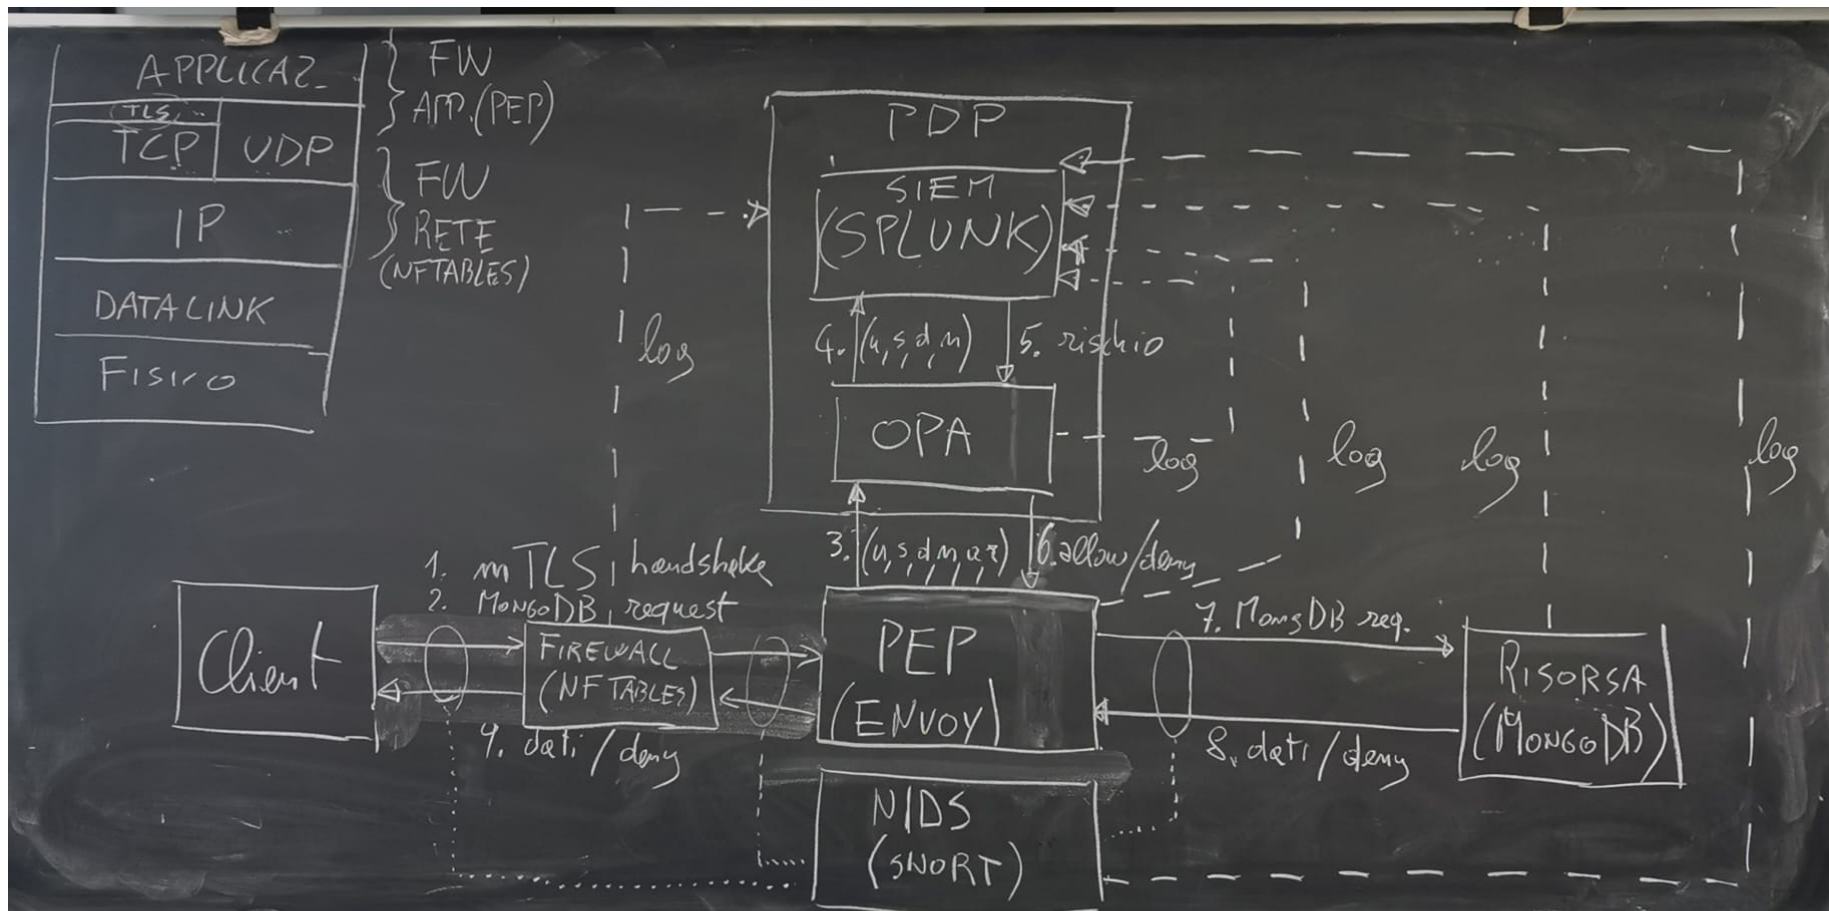



Draft plan

1. Install tools
2. Define policies
3. Develop PDP and PEP
4. Test

Tips and Tricks

- Device identity can only be obtained when using dedicated hardware (integrated into the processor chip):
 - examples include Intel's TPM required by Windows 11 and the Secure Enclave present on Apple Silicon processors.
- When this hardware is present, a user certificate can be bound to the hardware, so that it can only be used by that hardware:
 - if the user wants to use different hardware, different certificates must be used.
- When this hardware is not present, the fingerprint left by the software (JA3) only can be extracted:
 - however, keeping in mind that if two different devices use the same client and the same operating system, the two devices become indistinguishable.



UNIVERSITÀ
POLITECNICA
DELLE MARCHE



QUESTIONS?