

R Notebook for Network & belongingness Paper

By Neil Yetz, MPH

Contents

Introduction	1
Check for errors here.	2
Clear Environment	2
Load Libraries	2
setwd & load data	2
Format Edgelist	3
Format Attributes	3
Create Useful Functions	4
Set Legend	4
Create General Graphs	5
F15	5
S16	21
F16	37
S17	53
Combine Semesters to list	69
Save All Networks to permanant RData File	69
Examine Cliques	70
F15	70
S16	71
F16	72
S17	73



Introduction

This Document was last updated on March 20, 2018. This document is associated with the Campus Connections Social Network Data. Please set the correct working directories in the setwd & load data section of this notebook. When run successfully, all network graphs, separated by semester and night with role attributes will be outputted and saved as a .RDS file into the MERGEALL folder of WTG. If you have any questions concerning this document, please send an email to Neil Yetz at neil.yetz@colostate.edu.

Check for errors here.

```
#Source code for problem isolates

source("T:/Research folders/CCWTG/Analyses/Papers/Belongingness & Network Embeddedness/iso_source.R")#

#Look at the Global Environment for errors! They will be datasets indicating where the isolate is.
#For example, a dataset called "F15_M_1" indicates that there is an error in the Fall 2015 semester,
#Run the source code to check if there are any nodes that should be missing. #If nothing gets outputted

#No errors, checked on 3/20/2018 -Neil
```

Clear Environment

```
rm(list = ls(all.names = TRUE))
```

Load Libraries

```
#install.packages("CTT")
#install.packages("GGally")
#install.packages("ggplot2")
#install.packages("lattice")
#install.packages("gridExtra")
#install.packages("igraph")
#install.packages("dplyr")
#install.packages("tidyr")
#install.packages("igraph")
#install.packages("statnet")

library(CTT)
library(GGally)
library(ggplot2)
library(lattice)
library(gridExtra)
library(reshape)
library(igraph)
library(tidyverse)
```

setwd & load data

```
setwd("T:/Research folders/CCWTG/Analyses/Data for Stats Dept/FINAL DATA")

elmk <- read_csv("CC_edgelist.csv")
saveRDS(elmk, "cc_edgelist.rds")
elmk <- readRDS("cc_edgelist.rds")
```

```
youth_att <- read_csv("Mentee_Attributes.csv")
staff_att <- read_csv("Staff_Attributes_Final.csv")
```

Format Edgelist

```
elmk <- elmk %>%
  filter(Receiver_Missing == 0,
         Sender_missing == 0,
         Sender_Final_ID != Receiver_Final_ID) %>%
  mutate(sn1 = ifelse((sn1 == 1 & sn2 == 0), NA, sn1), #marking NA for nominated, but weight = 0
         sn2 = ifelse(is.na(sn1), NA, sn2)) %>%
  select(-Receiver_Missing, -Sender_missing)
```

Format Attributes

```
youth_att <- youth_att %>%
  mutate(Final_ID = final_ID,
         role1 = Role,
         night1 = tolower(night),
         night2 = NA,
         role2 = NA,
         mentee = NA
        ) %>%
  select(Final_ID, semester, night1, night2, mfcond, role1, role2, room, gender, mentee, impnotes, date)

staff_att <- staff_att %>%
  mutate(date_dropped = NA,
         no_start = NA,
         Final_ID = FFinal_ID) %>%
  select(Final_ID, semester, night1, night2, mfcond, role1, role2, room, gender, mentee, impnotes, date)

staff_youth_att <- rbind(staff_att, youth_att)

#Mentors that did NOT consent to survey research but DID consent to social Network (separate consent pr
sn_consent <- staff_youth_att %>%
  filter(is.na(role1) | is.na(night1) & role1 != "mentee")
sn_consent <- as.vector(sn_consent$Final_ID)

#Set night & role of non-consent survey but consent Social Network.
staff_youth_att <- staff_youth_att %>%
  mutate(
    night1 = ifelse(Final_ID == sn_consent[1], "tuesday", night1), role1 = ifelse(Final_ID == sn_c
    night1 = ifelse(Final_ID == sn_consent[2], "tuesday", night1), role1 = ifelse(Final_ID == sn_c
    night1 = ifelse(Final_ID == sn_consent[3], "tuesday", night1), role1 = ifelse(Final_ID == sn_c
  )

#Check sn_consent status again - Should be 0 rows
#staff_youth_att %>%
# filter(is.na(role1) | is.na(night1) & role1 != "mentee")
```

```

staff_youth_att <- staff_youth_att %>%
  #lowercase all
  mutate(role1 = tolower(role1),
         role2 = tolower(role2),
         night1 = tolower(night1),
         night2 = tolower(night2),
         #Set role colors
         role_col = ifelse(role1 == "mentee", "orange", NA),
         role_col = ifelse(role1 == "mentor", "green", role_col),
         role_col = ifelse(role1 == "mentor coach", "dodgerblue", role_col),
         role_col = ifelse(role1 == "lead mentor coach", "red", role_col),
         role_col = ifelse(role1 == "instructor", "grey50", role_col),

         role_col2 = ifelse(role2 == "mentee", "orange", NA),
         role_col2 = ifelse(role2 == "mentor", "green", role_col2),
         role_col2 = ifelse(role2 == "mentor coach", "dodgerblue", role_col2),
         role_col2 = ifelse(role2 == "lead mentor coach", "red", role_col2),
         role_col2 = ifelse(role2 == "instructor", "grey50", role_col2)
  )

rm(sn_consent)

```

Create Useful Functions

```

#use this function to create plots Adjust here if necessary.
my_sn_g <- function(g, title = "", vertex.label = NA, vertex.size = 10, edge.color = "black", edge.arrow=NA) {
  plot(g,
       vertex.label = NA,
       vertex.size = 10,
       edge.color = 'black',
       edge.arrow.size = .3,
       edge.width = (E(g)$weight / 4),
       layout = layout_nicely(g),
       main = title)
}

#function to make legend creation cleaner
#Create vectors of attributes colors & corresponding colors
my_leg <- function(att, colors) {
  legend("bottomright", legend=att , col = colors , bty = "n", pch=20 , pt.cex = 1, cex = 1, text.col="black")
}

```

Set Legend

```

#For Legend roles & corresponding colors
role <- c("mentee", "mentor", "mentor coach", "lead mentor coach", "instructor")
color <- c("orange", "green", "dodgerblue", "red", "grey50")

```

Create General Graphs

F15

```
temp <- elmk %>% filter(semester == "F15")

mon <- temp %>% filter(night == "monday")
tue <- temp %>% filter(night == "tuesday")
wed <- temp %>% filter(night == "wednesday")
thu <- temp %>% filter(night == "thursday")

sem <- list(mon = mon,
            tue = tue,
            wed = wed,
            thu = thu)

rm(mon);rm(tue);rm(wed);rm(thu)
```

Summary

```
sem$mon <- group_by(sem$mon, survnum)
sem$tue <- group_by(sem$tue, survnum)
sem$wed <- group_by(sem$wed, survnum)
sem$thu <- group_by(sem$thu, survnum)
```

```
summarize(sem$mon, day = "mon", n = length(unique(Sender_Final_ID)), tie_count = sum(sn1, na.rm = TRUE)
```

```
## # A tibble: 5 x 5
##   survnum day      n tie_count tie_prop
##   <int> <chr> <int>   <int>   <dbl>
## 1      1 mon     69      76   0.361
## 2      2 mon     65     441   2.09
## 3      3 mon     61     672   3.19
## 4      4 mon     58     834   3.96
## 5      5 mon     59     887   4.21
```

```
summarize(sem$tue, day = "tue", n = length(unique(Sender_Final_ID)), tie_count = sum(sn1, na.rm = TRUE)
```

```
## # A tibble: 5 x 5
##   survnum day      n tie_count tie_prop
##   <int> <chr> <int>   <int>   <dbl>
## 1      1 tue     62      73   0.387
## 2      2 tue     61     389   2.06
## 3      3 tue     60     623   3.31
## 4      4 tue     60     760   4.03
## 5      5 tue     61     871   4.62
```

```
summarize(sem$wed, day = "wed", n = length(unique(Sender_Final_ID)), tie_count = sum(sn1, na.rm = TRUE)
```

```
## # A tibble: 5 x 5
##   survnum day      n tie_count tie_prop
##   <int> <chr> <int>   <int>   <dbl>
```

```
## 1      1 wed      67      104    0.482
## 2      2 wed      64      482    2.23
## 3      3 wed      64      731    3.39
## 4      4 wed      64      859    3.98
## 5      5 wed      63     1004    4.65
```

```
summarize(sem$thu, day = "thu", n = length(unique(Sender_Final_ID)), tie_count = sum(sn1, na.rm = TRUE))
```

```
## # A tibble: 5 x 5
```

```
##   survnum day      n tie_count tie_prop
##   <int> <chr> <int>    <int>    <dbl>
## 1      1 1 thu     71      126    0.528
## 2      2 2 thu     71      568    2.38
## 3      3 3 thu     69      772    3.23
## 4      4 4 thu     67      830    3.48
## 5      5 5 thu     67      877    3.67
```

```
sem$mon <- ungroup(sem$mon)
sem$tue <- ungroup(sem$tue)
sem$wed <- ungroup(sem$wed)
sem$thu <- ungroup(sem$thu)
```

```
rm(sem)
```

Monday

```
#Set to right days
```

```
temp_night <- temp %>% filter(night == "monday")
temp_att <- staff_youth_att %>% mutate(night = "monday")
```

```
#Surv_1
```

```
surv_1 <- temp_night %>%
  filter(survnum == 1) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
```

```
#Getting isolates
```

```
isolates1 <- surv_1 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_1 <- surv_1 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))
```

```
#Surv_2
```

```
surv_2 <- temp_night %>%
  filter(survnum == 2) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
```

```
#Getting isolates
```

```
isolates2 <- surv_2 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_2 <- surv_2 %>%
```

```

    select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 3
surv_3 <- temp_night %>%
  filter(survnum == 3) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates3 <- surv_3 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_3 <- surv_3 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 4
surv_4 <- temp_night %>%
  filter(survnum == 4) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates4 <- surv_4 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_4 <- surv_4 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 5
surv_5 <- temp_night %>%
  filter(survnum == 5) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates5 <- surv_5 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_5 <- surv_5 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

day <- list(sur1 = surv_1,
            sur2 = surv_2,
            sur3 = surv_3,
            sur4 = surv_4,
            sur5 = surv_5,
            iso1 = isolates1,
            iso2 = isolates2,
            iso3 = isolates3,
            iso4 = isolates4,

```

```

iso5 = isolates5)

rm(surv_1);rm(surv_2);rm(surv_3);rm(surv_4);rm(surv_5)
rm(isolates1);rm(isolates2);rm(isolates3);rm(isolates4);rm(isolates5)

```

General Graphs

#Convert to Matrices

```

sur1 <- as.matrix(day$sur1)
sur2 <- as.matrix(day$sur2)
sur3 <- as.matrix(day$sur3)
sur4 <- as.matrix(day$sur4)
sur5 <- as.matrix(day$sur5)

```

Convert matrix to an igraph object

```

g1 <- graph.edgelist(sur1, directed = TRUE) + vertices(day$iso1$Sender_Final_ID) #Graph edgelist + Add
g2 <- graph.edgelist(sur2, directed = TRUE) + vertices(day$iso2$Sender_Final_ID) #Graph edgelist + Add
g3 <- graph.edgelist(sur3, directed = TRUE) + vertices(day$iso3$Sender_Final_ID) #Graph edgelist + Add
g4 <- graph.edgelist(sur4, directed = TRUE) + vertices(day$iso4$Sender_Final_ID) #Graph edgelist + Add
g5 <- graph.edgelist(sur5, directed = TRUE) + vertices(day$iso5$Sender_Final_ID) #Graph edgelist + Add

```

#Capture Roles, Nights & Colors

```

temp_att <- temp_att %>%
  mutate(
    role1 = ifelse(!is.na(role2)) & (night2 == night), role2, role1),
    night1 = ifelse(!is.na(night2)) & (night2 == night), night2, night1),
    role_col = ifelse(!is.na(role_col2)) & (night2 == night), role_col2, role_col)
  )

```

#Add staff Role Attribute

```

V(g1)$role <- temp_att$role1[match(V(g1)$name, temp_att$Final_ID)]
V(g2)$role <- temp_att$role1[match(V(g2)$name, temp_att$Final_ID)]
V(g3)$role <- temp_att$role1[match(V(g3)$name, temp_att$Final_ID)]
V(g4)$role <- temp_att$role1[match(V(g4)$name, temp_att$Final_ID)]
V(g5)$role <- temp_att$role1[match(V(g5)$name, temp_att$Final_ID)]

```

#Add role colors

```

V(g1)$color <- temp_att$role_col[match(V(g1)$name, temp_att$Final_ID)]
V(g2)$color <- temp_att$role_col[match(V(g2)$name, temp_att$Final_ID)]
V(g3)$color <- temp_att$role_col[match(V(g3)$name, temp_att$Final_ID)]
V(g4)$color <- temp_att$role_col[match(V(g4)$name, temp_att$Final_ID)]
V(g5)$color <- temp_att$role_col[match(V(g5)$name, temp_att$Final_ID)]

```



```

#Add Edge weights - Match by edgelist rows Send/ Receive rows & temp_night Send/Receive rows. filter by
w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g1)), Sender_Final_ID =V1 , Receiver_Final_ID =V2),
              filter(survnum == 1) #Match Weights
              g1 <- set_edge_attr(g1, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g2)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 2) #Match weights
              g2 <- set_edge_attr(g2, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g3)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 3) #Match weights
              g3 <- set_edge_attr(g3, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g4)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 4) #Match weights
              g4 <- set_edge_attr(g4, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g5)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 5) #Match weights
              g5 <- set_edge_attr(g5, "weight", value = w$sn2) #Add edge attribute

#Set graphs to list
graphs <- list(g1 = g1,g2 = g2, g3 = g3,g4 = g4, g5 = g5)

rm(g1); rm(g2); rm(g3); rm(g4); rm(g5)
rm(sur1);rm(sur2);rm(sur3);rm(sur4);rm(sur5)
rm(temp_att); rm(temp_night); rm(w)

```

Create Monday List

```

monday <- list(edgelist = day, graphs = graphs)
rm(day);rm(graphs)

```

Tuesday

```

temp_night <- temp %>% filter(night == "tuesday")
temp_att <- staff_youth_att %>% mutate(night = "tuesday")

#Surv_1
surv_1 <- temp_night %>%
  filter(survnum == 1) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) %>%

#Getting isolates
isolates1 <- surv_1 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_1 <- surv_1 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

```

```

#Surv 2
surv_2 <- temp_night %>%
  filter(survnum == 2) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates2 <- surv_2 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_2 <- surv_2 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 3
surv_3 <- temp_night %>%
  filter(survnum == 3) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates3 <- surv_3 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_3 <- surv_3 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 4
surv_4 <- temp_night %>%
  filter(survnum == 4) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates4 <- surv_4 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_4 <- surv_4 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 5
surv_5 <- temp_night %>%
  filter(survnum == 5) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates5 <- surv_5 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)

```

```

surv_5 <- surv_5 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

day <- list(sur1 = surv_1,
            sur2 = surv_2,
            sur3 = surv_3,
            sur4 = surv_4,
            sur5 = surv_5,
            iso1 = isolates1,
            iso2 = isolates2,
            iso3 = isolates3,
            iso4 = isolates4,
            iso5 = isolates5)

rm(surv_1);rm(surv_2);rm(surv_3);rm(surv_4);rm(surv_5)
rm(isolates1);rm(isolates2);rm(isolates3);rm(isolates4);rm(isolates5)

```

General Graphs

#Convert to Matrices

```

sur1 <- as.matrix(day$sur1)
sur2 <- as.matrix(day$sur2)
sur3 <- as.matrix(day$sur3)
sur4 <- as.matrix(day$sur4)
sur5 <- as.matrix(day$sur5)

```

Convert matrix to an igraph object

```

g1 <- graph.edgelist(sur1, directed = TRUE) + vertices(day$iso1$Sender_Final_ID) #Graph edgelist + Add
g2 <- graph.edgelist(sur2, directed = TRUE) + vertices(day$iso2$Sender_Final_ID) #Graph edgelist + Add
g3 <- graph.edgelist(sur3, directed = TRUE) + vertices(day$iso3$Sender_Final_ID) #Graph edgelist + Add
g4 <- graph.edgelist(sur4, directed = TRUE) + vertices(day$iso4$Sender_Final_ID) #Graph edgelist + Add
g5 <- graph.edgelist(sur5, directed = TRUE) + vertices(day$iso5$Sender_Final_ID) #Graph edgelist + Add

```

#Capture Roles, Nights & Colors

```

temp_att <- temp_att %>%
  mutate(
    role1 = ifelse(!(is.na(role2))) & (night2 == night), role2, role1),
    night1 = ifelse(!(is.na(night2))) & (night2 == night), night2, night1),
    role_col = ifelse(!(is.na(role_col2))) & (night2 == night), role_col2, role_col)

```

#Add staff Role Attribute

```

V(g1)$role <- temp_att$role1[match(V(g1)$name, temp_att$Final_ID)]
V(g2)$role <- temp_att$role1[match(V(g2)$name, temp_att$Final_ID)]
V(g3)$role <- temp_att$role1[match(V(g3)$name, temp_att$Final_ID)]
V(g4)$role <- temp_att$role1[match(V(g4)$name, temp_att$Final_ID)]

```

```

V(g5)$role <- temp_att$role1[match(V(g5)$name, temp_att$Final_ID)]

#Add role colors

V(g1)$color <- temp_att$role_col[match(V(g1)$name, temp_att$Final_ID)]
V(g2)$color <- temp_att$role_col[match(V(g2)$name, temp_att$Final_ID)]
V(g3)$color <- temp_att$role_col[match(V(g3)$name, temp_att$Final_ID)]
V(g4)$color <- temp_att$role_col[match(V(g4)$name, temp_att$Final_ID)]
V(g5)$color <- temp_att$role_col[match(V(g5)$name, temp_att$Final_ID)]

#Add Edge weights - Match by edgelist rows Send/ Receive rows & temp_night Send/Receive rows. filter by

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g1)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 1) #Match weights
              g1 <- set_edge_attr(g1, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g2)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 2) #Match weights
              g2 <- set_edge_attr(g2, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g3)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 3) #Match weights
              g3 <- set_edge_attr(g3, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g4)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 4) #Match weights
              g4 <- set_edge_attr(g4, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g5)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 5) #Match weights
              g5 <- set_edge_attr(g5, "weight", value = w$sn2) #Add edge attribute

#Set graphs to list
graphs <- list(g1 = g1,g2 = g2, g3 = g3,g4 = g4, g5 = g5)

rm(g1); rm(g2); rm(g3); rm(g4); rm(g5)
rm(sur1);rm(sur2);rm(sur3);rm(sur4);rm(sur5)
rm(temp_att); rm(temp_night); rm(w)

```

Create List

```

tuesday <- list(edgelist = day, graphs = graphs)
rm(day); rm(graphs)

```

Wednesday

```

temp_night <- temp %>% filter(night == "wednesday")
temp_att <- staff_youth_att %>% mutate(night = "wednesday")

#Surv_1

```

```

surv_1 <- temp_night %>%
  filter(survnum == 1) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates1 <- surv_1 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_1 <- surv_1 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 2
surv_2 <- temp_night %>%
  filter(survnum == 2) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates2 <- surv_2 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_2 <- surv_2 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 3
surv_3 <- temp_night %>%
  filter(survnum == 3) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates3 <- surv_3 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_3 <- surv_3 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 4
surv_4 <- temp_night %>%
  filter(survnum == 4) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates4 <- surv_4 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_4 <- surv_4 %>%

```

```

    select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 5
surv_5 <- temp_night %>%
  filter(survnum == 5) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates5 <- surv_5 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_5 <- surv_5 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

day <- list(sur1 = surv_1,
            sur2 = surv_2,
            sur3 = surv_3,
            sur4 = surv_4,
            sur5 = surv_5,
            iso1 = isolates1,
            iso2 = isolates2,
            iso3 = isolates3,
            iso4 = isolates4,
            iso5 = isolates5)

rm(surv_1);rm(surv_2);rm(surv_3);rm(surv_4);rm(surv_5)
rm(isolates1);rm(isolates2);rm(isolates3);rm(isolates4);rm(isolates5)

```

General Graphs

#Convert to Matrices

```

sur1 <- as.matrix(day$sur1)
sur2 <- as.matrix(day$sur2)
sur3 <- as.matrix(day$sur3)
sur4 <- as.matrix(day$sur4)
sur5 <- as.matrix(day$sur5)

```

Convert matrix to an igraph object

```

g1 <- graph.edgelist(sur1, directed = TRUE) + vertices(day$iso1$Sender_Final_ID) #Graph edgelist + Add
g2 <- graph.edgelist(sur2, directed = TRUE) + vertices(day$iso2$Sender_Final_ID) #Graph edgelist + Add
g3 <- graph.edgelist(sur3, directed = TRUE) + vertices(day$iso3$Sender_Final_ID) #Graph edgelist + Add
g4 <- graph.edgelist(sur4, directed = TRUE) + vertices(day$iso4$Sender_Final_ID) #Graph edgelist + Add
g5 <- graph.edgelist(sur5, directed = TRUE) + vertices(day$iso5$Sender_Final_ID) #Graph edgelist + Add

```

#Capture Roles, Nights & Colors

```

temp_att <- temp_att %>%
  mutate(
    role1 = ifelse(!is.na(role2)) & (night2 == night), role2, role1),
    night1 = ifelse(!is.na(night2)) & (night2 == night), night2, night1),
    role_col = ifelse(!is.na(role_col2)) & (night2 == night), role_col2, role_col)
  )

#Add staff Role Attribute

V(g1)$role <- temp_att$role1[match(V(g1)$name, temp_att$Final_ID)]
V(g2)$role <- temp_att$role1[match(V(g2)$name, temp_att$Final_ID)]
V(g3)$role <- temp_att$role1[match(V(g3)$name, temp_att$Final_ID)]
V(g4)$role <- temp_att$role1[match(V(g4)$name, temp_att$Final_ID)]
V(g5)$role <- temp_att$role1[match(V(g5)$name, temp_att$Final_ID)]

#Add role colors

V(g1)$color <- temp_att$role_col[match(V(g1)$name, temp_att$Final_ID)]
V(g2)$color <- temp_att$role_col[match(V(g2)$name, temp_att$Final_ID)]
V(g3)$color <- temp_att$role_col[match(V(g3)$name, temp_att$Final_ID)]
V(g4)$color <- temp_att$role_col[match(V(g4)$name, temp_att$Final_ID)]
V(g5)$color <- temp_att$role_col[match(V(g5)$name, temp_att$Final_ID)]

#Add Edge weights - Match by edgelist rows Send/ Receive rows & temp_night Send/Receive rows. filter by

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g1)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
  filter(survnum == 1) #Match Weights
  g1 <- set_edge_attr(g1, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g2)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
  filter(survnum == 2) #Match weights
  g2 <- set_edge_attr(g2, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g3)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
  filter(survnum == 3) #Match weights
  g3 <- set_edge_attr(g3, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g4)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
  filter(survnum == 4) #Match weights
  g4 <- set_edge_attr(g4, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g5)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
  filter(survnum == 5) #Match weights
  g5 <- set_edge_attr(g5, "weight", value = w$sn2) #Add edge attribute

#Set graphs to list
graphs <- list(g1 = g1,g2 = g2, g3 = g3,g4 = g4, g5 = g5)

rm(g1); rm(g2); rm(g3); rm(g4); rm(g5)
rm(sur1);rm(sur2);rm(sur3);rm(sur4);rm(sur5)
rm(temp_att); rm(temp_night); rm(w)

```

Create List

```
wednesday <- list(edgelists = day, graphs = graphs)
rm(day); rm(graphs)
```

Thursday

```
temp_night <- temp %>% filter(night == "thursday")
temp_att <- staff_youth_att %>% mutate(night = "thursday")

#Surv_1
surv_1 <- temp_night %>%
  filter(survnum == 1) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates1 <- surv_1 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_1 <- surv_1 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv_2
surv_2 <- temp_night %>%
  filter(survnum == 2) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates2 <- surv_2 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_2 <- surv_2 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv_3
surv_3 <- temp_night %>%
  filter(survnum == 3) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates3 <- surv_3 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_3 <- surv_3 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv_4
surv_4 <- temp_night %>%
  filter(survnum == 4) %>%
```



```

mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates4 <- surv_4 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_4 <- surv_4 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 5
surv_5 <- temp_night %>%
  filter(survnum == 5) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates5 <- surv_5 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_5 <- surv_5 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

day <- list(sur1 = surv_1,
            sur2 = surv_2,
            sur3 = surv_3,
            sur4 = surv_4,
            sur5 = surv_5,
            iso1 = isolates1,
            iso2 = isolates2,
            iso3 = isolates3,
            iso4 = isolates4,
            iso5 = isolates5)

rm(surv_1);rm(surv_2);rm(surv_3);rm(surv_4);rm(surv_5)
rm(isolates1);rm(isolates2);rm(isolates3);rm(isolates4);rm(isolates5)

```

General Graphs

#Convert to Matrices

```

sur1 <- as.matrix(day$sur1)
sur2 <- as.matrix(day$sur2)
sur3 <- as.matrix(day$sur3)
sur4 <- as.matrix(day$sur4)
sur5 <- as.matrix(day$sur5)

```

Convert matrix to an igraph object

```

g1 <- graph.edgelist(sur1, directed = TRUE) + vertices(day$iso1$Sender_Final_ID) #Graph edgelist + Add
g2 <- graph.edgelist(sur2, directed = TRUE) + vertices(day$iso2$Sender_Final_ID) #Graph edgelist + Add

```

```

g3 <- graph.edgelist(sur3, directed = TRUE) + vertices(day$iso3$Sender_Final_ID) #Graph edgelist + Add
g4 <- graph.edgelist(sur4, directed = TRUE) + vertices(day$iso4$Sender_Final_ID) #Graph edgelist + Add
g5 <- graph.edgelist(sur5, directed = TRUE) + vertices(day$iso5$Sender_Final_ID) #Graph edgelist + Add

#Capture Roles, Nights & Colors

temp_att <- temp_att %>%
  mutate(
    role1 = ifelse(!(is.na(role2))) & (night2 == night), role2, role1),
    night1 = ifelse(!(is.na(night2))) & (night2 == night), night2, night1),
    role_col = ifelse(!(is.na(role_col2))) & (night2 == night), role_col2, role_col)
  )

#Add staff Role Attribute

V(g1)$role <- temp_att$role1[match(V(g1)$name, temp_att$Final_ID)]
V(g2)$role <- temp_att$role1[match(V(g2)$name, temp_att$Final_ID)]
V(g3)$role <- temp_att$role1[match(V(g3)$name, temp_att$Final_ID)]
V(g4)$role <- temp_att$role1[match(V(g4)$name, temp_att$Final_ID)]
V(g5)$role <- temp_att$role1[match(V(g5)$name, temp_att$Final_ID)]

#Add role colors

V(g1)$color <- temp_att$role_col[match(V(g1)$name, temp_att$Final_ID)]
V(g2)$color <- temp_att$role_col[match(V(g2)$name, temp_att$Final_ID)]
V(g3)$color <- temp_att$role_col[match(V(g3)$name, temp_att$Final_ID)]
V(g4)$color <- temp_att$role_col[match(V(g4)$name, temp_att$Final_ID)]
V(g5)$color <- temp_att$role_col[match(V(g5)$name, temp_att$Final_ID)]

#Add Edge weights - Match by edgelist rows Send/ Receive rows & temp_night Send/Receive rows. filter by

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g1)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
  filter(survnum == 1) #Match Weights
)
g1 <- set_edge_attr(g1, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g2)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
  filter(survnum == 2) #Match weights
)
g2 <- set_edge_attr(g2, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g3)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
  filter(survnum == 3) #Match weights
)
g3 <- set_edge_attr(g3, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g4)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
  filter(survnum == 4) #Match weights
)
g4 <- set_edge_attr(g4, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g5)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
  filter(survnum == 5) #Match weights
)

```

```

g5 <- set_edge_attr(g5, "weight", value = w$sn2) #Add edge attribute

#Set graphs to list
graphs <- list(g1 = g1, g2 = g2, g3 = g3, g4 = g4, g5 = g5)

rm(g1); rm(g2); rm(g3); rm(g4); rm(g5)
rm(sur1); rm(sur2); rm(sur3); rm(sur4); rm(sur5)
rm(temp_att); rm(temp_night); rm(w)

```

Create List

```

thursday <- list(edgelists = day, graphs = graphs)
rm(day); rm(graphs)

```

Plot Graphs

```

#Set chart image
par(mfrow=c(4,5))

```

#Monday Graphs

```

my_sn_g(monday$graphs$g1, title = "Monday - Week 1") ; my_leg(att = role, colors = color) #Soc
my_sn_g(monday$graphs$g2, title = "Monday - Week 3") ; my_leg(att = role, colors = color) #Soc
my_sn_g(monday$graphs$g3, title = "Monday - Week 6") ; my_leg(att = role, colors = color) #Soc
my_sn_g(monday$graphs$g4, title = "Monday - Week 9") ; my_leg(att = role, colors = color) #Soc
my_sn_g(monday$graphs$g5, title = "Monday - Week 11") ; my_leg(att = role, colors = color) #Soc

```

#Tuesday Graphs

```

my_sn_g(tuesday$graphs$g1, title = "Tuesday - Week 1") ; my_leg(att = role, colors = color) #Soc
my_sn_g(tuesday$graphs$g2, title = "Tuesday - Week 3") ; my_leg(att = role, colors = color) #Soc
my_sn_g(tuesday$graphs$g3, title = "Tuesday - Week 6") ; my_leg(att = role, colors = color) #Soc
my_sn_g(tuesday$graphs$g4, title = "Tuesday - Week 9") ; my_leg(att = role, colors = color) #Soc
my_sn_g(tuesday$graphs$g5, title = "Tuesday - Week 11") ; my_leg(att = role, colors = color) #Soc

```

#Wednesday Graphs

```


my_sn_g(wednesday$graphs$g1, title = "Wednesday - Week 1") ; my_leg(att = role, colors = color) #Soc
my_sn_g(wednesday$graphs$g2, title = "Wednesday - Week 3") ; my_leg(att = role, colors = color) #Soc
my_sn_g(wednesday$graphs$g3, title = "Wednesday - Week 6") ; my_leg(att = role, colors = color) #Soc
my_sn_g(wednesday$graphs$g4, title = "Wednesday - Week 9") ; my_leg(att = role, colors = color) #Soc
my_sn_g(wednesday$graphs$g5, title = "Wednesday - Week 11") ; my_leg(att = role, colors = color) #Soc

```

```

my_sn_g(thursday$graphs$g1, title = "Thursday - Week 1") ; my_leg(att = role, colors = color) #Soc
my_sn_g(thursday$graphs$g2, title = "Thursday - Week 3") ; my_leg(att = role, colors = color) #Soc
my_sn_g(thursday$graphs$g3, title = "Thursday - Week 6") ; my_leg(att = role, colors = color) #Soc
my_sn_g(thursday$graphs$g4, title = "Thursday - Week 9") ; my_leg(att = role, colors = color) #Soc
my_sn_g(thursday$graphs$g5, title = "Thursday - Week 11") ; my_leg(att = role, colors = color) #Soc

```

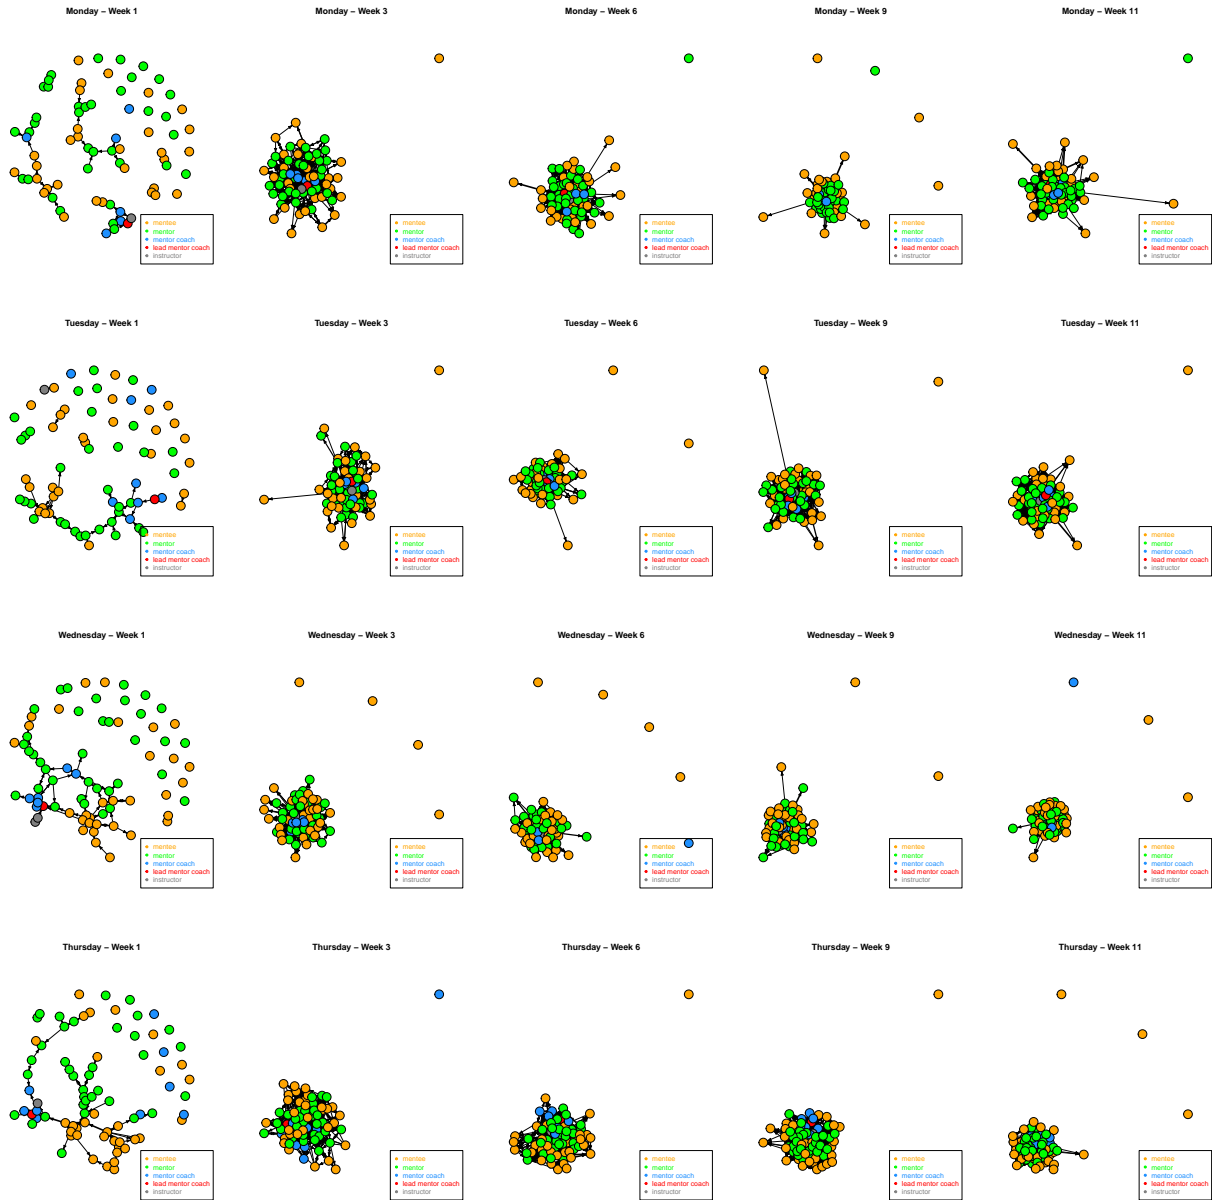

```
#Plot With purrr::walk()
#walk(.x = monday$graphs, .f = my_sn_g, title = "Monday");my_leg(role, color)
#walk(.x = tuesday$graphs, .f = my_sn_g, title = "Tuesday");my_leg(role, color)
#walk(.x = wednesday$graphs, .f = my_sn_g, title = "Wednesday");my_leg(role, color)
#walk(.x = thursday$graphs, .f = my_sn_g, title = "Thursday");my_leg(role, color)
```

Create Semester List

```
F15 <- list(monday = monday, tuesday = tuesday, wednesday = wednesday, thursday = thursday)
rm(monday);rm(tuesday);rm(wednesday);rm(thursday)
rm(temp)
```

S16

```
temp <- elmk %>% filter(semester == "S16")

mon <- temp %>% filter(night == "monday")
tue <- temp %>% filter(night == "tuesday")
wed <- temp %>% filter(night == "wednesday")
thu <- temp %>% filter(night == "thursday")

sem <- list(mon = mon,
            tue = tue,
            wed = wed,
            thu = thu)

rm(mon);rm(tue);rm(wed);rm(thu)
```

Summary

```
sem$mon <- group_by(sem$mon, survnum)
sem$tue <- group_by(sem$tue, survnum)
sem$wed <- group_by(sem$wed, survnum)
sem$thu <- group_by(sem$thu, survnum)

summarize(sem$mon, day = "mon", n = length(unique(Sender_Final_ID)), tie_count = sum(sn1, na.rm = TRUE))

## # A tibble: 5 x 5
##   survnum day      n tie_count tie_prop
##   <int> <chr> <int>   <int>   <dbl>
## 1      1 mon     74      86    0.344
## 2      2 mon     71     454    1.81
## 3      3 mon     66     652    2.61
## 4      4 mon     66     799    3.19
## 5      5 mon     64     789    3.15

summarize(sem$tue, day = "tue", n = length(unique(Sender_Final_ID)), tie_count = sum(sn1, na.rm = TRUE))

## # A tibble: 5 x 5
##   survnum day      n tie_count tie_prop
##   <int> <chr> <int>   <int>   <dbl>
## 1      1 tue     67      85    0.364
## 2      2 tue     68     419    1.80
## 3      3 tue     63     679    2.91
## 4      4 tue     64     923    3.96
## 5      5 tue     63    1062    4.55

summarize(sem$wed, day = "wed", n = length(unique(Sender_Final_ID)), tie_count = sum(sn1, na.rm = TRUE))

## # A tibble: 5 x 5
##   survnum day      n tie_count tie_prop
##   <int> <chr> <int>   <int>   <dbl>
## 1      1 wed     75     110    0.432
## 2      2 wed     73     404    1.59
## 3      3 wed     66     674    2.65
## 4      4 wed     67     854    3.35
## 5      5 wed     67     917    3.60
```

```
summarize(sem$thu, day = "thu", n = length(unique(Sender_Final_ID)), tie_count = sum(sn1, na.rm = TRUE))
```

```
## # A tibble: 5 x 5
##   survnum day      n tie_count tie_prop
##   <int> <chr> <int>   <int>   <dbl>
## 1      1 1 thu     72     136   0.546
## 2      2 2 thu     71     545   2.19
## 3      3 3 thu     70     827   3.32
## 4      4 4 thu     69     924   3.71
## 5      5 5 thu     69    1035   4.15
```

```
sem$mon <- ungroup(sem$mon)
sem$tue <- ungroup(sem$tue)
sem$wed <- ungroup(sem$wed)
sem$thu <- ungroup(sem$thu)
```

```
rm(sem)
```

Monday

```
temp_night <- temp %>% filter(night == "monday")
temp_att <- staff_youth_att %>% mutate(night = "monday")

#Surv_1
surv_1 <- temp_night %>%
  filter(survnum == 1) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates1 <- surv_1 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_1 <- surv_1 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv_2
surv_2 <- temp_night %>%
  filter(survnum == 2) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates2 <- surv_2 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_2 <- surv_2 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv_3
surv_3 <- temp_night %>%
  filter(survnum == 3) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
```

```

#Getting isolates
isolates3 <- surv_3 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_3 <- surv_3 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 4
surv_4 <- temp_night %>%
  filter(survnum == 4) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates4 <- surv_4 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_4 <- surv_4 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 5
surv_5 <- temp_night %>%
  filter(survnum == 5) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates5 <- surv_5 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_5 <- surv_5 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

day <- list(surv1 = surv_1,
            surv2 = surv_2,
            surv3 = surv_3,
            surv4 = surv_4,
            surv5 = surv_5,
            iso1 = isolates1,
            iso2 = isolates2,
            iso3 = isolates3,
            iso4 = isolates4,
            iso5 = isolates5)

rm(surv_1);rm(surv_2);rm(surv_3);rm(surv_4);rm(surv_5)
rm(isolates1);rm(isolates2);rm(isolates3);rm(isolates4);rm(isolates5)

```

General Graphs

```
#Convert to Matrices
```

```
sur1 <- as.matrix(day$sur1)
sur2 <- as.matrix(day$sur2)
sur3 <- as.matrix(day$sur3)
sur4 <- as.matrix(day$sur4)
sur5 <- as.matrix(day$sur5)
```

```
# Convert matrix to an igraph object
```

```
g1 <- graph.edgelist(sur1, directed = TRUE) + vertices(day$iso1$Sender_Final_ID) #Graph edgelist + Add
g2 <- graph.edgelist(sur2, directed = TRUE) + vertices(day$iso2$Sender_Final_ID) #Graph edgelist + Add
g3 <- graph.edgelist(sur3, directed = TRUE) + vertices(day$iso3$Sender_Final_ID) #Graph edgelist + Add
g4 <- graph.edgelist(sur4, directed = TRUE) + vertices(day$iso4$Sender_Final_ID) #Graph edgelist + Add
g5 <- graph.edgelist(sur5, directed = TRUE) + vertices(day$iso5$Sender_Final_ID) #Graph edgelist + Add
```

```
#Capture Roles, Nights & Colors
```

```
temp_att <- temp_att %>%
  mutate(
    role1 = ifelse(!(is.na(role2))) & (night2 == night), role2, role1),
    night1 = ifelse(!(is.na(night2))) & (night2 == night), night2, night1),
    role_col = ifelse(!(is.na(role_col2))) & (night2 == night), role_col2, role_col)
  )
```

```
#Add staff Role Attribute
```

```
V(g1)$role <- temp_att$role1[match(V(g1)$name, temp_att$Final_ID)]
V(g2)$role <- temp_att$role1[match(V(g2)$name, temp_att$Final_ID)]
V(g3)$role <- temp_att$role1[match(V(g3)$name, temp_att$Final_ID)]
V(g4)$role <- temp_att$role1[match(V(g4)$name, temp_att$Final_ID)]
V(g5)$role <- temp_att$role1[match(V(g5)$name, temp_att$Final_ID)]
```

```
#Add role colors
```

```
V(g1)$color <- temp_att$role_col[match(V(g1)$name, temp_att$Final_ID)]
V(g2)$color <- temp_att$role_col[match(V(g2)$name, temp_att$Final_ID)]
V(g3)$color <- temp_att$role_col[match(V(g3)$name, temp_att$Final_ID)]
V(g4)$color <- temp_att$role_col[match(V(g4)$name, temp_att$Final_ID)]
V(g5)$color <- temp_att$role_col[match(V(g5)$name, temp_att$Final_ID)]
```

```
#Add Edge weights - Match by edgelist rows Send/ Receive rows & temp_night Send/Receive rows. filter by
```

```
w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g1)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 1) #Match Weights)
g1 <- set_edge_attr(g1, "weight", value = w$sn2) #Add edge attribute
```

```
w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g2)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 1) #Match Weights)
```



```

        filter(survnum == 2) #Match weights
g2 <- set_edge_attr(g2, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g3)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 3) #Match weights
              g3 <- set_edge_attr(g3, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g4)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 4) #Match weights
              g4 <- set_edge_attr(g4, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g5)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 5) #Match weights
              g5 <- set_edge_attr(g5, "weight", value = w$sn2) #Add edge attribute

#Set graphs to list
graphs <- list(g1 = g1, g2 = g2, g3 = g3, g4 = g4, g5 = g5)

rm(g1); rm(g2); rm(g3); rm(g4); rm(g5)
rm(sur1); rm(sur2); rm(sur3); rm(sur4); rm(sur5)
rm(temp_att); rm(temp_night); rm(w)

```

Create List

```

monday <- list(edgelist = day, graphs = graphs)
rm(day); rm(graphs)

```

Tuesday

```

temp_night <- temp %>% filter(night == "tuesday")
temp_att <- staff_youth_att %>% mutate(night = "tuesday")

#Surv_1
surv_1 <- temp_night %>%
  filter(survnum == 1) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) %>%
#Getting isolates
isolates1 <- surv_1 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_1 <- surv_1 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv_2
surv_2 <- temp_night %>%
  filter(survnum == 2) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) %>%
#Getting isolates

```

```

isolates2 <- surv_2 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_2 <- surv_2 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 3
surv_3 <- temp_night %>%
  filter(survnum == 3) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates3 <- surv_3 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_3 <- surv_3 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 4
surv_4 <- temp_night %>%
  filter(survnum == 4) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates4 <- surv_4 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_4 <- surv_4 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 5
surv_5 <- temp_night %>%
  filter(survnum == 5) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates5 <- surv_5 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_5 <- surv_5 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

day <- list(surv1 = surv_1,
            surv2 = surv_2,

```

```

sur3 = surv_3,
sur4 = surv_4,
sur5 = surv_5,
iso1 = isolates1,
iso2 = isolates2,
iso3 = isolates3,
iso4 = isolates4,
iso5 = isolates5)

rm(surv_1);rm(surv_2);rm(surv_3);rm(surv_4);rm(surv_5)
rm(isolates1);rm(isolates2);rm(isolates3);rm(isolates4);rm(isolates5)

```

General Graphs

#Convert to Matrices

```

sur1 <- as.matrix(day$sur1)
sur2 <- as.matrix(day$sur2)
sur3 <- as.matrix(day$sur3)
sur4 <- as.matrix(day$sur4)
sur5 <- as.matrix(day$sur5)

```

Convert matrix to an igraph object

```

g1 <- graph.edgelist(sur1, directed = TRUE) + vertices(day$iso1$Sender_Final_ID) #Graph edgelist + Add
g2 <- graph.edgelist(sur2, directed = TRUE) + vertices(day$iso2$Sender_Final_ID) #Graph edgelist + Add
g3 <- graph.edgelist(sur3, directed = TRUE) + vertices(day$iso3$Sender_Final_ID) #Graph edgelist + Add
g4 <- graph.edgelist(sur4, directed = TRUE) + vertices(day$iso4$Sender_Final_ID) #Graph edgelist + Add
g5 <- graph.edgelist(sur5, directed = TRUE) + vertices(day$iso5$Sender_Final_ID) #Graph edgelist + Add

```

#Capture Roles, Nights & Colors

```

temp_att <- temp_att %>%
  mutate(
    role1 = ifelse(!(is.na(role2))) & (night2 == night), role2, role1),
    night1 = ifelse(!(is.na(night2))) & (night2 == night), night2, night1),
    role_col = ifelse(!(is.na(role_col2))) & (night2 == night), role_col2, role_col)

```

#Add staff Role Attribute

```

V(g1)$role <- temp_att$role1[match(V(g1)$name, temp_att$Final_ID)]
V(g2)$role <- temp_att$role1[match(V(g2)$name, temp_att$Final_ID)]
V(g3)$role <- temp_att$role1[match(V(g3)$name, temp_att$Final_ID)]
V(g4)$role <- temp_att$role1[match(V(g4)$name, temp_att$Final_ID)]
V(g5)$role <- temp_att$role1[match(V(g5)$name, temp_att$Final_ID)]

```

#Add role colors

```

V(g1)$color <- temp_att$role_col[match(V(g1)$name, temp_att$Final_ID)]

```

```

V(g2)$color <- temp_att$role_col[match(V(g2)$name, temp_att$Final_ID)]
V(g3)$color <- temp_att$role_col[match(V(g3)$name, temp_att$Final_ID)]
V(g4)$color <- temp_att$role_col[match(V(g4)$name, temp_att$Final_ID)]
V(g5)$color <- temp_att$role_col[match(V(g5)$name, temp_att$Final_ID)]

#Add Edge weights - Match by edgelist rows Send/ Receive rows & temp_night Send/Receive rows. filter by
w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g1)), Sender_Final_ID = V1, Receiver_Final_ID = V2),
              filter(survnum == 1) #Match Weights
              g1 <- set_edge_attr(g1, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g2)), Sender_Final_ID = V1, Receiver_Final_ID = V2),
              filter(survnum == 2) #Match weights
              g2 <- set_edge_attr(g2, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g3)), Sender_Final_ID = V1, Receiver_Final_ID = V2),
              filter(survnum == 3) #Match weights
              g3 <- set_edge_attr(g3, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g4)), Sender_Final_ID = V1, Receiver_Final_ID = V2),
              filter(survnum == 4) #Match weights
              g4 <- set_edge_attr(g4, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g5)), Sender_Final_ID = V1, Receiver_Final_ID = V2),
              filter(survnum == 5) #Match weights
              g5 <- set_edge_attr(g5, "weight", value = w$sn2) #Add edge attribute

#Set graphs to list
graphs <- list(g1 = g1, g2 = g2, g3 = g3, g4 = g4, g5 = g5)

rm(g1); rm(g2); rm(g3); rm(g4); rm(g5)
rm(sur1); rm(sur2); rm(sur3); rm(sur4); rm(sur5)
rm(temp_att); rm(temp_night); rm(w)

```

Create List

```

tuesday <- list(edgelist = day, graphs = graphs)
rm(day); rm(graphs)

```

Wednesday

```

temp_night <- temp %>% filter(night == "wednesday")
temp_att <- staff_youth_att %>% mutate(night = "wednesday")

#Surv_1
surv_1 <- temp_night %>%
  filter(survnum == 1) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%

#Getting isolates
isolates1 <- surv_1 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%

```

```

filter(isolate < 1) %>%
select(Sender_Final_ID)
surv_1 <- surv_1 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 2
surv_2 <- temp_night %>%
  filter(survnum == 2) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates2 <- surv_2 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_2 <- surv_2 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 3
surv_3 <- temp_night %>%
  filter(survnum == 3) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates3 <- surv_3 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_3 <- surv_3 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 4
surv_4 <- temp_night %>%
  filter(survnum == 4) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates4 <- surv_4 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_4 <- surv_4 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 5
surv_5 <- temp_night %>%
  filter(survnum == 5) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates5 <- surv_5 %>%

```

```

mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
group_by(Sender_Final_ID) %>%
summarize(isolate = sum(sn1)) %>%
filter(isolate < 1) %>%
select(Sender_Final_ID)
surv_5 <- surv_5 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

day <- list(sur1 = surv_1,
            sur2 = surv_2,
            sur3 = surv_3,
            sur4 = surv_4,
            sur5 = surv_5,
            iso1 = isolates1,
            iso2 = isolates2,
            iso3 = isolates3,
            iso4 = isolates4,
            iso5 = isolates5)

rm(surv_1);rm(surv_2);rm(surv_3);rm(surv_4);rm(surv_5)
rm(isolates1);rm(isolates2);rm(isolates3);rm(isolates4);rm(isolates5)

```

General Graphs

#Convert to Matrices

```

sur1 <- as.matrix(day$sur1)
sur2 <- as.matrix(day$sur2)
sur3 <- as.matrix(day$sur3)
sur4 <- as.matrix(day$sur4)
sur5 <- as.matrix(day$sur5)

```

Convert matrix to an igraph object

```

g1 <- graph.edgelist(sur1, directed = TRUE) + vertices(day$iso1$Sender_Final_ID) #Graph edgelist + Add
g2 <- graph.edgelist(sur2, directed = TRUE) + vertices(day$iso2$Sender_Final_ID) #Graph edgelist + Add
g3 <- graph.edgelist(sur3, directed = TRUE) + vertices(day$iso3$Sender_Final_ID) #Graph edgelist + Add
g4 <- graph.edgelist(sur4, directed = TRUE) + vertices(day$iso4$Sender_Final_ID) #Graph edgelist + Add
g5 <- graph.edgelist(sur5, directed = TRUE) + vertices(day$iso5$Sender_Final_ID) #Graph edgelist + Add

```

#Capture Roles, Nights & Colors

```

temp_att <- temp_att %>%
  mutate(
    role1 = ifelse(!(is.na(role2))) & (night2 == night), role2, role1),
    night1 = ifelse(!(is.na(night2))) & (night2 == night), night2, night1),
    role_col = ifelse(!(is.na(role_col2))) & (night2 == night), role_col2, role_col)

```

#Add staff Role Attribute

```

V(g1)$role <- temp_att$role1[match(V(g1)$name, temp_att$Final_ID)]
V(g2)$role <- temp_att$role1[match(V(g2)$name, temp_att$Final_ID)]
V(g3)$role <- temp_att$role1[match(V(g3)$name, temp_att$Final_ID)]
V(g4)$role <- temp_att$role1[match(V(g4)$name, temp_att$Final_ID)]
V(g5)$role <- temp_att$role1[match(V(g5)$name, temp_att$Final_ID)]

#Add role colors

V(g1)$color <- temp_att$role_col[match(V(g1)$name, temp_att$Final_ID)]
V(g2)$color <- temp_att$role_col[match(V(g2)$name, temp_att$Final_ID)]
V(g3)$color <- temp_att$role_col[match(V(g3)$name, temp_att$Final_ID)]
V(g4)$color <- temp_att$role_col[match(V(g4)$name, temp_att$Final_ID)]
V(g5)$color <- temp_att$role_col[match(V(g5)$name, temp_att$Final_ID)]

#Add Edge weights - Match by edgelist rows Send/ Receive rows & temp_night Send/Receive rows. filter by

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g1)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 1) #Match weights
              )
g1 <- set_edge_attr(g1, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g2)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 2) #Match weights
              )
g2 <- set_edge_attr(g2, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g3)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 3) #Match weights
              )
g3 <- set_edge_attr(g3, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g4)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 4) #Match weights
              )
g4 <- set_edge_attr(g4, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g5)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 5) #Match weights
              )
g5 <- set_edge_attr(g5, "weight", value = w$sn2) #Add edge attribute

#Set graphs to list
graphs <- list(g1 = g1,g2 = g2, g3 = g3,g4 = g4, g5 = g5)

rm(g1); rm(g2); rm(g3); rm(g4); rm(g5)
rm(sur1);rm(sur2);rm(sur3);rm(sur4);rm(sur5)
rm(temp_att); rm(temp_night); rm(w)

```

Create List

```

wednesday <- list(edgelists = day, graphs = graphs)
rm(day); rm(graphs)

```

Thursday

```

temp_night <- temp %>% filter(night == "thursday")
temp_att <- staff_youth_att %>% mutate(night = "thursday")

```

```

#Surv_1
surv_1 <- temp_night %>%
  filter(survnum == 1) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates1 <- surv_1 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_1 <- surv_1 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv_2
surv_2 <- temp_night %>%
  filter(survnum == 2) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates2 <- surv_2 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_2 <- surv_2 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv_3
surv_3 <- temp_night %>%
  filter(survnum == 3) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates3 <- surv_3 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_3 <- surv_3 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv_4
surv_4 <- temp_night %>%
  filter(survnum == 4) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates4 <- surv_4 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)

```



```

surv_4 <- surv_4 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 5
surv_5 <- temp_night %>%
  filter(survnum == 5) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates5 <- surv_5 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_5 <- surv_5 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

day <- list(sur1 = surv_1,
            sur2 = surv_2,
            sur3 = surv_3,
            sur4 = surv_4,
            sur5 = surv_5,
            iso1 = isolates1,
            iso2 = isolates2,
            iso3 = isolates3,
            iso4 = isolates4,
            iso5 = isolates5)

rm(surv_1);rm(surv_2);rm(surv_3);rm(surv_4);rm(surv_5)
rm(isolates1);rm(isolates2);rm(isolates3);rm(isolates4);rm(isolates5)

```

General Graphs

#Convert to Matrices

```

sur1 <- as.matrix(day$sur1)
sur2 <- as.matrix(day$sur2)
sur3 <- as.matrix(day$sur3)
sur4 <- as.matrix(day$sur4)
sur5 <- as.matrix(day$sur5)

```

Convert matrix to an igraph object

```

g1 <- graph.edgelist(sur1, directed = TRUE) + vertices(day$iso1$Sender_Final_ID) #Graph edgelist + Add
g2 <- graph.edgelist(sur2, directed = TRUE) + vertices(day$iso2$Sender_Final_ID) #Graph edgelist + Add
g3 <- graph.edgelist(sur3, directed = TRUE) + vertices(day$iso3$Sender_Final_ID) #Graph edgelist + Add
g4 <- graph.edgelist(sur4, directed = TRUE) + vertices(day$iso4$Sender_Final_ID) #Graph edgelist + Add
g5 <- graph.edgelist(sur5, directed = TRUE) + vertices(day$iso5$Sender_Final_ID) #Graph edgelist + Add

```

#Capture Roles, Nights & Colors

```

temp_att <- temp_att %>%
  mutate(
    role1 = ifelse(!(is.na(role2))) & (night2 == night), role2, role1),
    night1 = ifelse(!(is.na(night2))) & (night2 == night), night2, night1),
    role_col = ifelse(!(is.na(role_col2))) & (night2 == night), role_col2, role_col)
  )

#Add staff Role Attribute

V(g1)$role <- temp_att$role1[match(V(g1)$name, temp_att$Final_ID)]
V(g2)$role <- temp_att$role1[match(V(g2)$name, temp_att$Final_ID)]
V(g3)$role <- temp_att$role1[match(V(g3)$name, temp_att$Final_ID)]
V(g4)$role <- temp_att$role1[match(V(g4)$name, temp_att$Final_ID)]
V(g5)$role <- temp_att$role1[match(V(g5)$name, temp_att$Final_ID)]

#Add role colors

V(g1)$color <- temp_att$role_col[match(V(g1)$name, temp_att$Final_ID)]
V(g2)$color <- temp_att$role_col[match(V(g2)$name, temp_att$Final_ID)]
V(g3)$color <- temp_att$role_col[match(V(g3)$name, temp_att$Final_ID)]
V(g4)$color <- temp_att$role_col[match(V(g4)$name, temp_att$Final_ID)]
V(g5)$color <- temp_att$role_col[match(V(g5)$name, temp_att$Final_ID)]

#Add Edge weights - Match by edgelist rows Send/ Receive rows & temp_night Send/Receive rows. filter by

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g1)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
  filter(survnum == 1) #Match weights
)
g1 <- set_edge_attr(g1, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g2)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
  filter(survnum == 2) #Match weights
)
g2 <- set_edge_attr(g2, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g3)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
  filter(survnum == 3) #Match weights
)
g3 <- set_edge_attr(g3, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g4)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
  filter(survnum == 4) #Match weights
)
g4 <- set_edge_attr(g4, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g5)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
  filter(survnum == 5) #Match weights
)
g5 <- set_edge_attr(g5, "weight", value = w$sn2) #Add edge attribute

#Set graphs to list
graphs <- list(g1 = g1, g2 = g2, g3 = g3, g4 = g4, g5 = g5)

rm(g1); rm(g2); rm(g3); rm(g4); rm(g5)
rm(sur1); rm(sur2); rm(sur3); rm(sur4); rm(sur5)
rm(temp_att); rm(temp_night); rm(w)

```

Create List

```
thursday <- list(edgelist = day, graphs = graphs)
rm(day); rm(graphs)
```

Plot Graphs

```
#Set chart image
par(mfrow=c(4,5))
```

#Monday Graphs

```
my_sn_g(monday$graphs$g1, title = "Monday - Week 1") ; my_leg(att = role, colors = color) #Soc
my_sn_g(monday$graphs$g2, title = "Monday - Week 3") ; my_leg(att = role, colors = color) #Soc
my_sn_g(monday$graphs$g3, title = "Monday - Week 6") ; my_leg(att = role, colors = color) #Soc
my_sn_g(monday$graphs$g4, title = "Monday - Week 9") ; my_leg(att = role, colors = color) #Soc
my_sn_g(monday$graphs$g5, title = "Monday - Week 11") ; my_leg(att = role, colors = color) #Soc
```


#Tuesday Graphs

```
my_sn_g(tuesday$graphs$g1, title = "Tuesday - Week 1") ; my_leg(att = role, colors = color) #Soc
my_sn_g(tuesday$graphs$g2, title = "Tuesday - Week 3") ; my_leg(att = role, colors = color) #Soc
my_sn_g(tuesday$graphs$g3, title = "Tuesday - Week 6") ; my_leg(att = role, colors = color) #Soc
my_sn_g(tuesday$graphs$g4, title = "Tuesday - Week 9") ; my_leg(att = role, colors = color) #Soc
my_sn_g(tuesday$graphs$g5, title = "Tuesday - Week 11") ; my_leg(att = role, colors = color) #Soc
```

#Wednesday Graphs

```
my_sn_g(wednesday$graphs$g1, title = "Wednesday - Week 1") ; my_leg(att = role, colors = color) #Soc
my_sn_g(wednesday$graphs$g2, title = "Wednesday - Week 3") ; my_leg(att = role, colors = color) #Soc
my_sn_g(wednesday$graphs$g3, title = "Wednesday - Week 6") ; my_leg(att = role, colors = color) #Soc
my_sn_g(wednesday$graphs$g4, title = "Wednesday - Week 9") ; my_leg(att = role, colors = color) #Soc
my_sn_g(wednesday$graphs$g5, title = "Wednesday - Week 11") ; my_leg(att = role, colors = color) #Soc
```

```
my_sn_g(thursday$graphs$g1, title = "Thursday - Week 1") ; my_leg(att = role, colors = color) #Soc
my_sn_g(thursday$graphs$g2, title = "Thursday - Week 3") ; my_leg(att = role, colors = color) #Soc
my_sn_g(thursday$graphs$g3, title = "Thursday - Week 6") ; my_leg(att = role, colors = color) #Soc
my_sn_g(thursday$graphs$g4, title = "Thursday - Week 9") ; my_leg(att = role, colors = color) #Soc
my_sn_g(thursday$graphs$g5, title = "Thursday - Week 11") ; my_leg(att = role, colors = color) #Soc
```

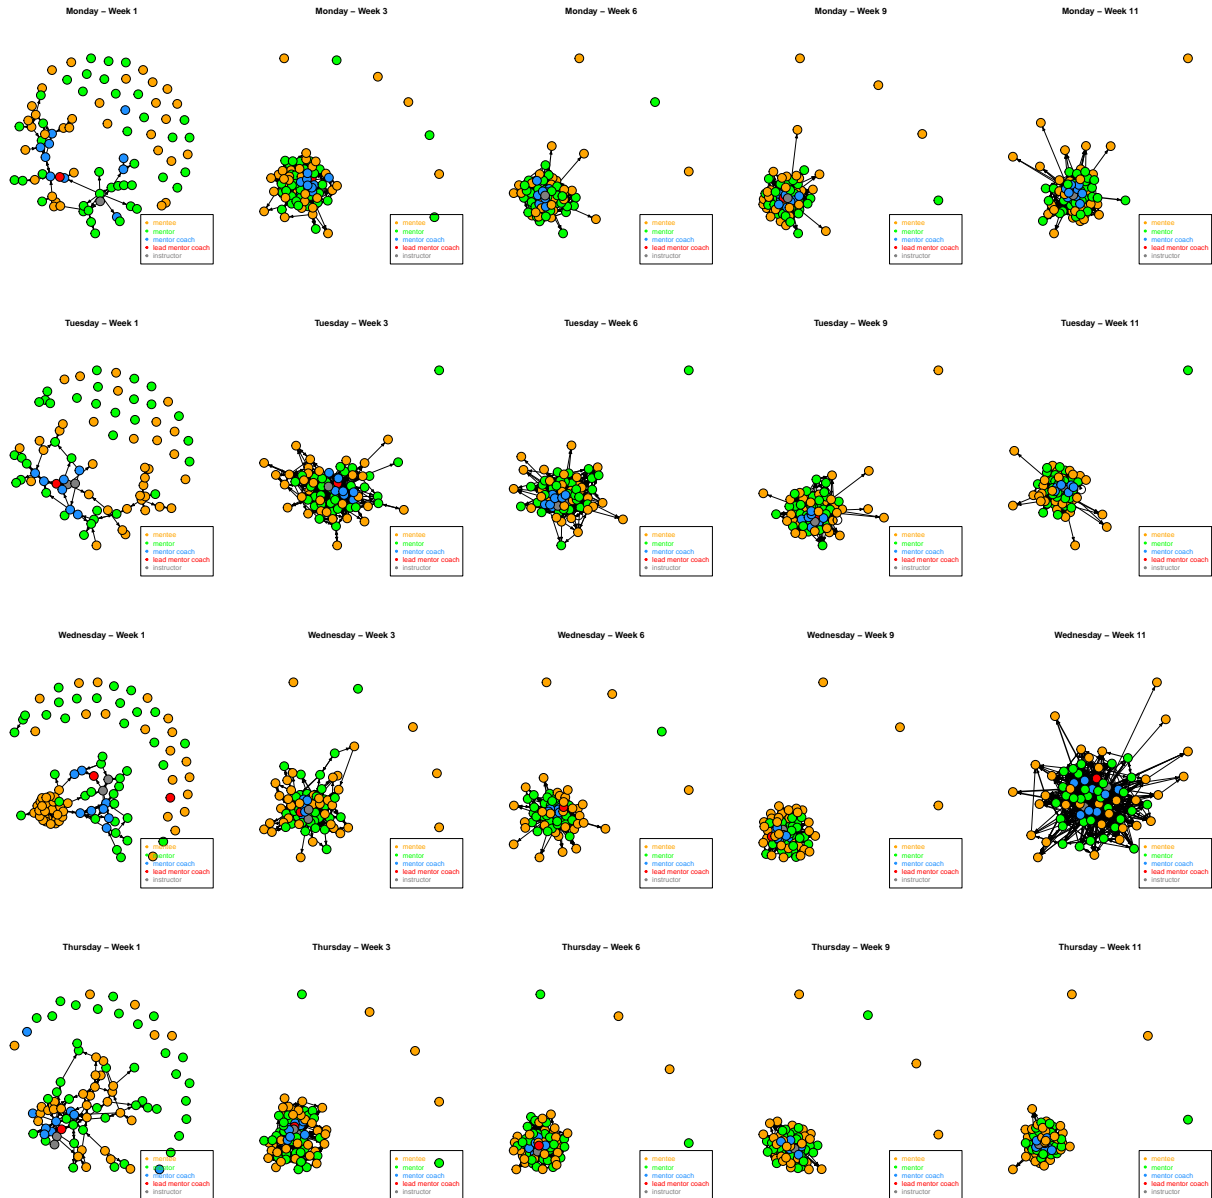

```
#Plot With purrr::walk()
#walk(.x = monday$graphs, .f = my_sn_g, title = "Monday");my_leg(role, color)
#walk(.x = tuesday$graphs, .f = my_sn_g, title = "Tuesday");my_leg(role, color)
#walk(.x = wednesday$graphs, .f = my_sn_g, title = "Wednesday");my_leg(role, color)
#walk(.x = thursday$graphs, .f = my_sn_g, title = "Thursday");my_leg(role, color)
```

Create Semester List

```
S16 <- list(monday = monday, tuesday = tuesday, wednesday = wednesday, thursday = thursday)
rm(monday);rm(tuesday);rm(wednesday);rm(thursday)
rm(temp)
```

F16

```
temp <- elmk %>% filter(semester == "F16")

mon <- temp %>% filter(night == "monday")
tue <- temp %>% filter(night == "tuesday")
wed <- temp %>% filter(night == "wednesday")
thu <- temp %>% filter(night == "thursday")

sem <- list(mon = mon,
            tue = tue,
            wed = wed,
            thu = thu)

rm(mon);rm(tue);rm(wed);rm(thu)
```

Summary

```
sem$mon <- group_by(sem$mon, survnum)
sem$tue <- group_by(sem$tue, survnum)
sem$wed <- group_by(sem$wed, survnum)
sem$thu <- group_by(sem$thu, survnum)

summarize(sem$mon, day = "mon", n = length(unique(Sender_Final_ID)), tie_count = sum(sn1, na.rm = TRUE))

## # A tibble: 5 x 5
##   survnum day      n tie_count tie_prop
##   <int> <chr> <int>   <int>   <dbl>
## 1      1 mon      63      73    0.383
## 2      2 mon      60     482    2.53
## 3      3 mon      60     705    3.70
## 4      4 mon      58     794    4.16
## 5      5 mon      58     842    4.41

summarize(sem$tue, day = "tue", n = length(unique(Sender_Final_ID)), tie_count = sum(sn1, na.rm = TRUE))

## # A tibble: 5 x 5
##   survnum day      n tie_count tie_prop
##   <int> <chr> <int>   <int>   <dbl>
## 1      1 tue      64      76    0.394
## 2      2 tue      61     319    1.65
## 3      3 tue      61     623    3.23
## 4      4 tue      60     804    4.17
## 5      5 tue      60     912    4.73

summarize(sem$wed, day = "wed", n = length(unique(Sender_Final_ID)), tie_count = sum(sn1, na.rm = TRUE))

## # A tibble: 5 x 5
##   survnum day      n tie_count tie_prop
##   <int> <chr> <int>   <int>   <dbl>
## 1      1 wed      66      93    0.466
## 2      2 wed      64     382    1.91
## 3      3 wed      62     632    3.17
## 4      4 wed      62     808    4.05
## 5      5 wed      60     716    3.59
```

```
summarize(sem$thu, day = "thu", n = length(unique(Sender_Final_ID)), tie_count = sum(sn1, na.rm = TRUE))
```

```
## # A tibble: 5 x 5
##   survnum day      n tie_count tie_prop
##   <int> <chr> <int>   <int>   <dbl>
## 1      1  thu     64      96    0.474
## 2      2  thu     62     535    2.64
## 3      3  thu     62     814    4.02
## 4      4  thu     61     909    4.49
## 5      5  thu     58     902    4.45
```

```
sem$mon <- ungroup(sem$mon)
sem$tue <- ungroup(sem$tue)
sem$wed <- ungroup(sem$wed)
sem$thu <- ungroup(sem$thu)
```

```
rm(sem)
```

Monday

```
temp_night <- temp %>% filter(night == "monday")
temp_att <- staff_youth_att %>% mutate(night = "monday")
```

#Surv_1

```
surv_1 <- temp_night %>%
  filter(survnum == 1) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
```

#Getting isolates

```
isolates1 <- surv_1 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_1 <- surv_1 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))
```

#Surv_2

```
surv_2 <- temp_night %>%
  filter(survnum == 2) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
```

#Getting isolates

```
isolates2 <- surv_2 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_2 <- surv_2 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))
```

#Surv_3

```
surv_3 <- temp_night %>%
  filter(survnum == 3) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
```

```

#Getting isolates
isolates3 <- surv_3 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_3 <- surv_3 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 4
surv_4 <- temp_night %>%
  filter(survnum == 4) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates4 <- surv_4 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_4 <- surv_4 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 5
surv_5 <- temp_night %>%
  filter(survnum == 5) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates5 <- surv_5 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_5 <- surv_5 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

day <- list(surv1 = surv_1,
            surv2 = surv_2,
            surv3 = surv_3,
            surv4 = surv_4,
            surv5 = surv_5,
            iso1 = isolates1,
            iso2 = isolates2,
            iso3 = isolates3,
            iso4 = isolates4,
            iso5 = isolates5)

rm(surv_1);rm(surv_2);rm(surv_3);rm(surv_4);rm(surv_5)
rm(isolates1);rm(isolates2);rm(isolates3);rm(isolates4);rm(isolates5)

```

General Graphs

```
#Convert to Matrices
```

```
sur1 <- as.matrix(day$sur1)
sur2 <- as.matrix(day$sur2)
sur3 <- as.matrix(day$sur3)
sur4 <- as.matrix(day$sur4)
sur5 <- as.matrix(day$sur5)
```

```
# Convert matrix to an igraph object
```

```
g1 <- graph.edgelist(sur1, directed = TRUE) + vertices(day$iso1$Sender_Final_ID) #Graph edgelist + Add
g2 <- graph.edgelist(sur2, directed = TRUE) + vertices(day$iso2$Sender_Final_ID) #Graph edgelist + Add
g3 <- graph.edgelist(sur3, directed = TRUE) + vertices(day$iso3$Sender_Final_ID) #Graph edgelist + Add
g4 <- graph.edgelist(sur4, directed = TRUE) + vertices(day$iso4$Sender_Final_ID) #Graph edgelist + Add
g5 <- graph.edgelist(sur5, directed = TRUE) + vertices(day$iso5$Sender_Final_ID) #Graph edgelist + Add
```

```
#Capture Roles, Nights & Colors
```

```
temp_att <- temp_att %>%
  mutate(
    role1 = ifelse(!(is.na(role2))) & (night2 == night), role2, role1),
    night1 = ifelse(!(is.na(night2))) & (night2 == night), night2, night1),
    role_col = ifelse(!(is.na(role_col2))) & (night2 == night), role_col2, role_col)
  )
```

```
#Add staff Role Attribute
```

```
V(g1)$role <- temp_att$role1[match(V(g1)$name, temp_att$Final_ID)]
V(g2)$role <- temp_att$role1[match(V(g2)$name, temp_att$Final_ID)]
V(g3)$role <- temp_att$role1[match(V(g3)$name, temp_att$Final_ID)]
V(g4)$role <- temp_att$role1[match(V(g4)$name, temp_att$Final_ID)]
V(g5)$role <- temp_att$role1[match(V(g5)$name, temp_att$Final_ID)]
```

```
#Add role colors
```

```
V(g1)$color <- temp_att$role_col[match(V(g1)$name, temp_att$Final_ID)]
V(g2)$color <- temp_att$role_col[match(V(g2)$name, temp_att$Final_ID)]
V(g3)$color <- temp_att$role_col[match(V(g3)$name, temp_att$Final_ID)]
V(g4)$color <- temp_att$role_col[match(V(g4)$name, temp_att$Final_ID)]
V(g5)$color <- temp_att$role_col[match(V(g5)$name, temp_att$Final_ID)]
```

```
#Add Edge weights - Match by edgelist rows Send/ Receive rows & temp_night Send/Receive rows. filter by
```

```
w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g1)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 1) #Match Weights)
g1 <- set_edge_attr(g1, "weight", value = w$sn2) #Add edge attribute
```

```
w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g2)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
```



```

        filter(survnum == 2) #Match weights
g2 <- set_edge_attr(g2, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g3)), Sender_Final_ID = V1, Receiver_Final_ID = V2),
              filter(survnum == 3) #Match weights
              g3 <- set_edge_attr(g3, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g4)), Sender_Final_ID = V1, Receiver_Final_ID = V2),
              filter(survnum == 4) #Match weights
              g4 <- set_edge_attr(g4, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g5)), Sender_Final_ID = V1, Receiver_Final_ID = V2),
              filter(survnum == 5) #Match weights
              g5 <- set_edge_attr(g5, "weight", value = w$sn2) #Add edge attribute

#Set graphs to list
graphs <- list(g1 = g1, g2 = g2, g3 = g3, g4 = g4, g5 = g5)

rm(g1); rm(g2); rm(g3); rm(g4); rm(g5)
rm(sur1); rm(sur2); rm(sur3); rm(sur4); rm(sur5)
rm(temp_att); rm(temp_night); rm(w)

```

Create List

```

monday <- list(edgelist = day, graphs = graphs)
rm(day); rm(graphs)

```

Tuesday

```

temp_night <- temp %>% filter(night == "tuesday")
temp_att <- staff_youth_att %>% mutate(night = "tuesday")

#Surv_1
surv_1 <- temp_night %>%
  filter(survnum == 1) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%

#Getting isolates
isolates1 <- surv_1 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_1 <- surv_1 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv_2
surv_2 <- temp_night %>%
  filter(survnum == 2) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%

```

```

#Getting isolates
isolates2 <- surv_2 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_2 <- surv_2 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 3
surv_3 <- temp_night %>%
  filter(survnum == 3) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates3 <- surv_3 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_3 <- surv_3 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 4
surv_4 <- temp_night %>%
  filter(survnum == 4) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates4 <- surv_4 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_4 <- surv_4 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 5
surv_5 <- temp_night %>%
  filter(survnum == 5) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates5 <- surv_5 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_5 <- surv_5 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

day <- list(surv1 = surv_1,

```

```

sur2 = surv_2,
sur3 = surv_3,
sur4 = surv_4,
sur5 = surv_5,
iso1 = isolates1,
iso2 = isolates2,
iso3 = isolates3,
iso4 = isolates4,
iso5 = isolates5)

rm(surv_1);rm(surv_2);rm(surv_3);rm(surv_4);rm(surv_5)
rm(isolates1);rm(isolates2);rm(isolates3);rm(isolates4);rm(isolates5)

```

General Graphs

#Convert to Matrices

```

sur1 <- as.matrix(day$sur1)
sur2 <- as.matrix(day$sur2)
sur3 <- as.matrix(day$sur3)
sur4 <- as.matrix(day$sur4)
sur5 <- as.matrix(day$sur5)

```

Convert matrix to an igraph object

```

g1 <- graph.edgelist(sur1, directed = TRUE) + vertices(day$iso1$Sender_Final_ID) #Graph edgelist + Add
g2 <- graph.edgelist(sur2, directed = TRUE) + vertices(day$iso2$Sender_Final_ID) #Graph edgelist + Add
g3 <- graph.edgelist(sur3, directed = TRUE) + vertices(day$iso3$Sender_Final_ID) #Graph edgelist + Add
g4 <- graph.edgelist(sur4, directed = TRUE) + vertices(day$iso4$Sender_Final_ID) #Graph edgelist + Add
g5 <- graph.edgelist(sur5, directed = TRUE) + vertices(day$iso5$Sender_Final_ID) #Graph edgelist + Add

```

#Capture Roles, Nights & Colors

```

temp_att <- temp_att %>%
  mutate(
    role1 = ifelse(!(is.na(role2))) & (night2 == night), role2, role1),
    night1 = ifelse(!(is.na(night2))) & (night2 == night), night2, night1),
    role_col = ifelse(!(is.na(role_col2))) & (night2 == night), role_col2, role_col)

```

#Add staff Role Attribute

```

V(g1)$role <- temp_att$role1[match(V(g1)$name, temp_att$Final_ID)]
V(g2)$role <- temp_att$role1[match(V(g2)$name, temp_att$Final_ID)]
V(g3)$role <- temp_att$role1[match(V(g3)$name, temp_att$Final_ID)]
V(g4)$role <- temp_att$role1[match(V(g4)$name, temp_att$Final_ID)]
V(g5)$role <- temp_att$role1[match(V(g5)$name, temp_att$Final_ID)]

```

#Add role colors

```

V(g1)$color <- temp_att$role_col[match(V(g1)$name, temp_att$Final_ID)]
V(g2)$color <- temp_att$role_col[match(V(g2)$name, temp_att$Final_ID)]
V(g3)$color <- temp_att$role_col[match(V(g3)$name, temp_att$Final_ID)]
V(g4)$color <- temp_att$role_col[match(V(g4)$name, temp_att$Final_ID)]
V(g5)$color <- temp_att$role_col[match(V(g5)$name, temp_att$Final_ID)]

#Add Edge weights - Match by edgelist rows Send/ Receive rows & temp_night Send/Receive rows. filter by
w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g1)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 1) #Match Weights
              g1 <- set_edge_attr(g1, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g2)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 2) #Match weights
              g2 <- set_edge_attr(g2, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g3)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 3) #Match weights
              g3 <- set_edge_attr(g3, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g4)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 4) #Match weights
              g4 <- set_edge_attr(g4, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g5)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 5) #Match weights
              g5 <- set_edge_attr(g5, "weight", value = w$sn2) #Add edge attribute

#Set graphs to list
graphs <- list(g1 = g1,g2 = g2, g3 = g3,g4 = g4, g5 = g5)

rm(g1); rm(g2); rm(g3); rm(g4); rm(g5)
rm(sur1);rm(sur2);rm(sur3);rm(sur4);rm(sur5)
rm(temp_att); rm(temp_night); rm(w)

```

Create List

```

tuesday <- list(edgelist = day, graphs = graphs)
rm(day); rm(graphs)

```

Wednesday

```

temp_night <- temp %>% filter(night == "wednesday")
temp_att <- staff_youth_att %>% mutate(night = "wednesday")

#Surv_1
surv_1 <- temp_night %>%
  filter(survnum == 1) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%

#Getting isolates
isolates1 <- surv_1 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%

```

```

summarize(isolate = sum(sn1)) %>%
filter(isolate < 1) %>%
select(Sender_Final_ID)
surv_1 <- surv_1 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 2
surv_2 <- temp_night %>%
  filter(survnum == 2) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates2 <- surv_2 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_2 <- surv_2 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 3
surv_3 <- temp_night %>%
  filter(survnum == 3) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates3 <- surv_3 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_3 <- surv_3 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 4
surv_4 <- temp_night %>%
  filter(survnum == 4) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates4 <- surv_4 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_4 <- surv_4 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 5
surv_5 <- temp_night %>%
  filter(survnum == 5) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates

```

```

isolates5 <- surv_5 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_5 <- surv_5 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

day <- list(sur1 = surv_1,
            sur2 = surv_2,
            sur3 = surv_3,
            sur4 = surv_4,
            sur5 = surv_5,
            iso1 = isolates1,
            iso2 = isolates2,
            iso3 = isolates3,
            iso4 = isolates4,
            iso5 = isolates5)

rm(surv_1);rm(surv_2);rm(surv_3);rm(surv_4);rm(surv_5)
rm(isolates1);rm(isolates2);rm(isolates3);rm(isolates4);rm(isolates5)

```

General Graphs

#Convert to Matrices

```

sur1 <- as.matrix(day$sur1)
sur2 <- as.matrix(day$sur2)
sur3 <- as.matrix(day$sur3)
sur4 <- as.matrix(day$sur4)
sur5 <- as.matrix(day$sur5)

```

Convert matrix to an igraph object

```

g1 <- graph.edgelist(sur1, directed = TRUE) + vertices(day$iso1$Sender_Final_ID) #Graph edgelist + Add
g2 <- graph.edgelist(sur2, directed = TRUE) + vertices(day$iso2$Sender_Final_ID) #Graph edgelist + Add
g3 <- graph.edgelist(sur3, directed = TRUE) + vertices(day$iso3$Sender_Final_ID) #Graph edgelist + Add
g4 <- graph.edgelist(sur4, directed = TRUE) + vertices(day$iso4$Sender_Final_ID) #Graph edgelist + Add
g5 <- graph.edgelist(sur5, directed = TRUE) + vertices(day$iso5$Sender_Final_ID) #Graph edgelist + Add

```

#Capture Roles, Nights & Colors

```

temp_att <- temp_att %>%
  mutate(
    role1 = ifelse(!(is.na(role2))) & (night2 == night), role2, role1),
    night1 = ifelse(!(is.na(night2))) & (night2 == night), night2, night1),
    role_col = ifelse(!(is.na(role_col2))) & (night2 == night), role_col2, role_col)

```

```
#Add staff Role Attribute
```

```
V(g1)$role <- temp_att$role1[match(V(g1)$name, temp_att$Final_ID)]  
V(g2)$role <- temp_att$role1[match(V(g2)$name, temp_att$Final_ID)]  
V(g3)$role <- temp_att$role1[match(V(g3)$name, temp_att$Final_ID)]  
V(g4)$role <- temp_att$role1[match(V(g4)$name, temp_att$Final_ID)]  
V(g5)$role <- temp_att$role1[match(V(g5)$name, temp_att$Final_ID)]
```

```
#Add role colors
```

```
V(g1)$color <- temp_att$role_col[match(V(g1)$name, temp_att$Final_ID)]  
V(g2)$color <- temp_att$role_col[match(V(g2)$name, temp_att$Final_ID)]  
V(g3)$color <- temp_att$role_col[match(V(g3)$name, temp_att$Final_ID)]  
V(g4)$color <- temp_att$role_col[match(V(g4)$name, temp_att$Final_ID)]  
V(g5)$color <- temp_att$role_col[match(V(g5)$name, temp_att$Final_ID)]
```

```
#Add Edge weights - Match by edgelist rows Send/ Receive rows & temp_night Send/Receive rows. filter by
```

```
w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g1)), Sender_Final_ID = V1, Receiver_Final_ID = V2),  
              filter(survnum == 1) #Match Weights,  
              g1 <- set_edge_attr(g1, "weight", value = w$sn2) #Add edge attribute)  
  
w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g2)), Sender_Final_ID = V1, Receiver_Final_ID = V2),  
              filter(survnum == 2) #Match weights,  
              g2 <- set_edge_attr(g2, "weight", value = w$sn2) #Add edge attribute)  
  
w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g3)), Sender_Final_ID = V1, Receiver_Final_ID = V2),  
              filter(survnum == 3) #Match weights,  
              g3 <- set_edge_attr(g3, "weight", value = w$sn2) #Add edge attribute)  
  
w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g4)), Sender_Final_ID = V1, Receiver_Final_ID = V2),  
              filter(survnum == 4) #Match weights,  
              g4 <- set_edge_attr(g4, "weight", value = w$sn2) #Add edge attribute)  
  
w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g5)), Sender_Final_ID = V1, Receiver_Final_ID = V2),  
              filter(survnum == 5) #Match weights,  
              g5 <- set_edge_attr(g5, "weight", value = w$sn2) #Add edge attribute)
```

```
#Set graphs to list
```

```
graphs <- list(g1 = g1, g2 = g2, g3 = g3, g4 = g4, g5 = g5)
```

```
rm(g1); rm(g2); rm(g3); rm(g4); rm(g5)  
rm(sur1); rm(sur2); rm(sur3); rm(sur4); rm(sur5)  
rm(temp_att); rm(temp_night); rm(w)
```

Create List

```
wednesday <- list(edgelists = day, graphs = graphs)  
rm(day); rm(graphs)
```

Thursday

```

temp_night <- temp %>% filter(night == "thursday")
temp_att <- staff_youth_att %>% mutate(night = "thursday")

#Surv_1
surv_1 <- temp_night %>%
  filter(survnum == 1) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates1 <- surv_1 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_1 <- surv_1 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv_2
surv_2 <- temp_night %>%
  filter(survnum == 2) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates2 <- surv_2 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_2 <- surv_2 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv_3
surv_3 <- temp_night %>%
  filter(survnum == 3) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates3 <- surv_3 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_3 <- surv_3 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv_4
surv_4 <- temp_night %>%
  filter(survnum == 4) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates4 <- surv_4 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%

```



```

summarize(isolate = sum(sn1)) %>%
filter(isolate < 1) %>%
select(Sender_Final_ID)
surv_4 <- surv_4 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 5
surv_5 <- temp_night %>%
  filter(survnum == 5) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates5 <- surv_5 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_5 <- surv_5 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

day <- list(sur1 = surv_1,
            sur2 = surv_2,
            sur3 = surv_3,
            sur4 = surv_4,
            sur5 = surv_5,
            iso1 = isolates1,
            iso2 = isolates2,
            iso3 = isolates3,
            iso4 = isolates4,
            iso5 = isolates5)

rm(surv_1);rm(surv_2);rm(surv_3);rm(surv_4);rm(surv_5)
rm(isolates1);rm(isolates2);rm(isolates3);rm(isolates4);rm(isolates5)

```

General Graphs

#Convert to Matrices

```

sur1 <- as.matrix(day$sur1)
sur2 <- as.matrix(day$sur2)
sur3 <- as.matrix(day$sur3)
sur4 <- as.matrix(day$sur4)
sur5 <- as.matrix(day$sur5)

```

Convert matrix to an igraph object

```

g1 <- graph.edgelist(sur1, directed = TRUE) + vertices(day$iso1$Sender_Final_ID) #Graph edgelist + Add
g2 <- graph.edgelist(sur2, directed = TRUE) + vertices(day$iso2$Sender_Final_ID) #Graph edgelist + Add
g3 <- graph.edgelist(sur3, directed = TRUE) + vertices(day$iso3$Sender_Final_ID) #Graph edgelist + Add
g4 <- graph.edgelist(sur4, directed = TRUE) + vertices(day$iso4$Sender_Final_ID) #Graph edgelist + Add
g5 <- graph.edgelist(sur5, directed = TRUE) + vertices(day$iso5$Sender_Final_ID) #Graph edgelist + Add

```

```
#Capture Roles, Nights & Colors
```

```
temp_att <- temp_att %>%  
  mutate(  
    role1 = ifelse(!(is.na(role2))) & (night2 == night), role2, role1),  
    night1 = ifelse(!(is.na(night2))) & (night2 == night), night2, night1),  
    role_col = ifelse(!(is.na(role_col2))) & (night2 == night), role_col2, role_col)  
  )
```

```
#Add staff Role Attribute
```

```
V(g1)$role <- temp_att$role1[match(V(g1)$name, temp_att$Final_ID)]  
V(g2)$role <- temp_att$role1[match(V(g2)$name, temp_att$Final_ID)]  
V(g3)$role <- temp_att$role1[match(V(g3)$name, temp_att$Final_ID)]  
V(g4)$role <- temp_att$role1[match(V(g4)$name, temp_att$Final_ID)]  
V(g5)$role <- temp_att$role1[match(V(g5)$name, temp_att$Final_ID)]
```

```
#Add role colors
```

```
V(g1)$color <- temp_att$role_col[match(V(g1)$name, temp_att$Final_ID)]  
V(g2)$color <- temp_att$role_col[match(V(g2)$name, temp_att$Final_ID)]  
V(g3)$color <- temp_att$role_col[match(V(g3)$name, temp_att$Final_ID)]  
V(g4)$color <- temp_att$role_col[match(V(g4)$name, temp_att$Final_ID)]  
V(g5)$color <- temp_att$role_col[match(V(g5)$name, temp_att$Final_ID)]
```

```
#Add Edge weights - Match by edgelist rows Send/ Receive rows & temp_night Send/Receive rows. filter by
```

```
w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g1)), Sender_Final_ID =V1, Receiver_Final_ID =V2),  
              filter(survnum == 1) #Match weights  
            )  
g1 <- set_edge_attr(g1, "weight", value = w$sn2) #Add edge attribute  
  
w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g2)), Sender_Final_ID =V1, Receiver_Final_ID =V2),  
              filter(survnum == 2) #Match weights  
            )  
g2 <- set_edge_attr(g2, "weight", value = w$sn2) #Add edge attribute  
  
w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g3)), Sender_Final_ID =V1, Receiver_Final_ID =V2),  
              filter(survnum == 3) #Match weights  
            )  
g3 <- set_edge_attr(g3, "weight", value = w$sn2) #Add edge attribute  
  
w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g4)), Sender_Final_ID =V1, Receiver_Final_ID =V2),  
              filter(survnum == 4) #Match weights  
            )  
g4 <- set_edge_attr(g4, "weight", value = w$sn2) #Add edge attribute  
  
w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g5)), Sender_Final_ID =V1, Receiver_Final_ID =V2),  
              filter(survnum == 5) #Match weights  
            )  
g5 <- set_edge_attr(g5, "weight", value = w$sn2) #Add edge attribute
```

```
#Set graphs to list
```

```
graphs <- list(g1 = g1, g2 = g2, g3 = g3, g4 = g4, g5 = g5)
```

```
rm(g1); rm(g2); rm(g3); rm(g4); rm(g5)
rm(sur1);rm(sur2);rm(sur3);rm(sur4);rm(sur5)
rm(temp_att); rm(temp_night); rm(w)
```

Create List

```
thursday <- list(edgelists = day, graphs = graphs)
rm(day); rm(graphs)
```

Plot Graphs

```
#Set chart image
par(mfrow=c(4,5))
```

#Monday Graphs

```
my_sn_g(monday$graphs$g1, title = "Monday - Week 1") ; my_leg(att = role, colors = color) #So
my_sn_g(monday$graphs$g2, title = "Monday - Week 3") ; my_leg(att = role, colors = color) #So
my_sn_g(monday$graphs$g3, title = "Monday - Week 6") ; my_leg(att = role, colors = color) #So
my_sn_g(monday$graphs$g4, title = "Monday - Week 9") ; my_leg(att = role, colors = color) #So
my_sn_g(monday$graphs$g5, title = "Monday - Week 11") ; my_leg(att = role, colors = color) #So
```


#Tuesday Graphs

```
my_sn_g(tuesday$graphs$g1, title = "Tuesday - Week 1") ; my_leg(att = role, colors = color) #So
my_sn_g(tuesday$graphs$g2, title = "Tuesday - Week 3") ; my_leg(att = role, colors = color) #So
my_sn_g(tuesday$graphs$g3, title = "Tuesday - Week 6") ; my_leg(att = role, colors = color) #So
my_sn_g(tuesday$graphs$g4, title = "Tuesday - Week 9") ; my_leg(att = role, colors = color) #So
my_sn_g(tuesday$graphs$g5, title = "Tuesday - Week 11") ; my_leg(att = role, colors = color) #So
```

#Wednesday Graphs

```
my_sn_g(wednesday$graphs$g1, title = "Wednesday - Week 1") ; my_leg(att = role, colors = color) #So
my_sn_g(wednesday$graphs$g2, title = "Wednesday - Week 3") ; my_leg(att = role, colors = color) #So
my_sn_g(wednesday$graphs$g3, title = "Wednesday - Week 6") ; my_leg(att = role, colors = color) #So
my_sn_g(wednesday$graphs$g4, title = "Wednesday - Week 9") ; my_leg(att = role, colors = color) #So
my_sn_g(wednesday$graphs$g5, title = "Wednesday - Week 11") ; my_leg(att = role, colors = color) #So
```

```
my_sn_g(thursday$graphs$g1, title = "Thursday - Week 1") ; my_leg(att = role, colors = color) #So
my_sn_g(thursday$graphs$g2, title = "Thursday - Week 3") ; my_leg(att = role, colors = color) #So
my_sn_g(thursday$graphs$g3, title = "Thursday - Week 6") ; my_leg(att = role, colors = color) #So
my_sn_g(thursday$graphs$g4, title = "Thursday - Week 9") ; my_leg(att = role, colors = color) #So
my_sn_g(thursday$graphs$g5, title = "Thursday - Week 11") ; my_leg(att = role, colors = color) #So
```

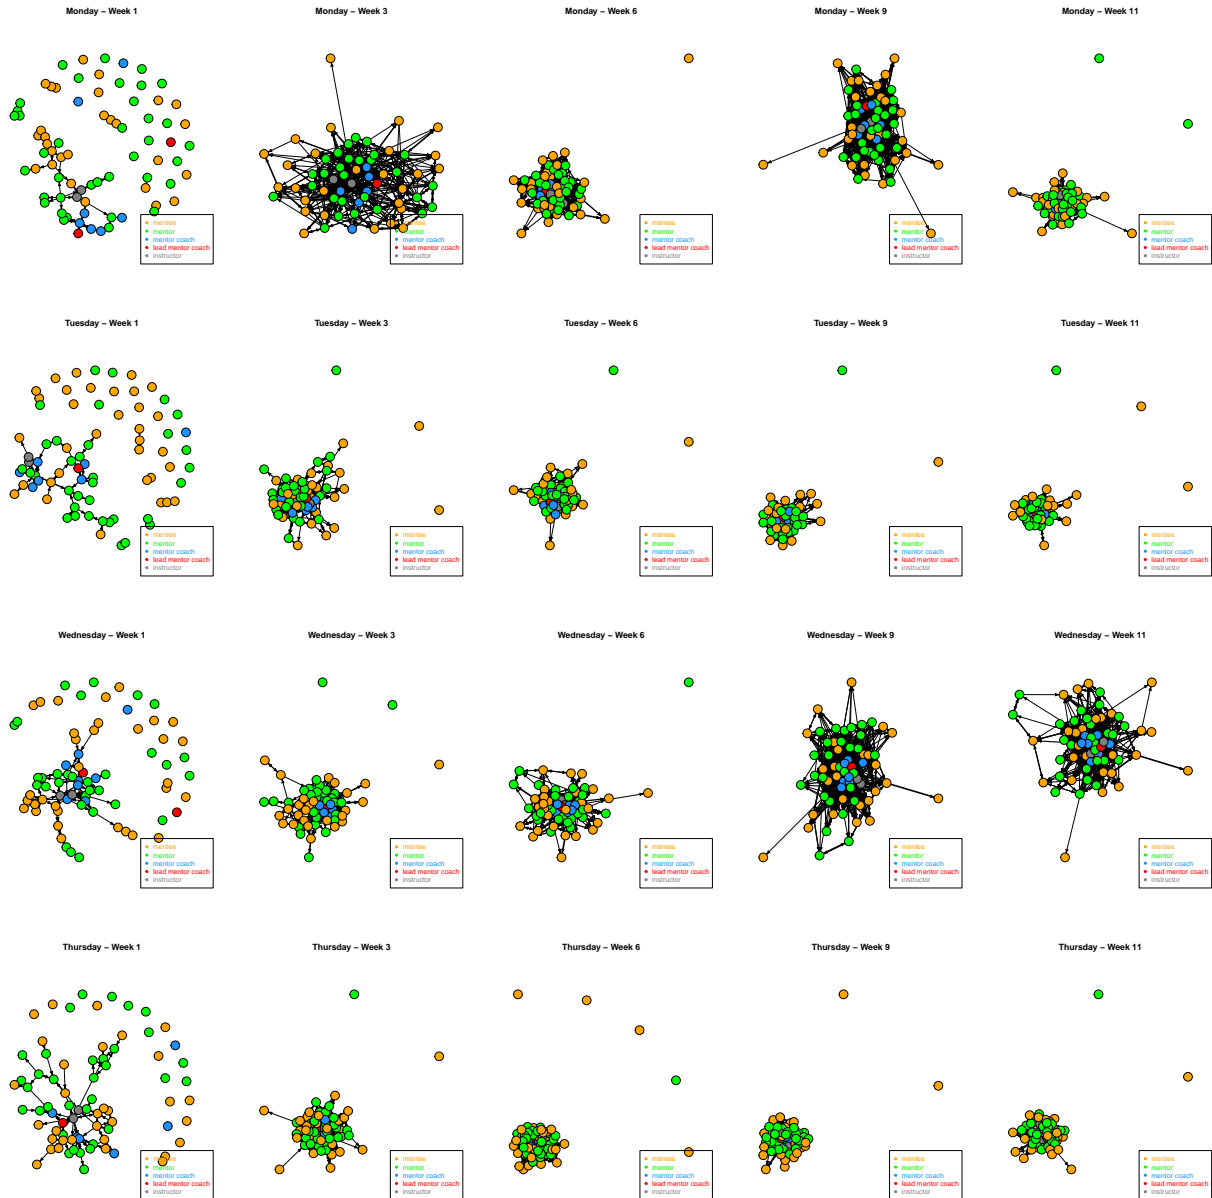

```
#Plot With purrr::walk()
#walk(.x = monday$graphs, .f = my_sn_g, title = "Monday");my_leg(role, color)
#walk(.x = tuesday$graphs, .f = my_sn_g, title = "Tuesday");my_leg(role, color)
#walk(.x = wednesday$graphs, .f = my_sn_g, title = "Wednesday");my_leg(role, color)
#walk(.x = thursday$graphs, .f = my_sn_g, title = "Thursday");my_leg(role, color)
```

Create Semester List

```
F16 <- list(monday = monday, tuesday = tuesday, wednesday = wednesday, thursday = thursday)
rm(monday);rm(tuesday);rm(wednesday);rm(thursday)
rm(temp)
```

S17

```
temp <- elmk %>% filter(semester == "S17")

mon <- temp %>% filter(night == "monday")
tue <- temp %>% filter(night == "tuesday")
wed <- temp %>% filter(night == "wednesday")
thu <- temp %>% filter(night == "thursday")

sem <- list(mon = mon,
            tue = tue,
            wed = wed,
            thu = thu)

rm(mon);rm(tue);rm(wed);rm(thu)
```

Summary

```
sem$mon <- group_by(sem$mon, survnum)
sem$tue <- group_by(sem$tue, survnum)
sem$wed <- group_by(sem$wed, survnum)
sem$thu <- group_by(sem$thu, survnum)

summarize(sem$mon, day = "mon", n = length(unique(Sender_Final_ID)), tie_count = sum(sn1, na.rm = TRUE))

## # A tibble: 5 x 5
##   survnum day      n tie_count tie_prop
##   <int> <chr> <int>   <int>   <dbl>
## 1      1 mon     66     149    0.702
## 2      2 mon     65     451    2.12
## 3      3 mon     63     664    3.13
## 4      4 mon     62     797    3.75
## 5      5 mon     61     839    3.95

summarize(sem$tue, day = "tue", n = length(unique(Sender_Final_ID)), tie_count = sum(sn1, na.rm = TRUE))

## # A tibble: 5 x 5
##   survnum day      n tie_count tie_prop
##   <int> <chr> <int>   <int>   <dbl>
## 1      1 tue     65      86    0.409
## 2      2 tue     64     466    2.22
## 3      3 tue     63     768    3.66
## 4      4 tue     62     841    4.00
## 5      5 tue     62    1006    4.79

summarize(sem$wed, day = "wed", n = length(unique(Sender_Final_ID)), tie_count = sum(sn1, na.rm = TRUE))

## # A tibble: 5 x 5
##   survnum day      n tie_count tie_prop
##   <int> <chr> <int>   <int>   <dbl>
## 1      1 wed     64     139    0.685
## 2      2 wed     64     432    2.13
## 3      3 wed     62     648    3.19
## 4      4 wed     62     846    4.17
## 5      5 wed     62     932    4.59
```

```
summarize(sem$thu, day = "thu", n = length(unique(Sender_Final_ID)), tie_count = sum(sn1, na.rm = TRUE))
```

```
## # A tibble: 5 x 5
##   survnum day      n tie_count tie_prop
##   <int> <chr> <int>   <int>   <dbl>
## 1      1  thu    65      92    0.428
## 2      2  thu    65     440    2.05
## 3      3  thu    64     700    3.25
## 4      4  thu    63     867    4.03
## 5      5  thu    63     954    4.44
```

```
sem$mon <- ungroup(sem$mon)
sem$tue <- ungroup(sem$tue)
sem$wed <- ungroup(sem$wed)
sem$thu <- ungroup(sem$thu)
```

```
rm(sem)
```

Monday

```
temp_night <- temp %>% filter(night == "monday")
temp_att <- staff_youth_att %>% mutate(night = "monday")

#Surv_1
surv_1 <- temp_night %>%
  filter(survnum == 1) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates1 <- surv_1 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_1 <- surv_1 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv_2
surv_2 <- temp_night %>%
  filter(survnum == 2) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates2 <- surv_2 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_2 <- surv_2 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv_3
surv_3 <- temp_night %>%
  filter(survnum == 3) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
```

```

#Getting isolates
isolates3 <- surv_3 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_3 <- surv_3 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 4
surv_4 <- temp_night %>%
  filter(survnum == 4) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates4 <- surv_4 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_4 <- surv_4 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 5
surv_5 <- temp_night %>%
  filter(survnum == 5) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates5 <- surv_5 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_5 <- surv_5 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

day <- list(surv1 = surv_1,
            surv2 = surv_2,
            surv3 = surv_3,
            surv4 = surv_4,
            surv5 = surv_5,
            iso1 = isolates1,
            iso2 = isolates2,
            iso3 = isolates3,
            iso4 = isolates4,
            iso5 = isolates5)

rm(surv_1);rm(surv_2);rm(surv_3);rm(surv_4);rm(surv_5)
rm(isolates1);rm(isolates2);rm(isolates3);rm(isolates4);rm(isolates5)

```

General Graphs

```
#Convert to Matrices
```

```
sur1 <- as.matrix(day$sur1)
sur2 <- as.matrix(day$sur2)
sur3 <- as.matrix(day$sur3)
sur4 <- as.matrix(day$sur4)
sur5 <- as.matrix(day$sur5)
```

```
# Convert matrix to an igraph object
```

```
g1 <- graph.edgelist(sur1, directed = TRUE) + vertices(day$iso1$Sender_Final_ID) #Graph edgelist + Add
g2 <- graph.edgelist(sur2, directed = TRUE) + vertices(day$iso2$Sender_Final_ID) #Graph edgelist + Add
g3 <- graph.edgelist(sur3, directed = TRUE) + vertices(day$iso3$Sender_Final_ID) #Graph edgelist + Add
g4 <- graph.edgelist(sur4, directed = TRUE) + vertices(day$iso4$Sender_Final_ID) #Graph edgelist + Add
g5 <- graph.edgelist(sur5, directed = TRUE) + vertices(day$iso5$Sender_Final_ID) #Graph edgelist + Add
```

```
#Capture Roles, Nights & Colors
```

```
temp_att <- temp_att %>%
  mutate(
    role1 = ifelse(!(is.na(role2))) & (night2 == night), role2, role1),
    night1 = ifelse(!(is.na(night2))) & (night2 == night), night2, night1),
    role_col = ifelse(!(is.na(role_col2))) & (night2 == night), role_col2, role_col)
  )
```

```
#Add staff Role Attribute
```

```
V(g1)$role <- temp_att$role1[match(V(g1)$name, temp_att$Final_ID)]
V(g2)$role <- temp_att$role1[match(V(g2)$name, temp_att$Final_ID)]
V(g3)$role <- temp_att$role1[match(V(g3)$name, temp_att$Final_ID)]
V(g4)$role <- temp_att$role1[match(V(g4)$name, temp_att$Final_ID)]
V(g5)$role <- temp_att$role1[match(V(g5)$name, temp_att$Final_ID)]
```

```
#Add role colors
```

```
V(g1)$color <- temp_att$role_col[match(V(g1)$name, temp_att$Final_ID)]
V(g2)$color <- temp_att$role_col[match(V(g2)$name, temp_att$Final_ID)]
V(g3)$color <- temp_att$role_col[match(V(g3)$name, temp_att$Final_ID)]
V(g4)$color <- temp_att$role_col[match(V(g4)$name, temp_att$Final_ID)]
V(g5)$color <- temp_att$role_col[match(V(g5)$name, temp_att$Final_ID)]
```

```
#Add Edge weights - Match by edgelist rows Send/ Receive rows & temp_night Send/Receive rows. filter by
```

```
w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g1)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 1) #Match Weights)
g1 <- set_edge_attr(g1, "weight", value = w$sn2) #Add edge attribute
```

```
w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g2)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 1) #Match Weights)
```



```

        filter(survnum == 2) #Match weights
g2 <- set_edge_attr(g2, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g3)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 3) #Match weights
              g3 <- set_edge_attr(g3, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g4)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 4) #Match weights
              g4 <- set_edge_attr(g4, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g5)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 5) #Match weights
              g5 <- set_edge_attr(g5, "weight", value = w$sn2) #Add edge attribute

#Set graphs to list
graphs <- list(g1 = g1, g2 = g2, g3 = g3, g4 = g4, g5 = g5)

rm(g1); rm(g2); rm(g3); rm(g4); rm(g5)
rm(sur1); rm(sur2); rm(sur3); rm(sur4); rm(sur5)
rm(temp_att); rm(temp_night); rm(w)

```

Create List

```

monday <- list(edgelist = day, graphs = graphs)
rm(day); rm(graphs)

```

Tuesday

```

temp_night <- temp %>% filter(night == "tuesday")
temp_att <- staff_youth_att %>% mutate(night = "tuesday")

#Surv_1
surv_1 <- temp_night %>%
  filter(survnum == 1) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%

#Getting isolates
isolates1 <- surv_1 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_1 <- surv_1 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv_2
surv_2 <- temp_night %>%
  filter(survnum == 2) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%

#Getting isolates
isolates2 <- surv_2 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%

```

```

summarize(isolate = sum(sn1)) %>%
filter(isolate < 1) %>%
select(Sender_Final_ID)
surv_2 <- surv_2 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 3
surv_3 <- temp_night %>%
  filter(survnum == 3) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates3 <- surv_3 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_3 <- surv_3 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 4
surv_4 <- temp_night %>%
  filter(survnum == 4) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates4 <- surv_4 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_4 <- surv_4 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 5
surv_5 <- temp_night %>%
  filter(survnum == 5) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates5 <- surv_5 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_5 <- surv_5 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

day <- list(surv1 = surv_1,
            surv2 = surv_2,
            surv3 = surv_3,
            surv4 = surv_4,
            surv5 = surv_5,

```

```

iso1 = isolates1,
iso2 = isolates2,
iso3 = isolates3,
iso4 = isolates4,
iso5 = isolates5)

rm(surv_1);rm(surv_2);rm(surv_3);rm(surv_4);rm(surv_5)
rm(isolates1);rm(isolates2);rm(isolates3);rm(isolates4);rm(isolates5)

```

General Graphs

#Convert to Matrices

```

sur1 <- as.matrix(day$sur1)
sur2 <- as.matrix(day$sur2)
sur3 <- as.matrix(day$sur3)
sur4 <- as.matrix(day$sur4)
sur5 <- as.matrix(day$sur5)

```

Convert matrix to an igraph object

```

g1 <- graph.edgelist(sur1, directed = TRUE) + vertices(day$iso1$Sender_Final_ID) #Graph edgelist + Add
g2 <- graph.edgelist(sur2, directed = TRUE) + vertices(day$iso2$Sender_Final_ID) #Graph edgelist + Add
g3 <- graph.edgelist(sur3, directed = TRUE) + vertices(day$iso3$Sender_Final_ID) #Graph edgelist + Add
g4 <- graph.edgelist(sur4, directed = TRUE) + vertices(day$iso4$Sender_Final_ID) #Graph edgelist + Add
g5 <- graph.edgelist(sur5, directed = TRUE) + vertices(day$iso5$Sender_Final_ID) #Graph edgelist + Add

```

#Capture Roles, Nights & Colors

```

temp_att <- temp_att %>%
  mutate(
    role1 = ifelse(!(is.na(role2))) & (night2 == night), role2, role1),
    night1 = ifelse(!(is.na(night2))) & (night2 == night), night2, night1),
    role_col = ifelse(!(is.na(role_col2))) & (night2 == night), role_col2, role_col)

```

#Add staff Role Attribute

```

V(g1)$role <- temp_att$role1[match(V(g1)$name, temp_att$Final_ID)]
V(g2)$role <- temp_att$role1[match(V(g2)$name, temp_att$Final_ID)]
V(g3)$role <- temp_att$role1[match(V(g3)$name, temp_att$Final_ID)]
V(g4)$role <- temp_att$role1[match(V(g4)$name, temp_att$Final_ID)]
V(g5)$role <- temp_att$role1[match(V(g5)$name, temp_att$Final_ID)]

```

#Add role colors

```

V(g1)$color <- temp_att$role_col[match(V(g1)$name, temp_att$Final_ID)]
V(g2)$color <- temp_att$role_col[match(V(g2)$name, temp_att$Final_ID)]
V(g3)$color <- temp_att$role_col[match(V(g3)$name, temp_att$Final_ID)]
V(g4)$color <- temp_att$role_col[match(V(g4)$name, temp_att$Final_ID)]
V(g5)$color <- temp_att$role_col[match(V(g5)$name, temp_att$Final_ID)]

```

```

#Add Edge weights - Match by edgelist rows Send/ Receive rows & temp_night Send/Receive rows. filter by
w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g1)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 1) #Match Weights
              g1 <- set_edge_attr(g1, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g2)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 2) #Match weights
              g2 <- set_edge_attr(g2, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g3)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 3) #Match weights
              g3 <- set_edge_attr(g3, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g4)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 4) #Match weights
              g4 <- set_edge_attr(g4, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g5)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 5) #Match weights
              g5 <- set_edge_attr(g5, "weight", value = w$sn2) #Add edge attribute

#Set graphs to list
graphs <- list(g1 = g1,g2 = g2, g3 = g3,g4 = g4, g5 = g5)

rm(g1); rm(g2); rm(g3); rm(g4); rm(g5)
rm(sur1);rm(sur2);rm(sur3);rm(sur4);rm(sur5)
rm(temp_att); rm(temp_night); rm(w)

```

Create List

```

tuesday <- list(edgelists = day, graphs = graphs)
rm(day); rm(graphs)

```

Wednesday

```

temp_night <- temp %>% filter(night == "wednesday")
temp_att <- staff_youth_att %>% mutate(night = "wednesday")

#Surv_1
surv_1 <- temp_night %>%
  filter(survnum == 1) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%

#Getting isolates
isolates1 <- surv_1 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_1 <- surv_1 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

```

```

#Surv 2
surv_2 <- temp_night %>%
  filter(survnum == 2) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates2 <- surv_2 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_2 <- surv_2 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 3
surv_3 <- temp_night %>%
  filter(survnum == 3) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates3 <- surv_3 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_3 <- surv_3 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 4
surv_4 <- temp_night %>%
  filter(survnum == 4) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates4 <- surv_4 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_4 <- surv_4 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 5
surv_5 <- temp_night %>%
  filter(survnum == 5) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates5 <- surv_5 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)

```

```

surv_5 <- surv_5 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

day <- list(sur1 = surv_1,
            sur2 = surv_2,
            sur3 = surv_3,
            sur4 = surv_4,
            sur5 = surv_5,
            iso1 = isolates1,
            iso2 = isolates2,
            iso3 = isolates3,
            iso4 = isolates4,
            iso5 = isolates5)

rm(surv_1);rm(surv_2);rm(surv_3);rm(surv_4);rm(surv_5)
rm(isolates1);rm(isolates2);rm(isolates3);rm(isolates4);rm(isolates5)

```

General Graphs

#Convert to Matrices

```

sur1 <- as.matrix(day$sur1)
sur2 <- as.matrix(day$sur2)
sur3 <- as.matrix(day$sur3)
sur4 <- as.matrix(day$sur4)
sur5 <- as.matrix(day$sur5)

```

Convert matrix to an igraph object

```

g1 <- graph.edgelist(sur1, directed = TRUE) + vertices(day$iso1$Sender_Final_ID) #Graph edgelist + Add
g2 <- graph.edgelist(sur2, directed = TRUE) + vertices(day$iso2$Sender_Final_ID) #Graph edgelist + Add
g3 <- graph.edgelist(sur3, directed = TRUE) + vertices(day$iso3$Sender_Final_ID) #Graph edgelist + Add
g4 <- graph.edgelist(sur4, directed = TRUE) + vertices(day$iso4$Sender_Final_ID) #Graph edgelist + Add
g5 <- graph.edgelist(sur5, directed = TRUE) + vertices(day$iso5$Sender_Final_ID) #Graph edgelist + Add

```

#Capture Roles, Nights & Colors

```

temp_att <- temp_att %>%
  mutate(
    role1 = ifelse(!(is.na(role2))) & (night2 == night), role2, role1),
    night1 = ifelse(!(is.na(night2))) & (night2 == night), night2, night1),
    role_col = ifelse(!(is.na(role_col2))) & (night2 == night), role_col2, role_col)

```

#Add staff Role Attribute

```

V(g1)$role <- temp_att$role1[match(V(g1)$name, temp_att$Final_ID)]
V(g2)$role <- temp_att$role1[match(V(g2)$name, temp_att$Final_ID)]
V(g3)$role <- temp_att$role1[match(V(g3)$name, temp_att$Final_ID)]
V(g4)$role <- temp_att$role1[match(V(g4)$name, temp_att$Final_ID)]

```

```

V(g5)$role <- temp_att$role1[match(V(g5)$name, temp_att$Final_ID)]

#Add role colors

V(g1)$color <- temp_att$role_col[match(V(g1)$name, temp_att$Final_ID)]
V(g2)$color <- temp_att$role_col[match(V(g2)$name, temp_att$Final_ID)]
V(g3)$color <- temp_att$role_col[match(V(g3)$name, temp_att$Final_ID)]
V(g4)$color <- temp_att$role_col[match(V(g4)$name, temp_att$Final_ID)]
V(g5)$color <- temp_att$role_col[match(V(g5)$name, temp_att$Final_ID)]

#Add Edge weights - Match by edgelist rows Send/ Receive rows & temp_night Send/Receive rows. filter by

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g1)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 1) #Match weights
              g1 <- set_edge_attr(g1, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g2)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 2) #Match weights
              g2 <- set_edge_attr(g2, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g3)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 3) #Match weights
              g3 <- set_edge_attr(g3, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g4)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 4) #Match weights
              g4 <- set_edge_attr(g4, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g5)), Sender_Final_ID =V1, Receiver_Final_ID =V2),
              filter(survnum == 5) #Match weights
              g5 <- set_edge_attr(g5, "weight", value = w$sn2) #Add edge attribute

#Set graphs to list
graphs <- list(g1 = g1,g2 = g2, g3 = g3,g4 = g4, g5 = g5)

rm(g1); rm(g2); rm(g3); rm(g4); rm(g5)
rm(sur1);rm(sur2);rm(sur3);rm(sur4);rm(sur5)
rm(temp_att); rm(temp_night); rm(w)

```

Create List

```

wednesday <- list(edgelists = day, graphs = graphs)
rm(day); rm(graphs)

```

Thursday

```

temp_night <- temp %>% filter(night == "thursday")
temp_att <- staff_youth_att %>% mutate(night = "thursday")

#Surv_1
surv_1 <- temp_night %>%
  filter(survnum == 1) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) %>%

```

```

#Getting isolates
isolates1 <- surv_1 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_1 <- surv_1 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 2
surv_2 <- temp_night %>%
  filter(survnum == 2) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates2 <- surv_2 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_2 <- surv_2 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 3
surv_3 <- temp_night %>%
  filter(survnum == 3) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates3 <- surv_3 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_3 <- surv_3 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 4
surv_4 <- temp_night %>%
  filter(survnum == 4) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates4 <- surv_4 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_4 <- surv_4 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

#Surv 5

```



```

surv_5 <- temp_night %>%
  filter(survnum == 5) %>%
  mutate(Receiver_Final_ID = ifelse(is.na(sn1), NA, Receiver_Final_ID)) #>%
#Getting isolates
isolates5 <- surv_5 %>%
  mutate(sn1 = ifelse(is.na(sn1), 0, sn1)) %>%
  group_by(Sender_Final_ID) %>%
  summarize(isolate = sum(sn1)) %>%
  filter(isolate < 1) %>%
  select(Sender_Final_ID)
surv_5 <- surv_5 %>%
  select(Sender_Final_ID, Receiver_Final_ID) %>% filter(!(is.na(Receiver_Final_ID)))

day <- list(sur1 = surv_1,
            sur2 = surv_2,
            sur3 = surv_3,
            sur4 = surv_4,
            sur5 = surv_5,
            iso1 = isolates1,
            iso2 = isolates2,
            iso3 = isolates3,
            iso4 = isolates4,
            iso5 = isolates5)

rm(surv_1);rm(surv_2);rm(surv_3);rm(surv_4);rm(surv_5)
rm(isolates1);rm(isolates2);rm(isolates3);rm(isolates4);rm(isolates5)

```

General Graphs

#Convert to Matrices

```

sur1 <- as.matrix(day$sur1)
sur2 <- as.matrix(day$sur2)
sur3 <- as.matrix(day$sur3)
sur4 <- as.matrix(day$sur4)
sur5 <- as.matrix(day$sur5)

```

Convert matrix to an igraph object

```

g1 <- graph.edgelist(sur1, directed = TRUE) + vertices(day$iso1$Sender_Final_ID) #Graph edgelist + Add
g2 <- graph.edgelist(sur2, directed = TRUE) + vertices(day$iso2$Sender_Final_ID) #Graph edgelist + Add
g3 <- graph.edgelist(sur3, directed = TRUE) + vertices(day$iso3$Sender_Final_ID) #Graph edgelist + Add
g4 <- graph.edgelist(sur4, directed = TRUE) + vertices(day$iso4$Sender_Final_ID) #Graph edgelist + Add
g5 <- graph.edgelist(sur5, directed = TRUE) + vertices(day$iso5$Sender_Final_ID) #Graph edgelist + Add

```

#Capture Roles, Nights & Colors

```

temp_att <- temp_att %>%
  mutate(
    role1 = ifelse(!(is.na(role2))) & (night2 == night), role2, role1),

```

```

    night1 = ifelse(!(is.na(night2))) & (night2 == night), night2, night1),
    role_col = ifelse(!(is.na(role_col2))) & (night2 == night), role_col2, role_col)
  )

#Add staff Role Attribute

V(g1)$role <- temp_att$role1[match(V(g1)$name, temp_att$Final_ID)]
V(g2)$role <- temp_att$role1[match(V(g2)$name, temp_att$Final_ID)]
V(g3)$role <- temp_att$role1[match(V(g3)$name, temp_att$Final_ID)]
V(g4)$role <- temp_att$role1[match(V(g4)$name, temp_att$Final_ID)]
V(g5)$role <- temp_att$role1[match(V(g5)$name, temp_att$Final_ID)]

#Add role colors

V(g1)$color <- temp_att$role_col[match(V(g1)$name, temp_att$Final_ID)]
V(g2)$color <- temp_att$role_col[match(V(g2)$name, temp_att$Final_ID)]
V(g3)$color <- temp_att$role_col[match(V(g3)$name, temp_att$Final_ID)]
V(g4)$color <- temp_att$role_col[match(V(g4)$name, temp_att$Final_ID)]
V(g5)$color <- temp_att$role_col[match(V(g5)$name, temp_att$Final_ID)]

#Add Edge weights - Match by edgelist rows Send/ Receive rows & temp_night Send/Receive rows. filter by

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g1)), Sender_Final_ID = V1, Receiver_Final_ID = V2),
              filter(survnum == 1) #Match weights
              g1 <- set_edge_attr(g1, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g2)), Sender_Final_ID = V1, Receiver_Final_ID = V2),
              filter(survnum == 2) #Match weights
              g2 <- set_edge_attr(g2, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g3)), Sender_Final_ID = V1, Receiver_Final_ID = V2),
              filter(survnum == 3) #Match weights
              g3 <- set_edge_attr(g3, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g4)), Sender_Final_ID = V1, Receiver_Final_ID = V2),
              filter(survnum == 4) #Match weights
              g4 <- set_edge_attr(g4, "weight", value = w$sn2) #Add edge attribute

w <- left_join(dplyr::rename(dplyr::as_data_frame(as_edgelist(g5)), Sender_Final_ID = V1, Receiver_Final_ID = V2),
              filter(survnum == 5) #Match weights
              g5 <- set_edge_attr(g5, "weight", value = w$sn2) #Add edge attribute

#Set graphs to list
graphs <- list(g1 = g1, g2 = g2, g3 = g3, g4 = g4, g5 = g5)

rm(g1); rm(g2); rm(g3); rm(g4); rm(g5)
rm(sur1); rm(sur2); rm(sur3); rm(sur4); rm(sur5)
rm(temp_att); rm(temp_night); rm(w)

```

Create List

```
thursday <- list(edgelists = day, graphs = graphs)
rm(day); rm(graphs)
```

Plot Graphs

```
#Set chart image
par(mfrow=c(4,5))
```

#Monday Graphs

```
my_sn_g(monday$graphs$g1, title = "Monday - Week 1") ; my_leg(att = role, colors = color) #Soc
my_sn_g(monday$graphs$g2, title = "Monday - Week 3") ; my_leg(att = role, colors = color) #Soc
my_sn_g(monday$graphs$g3, title = "Monday - Week 6") ; my_leg(att = role, colors = color) #Soc
my_sn_g(monday$graphs$g4, title = "Monday - Week 9") ; my_leg(att = role, colors = color) #Soc
my_sn_g(monday$graphs$g5, title = "Monday - Week 11") ; my_leg(att = role, colors = color) #Soc
```


#Tuesday Graphs

```
my_sn_g(tuesday$graphs$g1, title = "Tuesday - Week 1") ; my_leg(att = role, colors = color) #Soc
my_sn_g(tuesday$graphs$g2, title = "Tuesday - Week 3") ; my_leg(att = role, colors = color) #Soc
my_sn_g(tuesday$graphs$g3, title = "Tuesday - Week 6") ; my_leg(att = role, colors = color) #Soc
my_sn_g(tuesday$graphs$g4, title = "Tuesday - Week 9") ; my_leg(att = role, colors = color) #Soc
my_sn_g(tuesday$graphs$g5, title = "Tuesday - Week 11") ; my_leg(att = role, colors = color) #Soc
```

#Wednesday Graphs

```
my_sn_g(wednesday$graphs$g1, title = "Wednesday - Week 1") ; my_leg(att = role, colors = color) #Soc
my_sn_g(wednesday$graphs$g2, title = "Wednesday - Week 3") ; my_leg(att = role, colors = color) #Soc
my_sn_g(wednesday$graphs$g3, title = "Wednesday - Week 6") ; my_leg(att = role, colors = color) #Soc
my_sn_g(wednesday$graphs$g4, title = "Wednesday - Week 9") ; my_leg(att = role, colors = color) #Soc
my_sn_g(wednesday$graphs$g5, title = "Wednesday - Week 11") ; my_leg(att = role, colors = color) #Soc
```

```
my_sn_g(thursday$graphs$g1, title = "Thursday - Week 1") ; my_leg(att = role, colors = color) #Soc
my_sn_g(thursday$graphs$g2, title = "Thursday - Week 3") ; my_leg(att = role, colors = color) #Soc
my_sn_g(thursday$graphs$g3, title = "Thursday - Week 6") ; my_leg(att = role, colors = color) #Soc
my_sn_g(thursday$graphs$g4, title = "Thursday - Week 9") ; my_leg(att = role, colors = color) #Soc
my_sn_g(thursday$graphs$g5, title = "Thursday - Week 11") ; my_leg(att = role, colors = color) #Soc
```

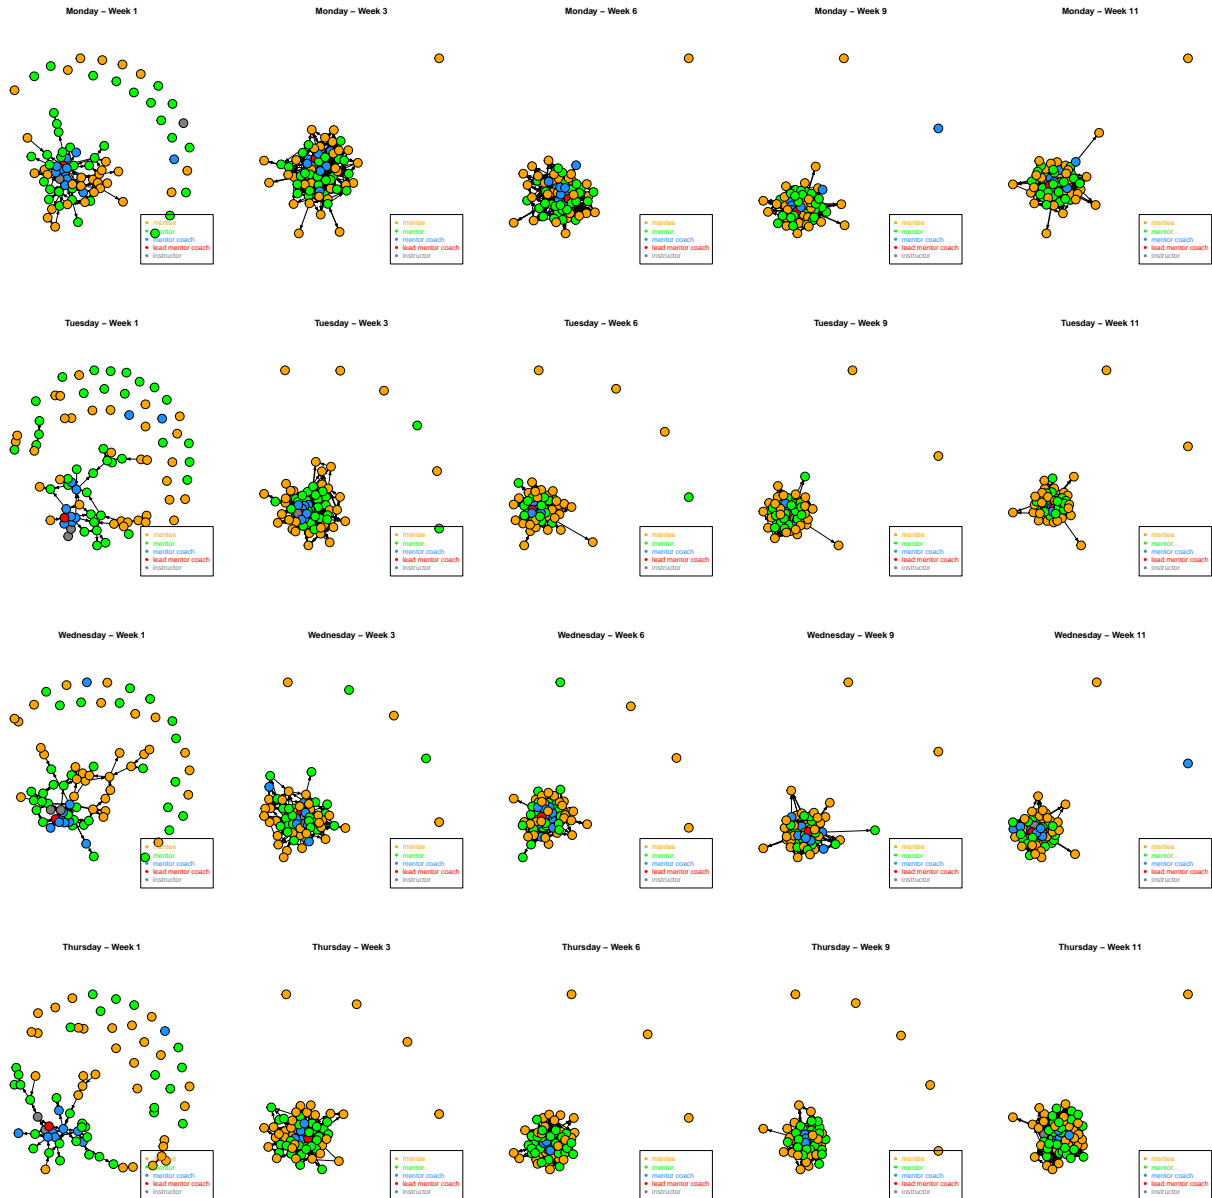

```
#Plot With purrr::walk()
#walk(.x = monday$graphs, .f = my_sn_g, title = "Monday");my_leg(role, color)
#walk(.x = tuesday$graphs, .f = my_sn_g, title = "Tuesday");my_leg(role, color)
#walk(.x = wednesday$graphs, .f = my_sn_g, title = "Wednesday");my_leg(role, color)
#walk(.x = thursday$graphs, .f = my_sn_g, title = "Thursday");my_leg(role, color)
```

Create Semester List

```
S17 <- list(monday = monday, tuesday = tuesday, wednesday = wednesday, thursday = thursday)
rm(monday);rm(tuesday);rm(wednesday);rm(thursday)
rm(temp)
```

Combine Semesters to list


```
ALL <- list(F15 = F15, S16 = S16, F16 = F16, S17 = S17)
rm(F15);rm(S16);rm(F16);rm(S17)
```


Save All Networks to permanant RData File

```
saveRDS(ALL, file="T:/Research folders/CCWTG/Data/MERGEALL/ALL_NETWORKS.RDS")
```


Examine Cliques

F15

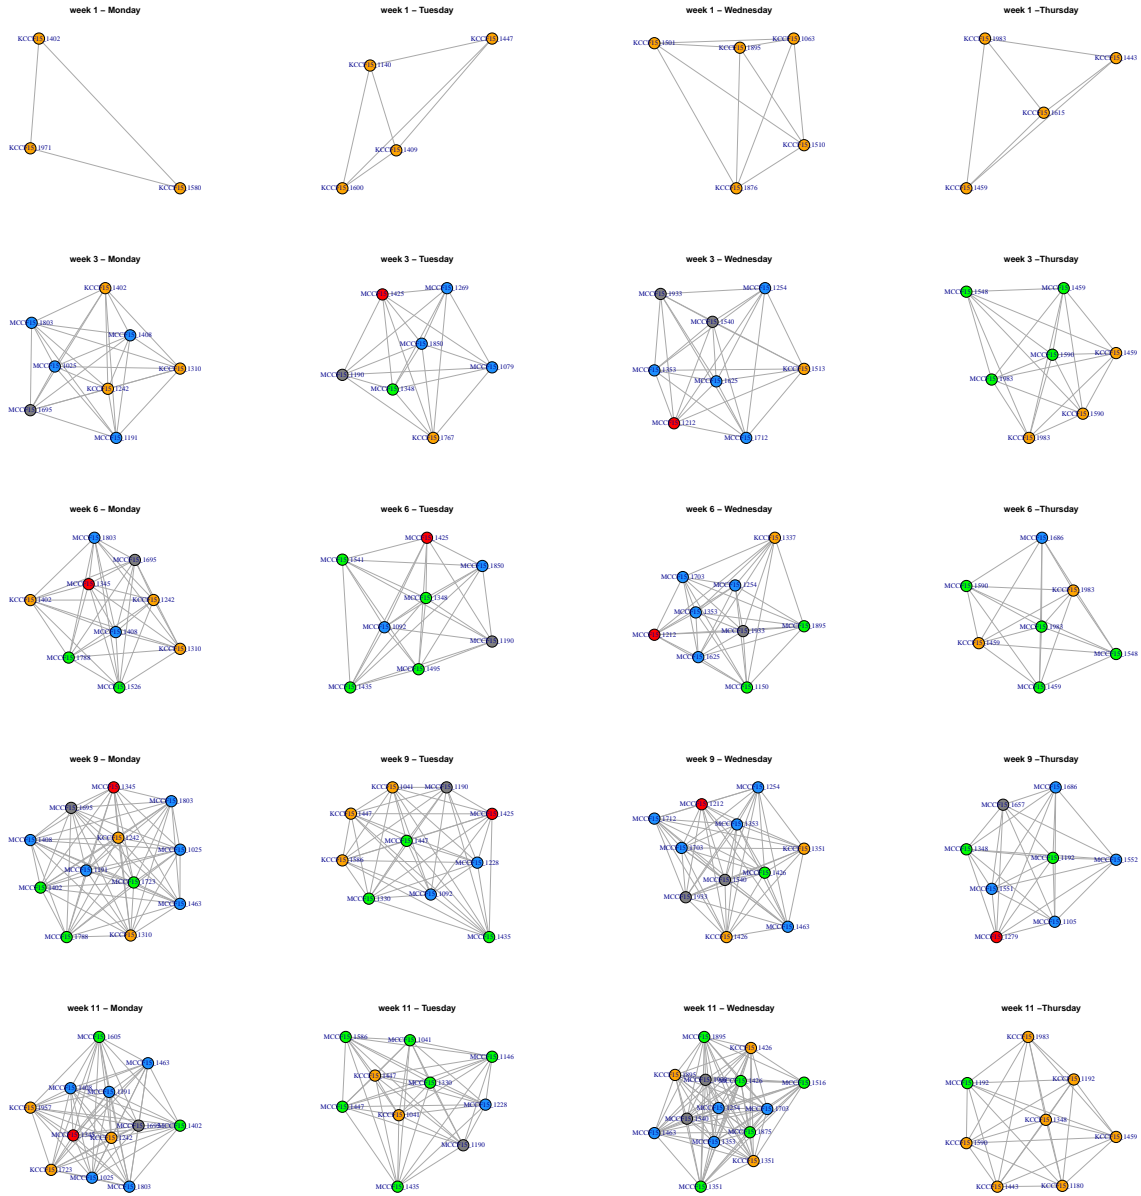


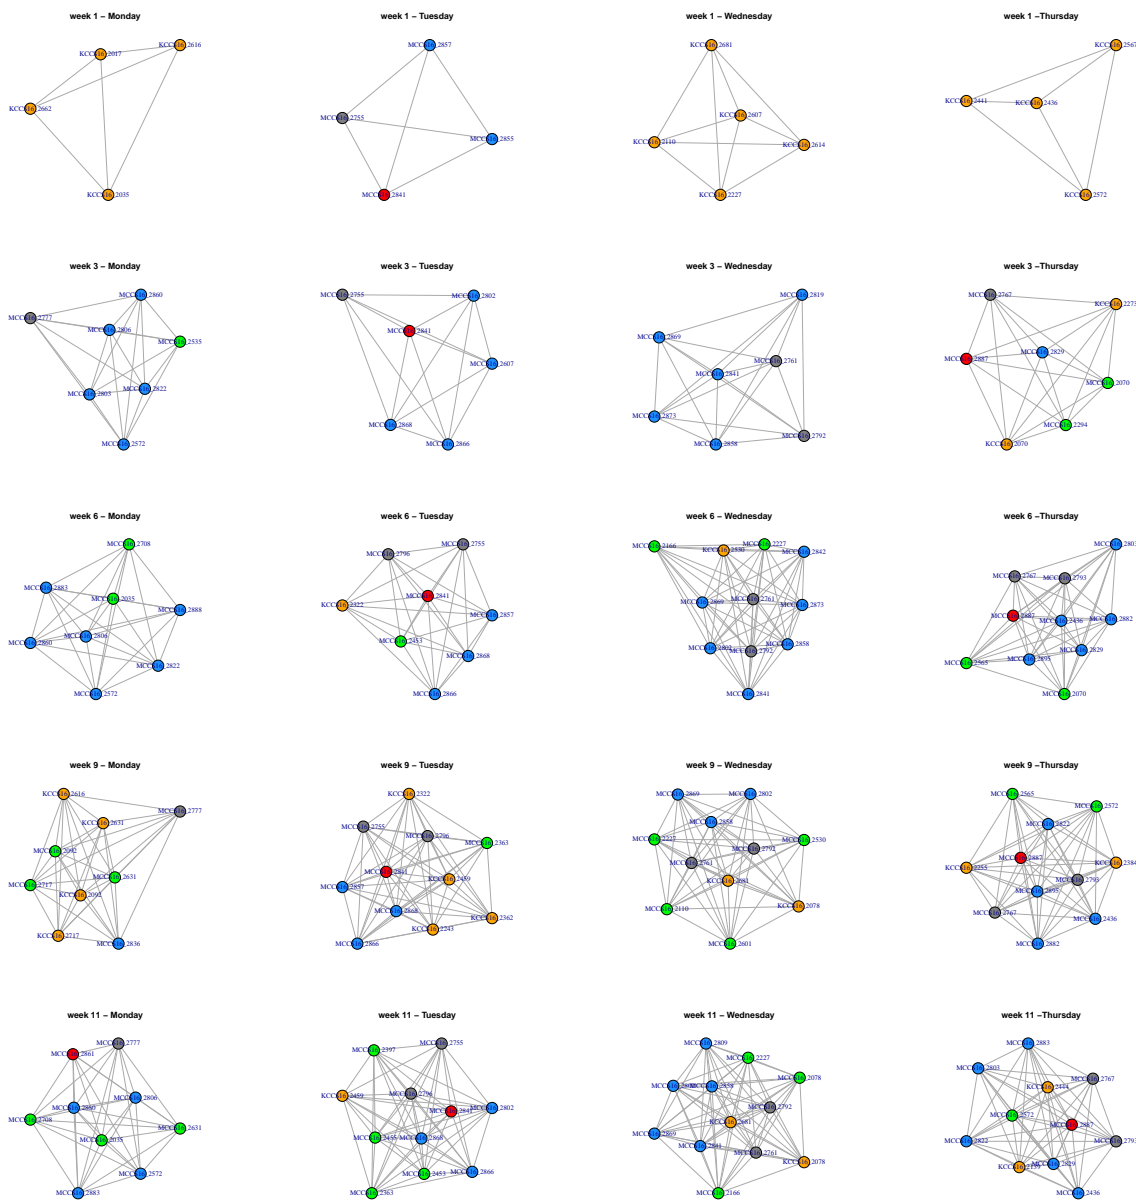

F16

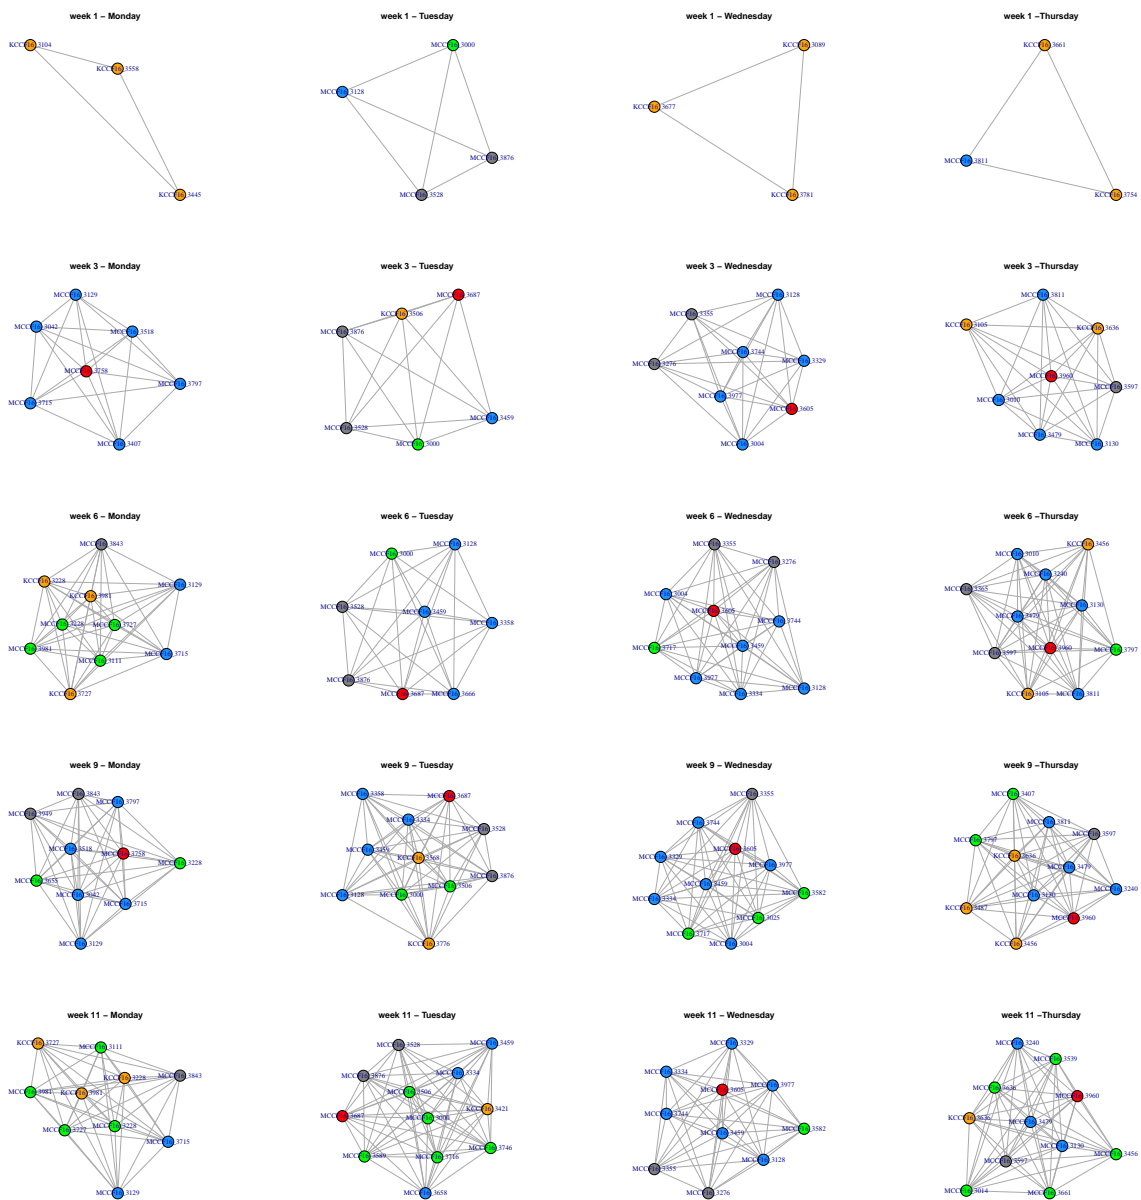

S17

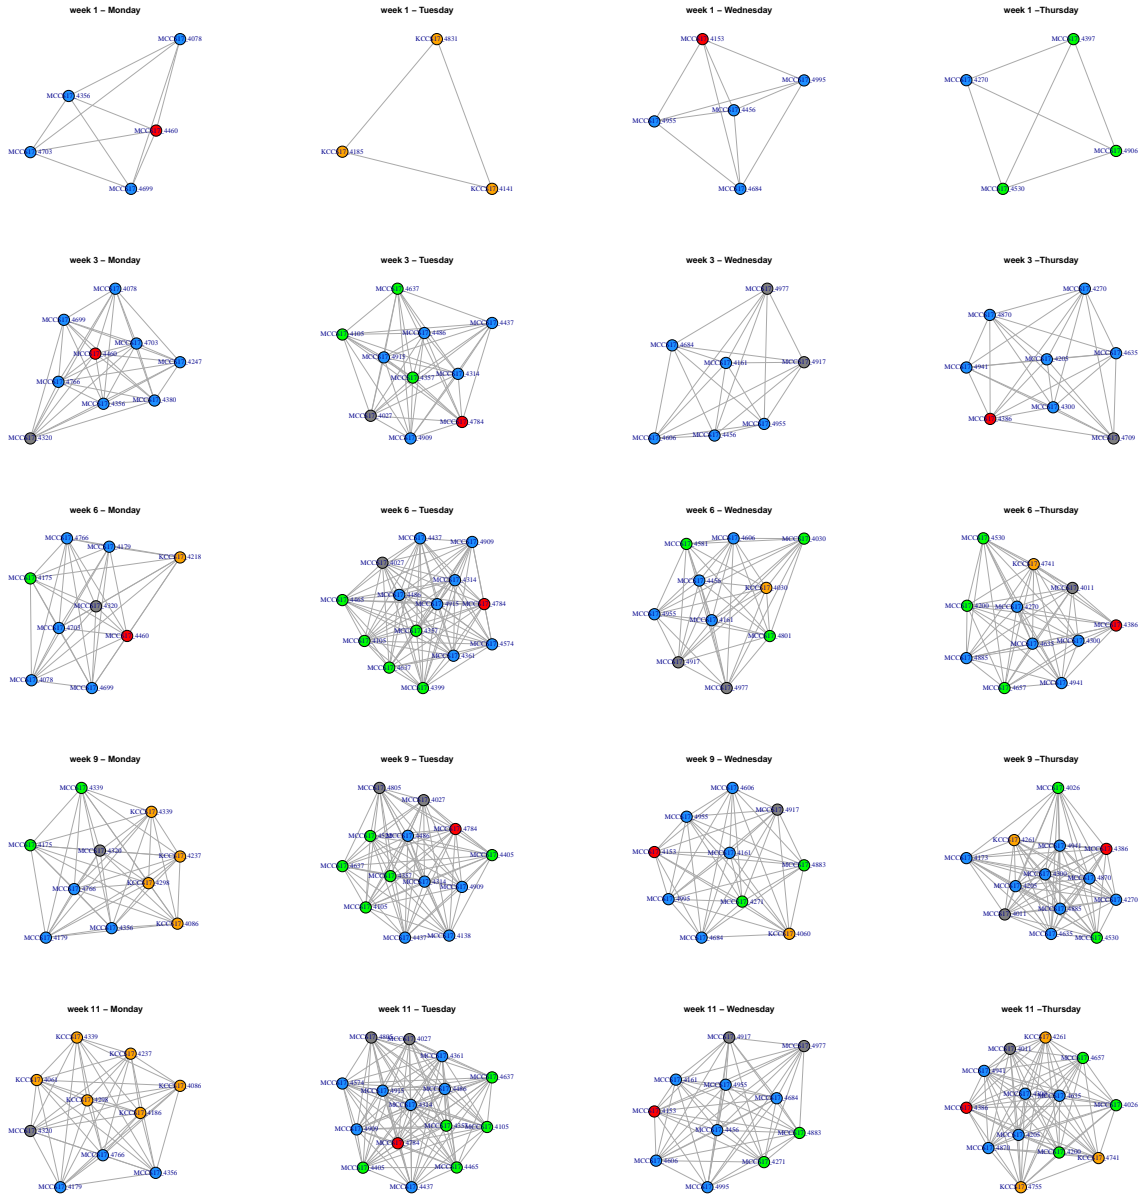

##Combine Cliques

```
cliques <- list(F15 = F15, S16 = S16, F16 = F16, S17 = S17)
rm(F15);rm(S16);rm(F16);rm(S17)
```