

# real-world refactoring



NF

NEAL FORD software architect / meme wrangler

## ThoughtWorks

nford@thoughtworks.com  
3003 Summit Boulevard, Atlanta, GA 30319  
www.nealford.com  
www.thoughtworks.com  
memeagora.blogspot.com

# housekeeping


ask questions anytime

download slides from  
nealford.com →

The screenshot shows the homepage of nealford.com. At the top, there is a navigation bar with links to "nealford.com", "About me (Bio)", "Book Club", "Triathlon", "Music", "Travel", "Read my Blog", "Conference Slides & Samples", and "Email Neal". Below the navigation bar, there is a main content area with a heading "Neal Ford ThoughtWorker / Meme Wrangler". A paragraph of text welcomes visitors to the site, mentioning its purpose as an informational site about the author's professional life and a forum for sharing interests. There is also a section for "Upcoming Conferences" and a small image at the bottom.

download samples from [github.com/nealford](https://github.com/nealford)


# emergent design family

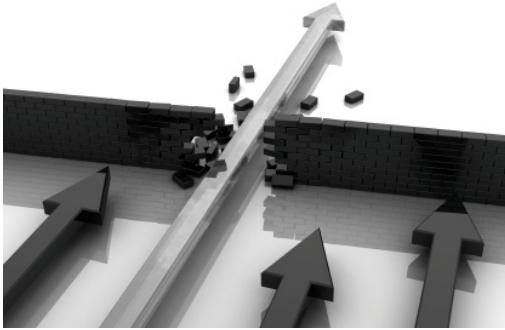

emergent design &  
evolutionary architecture



test-driven  
design

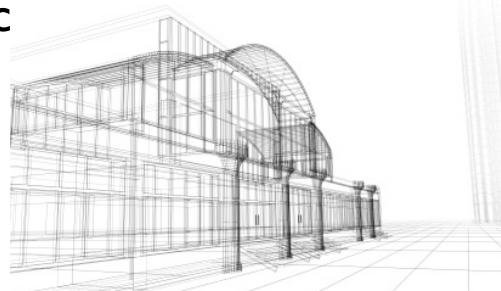

real  
world  
refactoring

## what i cover


building blocks

composed method


the slap principle

refactoring code, databases, and build files


advice on why & when to refactor

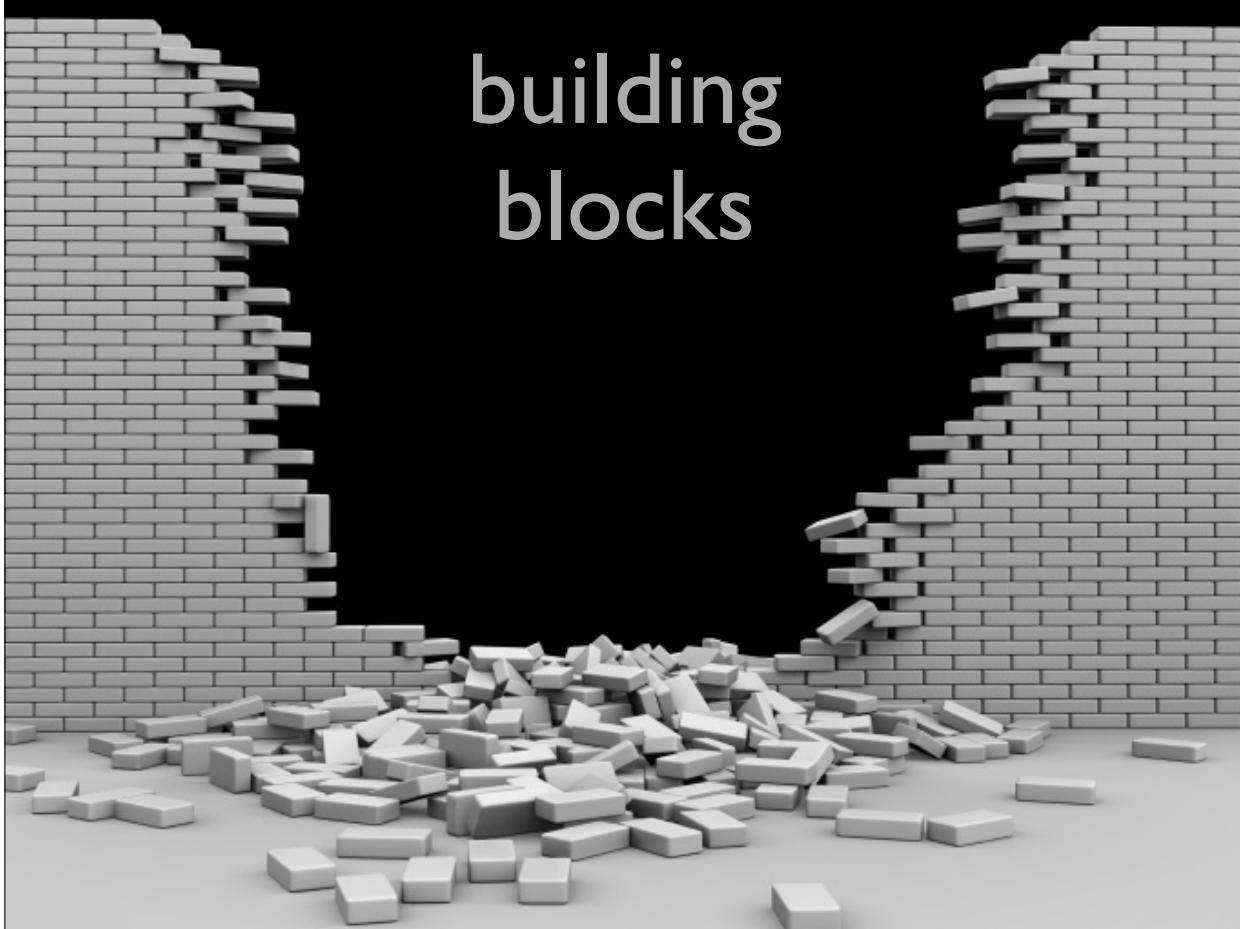

**building  
blocks**

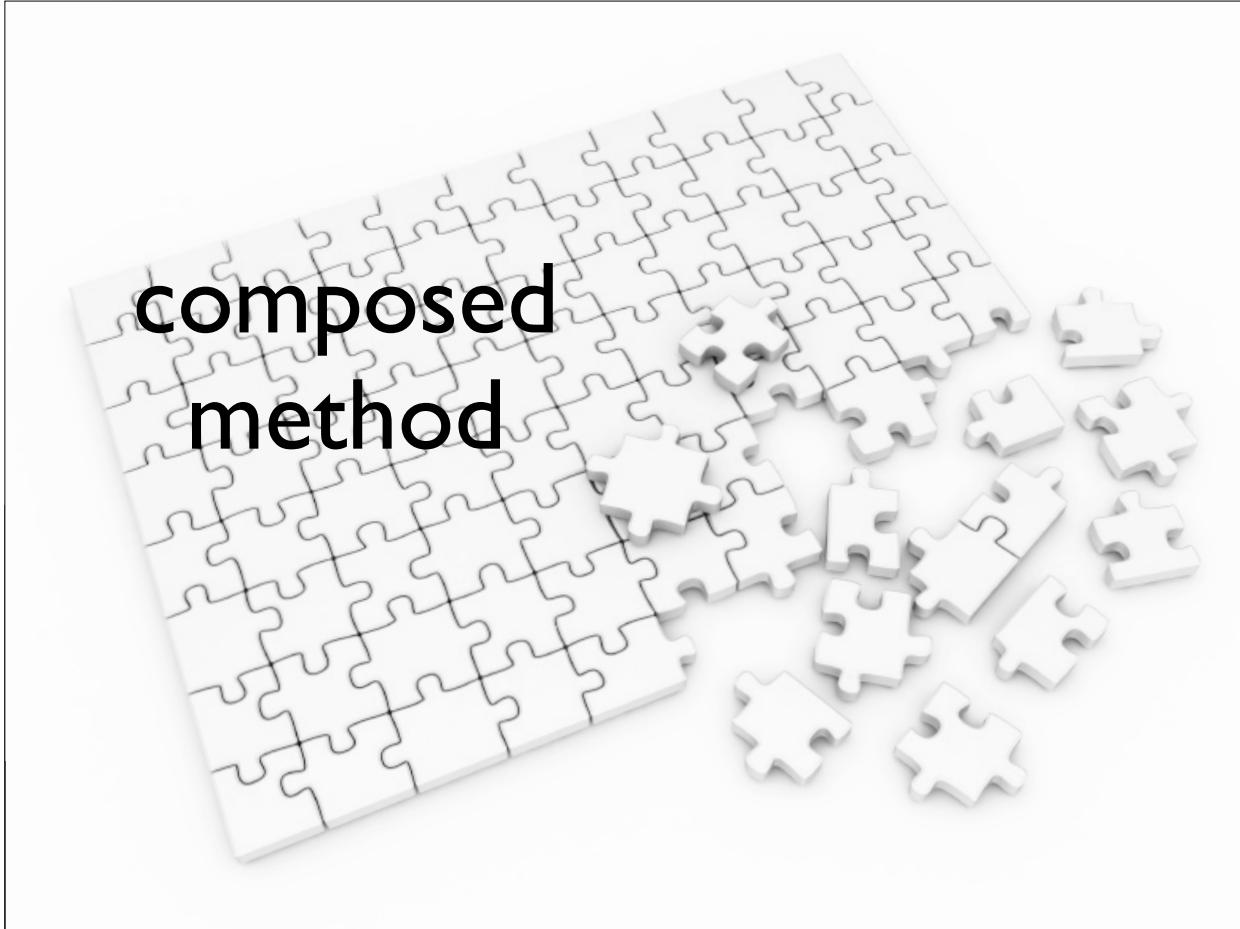

**composed  
method**

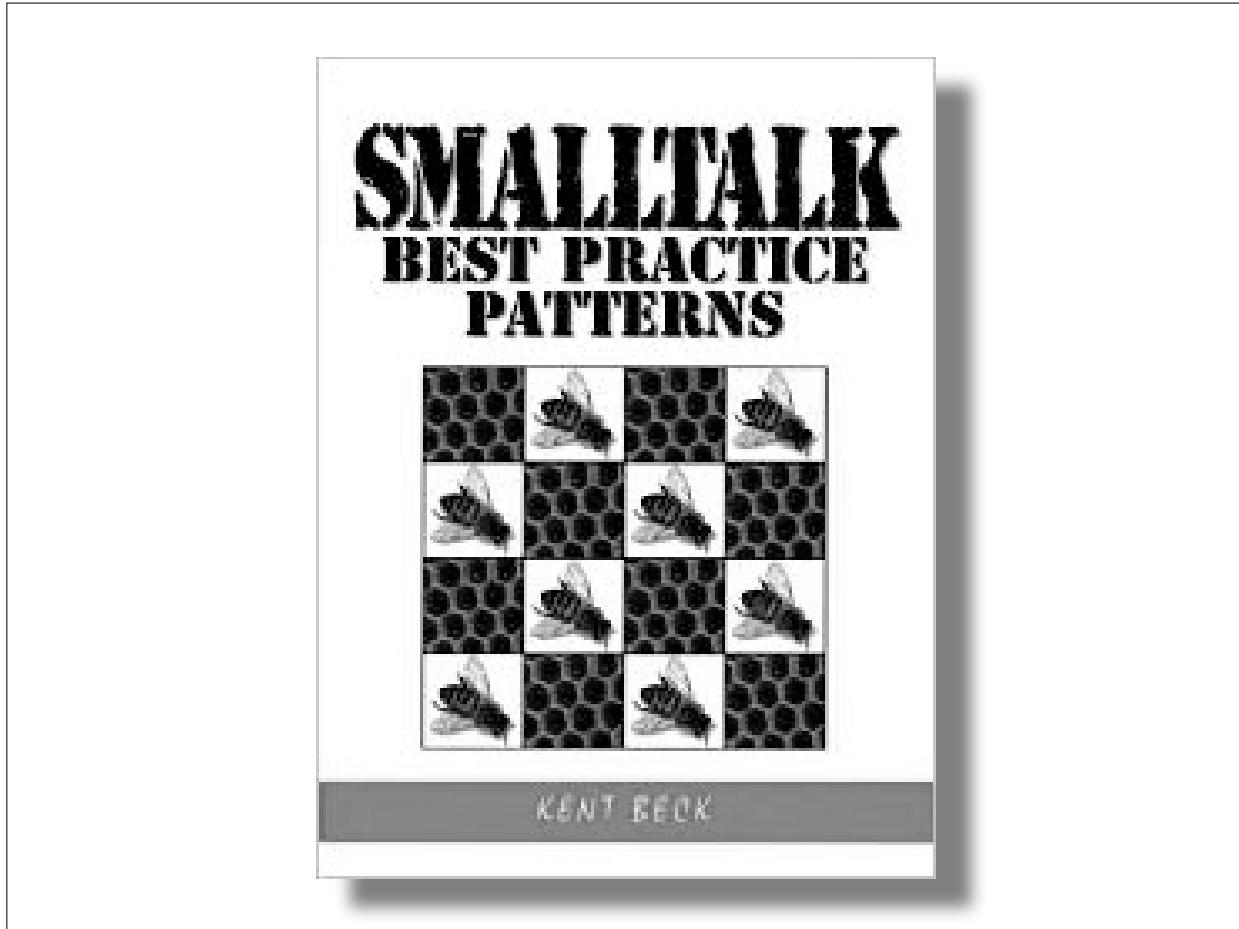


## composed method

***Divide your program into methods that perform one identifiable task.***

Keep all of the operations in a method at the same level of abstraction.

This will naturally result in programs with many small methods, each a few lines long.

# refactoring to composed method

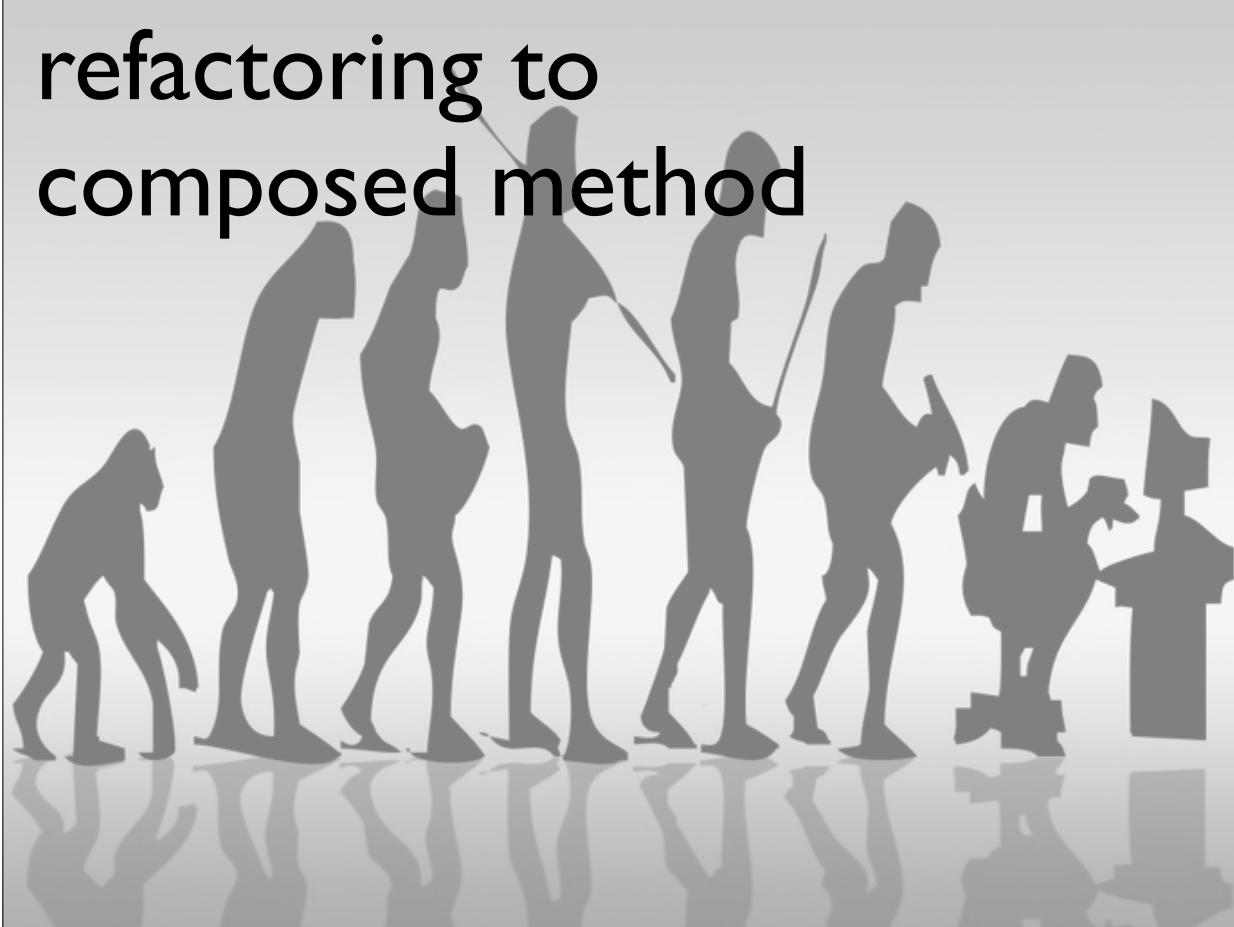

```
public void populate() throws Exception {
    Connection c = null;
    try {
        Class.forName(DRIVER_CLASS);
        c = DriverManager.getConnection(DB_URL, USER, PASSWORD);
        Statement stmt = c.createStatement();
        ResultSet rs = stmt.executeQuery(SQL_SELECT_PARTS);
        while (rs.next()) {
            Part p = new Part();
            p.setName(rs.getString("name"));
            p.setBrand(rs.getString("brand"));
            p.setRetailPrice(rs.getDouble("retail_price"));
            partList.add(p);
        }
    } finally {
        c.close();
    }
}
```

```

private void addPartToListFromResultSet(ResultSet rs)
    throws SQLException {
    Part p = new Part();
    p.setName(rs.getString("name"));
    p.setBrand(rs.getString("brand"));
    p.setRetailPrice(rs.getDouble("retail_price"));
    partList.add(p);
}

public void populate() throws Exception {
    Connection c = null;
    try {
        c = getDatabaseConnection();
        ResultSet rs = createResultSet(c);
        while (rs.next())
            addPartToListFromResultSet(rs);
    } finally {
        c.close();
    }
}

private Connection getDatabaseConnection()
    throws ClassNotFoundException, SQLException {
    Connection c;
    Class.forName(DRIVER_CLASS);
    c = DriverManager.getConnection(DB_URL,
        "webuser", "webpass");
    return c;
}

```

```

private ResultSet createResultSet(Connection c)
    throws SQLException {
    return c.createStatement().
        executeQuery(SQL_SELECT_PARTS);
}

```



**BoundaryBase**  
getDatabaseConnection()

**PartDb**  
populate()  
  
createResultSet()  
addPartToListFromResultSet()

```

private Connection getDatabaseConnection()
    throws ClassNotFoundException, SQLException {
    Connection c;
    Class.forName(DRIVER_CLASS);
    c = DriverManager.getConnection(DB_URL,
        "webuser", "webpass");
    return c;
}

```

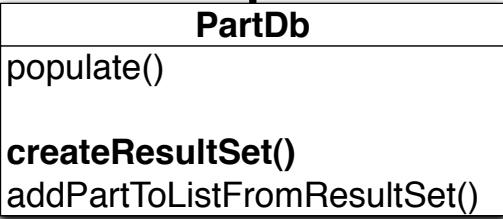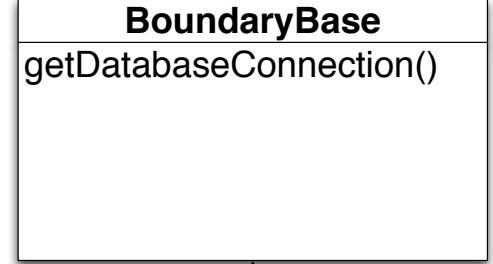

```
private ResultSet createResultSet(Connection c)
    throws SQLException {
    return c.createStatement().
        executeQuery(SQL_SELECT_PARTS);
}
```

## BoundaryBase


```
abstract protected String getSqlForEntity();

protected ResultSet createResultSet(Connection c) throws SQLException {
    Statement stmt = c.createStatement();
    return stmt.executeQuery(getSqlForEntity());
}
```


```
private ResultSet createResultSet(Connection c)
    throws SQLException {
    return c.createStatement().
        executeQuery(SQL_SELECT_PARTS);
}
```

## PartDb

```
protected String getSqlForEntity() {
    return SQL_SELECT_PARTS;
}
```

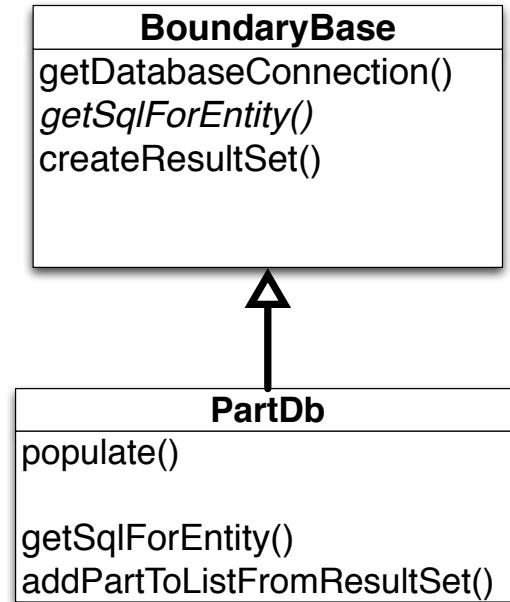

|   |   |
|---|---|
| <b>old version<br/>(in PartDB)</b> <pre> public void populate() throws Exception {     Connection c = null;     try {         c = getDatabaseConnection();         ResultSet rs = createResultSet(c);         while (rs.next())             addPartToListFromResultSet(rs);     } finally {         c.close();     } }  abstract protected void addEntityToListFromResultSet(ResultSet rs) throws SQLException;  public void populate() throws Exception {     Connection c = null;     try {         c = getDatabaseConnection();         ResultSet rs = createResultSet(c);         while (rs.next())             addEntityToListFromResultSet(rs);     } finally {         c.close();     } } </pre> | <b>refactored version<br/>(in BoundaryBase)</b> |
|---|---|

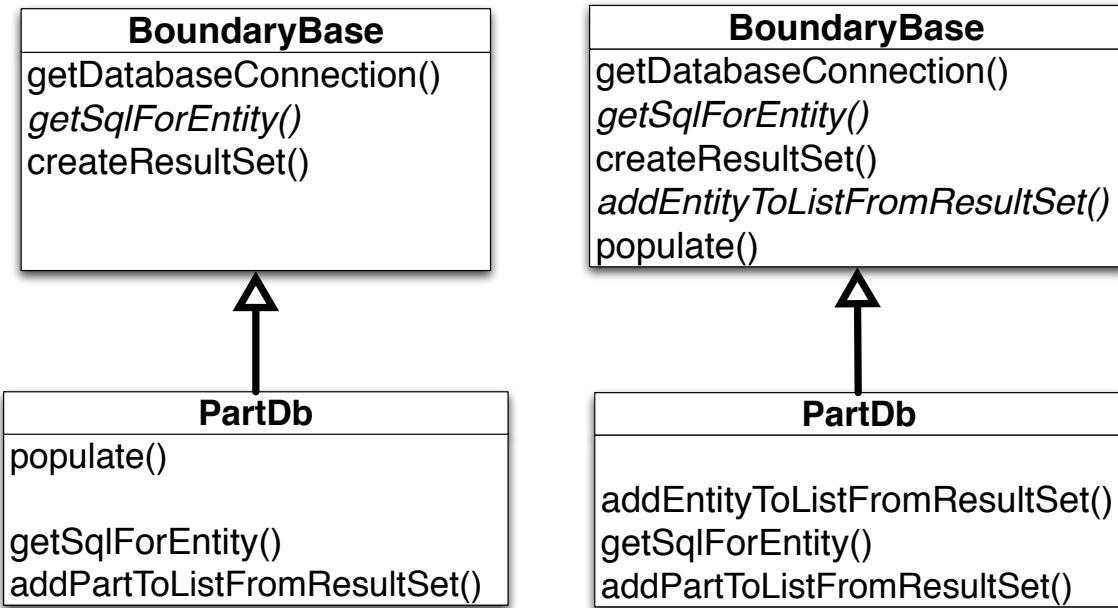

```

protected Connection getDatabaseConnection() throws ClassNotFoundException,
                                                SQLException {
    Connection c;
    Class.forName(DRIVER_CLASS);
    c = DriverManager.getConnection(DB_URL, "webuser", "webpass");
    return c;
}

abstract protected String getSqlForEntity();

protected ResultSet createResultSet(Connection c) throws SQLException {
    Statement stmt = c.createStatement();
    return stmt.executeQuery(getSqlForEntity());
}

abstract protected void addEntityToListFromResultSet(ResultSet rs)
    throws SQLException;

public void populate() throws Exception {
    Connection c = null;
    try {
        c = getDatabaseConnection();
        ResultSet rs = createResultSet(c);
        while (rs.next())
            addEntityToListFromResultSet(rs);
    } finally {
        c.close();
    }
}

```

**BoundaryBase**

## PartDb

```
public Part[] getParts() {  
    return (Part[]) partList.toArray(TEMPLATE);  
}  
  
protected String getSqlForEntity() {  
    return SQL_SELECT_PARTS;  
}  
  
protected void addEntityToListFromResultSet(ResultSet rs) throws SQLException {  
    Part p = new Part();  
    p.setName(rs.getString("name"));  
    p.setBrand(rs.getString("brand"));  
    p.setRetailPrice(rs.getDouble("retail_price"));  
    partList.add(p);  
}
```

# benefits of composed method

shorter methods easier to test

method names become documentation

large number of very cohesive methods

discover reusable assets that you didn't know  
were there




## composed method

Divide your program into methods that perform one identifiable task.

***Keep all of the operations in a method at the same level of abstraction.***

This will naturally result in programs with many small methods, each a few lines long.

# jumping abstraction layers makes code hard to understand

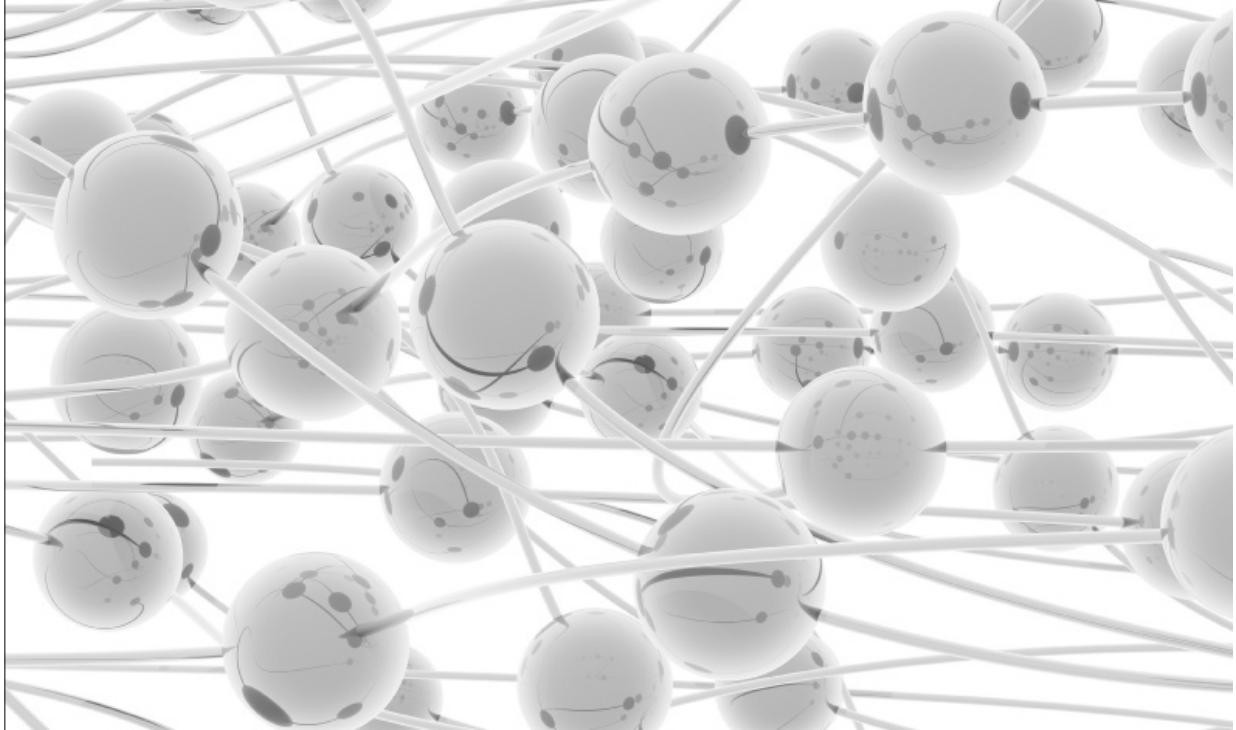

```
public void addOrder(final ShoppingCart cart, String userName,
    Order order) throws SQLException {
    Connection c = null; PreparedStatement ps = null;
    Statement s = null; ResultSet rs = null;
    boolean transactionState = false;
    try {
        c = dbPool.getConnection();
        s = c.createStatement();
        transactionState = c.getAutoCommit();
        int userKey = getUserKey(userName, c, ps, rs);
        c.setAutoCommit(false);
        addSingleOrder(order, c, ps, userKey);
        int orderKey = getOrderKey(s, rs);
        addLineItems(cart, c, orderKey);
        c.commit();
        order.setOrderKey(orderKey);
    } catch (SQLException sqlx) {
        s = c.createStatement();
        c.rollback();
        throw sqlx;
    } finally {
        try {
            c.setAutoCommit(transactionState);
            dbPool.release(c);
            if (s != null) s.close();
            if (ps != null) ps.close();
            if (rs != null) rs.close();
        } catch (SQLException ignored) {
        }
    }
}
```

```

public void addOrder(final ShoppingCart cart, String userName,
                     Order order) throws SQLException {
    Connection connection = null; PreparedStatement ps = null;
    Statement statement = null; ResultSet rs = null;
    boolean transactionState = false;
    try {
        connection = dbPool.getConnection();
        statement = connection.createStatement();
        transactionState = setupTransactionStateFor(connection, transactionState);
        addSingleOrder(order, connection, ps, userKeyFor(userName, connection));
        order.setOrderKey(generateOrderKey(statement, rs));
        addLineItems(cart, connection, order.getOrderKey());
        completeTransaction(connection);
    } catch (SQLException sqlx) {
        rollbackTransactionFor(connection);
        throw sqlx;
    } finally {
        cleanUpDatabaseResources(connection, transactionState, statement, ps, rs);
    }
}

```

```

public void addOrderFrom(ShoppingCart cart, String userName,
                        Order order) throws SQLException {
    private void setupDataInfrastructure(); throws SQLException {
        _db = new Map();
    }
    private void add(Order order, String userKeyBasedOn(userName)) {
        db.put(SOBN, addLineItemsFrom(cart, order.getOrderKey()));
    }
    private void completeTransaction() throws SQLException {
        ((Connection)_db.get("connection")).commit(); // connection
    }
    private void rollbackTransaction() throws SQLException {
        ((Connection)_db.get("connection")).rollback(); // connection
    }
    private void cleanUp() {
        ps.setString(1, userKeyBasedOn(userName));
        ps.setString(2, order.getCardType());
        ps.setString(3, order.getCardNumber());
        ps.setString(4, order.getCardExp());
        if (result != 1) {
            throw new SQLException(
                "Order.add(): order insert failed");
        }
    }
    dbInfrastructure.put("prepared statement", ps);
}


```

```
public void addOrder(ShoppingCart cart, String userName,
                     Order order) throws SQLException {
    Connection c = null;
    PreparedStatement ps = null;
    Statement s = null;
    ResultSet rs = null;
    boolean transactionState = false;
    try {
        s = c.createStatement();
        transactionState = c.getAutoCommit();
        int userKey = getUserKey(userName, c, ps, rs);
        c.setAutoCommit(false);
        addSingleOrder(order, c, ps, userKey);
        int orderKey = getOrderKey(s, rs);
        addLineItems(cart, c, orderKey);
        c.commit();
        order.setOrderKeyFrom(orderKey);
    } catch (SQLException sqlx) {
        s = c.createStatement();
        c.rollback();
        throw sqlx;
    } finally {
        try {
            c.setAutoCommit(transactionState);
            dbPool.release(c);
            if (s != null)
                s.close();
            if (ps != null)
                ps.close();
            if (rs != null)
                rs.close();
        } catch (SQLException ignored)
        {}
    }
}
```


```
public void addOrderFrom(ShoppingCart cart, String userName,
                         Order order) throws SQLException {
    setupDataInfrastructure();
    try {
        add(order, userKeyBasedOn(userName));
        addLineItemsFrom(cart, order.getOrderKey());
        completeTransaction();
    } catch (SQLException sqlx) {
        rollbackTransaction();
        throw sqlx;
    } finally {
        cleanUp();
    }
}
```


# code



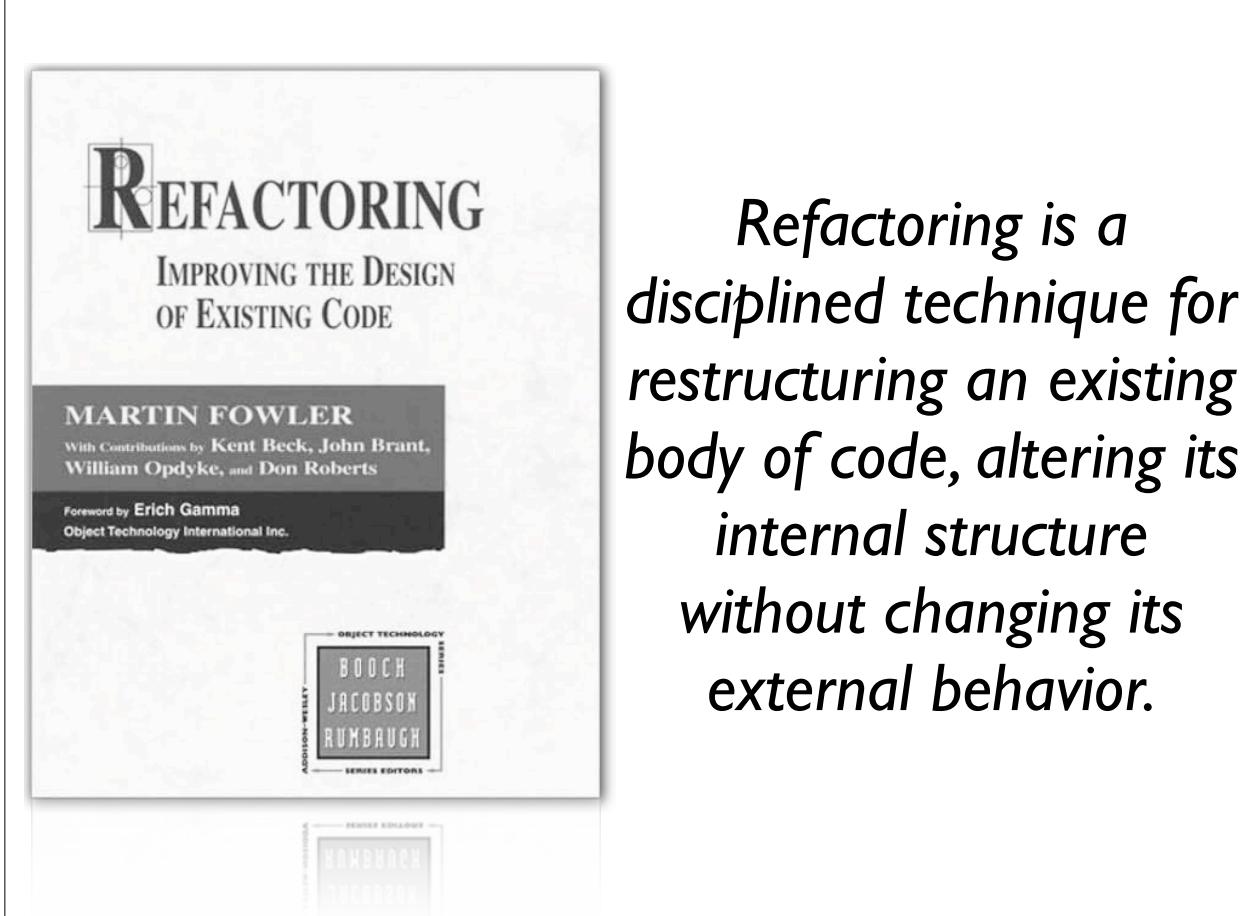

*Refactoring is a disciplined technique for restructuring an existing body of code, altering its internal structure without changing its external behavior.*

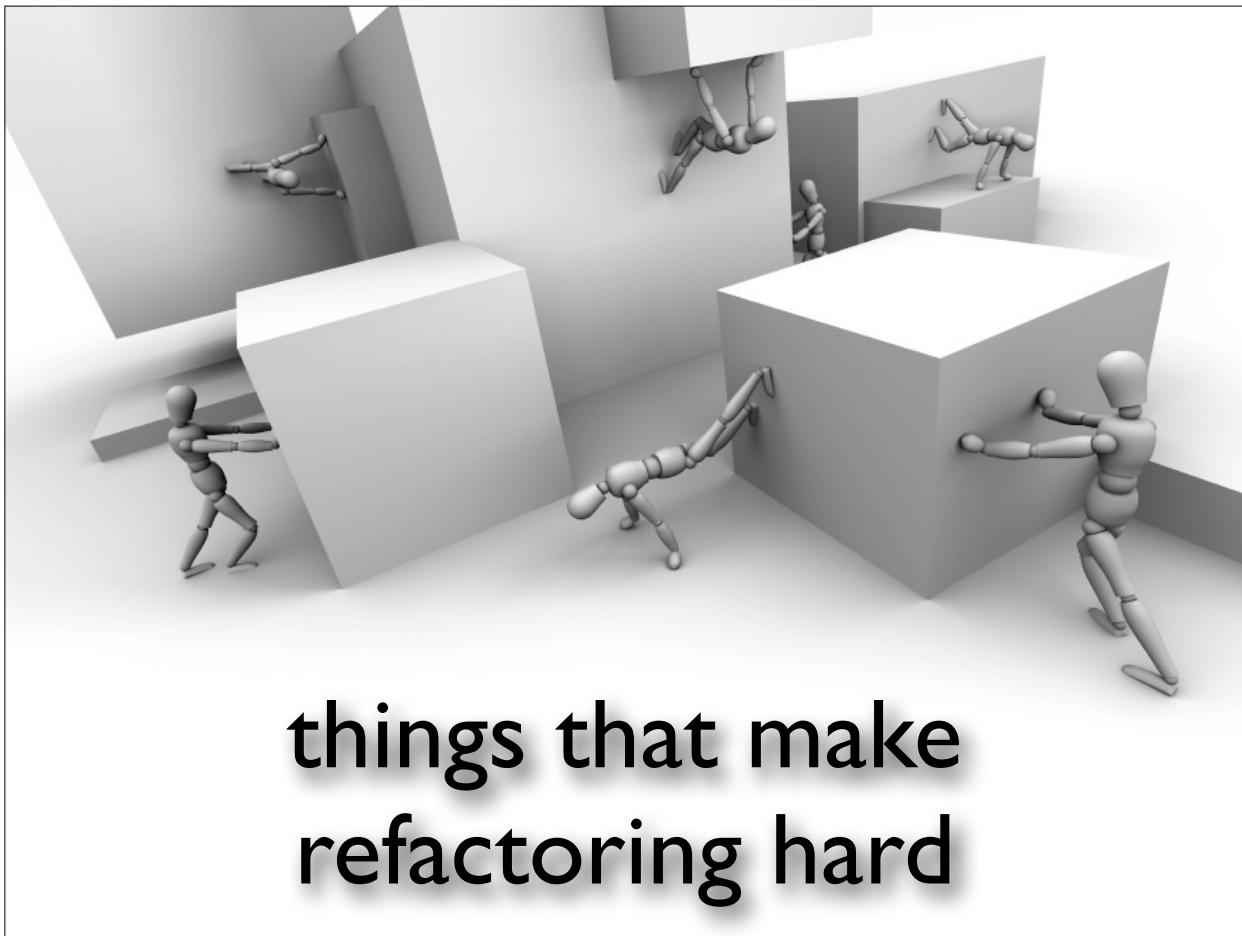

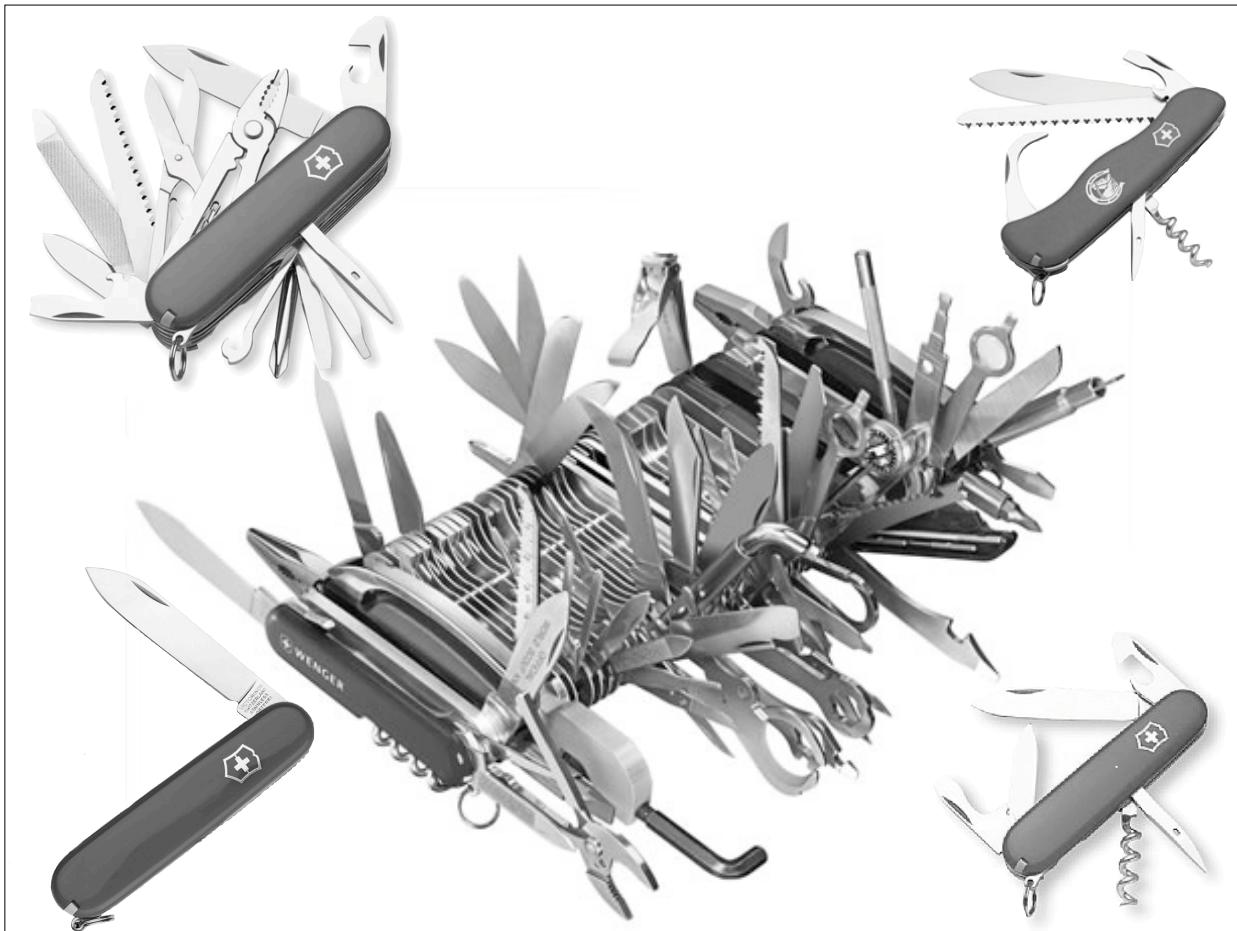

```
public void evaluateExtraParams() {
    super.evaluateExtraParams();

    //Object doubleName = null;

    if (emptyOption != null) {
        addParameter("emptyOption", findValue(emptyOption, Boolean.class));
    }

    if (multiple != null) {
        addParameter("multiple", findValue(multiple, Boolean.class));
    }

    if (size != null) {
        addParameter("size", findString(size));
    }

    if ((headerKey != null) && (headerValue != null)) {
        addParameter("headerKey", findString(headerKey));
        addParameter("headerValue", findString(headerValue));
    }

    if (doubleMultiple != null) {
        addParameter("doubleMultiple", findValue(doubleMultiple, Boolean.class));
    }

    if (doubleSize != null) {
```

**from Struts 2.0.11,  
evaluateExtraParams(), 178 lines**



**debug + refactor**

OUR GOAL IS TO WRITE  
BUG-FREE SOFTWARE.  
I'LL PAY A TEN-DOLLAR  
BONUS FOR EVERY BUG  
YOU FIND AND FIX.




E-mail: SCOTTADAMS@AOL.COM



© 1995 United Feature Syndicate, Inc. (NYC)

I HOPE THIS DRIVES THE RIGHT BEHAVIOR.  
I'M GONNA WRITE ME A NEW MINIVAN THIS AFTERNOON!

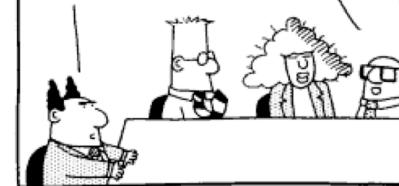

# the problem:

aging code base

no tests

lots of bugs

strong desire to refactor...

...plus gut-wrenching fear

# lots of long untested methods

you want to refactor them but...

...you're afraid of what will happen

1. refactor to composed method
2. write tests for the (now) smaller methods
3. write tests when debugging or adding new features

# refactoring attack

refactor to composed method using extract method

(you're debugging anyway)

once you extract the buggy code...

...write tests for it

tests grow around most fragile code first

# how to I get started writing unit tests?

break long methods into small pieces using composed methods

draw a line in the sand: starting next thursday, our code coverage will always rise

every time you find a bug, write a test

write a test for every new feature

you will slowly grow tests around the part of your code that needs it the most


## decomposition



just because it's long  
doesn't mean it's wrong

look for *accidental* longness

# coupling to infrastructure

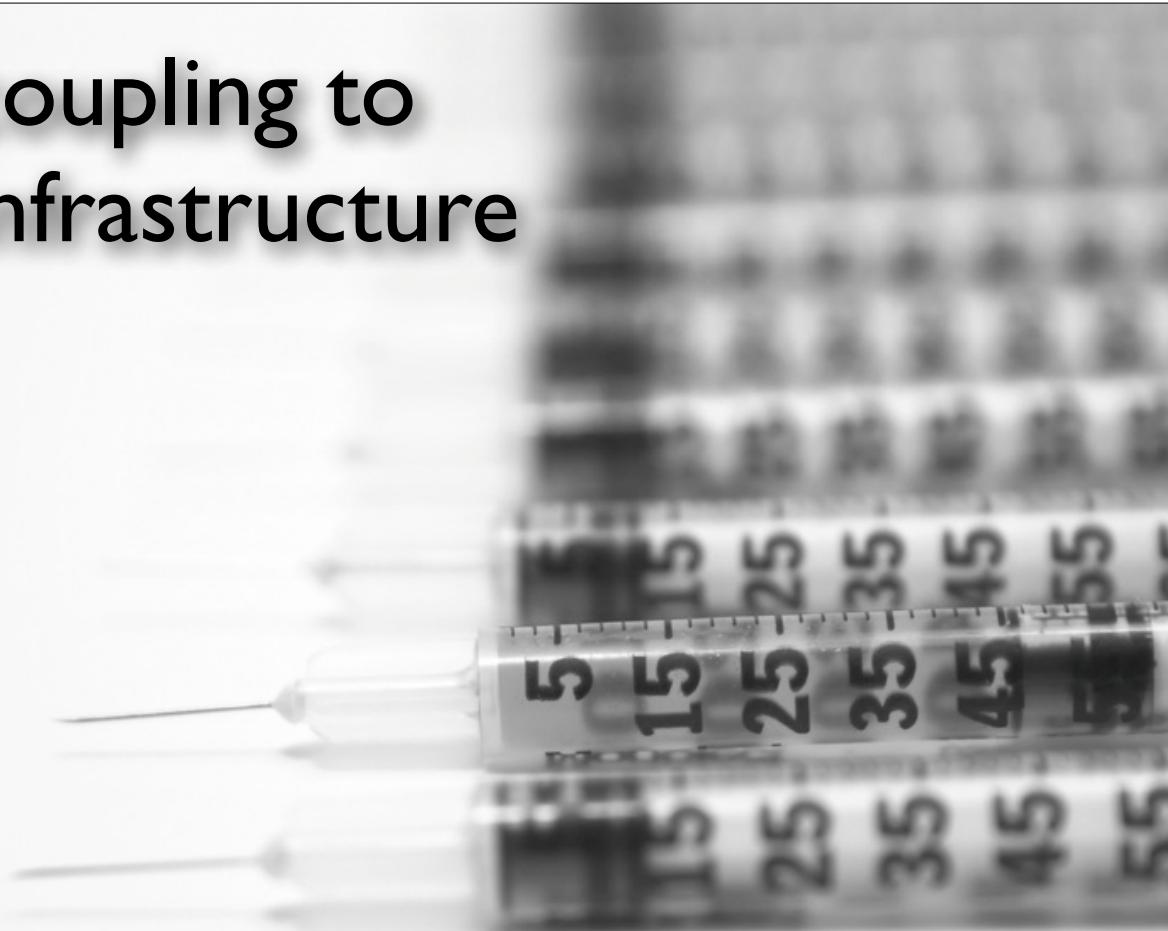

# coupling to infrastructure

don't tie yourself into infrastructure


```
import com.giantvendor.seductiveclasses.*
```

pay attention to dependencies


don't extend library/framework classes

*compose instead*

# struts ActionForm

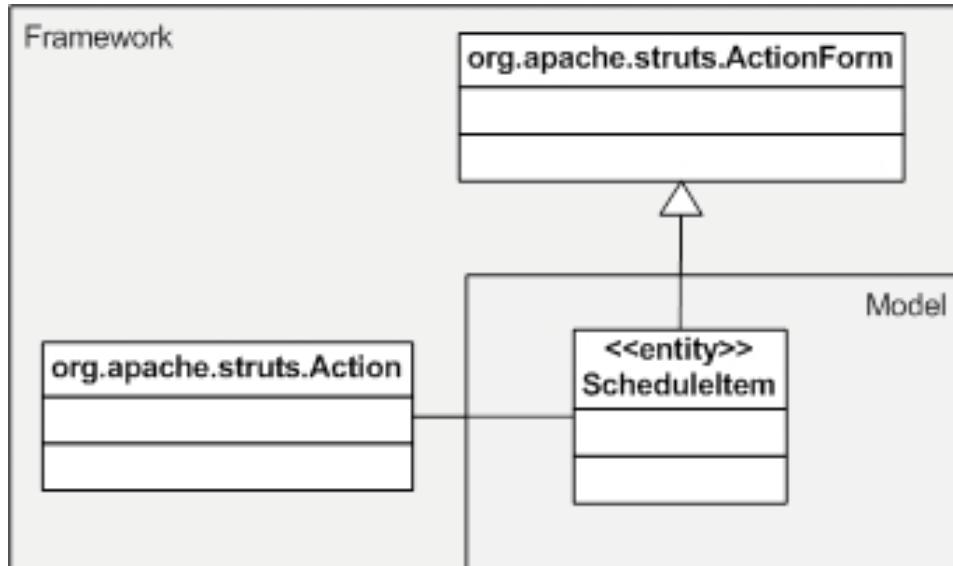

decoupling from struts

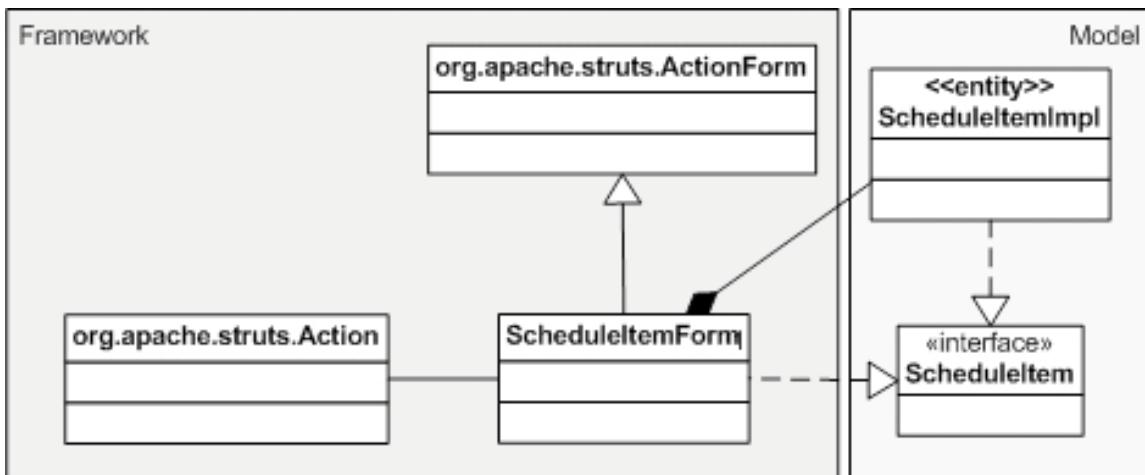

# DRY violations



copy & paste



# cpd

part of the source-code analysis tool **pmd**

configurable window of number of duplicate tokens

pre-configured with several languages

easy to add new language support

also simian (commercial)

The screenshot shows the PMD Duplicate Code Detector application window. At the top, there are fields for 'Root source directory' (set to '/Users/nealford/bin/struts-2.0.11/src/core/src/main'), 'Report duplicate chunks larger than:' (set to 75), 'Also scan subdirectories?' (checked), 'Ignore literals and identifiers?' (unchecked), and language settings ('Language: Java' and 'Extension: .java'). Below these, a table lists 'Source' files and their 'Matches' and 'Lines' of code where duplicates were found. The table includes rows for various Java files like ApplicationMap.java, Sorter.java, and PortletApplicationMap.java. To the right of the table, a large text area displays the detailed report of the found duplicates, showing the specific code snippets and their line numbers.

| Source                  | Matches | Lines |
|-------------------------|---------|-------|
| (2 separate files)      | 157     |       |
| (2 separate files)      | 71      |       |
| (2 separate files)      | 55      |       |
| (2 separate files)      | 34      |       |
| (2 separate files)      | 93      |       |
| .../ApplicationMap.java | 27      |       |
| (2 separate files)      | 33      |       |
| (2 separate files)      | 21      |       |
| (2 separate files)      | 25      |       |
| (2 separate files)      | 23      |       |
| (2 separate files)      | 30      |       |
| (2 separate files)      | 18      |       |
| (2 separate files)      | 20      |       |
| (2 separate files)      | 46      |       |
| (2 separate files)      | 21      |       |
| .../Sorter.java         | 28      |       |
| (2 separate files)      | 53      |       |
| (2 separate files)      | 22      |       |
| (2 separate files)      | 14      |       |

Found a 157 line (605 tokens) duplication in the following files:  
Starting at line 53 of /Users/nealford/bin/struts-2.0.11/src/core/src/main/java/org/apache/struts2/dispatcher/ApplicationMap.java  
Starting at line 50 of /Users/nealford/bin/struts-2.0.11/src/core/src/main/java/org/apache/struts2/portlet/PortletApplicationMap.java

```
public PortletApplicationMap(PortletContext ctx) {
    this.context = ctx;
}
/**
 * Removes all entries from the Map and removes all attributes from the
 * portlet context.
 */
public void clear() {
    entries = null;
}

Enumeration e = context.getAttributeNames();
while (e.hasMoreElements()) {
    context.removeAttribute(e.nextElement().toString());
}
}

Creates a Set of all portlet context attributes as well as context init
```

# intellij's duplication view

```
#1 lines 85 to 109 in ApplicationMap (org.apache.struts2.dispatcher)
1 entries.add(new Map.Entry() {
2     public boolean equals(Object obj) {
3         Map.Entry entry = (Map.Entry) obj;
4
5         return ((key == null) ? (entry.getKey() == null) :
6             key.equals(entry.getKey()));
7     }
8
9     public int hashCode() {
10        return ((key == null) ? 0 : key.hashCode()) ^ ((value == null) ?
11            0 : value.hashCode());
12    }
13
14    public Object getKey() {
15        return key;
16    }
17
18    public Object getValue() {
19        return value;
20    }
21
22    public Object setValue(Object obj) {
23        context.setAttribute(key.toString(), obj);
24
25        return value;
26    }
27});
```

```
#2 lines 118 to 142 in ApplicationMap (org.apache.struts2.dispatcher)
1 entries.add(new Map.Entry() {
2     public boolean equals(Object obj) {
3         Map.Entry entry = (Map.Entry) obj;
4
5         return ((key == null) ? (entry.getKey() == null) :
6             key.equals(entry.getKey()));
7     }
8
9     public int hashCode() {
10        return ((key == null) ? 0 : key.hashCode()) ^ ((value == null) ?
11            0 : value.hashCode());
12    }
13
14    public Object getKey() {
15        return key;
16    }
17
18    public Object getValue() {
19        return value;
20    }
21
22    public Object setValue(Object obj) {
23        context.setAttribute(key.toString(), obj);
24
25        return value;
26    }
27});
```

```
while (enumeration.hasMoreElements()) {
    final String key = enumeration.nextElement().toString();
    final Object value = context.getInitParameter(key);
    entries.add(new Map.Entry() {
        public boolean equals(Object obj) {
            Map.Entry entry = (Map.Entry) obj;

            return ((key == null) ?
                (entry.getKey() == null) :
                key.equals(entry.getKey())) && ((value == null) ?
                    (entry.getValue() == null) :
                    value.equals(entry.getValue()));
        }


        public int hashCode() {
            return ((key == null) ? 0 : key.hashCode()) ^ ((value == null) ? 0 : value.hashCode());
        }

        public Object getKey() {
            return key;
        }

        public Object getValue() {
            return value;
        }

        public Object setValue(Object obj) {
            context.setAttribute(key.toString(), obj);

            return value;
        }
    });
}
```

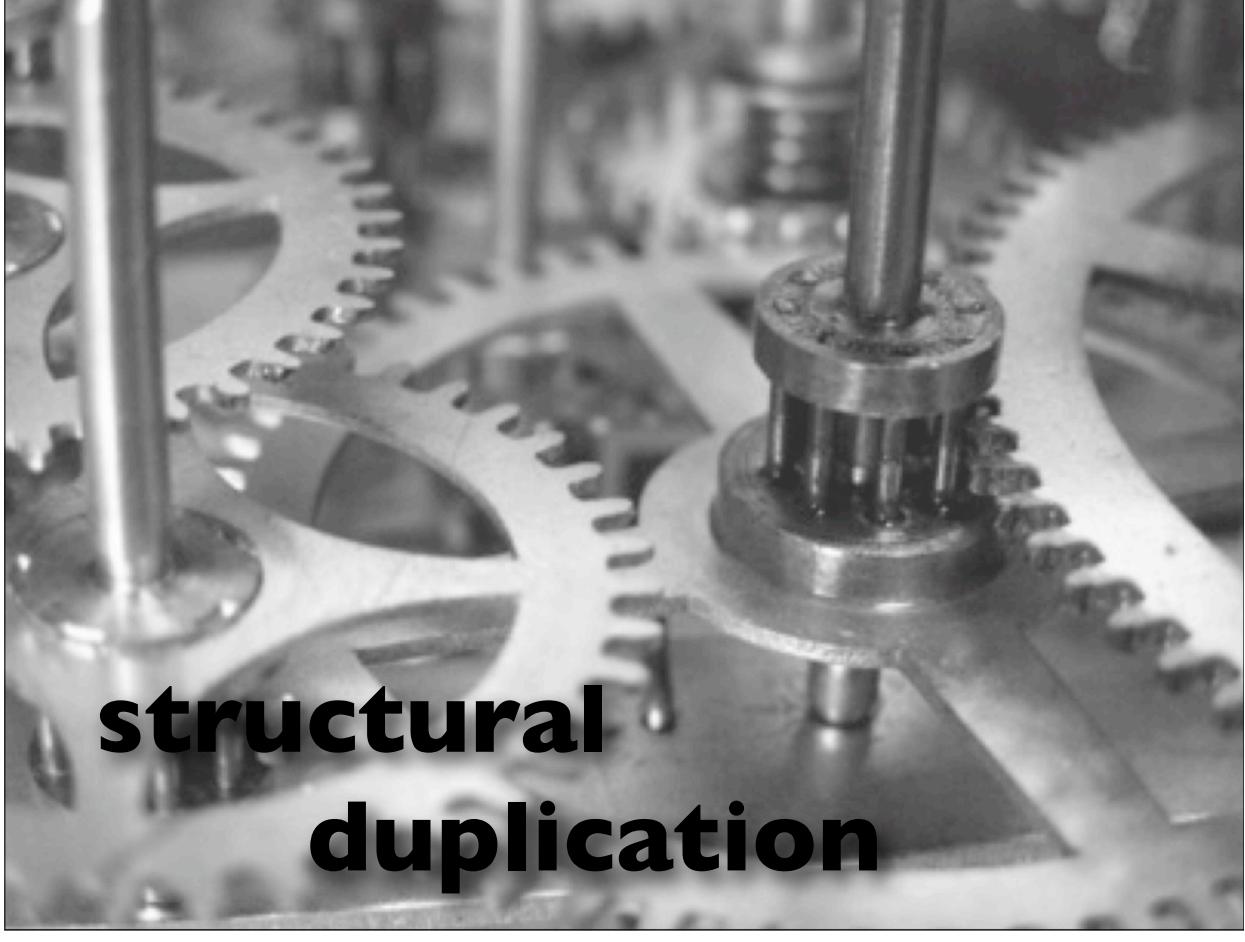

# structural duplication

given:

```
public class Employee {  
    private String name;  
    private int salary;  
    private int hireYear;  
  
    public Employee(String name, int salary, int hireYear) {  
        this.name = name;  
        this.salary = salary;  
        this.hireYear = hireYear;  
    }  
  
    public String getName() { return name; }  
    public int getSalary() { return salary; }  
    public int getHireYear() { return hireYear; }  
}
```



goal:  
sort on  
any property

## comparator mania!

```
public class EmployeeNameComparator implements Comparator<Employee> {  
    public int compare(Employee emp1, Employee emp2) {  
        return emp1.getName().compareTo(emp2.getName());  
    }  
}
```

```
public class EmployeeSalaryComparator implements Comparator<Employee> {  
    public int compare(Employee emp1, Employee emp2) {  
        return emp1.getSalary() - emp2.getSalary();  
    }  
}
```

same whitespace, different values

```

public class EmployeeSorter {

    public void sort(List<DryEmployee> employees, String criteria) {
        Collections.sort(employees, getComparatorFor(criteria));
    }

    private Method getSelectionCriteriaMethod(String methodName) {
        Method m;
        methodName = "get" + methodName.substring(0, 1).toUpperCase() +
            methodName.substring(1);
        try {
            m = DryEmployee.class.getMethod(methodName);
        } catch (NoSuchMethodException e) {
            throw new RuntimeException(e.getMessage());
        }
        return m;
    }

    public Comparator<DryEmployee> getComparatorFor(final String field) {
        return new Comparator<DryEmployee>() {
            public int compare(DryEmployee o1, DryEmployee o2) {
                Object field1, field2;
                Method method = getSelectionCriteriaMethod(field);
                try {
                    field1 = method.invoke(o1);
                    field2 = method.invoke(o2);
                } catch (Exception e) {
                    throw new RuntimeException(e);
                }
                return ((Comparable) field1).compareTo(field2);
            }
        };
    }
}

```

```

@Before public void setup() {
    _sorter = new EmployeeSorter();
    _list = new ArrayList<DryEmployee>();
    _list.add(new DryEmployee("Homer", 20000, 1975));
    _list.add(new DryEmployee("Smithers", 150000, 1980));
    _list.add(new DryEmployee("Lenny", 100000, 1982));
}

@Test public void name_comparisons() {
    _sorter.sort(_list, "name");
    assertThat(_list.get(0).getName(), is("Homer"));
    assertThat(_list.get(1).getName(), is("Lenny"));
    assertThat(_list.get(2).getName(), is("Smithers"));
}

@Test public void salary_comparisons() {
    _sorter.sort(_list, "salary");
    assertThat(_list.get(0).getSalary(), is(20000));
    assertThat(_list.get(1).getSalary(), is(100000));
    assertThat(_list.get(2).getSalary(), is(150000));
}

@Test public void hireYearComparison() {
    _sorter.sort(_list, "hireYear");
    assertThat(_list.get(0).getHireYear(), is(1975));
    assertThat(_list.get(1).getHireYear(), is(1980));
    assertThat(_list.get(2).getHireYear(), is(1982));
}

```

# refactoring tests



```
@Before public void setup() {  
    _sorter = new EmployeeSorter();  
    _list = new ArrayList<DryEmployee>();  
    _list.add(new DryEmployee("Homer", 20000, 1975));  
    _list.add(new DryEmployee("Smithers", 150000, 1980));  
    _list.add(new DryEmployee("Lenny", 100000, 1982));  
}  
  
@Test public void name_comparisons() {  
    _sorter.sort(_list, "name");  
    assertThat(_list.get(0).getName(), is("Homer"));  
    assertThat(_list.get(1).getName(), is("Lenny"));  
    assertThat(_list.get(2).getName(), is("Smithers"));  
}  
  
@Test public void salary_comparisons() {  
    _sorter.sort(_list, "salary");  
    assertThat(_list.get(0).getSalary(), is(20000));  
    assertThat(_list.get(1).getSalary(), is(100000));  
    assertThat(_list.get(2).getSalary(), is(150000));  
}  
  
@Test public void hireYearComparison() {  
    _sorter.sort(_list, "hireYear");  
    assertThat(_list.get(0).getHireYear(), is(1975));  
    assertThat(_list.get(1).getHireYear(), is(1980));  
    assertThat(_list.get(2).getHireYear(), is(1982));  
}
```

# generic tests

```
private HashMap<String, Object> expectations = new HashMap<String, Object>();

@Before public void setup() {
    _sorter = new EmployeeSorter();
    _list = new ArrayList<DryEmployee>();
    _list.add(new DryEmployee("Homer", 20000, 1975));
    _list.add(new DryEmployee("Smithers", 150000, 1980));
    _list.add(new DryEmployee("Lenny", 100000, 1982));
    expectations.put("name", new String[] {"Homer", "Lenny", "Smithers"});
    expectations.put("salary", new Integer[] {20000, 100000, 150000});
    expectations.put("hireYear", new Integer[] {1975, 1980, 1982});
}
```

```
private String[] FIELDS = new String[] {"name", "salary", "hireYear"};

@Test public void all_comparators() {
    for (String field : FIELDS) {
        _sorter.sort(_list, field);
        for (int j = 0; j < expectations.size(); j++) {
            Object[] o = (Object[]) expectations.get(field);
            try {
                Method m = DryEmployee.
                    class.
                    getDeclaredMethod("get" + methodNameFromString(field));
                for (int i = 0; i < o.length; i++)
                    assertThat(m.invoke(_list.get(i)), is(o[i]));
            } catch (Exception e) {
                fail();
            }
        }
    }
}

private static String methodNameFromString(String s) {
    return s.substring(0, 1).toUpperCase() + s.substring(1);
}
```



is this a good idea?

how far is *too* far?

reflection  
potion

don't fear powerful  
things



# choosing what to refactor




## cyclomatic complexity

measures complexity of a function

```
V(G) = e - n + 2  
V(G) = cyclomatic complexity of G  
e = # edges  
n = # of nodes
```


```
int max (int a, int b) {  
    int max = a;  
    if (a < b) {  
        max = b;  
    }  
    return max;  
}
```



```

public void doit() {
    if (c1) {
        f1();
    } else {
        f2();
    }
    if (c2) {
        f3();
    } else {
        f4();
    }
}

```

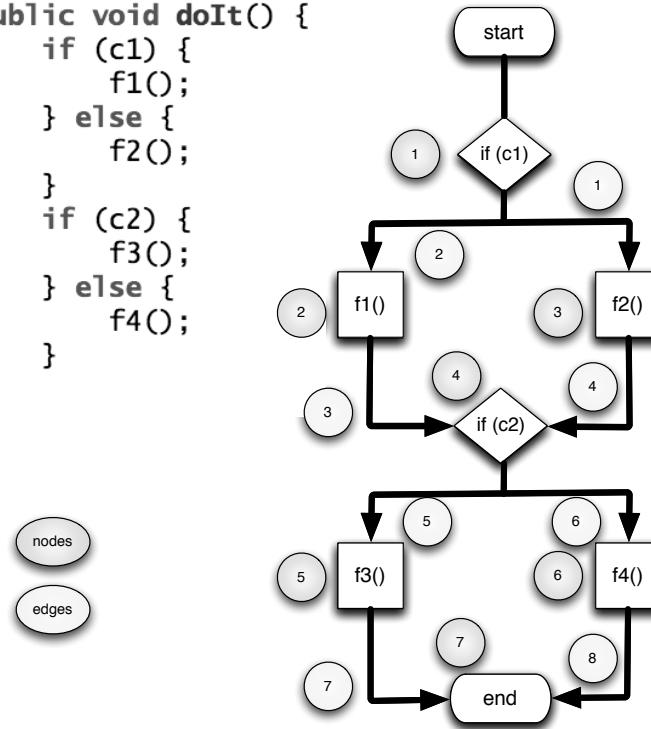

# afferent coupling

$\Sigma$  of how many classes use this class

incoming calls

determines what is the “hard, crunchy center”  
of your code base

measure with CKJM or other metrics tools

# ckjm

open source code metrics tool for java

simple to the extreme

run with command-line fu

several different output formats

includes ant & maven targets

## running ckjm

```
for i in lib/*.jar
do
    jar tf $i |
        sed -n "/^.class$/s,/^\,$i ,p"
done |
    java -jar ~/bin/ckjm-1.8/build/ckjm-1.8.jar | ./ckjm2xml >metrics.xml
```

# ckjm2xml

```
#!/usr/bin/sed -f
1i\
<?xml version="1.0" ?>\n
<ckjm>
s/^<metric><classname>/
s/ /<\classname><WMC>/
s/ /<\WMC><DIT>/
s/ /<\DIT><NOC>/
s/ /<\NOC><CBO>/
s/ /<\CBO><RFC>/
s/ /<\RFC><LCOM>/
s/ /<\LCOM><Ca>/
s/ /<\Ca><NPM>/
s/$/<\NPM><\metric>/
$a\
</ckjm>
```

```
<?xml version="1.0" ?>
<ckjm>
<metric><classname>org.apache.struts2.dispatcher.mapper.DefaultActionMapper$2$3</classname><WMC>2</WMC><DIT>1</DIT><NOC>0</NOC><CBO>7</CBO><RFC>12</RFC><LCOM>1</LCOM><Ca>1</Ca><NPM>1</NPM></metric>
<metric><classname>org.apache.struts2.views.velocity.components.BeanDirective</classname><WMC>3</WMC><DIT>0</DIT><NOC>0</NOC><CBO>4</CBO><RFC>5</RFC><LCOM>3</LCOM><Ca>0</Ca><NPM>2</NPM></metric>
<metric><classname>org.apache.struts2.util.MergeIteratorFilter</classname><WMC>6</WMC><DIT>0</DIT><NOC>0</NOC><CBO>2</CBO><RFC>16</RFC><LCOM>0</LCOM><Ca>1</Ca><NPM>0</NPM></metric>
<metric><classname>org.apache.struts2.components.template.VelocityTemplateEngine</classname><WMC>5</WMC><DIT>0</DIT><NOC>0</NOC><CBO>12</CBO><RFC>32</RFC><LCOM>6</LCOM><Ca>0</Ca><NPM>3</NPM></metric>
<metric><classname>org.apache.struts2.views.jsp.ui.AnchorTag</classname><WMC>6</WMC><DIT>0</DIT><NOC>0</NOC><CBO>4</CBO><RFC>10</RFC><LCOM>13</LCOM><Ca>0</Ca><NPM>5</NPM></metric>
<metric><classname>org.apache.struts2.views.freemarker.StrutsBeanWrapper$FriendlyMapModel$1</classname><WMC>2</WMC><DIT>1</DIT><NOC>0</NOC><CBO>5</CBO><RFC>4</RFC><LCOM>1</LCOM><Ca>1</Ca><NPM>1</NPM></metric>
<metric><classname>org.apache.struts2.views.jsp.ui.TextfieldTag</classname><WMC>7</WMC><DIT>0</DIT><NOC>2</NOC><CBO>4</CBO><RFC>13</RFC><LCOM>8</LCOM><Ca>2</Ca><NPM>6</NPM></metric>
<metric><classname>org.apache.struts2.views.freemarker.tags.FileModel</classname><WMC>6</WMC><DIT>1</DIT><NOC>0</NOC><CBO>1</CBO><RFC>11</RFC><LCOM>11</LCOM><Ca>2</Ca><NPM>6</NPM></metric>
<metric><classname>org.apache.struts2.portlet.PortletRequestMap</classname><WMC>8</WMC><DIT>2</DIT><NOC>0</NOC><CBO>3</CBO><RFC>31</RFC><LCOM>0</LCOM><Ca>0</Ca><NPM>4</NPM></metric>
<metric><classname>org.apache.struts2.portlet.servlet.PortletServletConfig</classname><WMC>6</WMC><DIT>1</DIT><NOC>0</NOC><CBO>1</CBO><RFC>12</RFC><LCOM>0</LCOM><Ca>0</Ca><NPM>6</NPM></metric>
<metric><classname>org.apache.struts2.portlet.context.PortletActionContext</classname><WMC>17</WMC><DIT>1</DIT><NOC>0</NOC><CBO>3</CBO><RFC>22</RFC><LCOM>136</LCOM><Ca>7</Ca><NPM>16</NPM></metric>
<metric><classname>org.apache.struts2.dispatcher.VelocityResult</classname><WMC>2</WMC><DIT>0</DIT><NOC>0</NOC><CBO>13</CBO><RFC>48</RFC><LCOM>39</LCOM><Ca>0</Ca><NPM>5</NPM></metric>
<metric><classname>org.apache.struts2.components.TabbedPane</classname><WMC>12</WMC><DIT>0</DIT><NOC>0</NOC><CBO>2</CBO><RFC>28</RFC><LCOM>54</LCOM><Ca>3</Ca><NPM>9</NPM></metric>
<metric><classname>org.apache.struts2.interceptor.ParameterAware</classname><WMC>1</WMC><DIT>1</DIT><NOC>0</NOC><CBO>0</CBO><RFC>1</RFC><LCOM>0</LCOM><Ca>1</Ca><NPM>1</NPM></metric>
<metric><classname>org.apache.struts2.views.velocity.components.AbstractDirective</classname><WMC>8</WMC><DIT>0</DIT><NOC>43</NOC><CBO>12</CBO><RFC>34</RFC><LCOM>28</LCOM><Ca>43</Ca><NPM>5</NPM></metric>
<metric><classname>org.apache.struts2.interceptor.CookieInterceptor</classname><WMC>7</WMC><DIT>0</DIT><NOC>0</NOC><CBO>9</CBO><RFC>30</RFC><LCOM>6</LCOM><Ca>0</Ca><NPM>4</NPM></metric>
<metric><classname>org.apache.struts2.components.table.WebTableRowIterator</classname><WMC>5</WMC><DIT>1</DIT><NOC>0</NOC><CBO>1</CBO><RFC>11</RFC><LCOM>4</LCOM><Ca>1</Ca><NPM>3</NPM></metric>
<metric><classname>org.apache.struts2.interceptor.CookiesAware</classname><WMC>4</WMC><DIT>1</DIT><NOC>0</NOC><CBO>2</CBO><RFC>19</RFC><LCOM>0</LCOM><Ca>1</Ca><NPM>4</NPM></metric>
<metric><classname>org.apache.struts2.views.xst.SimpleModelList</classname><WMC>0</WMC><DIT>0</DIT><NOC>0</NOC><CBO>0</CBO><RFC>0</RFC><LCOM>0</LCOM><Ca>0</Ca><NPM>0</NPM></metric>
```

| ...version="1.0"   | WMC | DIT | NOC | CBO | RFC | LCOM | Ca | NPM |
|--|-----|-----|-----|-----|-----|------|----|-----|
| 1 org.apache.struts2.dispatcher.mapper.DefaultActionMapper\$2\$3             | 2   | 1   | 0   | 7   | 10  | 0    | 1  | 1   |
| 2 org.apache.struts2.views.velocity.components.BeanDirective                 | 3   | 0   | 0   | 4   | 5   | 3    | 0  | 2   |
| 3 org.apache.struts2.util.MergeIteratorFilter                                | 6   | 0   | 0   | 2   | 16  | 0    | 1  | 6   |
| 4 org.apache.struts2.components.template.VelocityTemplateEngine              | 5   | 0   | 0   | 12  | 32  | 6    | 0  | 3   |
| 5 org.apache.struts2.views.jsp.ui.AnchorTag                                  | 6   | 0   | 0   | 4   | 10  | 13   | 0  | 5   |
| 6 org.apache.struts2.views.freemarker.StrutsBeanWrapper\$FriendlyMapModel\$1 | 2   | 1   | 0   | 5   | 4   | 1    | 1  | 1   |
| 7 org.apache.struts2.portlet.PortletRequestMap                               | 8   | 2   | 0   | 3   | 31  | 0    | 2  | 6   |
| 8 org.apache.struts2.views.jsp.ui.TextfieldTag                               | 7   | 0   | 2   | 4   | 13  | 11   | 2  | 6   |
| 9 org.apache.struts2.portlet.servlet.PortletServletConfig                    | 6   | 1   | 0   | 1   | 12  | 0    | 0  | 6   |
| 10 org.apache.struts2.views.freemarker.tags.FileModel                        | 2   | 0   | 0   | 4   | 4   | 1    | 1  | 1   |
| 11 org.apache.struts2.portlet.context.PortletActionContext                   | 17  | 1   | 0   | 3   | 22  | 136  | 7  | 16  |
| 12 org.apache.struts2.dispatcher.VelocityResult                              | 10  | 0   | 0   | 13  | 40  | 39   | 0  | 5   |
| 13 org.apache.struts2.components.TabbedPane                                  | 12  | 0   | 0   | 2   | 20  | 54   | 3  | 9   |
| 14 org.apache.struts2.interceptor.ParameterAware                             | 1   | 1   | 0   | 0   | 1   | 0    | 1  | 1   |
| 15 org.apache.struts2.views.velocity.components.AbstractDirective            | 8   | 0   | 43  | 12  | 34  | 28   | 43 | 5   |
| 16 org.apache.struts2.interceptor.CookieInterceptor                          | 7   | 0   | 0   | 9   | 30  | 0    | 0  | 4   |
| 17 org.apache.struts2.interceptor.ProfilingActivationInterceptor             | 5   | 0   | 0   | 4   | 14  | 0    | 0  | 5   |
| 18 org.apache.struts2.components.table.WebTableRowIterator                   | 5   | 1   | 0   | 1   | 11  | 4    | 1  | 3   |

# struts 2.x

| classname  | WMC | Ca  |
|--|-----|-----|
| org.apache.struts2.components.Component                        | 28  | 177 |
| org.apache.struts2.views.freemarker.tags.TagModel              | 7   | 47  |
| org.apache.struts2.views.velocity.components.AbstractDirective | 8   | 43  |
| org.apache.struts2.StrutsException                             | 7   | 23  |
| org.apache.struts2.components.UIBean                           | 53  | 22  |
| org.apache.struts2.dispatcher.mapper.ActionMapping             | 13  | 20  |
| org.apache.struts2.views.jsp.ComponentTagSupport               | 6   | 19  |
| org.apache.struts2.dispatcher.Dispatcher                       | 37  | 19  |
| org.apache.struts2.views.jsp.ui.AbstractUITag                  | 34  | 18  |
| org.apache.struts2.views.xslt.AdapterFactory                   | 9   | 16  |
| org.apache.struts2.views.xslt.AdapterNode                      | 10  | 15  |
| org.apache.struts2.ServletActionContext                        | 11  | 15  |
| org.apache.struts2.components.table.WebTable                   | 33  | 12  |
| org.apache.struts2.dispatcher.mapper.ActionMapper              | 2   | 11  |
| org.apache.struts2.components.template.TemplateEngine          | 2   | 10  |
| org.apache.struts2.components.template.Template                | 7   | 10  |
| org.apache.struts2.dispatcher.StrutsResultSupport              | 13  | 10  |
| org.apache.struts2.components.Form                             | 24  | 10  |
| org.apache.struts2.components.ListUIBean                       | 8   | 9   |
| org.apache.struts2.util.MakeIterator                           | 3   | 8   |
| org.apache.struts2.StrutsStatics                               | 0   | 7   |

## UIBean evaluateParams()

```
public void evaluateParams() {
    addParameter("templateDir", getTemplateDir());
    addParameter("theme", getTheme());

    String name = null;

    if (this.key != null) {
        if(this.name == null) {
            this.name = key;
        }

        if(this.label == null) {
            this.label = "%{getText('"+ key +"')}";
        }
    }

    if (this.name != null) {
        name = findString(this.name);
        addParameter("name", name);
    }

    if (label != null) {
        addParameter("label", findString(label));
    }
}
```

# identifying idiomatic patterns

lots of accidental complexity around  
`evaluateParameters()`


what is the purpose of this code?

what would make it cleaner?

move to a factory or strategy design pattern?

idiomatic patterns implemented via formal  
design patterns

## intersection of idiomatic & design patterns

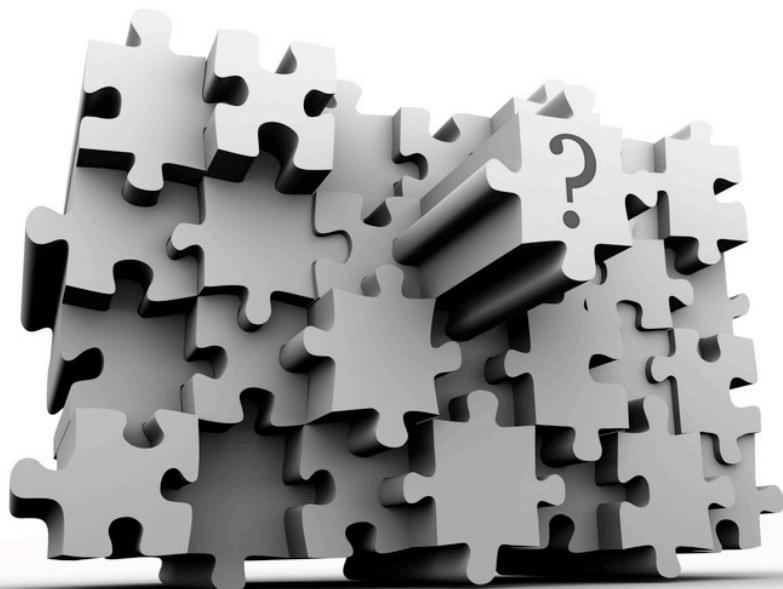

# unit of work

```
public void addOrderFrom(ShoppingCart cart, String userName,
                        Order order) throws Exception {
    setupDataInfrastructure();
    try {
        add(order, userKeyBasedOn(userName));
        addLineItemsFrom(cart, order.getOrderKey());
        completeTransaction();
    } catch (Exception condition) {
        rollbackTransaction();
        throw condition;
    } finally {
        cleanUp();
    }
}
```

# command design pattern

```
public void wrapInTransaction(Command c) throws Exception {
    setupDataInfrastructure();
    try {
        c.execute();
        completeTransaction();
    } catch (Exception condition) {
        rollbackTransaction();
        throw condition;
    } finally {
        cleanUp();
    }
}


public void addOrderFrom(final ShoppingCart cart, final String userName,
                        final Order order) throws Exception {
    wrapInTransaction(new Command() {
        public void execute() {
            add(order, userKeyBasedOn(userName));
            addLineItemsFrom(cart, order.getOrderKey());
        }
    });
}
```

# *unit of work*

common idiomatic pattern

implemented via the command design pattern

use aspects

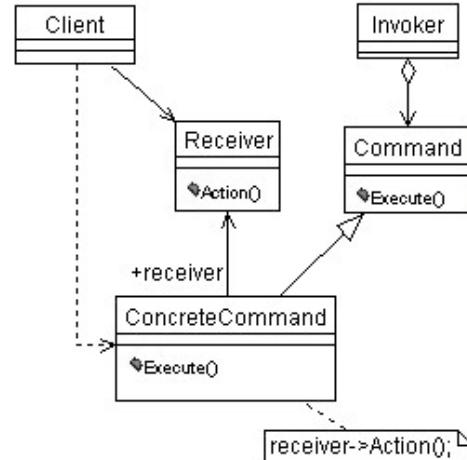

# world's worst framework

every single project depends on it




strange configuration

hard to test


no refactoring support

outlives every project

# database refactoring

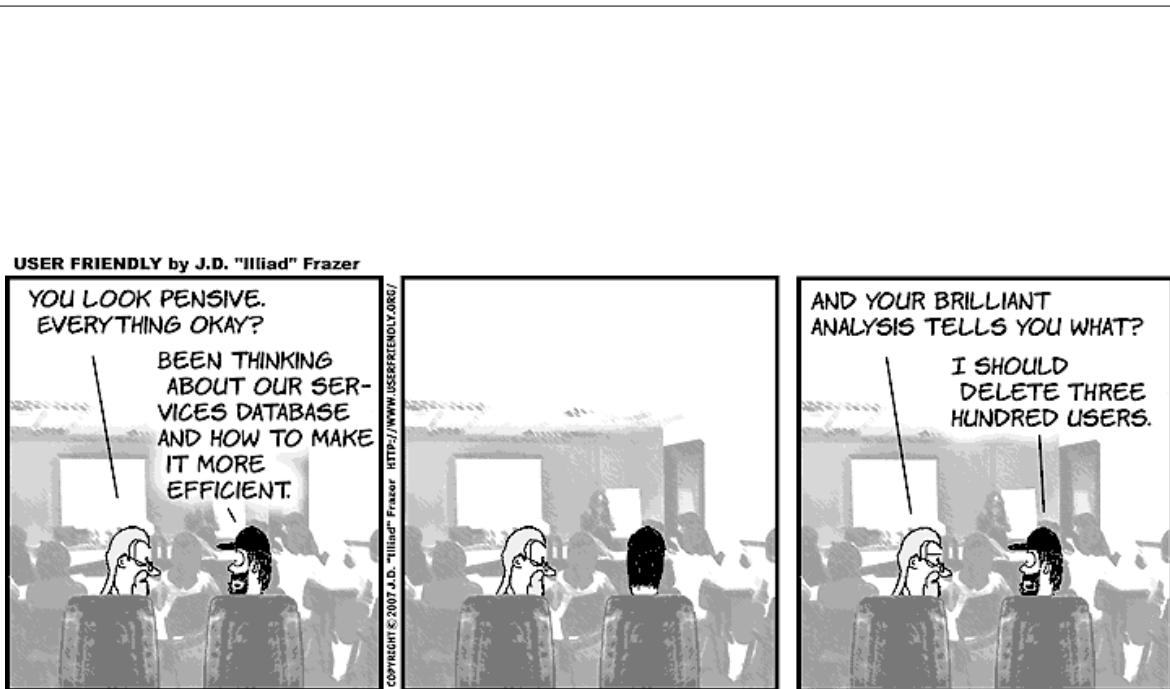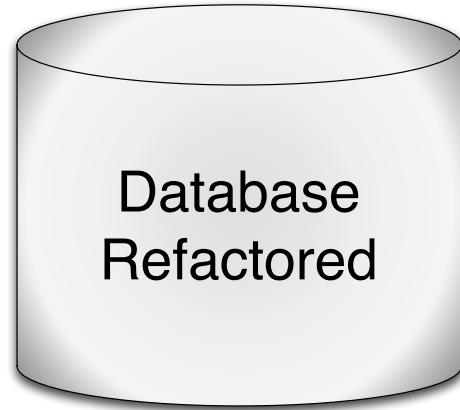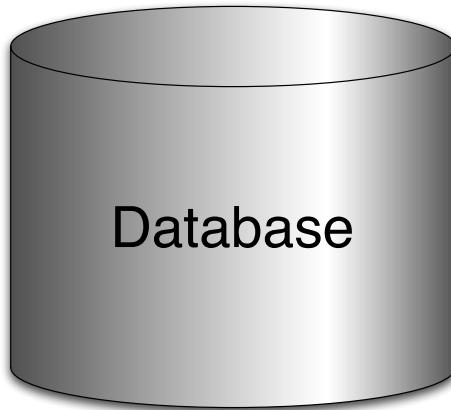

<http://ars.userfriendly.org/cartoons/?id=20090304>

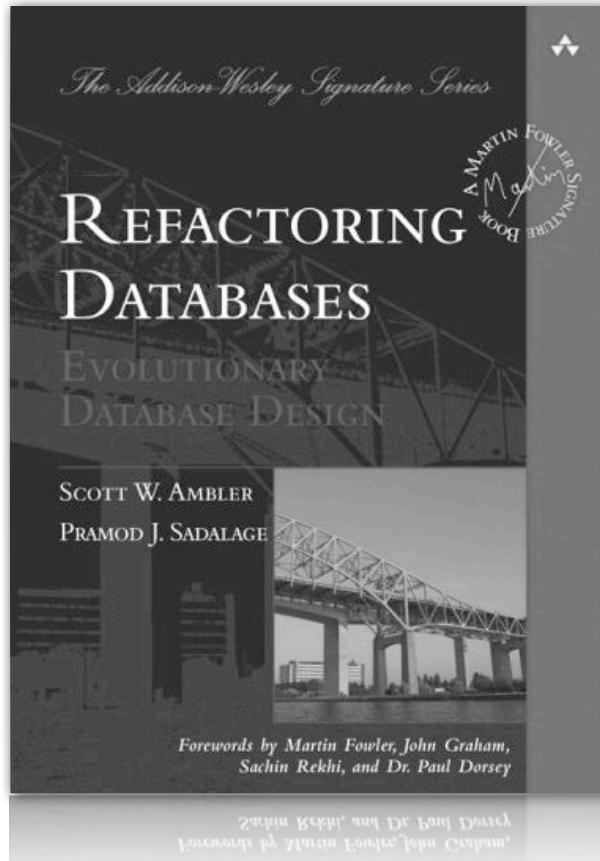

## process

1. verify that a database refactoring is appropriate
2. choose the most appropriate database refactoring
3. deprecate the original database schema
4. test before, during, and after
5. modify the database schema

# process

6. migrate the source data
7. modify external access program(s)
8. run regression tests
9. version control your work
10. announce the refactoring

# dbDeploy

migrations for the rest of the world

open-source tool to help you manage database changes

version database schema changes along with code

builds delta scripts for you

# using dbDeploy

someone (dba) creates a sql baseline

developers create delta scripts for each change

dbDeploy compares delta with patch table

generates change scripts


invoked from ant's sql task

## example


move column refactoring



# transition period

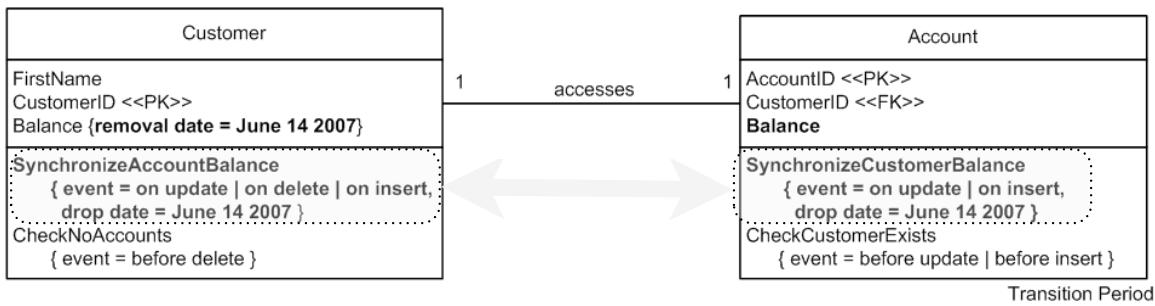

# resulting schema

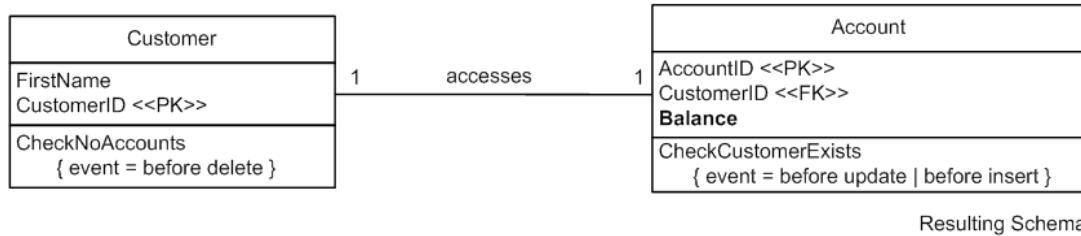

# strategies

smaller changes are easier to apply

uniquely identify individual refactorings

implement a large change by many smaller ones

prefer triggers over views or batch synchronization

choose a sufficient deprecation period

# strategies

encapsulate data access

be able to easily set up a database environment


don't duplicate SQL

put database assets under change control

beware of politics



# build files

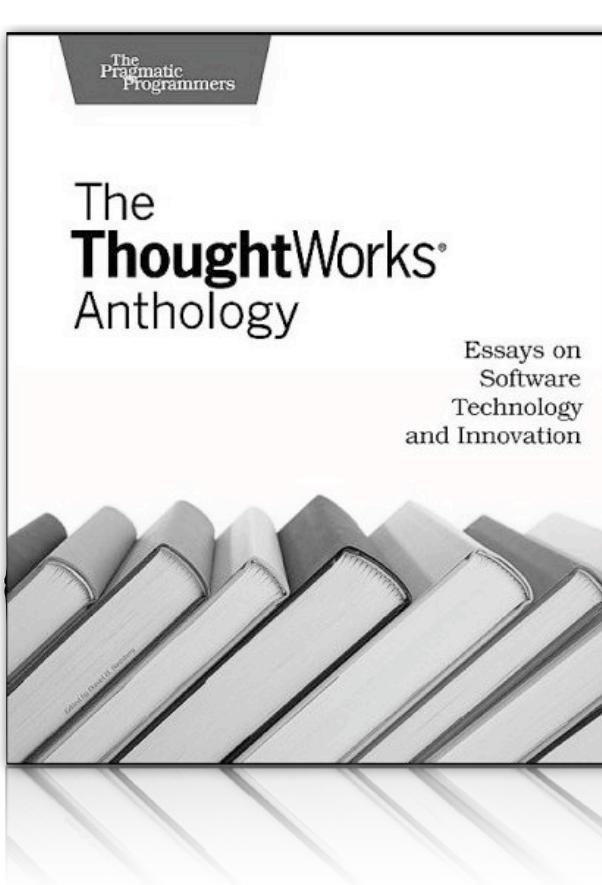

*When we... construct and maintain build files, all those code perfectionist ideals seem to disappear.*  
» Paul Glover

## Chapter 11

# Refactoring Ant Build Files

by Julian Simpson, Build Architect

### 11.1 Introduction

A bad software build system seems to actively resist change. The most innocent change can stop your colleagues from being able to work. Such a reputation won't encourage people to try to improve a build if it eventually gets the job done. This essay will show you how to help ease some of that pain and allow change to take place by describing some short refactorings to apply to your Ant build file. Each refactoring is expressed as a "before" and "after" code example (separated by an arrow to show the direction of transformation) with an explanation. You will be left with some concrete tools that you can apply to your Ant build to make it smaller, more legible, and easier to modify.

#### What Is Refactoring? And What Is Ant?

*Refactoring* is the art of making small changes to a system to improve the readability, clarity, or ease of maintenance of a codebase. Refactoring doesn't change functionality; it's used to make the internals of a codebase easier to work on.

Ant is the build tool of choice for many Java-based software projects. It was written at a time when XML seemed to be the answer to any problem in software development. Hence, a project's dependencies are described in an XML file, typically called `build.xml`. This is the Java equivalent of a Makefile. Ant has been very successful as an open source project, but as projects grow, flex, and become more complicated, it generally becomes hard to maintain.

## *extract macrodef*

Take small blocks of ant code, and pull out into macrodef with appropriate name.

```
<target name="build_and_war_foo.war" >
  <javac srcdir="src/foo" destdir="classes/foo" />
  <copy todir="${classes.dir}" >
    <filterset>
      <filter token="ENV" value="${environment}" />
    </filterset>
    <fileset dir="config" />
  </copy>
  <war destfile="foo.war" >
    <fileset dir="${classes.dir}" />
  </war>
  <move todir="archives" file="foo.war" />
</target>
```

## **macrodef**

**container task**

**wraps sequential or parallel tasks**

**invokable from anywhere in the build file**

**with attributes**

**attributes can have default values**

```
<macrodef name="build_code" >
    <attribute name="component" />
    <sequential>
        <javac srcdir="src/@{component}" destdir="classes/@{component}" />
        <copy todir="${classes.dir}" >
            <filterset>
                <filter token="ENV" value="${environment}" />
            </filterset>
            <fileset dir="config" />
        </copy>
    </sequential>
</macrodef>
<macrodef name="make_war" >
    <attribute name="component" />
    <sequential>
        <war destfile="@{component}.war" >
            <fileset dir="${classes.dir}" />
        </war>
        <move todir="archives" file="@{component}.war" />
    </sequential>
</macrodef>
<target name="foo.war" >
    <build_code component="foo" />
    <make_war component="foo" />
</target>
```

## *introduce declaration*

use ant's built-in declarative logic to replace if conditions, which can be hard to debug.

```
<target name="deploy" >
  <if>
    <equals arg1="${j2ee.server}" arg2="was" />
    <then>
      <antcall target="was_deploy" />
    </then>
    <else>
      <antcall target="weblogic_deploy" />
    </else>
  </if>
</target>
```

I'm never going to  
stop throwing up!



```
<property name="j2ee.server" value="was" />
<import file="${j2ee.server}.build.xml" />
<!-- there is now a an appropriate target named
deploy depending on the version of the app server --&gt;</pre>
```

# *move target to wrapper build file*

pull continuous integration targets out of the developer build file; provide some indirection.

# separating concerns

mixed concerns obstruct refactoring

logically separate build and continuous integration logic

before:

```
<target name="build" >
    <!-- developer build-->
</target>
<target name="functest" >
    <!-- functional tests-->
</target>
<target name="cruise" depends="update,build,tag" />
<target name="functional_cruise" depends="update,build,functest,tag" />
```

```

<target name="build" >
    <!-- developer build-->
</target>
<target name="functest" >
    <!-- functional tests-->
</target>

<project name="cruise" default="tag" >
    <target name="tag" depends="build" >
        <!-- code to tag the files you have checked out -->
    </target>
    <target name="build" depends="update" >
        <ant buildfile="build.xml" />
    </target>
    <target name="update" >
        <!-- code to update from your scm system-->
    </target>
</project>
<!-- END ccbuild -->
<project default="update" basedir="."
         xmlns:my="antlib:com.thoughtworks.monkeybook" >
    <target name="update" depends="build" >
        <my:svn_up/>
    </target>
</project>
<!-- END antlibccbuild -->

```

*developer  
concerns*

*build  
concerns*

## *enforce internal target*

make the first character of internal target  
 names a hyphen so they cannot be called from  
 the command line

# Ant encapsulation

no scoping for ant tasks...

...so make your own via conventions

```
<target name="-init" >  
  <mkdir dir="build" />  
</target>
```

## lots of bad habits

naming

treating build files like bash

scoping

methods

reuse



***everything in your  
infrastructure matters***

**ThoughtWorks**

?'s

**please fill out the session evaluations  
samples at [github.com/nealford](https://github.com/nealford)**



This work is licensed under the Creative Commons  
Attribution-Share Alike 3.0 License.

<http://creativecommons.org/licenses/by-sa/3.0/us/>

NEAL FORD software architect / meme wrangler

**ThoughtWorks**

nford@thoughtworks.com  
3003 Summit Boulevard, Atlanta, GA 30319  
www.nealford.com  
www.thoughtworks.com  
memeagora.blogspot.com

N