

Correcting Methylation Calls in Low-Mappability Regions

Caiden M. Kumar, Ariel Erijman, Bradley W. Langhorst

July 12, 2021

Abstract

DNA methylation is an important component in vital biological functions such as embryonic development, carcinogenesis, and heritable regulation. Accurate methods to assess genomic methylation status are crucial to its effective use in many scenarios, especially in the detection and diagnosis of disease. Methylation aligners, such as Bismark and bwa-meth, frequently assign MapQ values to reads which are significantly higher than can be supported by the uniqueness of the region they are mapped to. These incorrectly high MapQs result in inappropriate methylation calling in repetitive regions. We observe reads that should map to separate locations (possibly having different methylation states) actually end up mapping to the same locus, causing apparent mixed methylation at such loci. Methylation calling can be improved by using Bismap mappability data to filter out insufficiently unique reads. Simply filtering out Cs in insufficiently unique regions is not adequate as it is prone to overfiltering Cs in small mappability dips. These Cs can in fact often be called using reads anchored in a nearby mappable region. We have created a patch for the MethylDackel methylation caller to perform read-based filtering. Read-based filtering resolves some of the apparent mixed methylation to either 0% or 100% methylation. We examined methylation calls with and without read-based filtering in or near the 7830 <check this number> genes containing ClinVar variants in a methylation sequencing data set from the NA12878 cell line and in tumor samples. Examining low mappability Cs in the NA12878 data set revealed 1405 mixed methylation Cs were corrected to 0% methylation, and 2577 mixed methylation Cs were corrected to 100% methylation.

Introduction

As DNA methylation status can have a significant biological function [23], it is important that there be an accurate way of calling methylation on a genome. Although there are multiple varieties of DNA methylation, a significant type is methylation of cytosine to 5-methylcytosine [5]. Data on DNA cytosine methylation state can be gathered using a methylation sequencing technique

(see Figure 1), for example bisulfite sequencing [6]. In bisulfite sequencing, unmethylated cytosines are deaminated to uracil by the addition of sodium bisulfite. 5-methylcytosines are not affected. Since uracil sequences as thymine and 5-methylcytosine sequences as cytosine, positions of unmethylated Cs in a reference sequence can be identified by C->T transitions[6].

It is also possible to use an enzymatic method, EM-seq, employing TET2 to oxidize 5-methylcytosine and an APOBEC enzyme to deaminate unmodified cytosines to uracil. While sodium bisulfite treatment produces other DNA damage, this enzymatic method deaminates with more precision <add citation>.

Whichever method is used to deaminate cytosines, sequence data is typically aligned to a reference genome using a methylation-aware aligner [9], which is specifically designed to handle the C->T transitions in methylation sequencing data when aligning the reads to a reference. Once aligned, the data can be passed through a methylation caller such as MethylDackel [22] or bismark_methylation_extractor [16], which will use the resulting reads to determine the methylation status of a particular cytosine (see Figure 2). The resulting data shows the methylation status of each cytosine in the genome and can therefore be used to find and study biologically significant DNA methylation sites.

A read must be unambiguously placed if it is to provide information about a specific locus. Reads that equally match more than one area of the reference genome should not be used to assess methylation of any given C. To avoid calling Cs using reads derived from multiple genomic loci, methylation aligners (and read aligners in general) assign a MapQ value to each read alignment (see Figure 2). According to the SAM specification [10], MapQ is defined as: “ $-10 \log_{10} \Pr\{\text{mapping position is wrong}\}$, rounded to the nearest integer”. MapQ indicates how uniquely placed a read alignment is, that is, in how many other places could the read align to the reference. A low MapQ means that the read may align in many places throughout the genome (for instance, a read of centromeric satellite DNA would likely have a very low MapQ). A high MapQ indicates that the read likely aligns where it is placed and nowhere else in the genome.

A methylation caller can use accurate MapQ values to filter out reads with multiple placements in the genome, allowing the resulting methylation calls to accurately reflect their specific loci.

Results

While evaluating the methylation aligner bwa-meth [20], we observed a significant number of reads with unexpectedly high MapQ values in repetitive regions (e.g. centromeres). After observing these high MapQ reads in the centromere and larger repetitive regions, we investigated to see if smaller regions might also be too repetitive to support the high aligner MapQ estimates observed. We identified repetitive regions using data from Bismap [14], a tool that counts the number of occurrences of every single K-mer of a particular length (in this case,

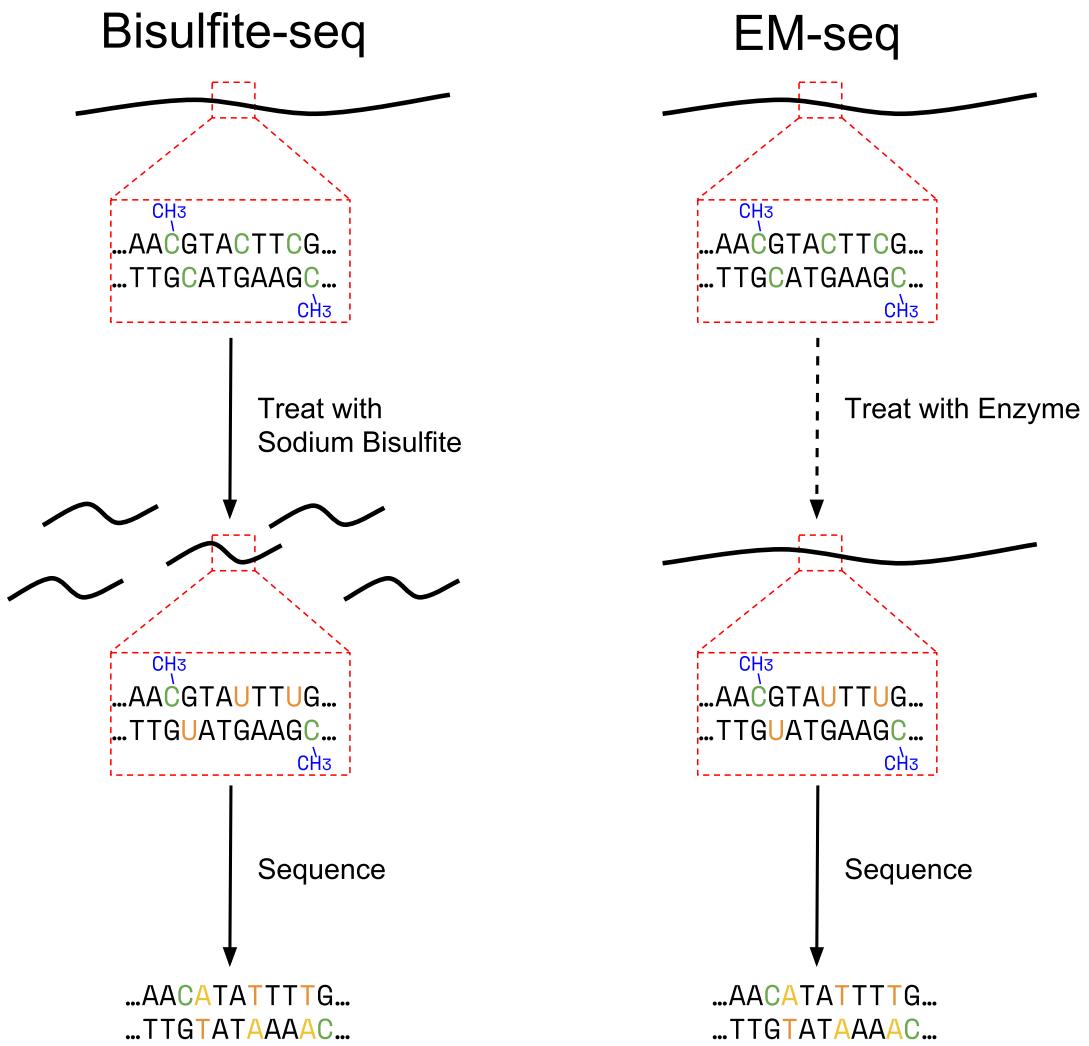


Figure 1: Overview of Methylation Sequencing Methods. <todo: Treat with Enzyme -> Tet2-> APOBEC

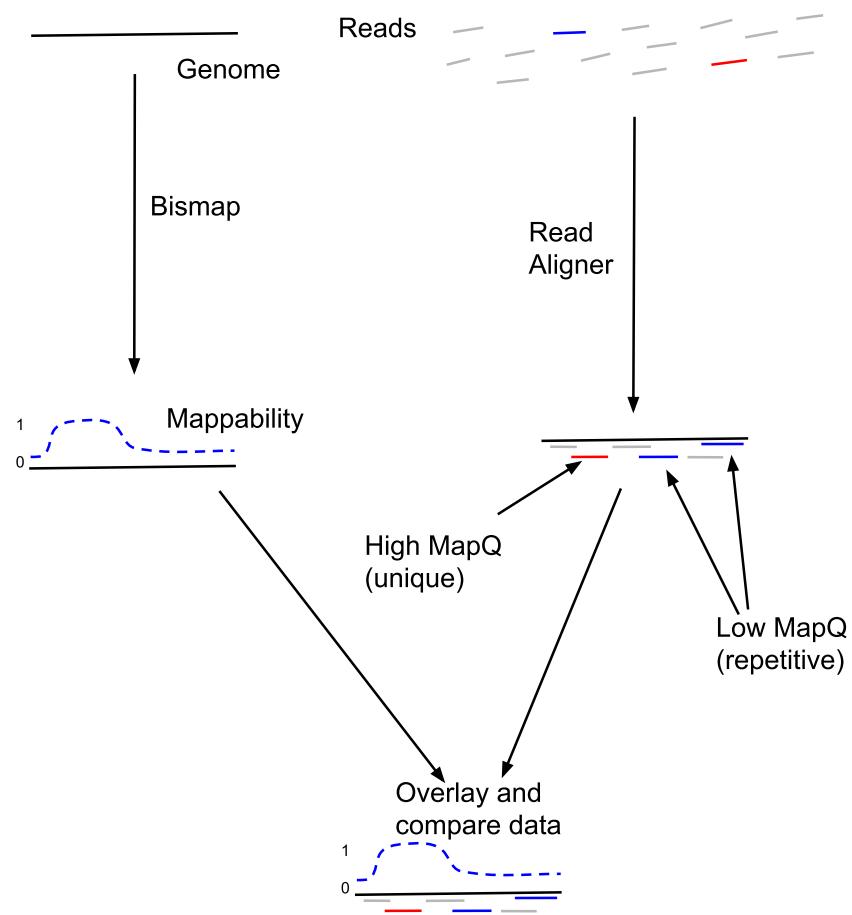


Figure 2: Experimental Overview

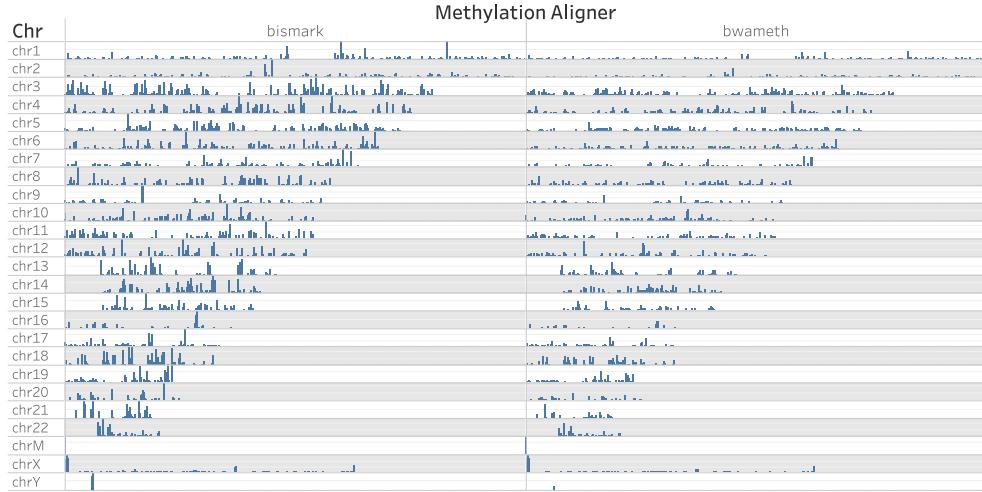


Figure 3: Cs called in low mappability regions after MapQ filtering are represented across all chromosomes...

$k=100$) in the genome to create a mappability score (ranging from 0 to 1 in increments of 0.01) for every base in the GRCh38 reference. <bases this on assumption that each locus is either 0 or 100%> Bismap takes the effect of C->T conversion into account and therefore produces data which is applicable in the context of methylation sequencing. Reads entirely contained within a region of low mappability should not have high MapQ values due to their repetitiveness, however we observed many high-MapQ reads in regions with very low or zero Bismap mappability (see Figure 4).

While low MapQ can indicate repetitiveness, even stringent MapQ thresholds cannot reliably select reads for safe methylation calling in regions containing repetitive DNA. We considered excluding methylation calls on Cs found in low-mappability regions (e.g. using bedtools), but rejected this approach because it is prone to both over- and underfiltering. Cs in short, unique regions would be kept (underfiltered) even if the surrounding DNA is repetitive (see Figure 5). However, this situation was not commonly observed. Overfiltering of Cs in short repetitive regions is a larger problem though. In this scenario, a C located in a small dip in mappability would be eliminated (overfiltered) despite coverage from read pairs anchored in nearby unique regions (see Figure 7). In practice, underfiltering is rare ($x\%$ of Cs in GRCh38) but overfiltering is much more common ($y\%$ of Cs in GRCh38) <need to fill in data here> (see Figure 6). In cases where reads from multiple low-mappability regions are placed onto one region (creating a coverage spike), filtering by coverage could possibly also remove the problematic region, but in cases where reads are simply mixed among multiple low-mappability regions (not creating a coverage spike), coverage filtering would not be effective at removing the affected regions.

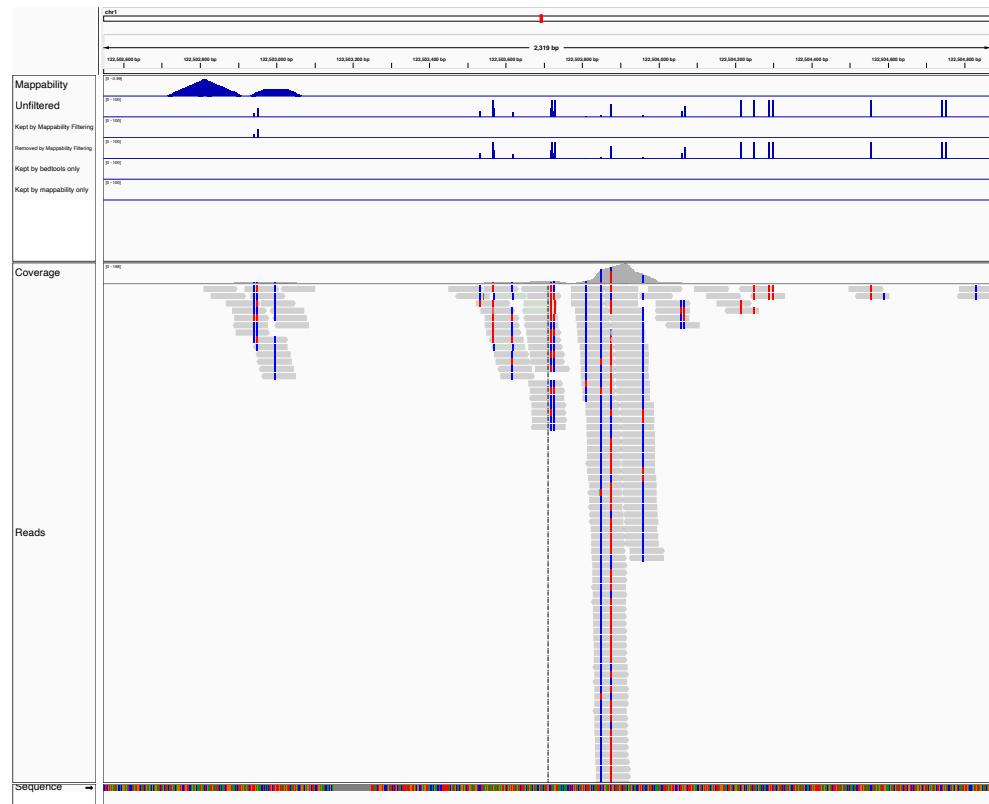


Figure 4: MapQ filtering does not remove all poorly mapped reads.

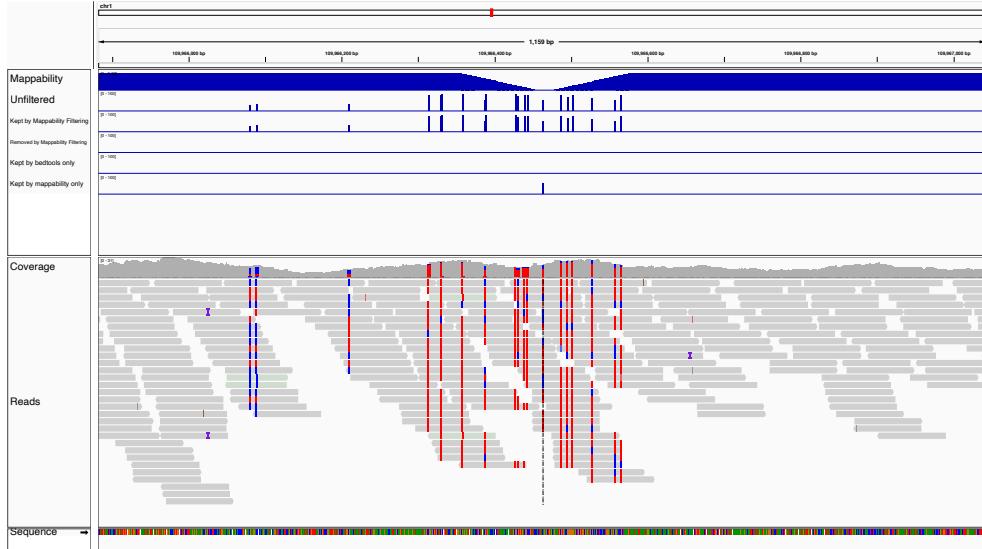


Figure 5: An example of a C incorrectly discarded by coordinate filtering.

To reliably filter out only problematic read pairs (those where both mates are placed in low mappability regions) we modified the MethylDackel methylation caller to accept a bigWig file of low-mappability regions to exclude from analysis. This alignment filtering approach precisely eliminates only those reads in repetitive regions and does not incur a significant cost in terms of execution speed (10:14 min with the patch 9:55 min without, when run with 20 threads on the GRCh38 reference genome). (see computational methods for details)

To focus on the incorrect alignments and methylation calls that have biological and medical significance, we examined methylation calls in GENCODE genes [11] that contain variants listed in the ClinVar [17] database of disease-associated variants. Using our alignment filtering approach we successfully avoided calling 15,539 <update this number after re-run> Cs in these important regions in a 50ng EM-seq sample which have insufficient mappability to support methylation calling. Briefly, to determine that we avoided methylation calling in a region that has insufficient mappability, we intersected read alignments and MapQ data with Bismap low mappability regions, counting Cs in regions where the MapQ is higher than should be possible given the mappability (see Figure 2). <is this how we did it? or did we compare filtered/unfiltered?>

For comparison, we also examined the Bismark methylation aligner [16] in the same manner. We observed that compared to bwa-meth, Bismark produced more high MapQ reads in repetitive regions (see Figure 3). In addition, Bismark and bwa-meth use different systems to define values for MapQ. Bismark (as a result of using Bowtie2 for alignment) reports MapQ based on number of reference mismatches, producing values between 0 and 42 [1, 13]. Bwa-meth (using BWA-MEM for alignments) follows the SAM specification in estimating

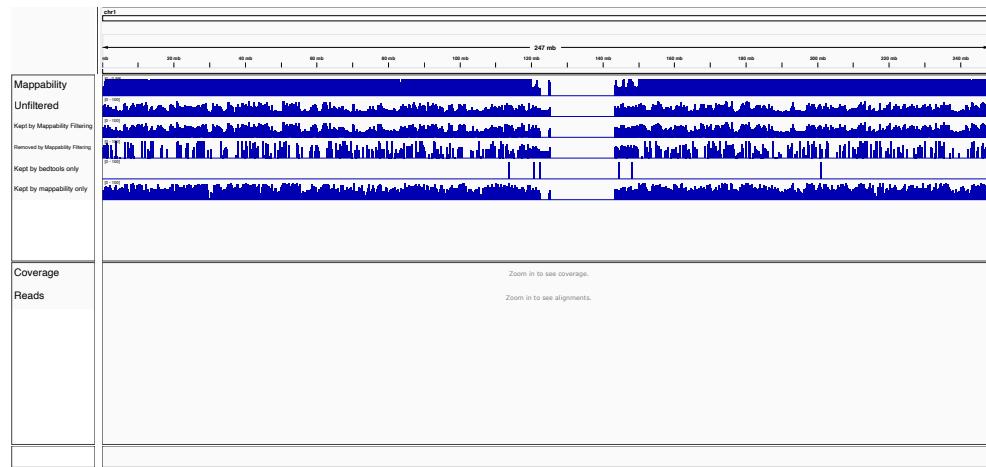


Figure 6: <I think we need to be more explicit about what is being plotted here, move up>An overview of the occurrences of these scenarios in GRCh38 chromosome 1.

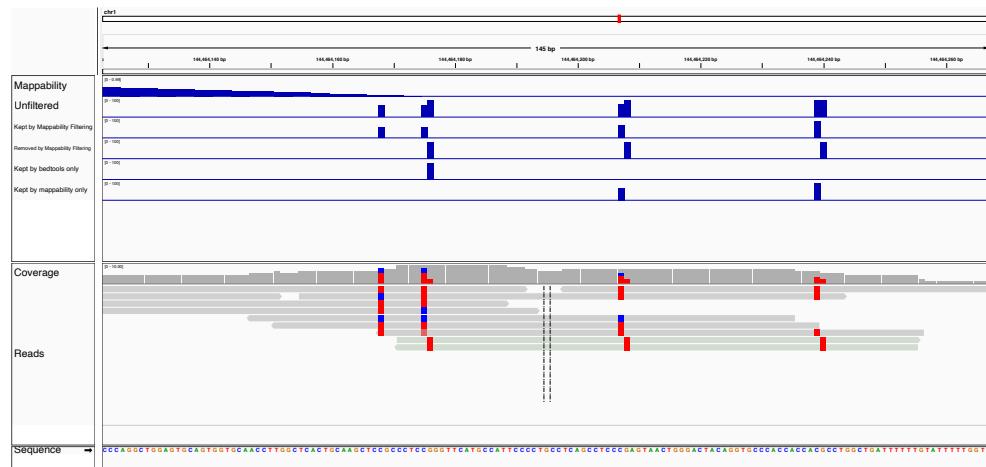


Figure 7: <needs an expanded explanation>An example of a C incorrectly kept by coordinate filtering.

probabilities in the MapQ field.

todo: filtering effect em-seq vs wgbs (fig) for bwa-meth

todo: filtering effect em-seq-vs wgbs for bismark (this is the data I'm working on)

todo: # cs affected (worst) bismark vs filtered vs bwa-meth vs filtered (best) (fig?) (I can get this from the emseq/wgbs data, it's a simple bedtools operation)

todo: group Cs by magnitude of change in methylation post filtering (fig, heatmap?) (best done by comparing both %methyl and read count, maybe we should discuss how to layout this figure though)

todo: effect on ClinVar

todo: examples of specific effects in ClinVar (I have 2 of these from my talk)

todo: find/examine relevant human (GEO?) dataset (maybe, depends on time/progress) (sequencing, not chip) (ideally, clinically relevant EM-seq)

todo: T2T data (repeat analysis on this and compare effect)

Materials and Methods

DNA Methylation Sequencing

Materials

Libraries were prepared from 10, 50, and 200 ng of genomic DNA from the NA12878 cell line (Coriel). This input was supplemented with a small amount of fully-methylated Xp-12 DNA (isolated from Xp12 phage following the procedure in Y. J. Lee, P. R. Weigle, Detection of modified bases in bacteriophage genomic DNA. Methods Mol. Biol. 2198, 53-66 (2021).) <is there a specific source for this, e.g. a company and/or product name <https://www.pnas.org/content/118/26/e2026742118.full#ref-35?>>, lambda phage DNA (NEB #N3011), and a pUC19 plasmid (NEB #N3041) treated with M.SssI CpG Methyltransferase (NEB #M0226).

Whole Genome Bisulfite Libraries

Libraries were prepared using the Ultra II DNA library prep kit (NEB E7645) before being Bisulfite converted according to <protocol>.

EM-seq Libraries

<anything about the EM-seq samples?>

Sequencing

Libraries were pooled and sequenced with diverse libraries (~10%) on 2 flow cells of an Illumina Novaseq 6000 [12] using the S2 chemistry. We acquired 1.55 billion 99 bp paired-end reads for the EM-seq method and 1.60 billion paired-end reads for the Bisulfite converted libraries <get this from samtools stats on the bams what mass is this for? need counts for all masses unless they're identical>.

Computational Methods

The following data and tools were used for the analysis:

The GRCh38.p11 analysis set (hereafter referred to as “GRCh38”) supplemented with phage T4, phage lambda, phage Xp12, and pUC19 contigs was used throughout [7]. A VCF file of disease-associated variant sites was downloaded from ClinVar (see supplemental data for file date) and a GFF file of the GENCODE v31 gene annotations were used. The mappability data was the 100bp multi-read bigWig file downloaded from Bismap (see supplemental materials for link). A detailed diagram of the analysis pipeline is found in Figures 9 and 10. Tools used include bedtools [21], samtools [18], GNU awk, MethylDackel, bigWigToBedGraph [15], BEDOPS [19], GNU sort, GNU head, bwa-meth, and Bismark. GNU sort and head are required since some of the functionality needed (specifically, the ability to parallelize sorting and the ability to use a negative value with the -n option for head to count lines from the end of the file) is not present in BSD sort and head.

The sequencing reads were aligned using the bwa-meth aligner using default options. Methylation calling was performed on the resulting BAMs using MethylDackel v0.5.2. MethylDackel uses a default value of 10 as a minimum MapQ which should include mostly single locus reads, however inaccurate MapQs can lead to reads being incorrectly included in methylation calling. In order to eliminate reads in low-mappability regions, a patch was created for MethylDackel which allows it to take as an input a bigWig file which is then used to filter out read pairs (this patch currently only supports paired-end reads) where neither mate intersects a high-mappability region. The patch allows for user configuration of the low mappability threshold and the number of bases which must be equal to or above that threshold in order for the read pair to be kept (the defaults are a low mappability threshold of 0.01 and to require 15 bases that are greater than or equal to that threshold in a single read). The filtering algorithm has been optimized both by loading the mappability data into memory before calling, and through the use of a custom run-length compressed binary file format that we here term BBM (Binary BisMap). This format can store the mappability data for the hg38/GRCh38 human genome in 143 MB, compared to 1.11 GB when stored as a bigWig, giving a compression ratio for this dataset of 7.78:1.

The ClinVar VCF and GENCODE GFF were combined using bedtools and BEDOPS into a single BED file listing all GENCODE annotation regions that overlap one or more ClinVar variants (these regions will be referred to as “ClinVar regions”), which will be called the “ClinVar regions BED”. The Bismap bedGraph (which, as is standard for bedGraph files, did not contain zeroes) and an FAI index of the GRCh38 reference genome FASTA file were processed with bedtools, awk, and GNU sort to obtain a bedGraph containing all mappability data, including zeroes. This file will be referred to as the “Bismap complete bedGraph”. It was then combined with the ClinVar regions BED using bedtools map to create a file containing the minimum and mean mappability for each gene with a ClinVar variant.

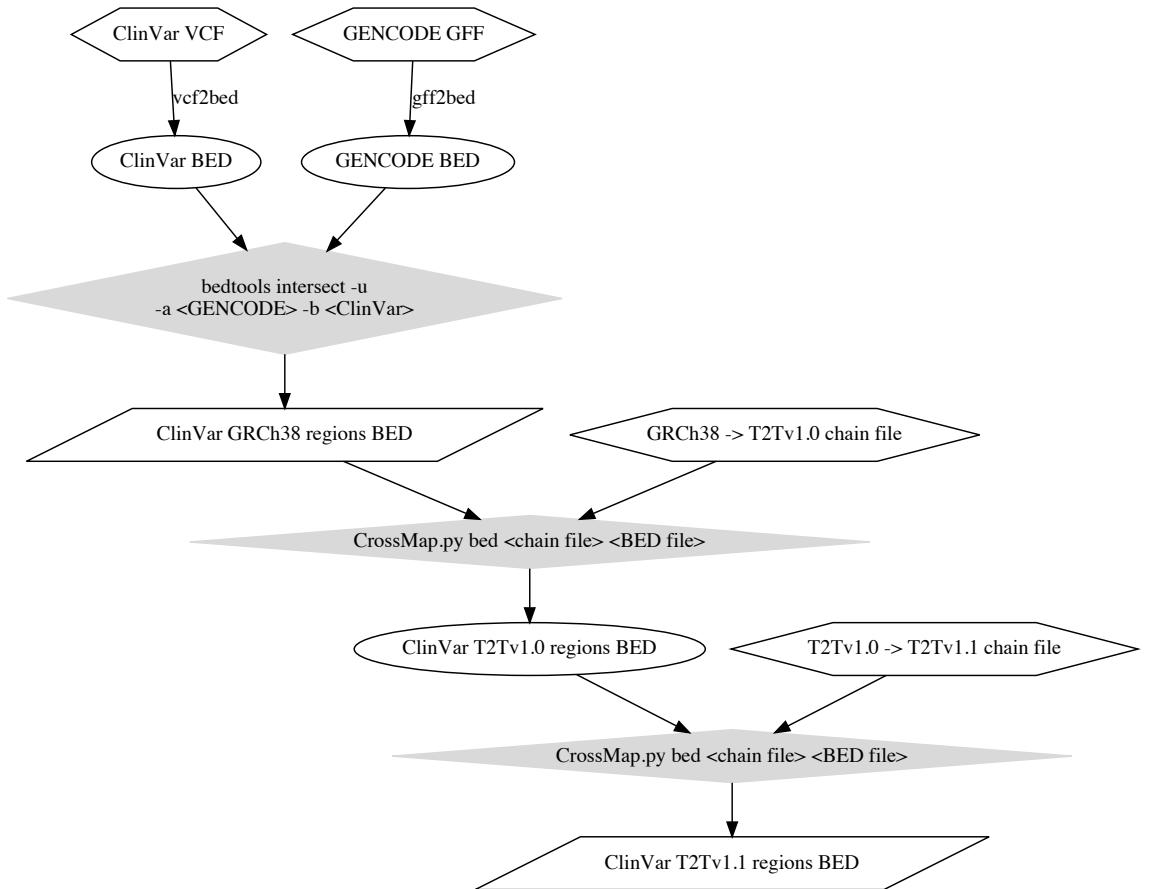


Figure 8: Detailed description of the procedure used to annotate the T2Tv1.1 reference using the GRCh38 ClinVar and GENCODE data. Hexagons are input files. Ovals are intermediate files. Gray rhombuses are processing steps with multiple arguments. Parallelograms are output files. Labels on edges are processing steps with one input and one output.

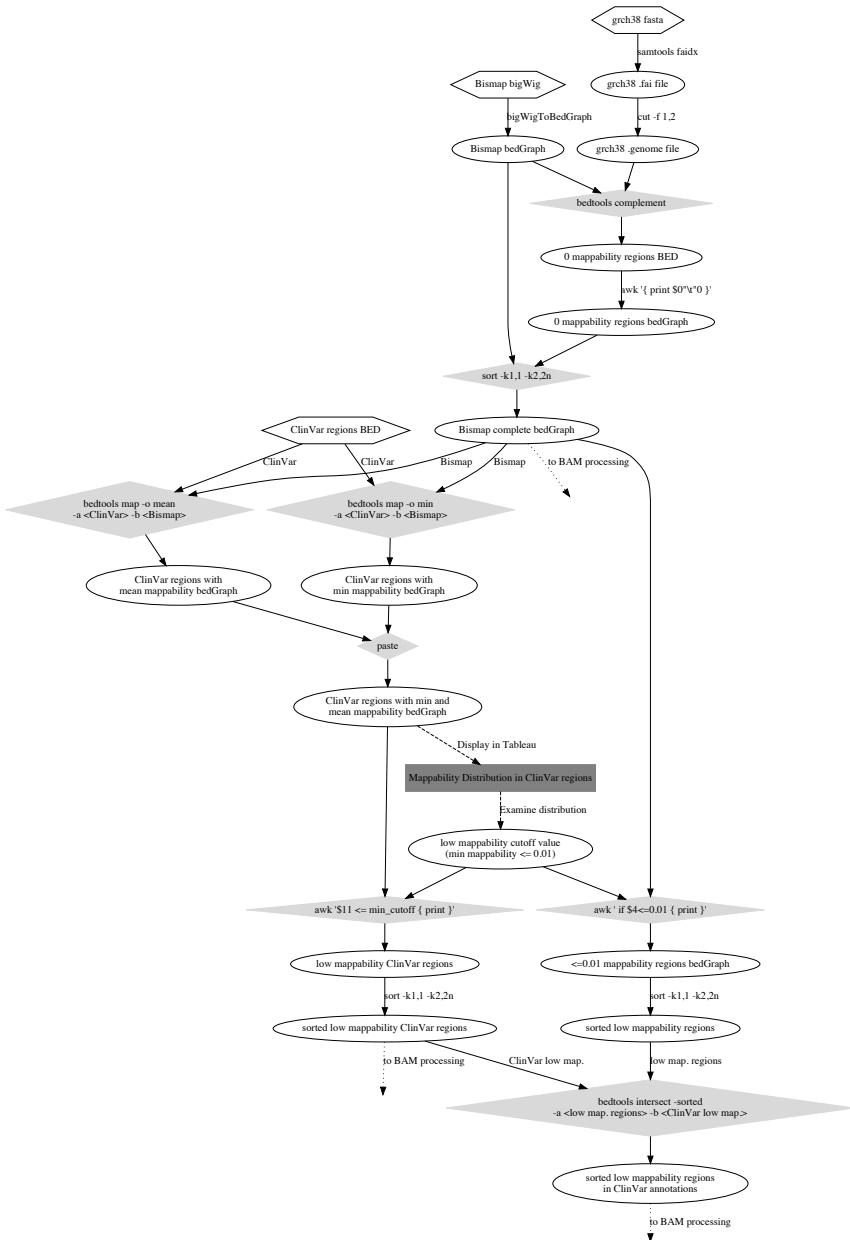


Figure 9: Detailed description of preprocesing steps used to identify biologically relevant low-mappability regions.. Ovals are intermediate files. Gray rhombuses are processing steps with multiple arguments. Parallelograms are output files. Labels on edges are processing steps with one input and one output (except edges directly entering rhombuses, which simply indicate which lines come from which steps and go to which arguments). Dotted lines indicate inputs that go to the BAM processing steps in Figure 10. Dark gray rectangles indicate steps involving manually examining the data.^{1,2}Dashed lines indicate manual steps.

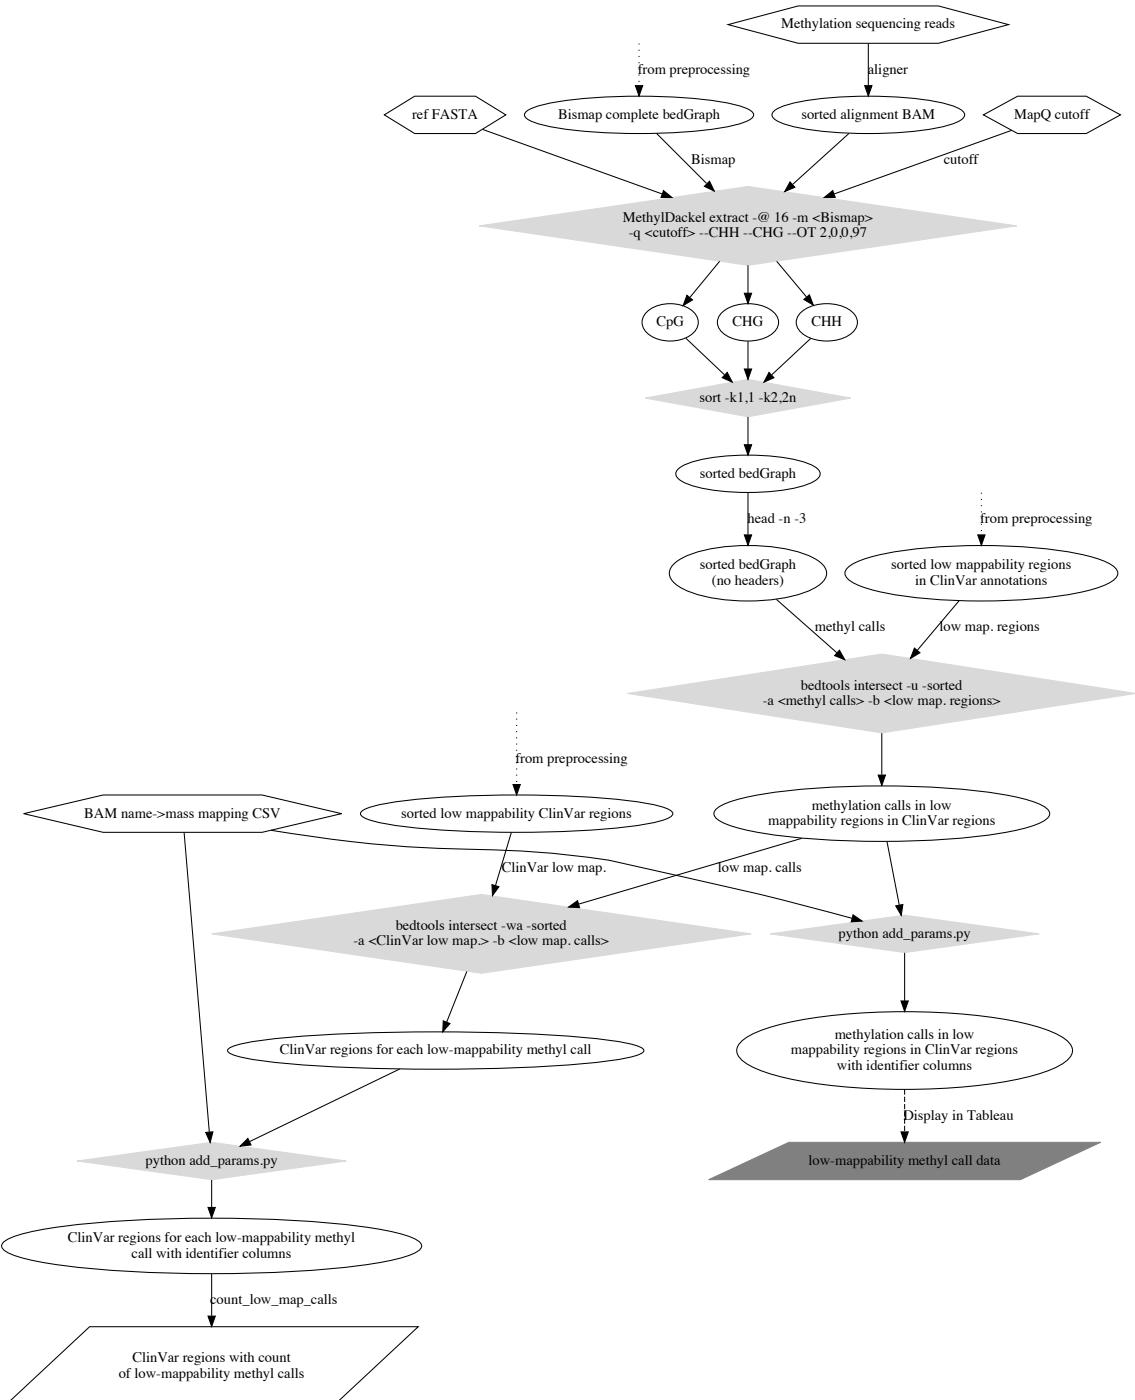


Figure 10: Detailed description of <rework with some more detail about what is being done by this procedure>. Ovals are intermediate files. Gray rhombuses are processing steps with multiple arguments. Parallelograms are output files. Labels on edges are processing steps with one input and one output (except edges directly entering rhombuses, which simply indicate which lines come from which steps and go to which arguments). Dotted lines indicate inputs that come from the preprocessing steps in Figure 9. Dark gray parallelograms indicate final outputs that are examined manually. Dashed lines indicate manual steps.

The Bismap complete bedGraph was then filtered using awk to produce a file containing only low mappability regions ($\text{mappability} < 0.01$). The file with minimum and mean mappability for every ClinVar region was filtered likewise on minimum mappability. The two resulting files (one of low-mappability regions, one of ClinVar regions with low minimum mappability) were combined to produce a file of all low mappability regions that are in ClinVar regions. <what did I do for partial overlaps here??>

Alignments of 2x99-bp paired-end EM-seq and whole genome bisulfite reads were processed using MethylDackel (with and without the custom patch) using a minimum MapQ cutoff of 10 and the default settings mentioned above and combined with the file of all low mappability regions in ClinVar regions to produce a list of all methylation calls in low mappability regions (this will be referred to as the “low mappability calls file”). A low-mappability methylation call, as used here, is defined as a methylation call that is in a region with Bismap mappability less than 0.01, as defined by the position of the C alone (positions of anchoring reads are not considered when determining this).

The low mappability calls file was intersected with the file of ClinVar regions with low minimum mappability to produce a file of ClinVar regions with low mappability calls. The -wa option for bedtools intersect was used here, which writes a copy of the ClinVar region to the output file for each low mappability call in the region, in order that this file would contain multiple copies of each region, one per low mappability call in the region. These duplicates were then used to count low mappability calls by feeding the data to a custom Python script (found in the Nextflow script in the supplemental materials) which counted and combined the duplicates, producing a list of all ClinVar regions with low mappability calls and how many low mappability calls are in each region.

Since this analysis was run for three different input masses and two sequencing protocols, the low mappability calls files were also processed through a custom Python script (see supplemental materials) to add a field specifying which input mass, sequencing protocol, and MethylDackel filtering setting were used. As the input mass would have been difficult to parse out of the BAM name due to inconsistent formatting, a CSV mapping BAM file names to input masses was created and given as input to this step. The same field was added to the lists of all ClinVar regions with low mappability calls and counts described previously. All files were examined and compared in Tableau®.

To compare the behavior of Bismark with bwa-meth, this analysis was re-run with the Bismark aligner using default settings and deduplicated using deduplicate_bismark according to the documented protocol <citation>. The name of the aligner was added to the field specifying the input mass, protocol, and MethylDackel filtering settings present in the low mappability calls files and the lists of all ClinVar regions with low mappability calls and counts (using the same custom Python script).

<still getting data>

To compare the need for and the effect of mappability filtering on the more complete T2T v1.1 reference genome <citation> (hereafter referred to as “T2T”), the analysis was re-run using the T2T reference in place of GRCh38

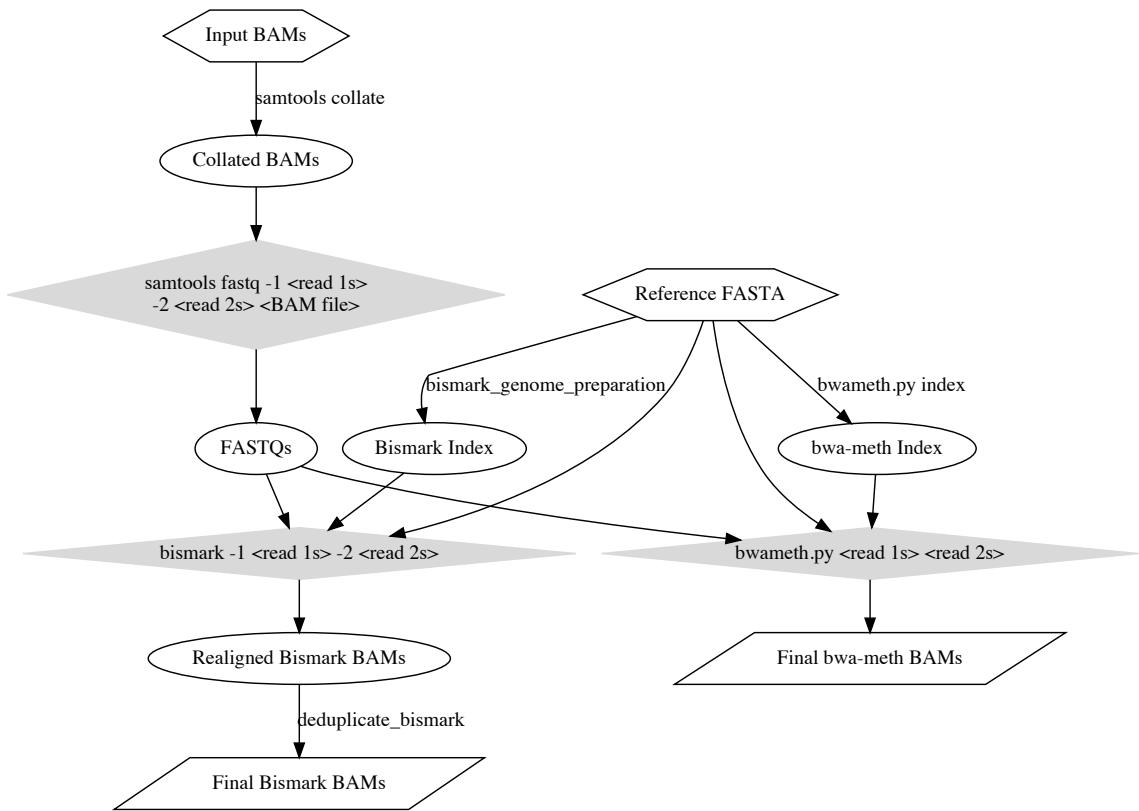


Figure 11: Detailed description of BAM realignment steps. Hexagons are input files. Ovals are intermediate files. Gray rhombuses are processing steps with multiple arguments. Parallelograms are output files. Labels on edges are processing steps with one input and one output.

(supplemented with phage T4, phage lambda, phage Xp12, and pUC19 just as with GRCh38). To use the ClinVar and GENCODE data, which were respectively originally obtained as VCF and GFF files containing genomic coordinates in GRCh38, with the T2T reference, the positions were transferred over to the T2T reference using CrossMap [25]. The lift-over was done in two steps with separate chain files. First, the GRCh38 regions were lifted over using CrossMap to T2Tv1.0 using a chain file published on GitHub by Nico Alavi [4]. Then, the lifted-over T2Tv1.0 annotations were lifted over again to T2Tv1.1 using a chain file from the T2T Consortium [2]. Specifically, the ClinVar regions BED, with the ClinVar and GENCODE data already combined, was lifted over. This converted file was used in place of the ClinVar regions BED for analysis with the T2T reference. As there was no Bismap mappability file for the T2T reference, we downloaded the Bismap tool and generated a k=100 multi-read Bismap mappability dataset for this reference genome. In total, this analysis was run on all combinations of sequencing method (WGBS or EM-seq), aligner (Bismark or bwa-meth), input mass (10, 50, or 200 ng), filtering (read-based filtering or no read-based filtering), and reference genome (GRCh38 or T2T), using a Nextflow[8] pipeline (see supplemental materials) which managed the execution of all the analysis tools needed. <write about how the resulting files are processed>

Discussion

Reads placed with falsely high confidence have cascading detrimental effects on methylation calling, differential methylation assessment, and assement of phenotypes associated with methylation status. Because of the more accurate MapQ values, decreased run time, and more flexibility to separate methylation calling from alignment, we recommend the use of bwa-meth for alignment and MethylDackel with MapQ > 10 for methylation calling. To further improve accuracy of methylation assessment, reads with both mates in low mappability regions should be excluded.

<waiting on results>

Supplemental Materials

The Nextflow scripts used to analyze this data can be found at https://github.com/nebiolabs/low_bismap_methyl_calls. <add versions to conda lines in nextflow> Individual tools used in the analysis include sambamba[24], vcf2bed, gff2bed, bigWigToBedGraph, MethylDackel, awk, python, GNU sort, GNU head, bedtools, BEDOPS. Versions of all tools used are specified in the nextflow 21.04.0 scripts using conda[3] dependency resolution.

The custom Python script that adds the input mass, sequencing protocol, MethylDackel filtering setting, and aligner name can be found at https://github.com/nebiolabs/low_bismap_methyl_calls.

The pull request for the patch adding mappability support to MethylDackel can be found at <https://github.com/dpryan79/MethylDackel/pull/80>. It was merged into MethylDackel in version 0.5.0.

The Bismap file used for this analysis was downloaded from <https://www.ncbi.nlm.nih.gov/bioproject/52383>.
bw <refer to these in the main body>

The ClinVar VCF was the July 22, 2019 version of ClinVar's variants VCF, with a file name of clinvar_20190722.vcf.gz

References

- [1] QC Fail Sequencing » MAPQ values are really useful but their implementation is a mess.
- [2] marbl/CHM13, July 2021. original-date: 2019-02-28T16:00:16Z.
- [3] Miniconda, April 2021.
- [4] Nico Alavi. burgshrimps/liftover_t2t, May 2021. original-date: 2020-11-03T21:50:35Z.
- [5] Achim Breiling and Frank Lyko. Epigenetic regulatory functions of DNA modifications: 5-methylcytosine and beyond. *Epigenetics & Chromatin*, 8:24, 2015.
- [6] Gary G. Chen, Jeffrey A. Gross, Pierre-Eric Lutz, Kathryn Vaillancourt, Gilles Maussion, Alexandre Bramouille, Jean-François Théroux, Elena S. Gardini, Ulrike Ehlert, Geneviève Bourret, Aurélie Masurel, Pierre Lepage, Naguib Mechawar, Gustavo Turecki, and Carl Ernst. Medium throughput bisulfite sequencing for accurate detection of 5-methylcytosine and 5-hydroxymethylcytosine. *BMC Genomics*, 18:96, Jan 2017. 28100169[pmid].
- [7] Deanna M. Church, Valerie A. Schneider, Tina Graves, Katherine Auger, Fiona Cunningham, Nathan Bouk, Hsiu-Chuan Chen, Richa Agarwala, William M. McLaren, Graham R. S. Ritchie, Derek Albracht, Milinn Kremitzki, Susan Rock, Holland Kotkiewicz, Colin Kremitzki, Aye Wollam, Lee Trani, Lucinda Fulton, Robert Fulton, Lucy Matthews, Siobhan Whitehead, Will Chow, James Torrance, Matthew Dunn, Glenn Harden, Glen Threadgold, Jonathan Wood, Joanna Collins, Paul Heath, Guy Griffiths, Sarah Pelan, Darren Grafham, Evan E. Eichler, George Weinstock, Elaine R. Mardis, Richard K. Wilson, Kerstin Howe, Paul Flicek, and Tim Hubbard. Modernizing reference genome assemblies. *PLoS biology*, 9(7):e1001091, July 2011.
- [8] Paolo Di Tommaso, Maria Chatzou, Evan W. Floden, Pablo Prieto Barja, Emilio Palumbo, and Cedric Notredame. Nextflow enables reproducible computational workflows. *Nature Biotechnology*, 35(4):316–319, April

2017. Bandiera_abtest: a Cg_type: Nature Research Journals Number: 4 Primary_atype: Correspondence Publisher: Nature Publishing Group Subject_term: Computational biology and bioinformatics;Data publication and archiving Subject_term_id: computational-biology-and-bioinformatics;data-publication-and-archiving.
- [9] Francine E. Garrett-Bakelman, Caroline K. Sheridan, Thadeous J. Kacmarczyk, Jennifer Ishii, Doron Betel, Alicia Alonso, Christopher E. Mason, Maria E. Figueroa, and Ari M. Melnick. Enhanced reduced representation bisulfite sequencing for assessment of dna methylation at base pair resolution. *J Vis Exp*, (96):52246, Feb 2015. 25742437[pmid].
 - [10] The SAM/BAM Format Specification Working Group. Sequence Alignment/Map Format Specification, May 2018. <https://samtools.github.io/hts-specs/SAMv1.pdf>.
 - [11] Jennifer Harrow, Adam Frankish, Jose M. Gonzalez, Electra Tapanari, Mark Diekhans, Felix Kokocinski, Bronwen L. Aken, Daniel Barrell, Amonida Zadissa, Stephen Searle, If Barnes, Alexandra Bignell, Veronika Boychenko, Toby Hunt, Mike Kay, Gaurab Mukherjee, Jeena Rajan, Gloria Despacio-Reyes, Gary Saunders, Charles Steward, Rachel Harte, Michael Lin, Cédric Howald, Andrea Tanzer, Thomas Derrien, Jacqueline Chrast, Nathalie Walters, Suganthi Balasubramanian, Baikang Pei, Michael Tress, Jose Manuel Rodriguez, Iakes Ezkurdia, Jeltje van Baren, Michael Brent, David Haussler, Manolis Kellis, Alfonso Valencia, Alexandre Reymond, Mark Gerstein, Roderic Guigó, and Tim J. Hubbard. Gencode: The reference human genome annotation for the encode project. *Genome Res*, 22(9):1760–1774, Sep 2012. 22955987[pmid].
 - [12] Illumina. Novaseq 6000. <https://www.illumina.com/systems/sequencing-platforms/novaseq/specifications.html>.
 - [13] Johnnurbanggenome. Biofinysics: How does bowtie2 assign MAPQ scores?, May 2014.
 - [14] Mehran Karimzadeh, Carl Ernst, Anshul Kundaje, and Michael M. Hoffman. Umap and bismap: quantifying genome and methylome mappability. *Nucleic Acids Research*, 2018.
 - [15] W. J. Kent, A. S. Zweig, G. Barber, A. S. Hinrichs, and D. Karolchik. Bigwig and bigbed: enabling browsing of large distributed datasets. *Bioinformatics*, 26(17):2204–2207, 2010. <http://genome.ucsc.edu/>.
 - [16] Felix Krueger and Simon R. Andrews. Bismark: a flexible aligner and methylation caller for bisulfite-seq applications. *Bioinformatics*, 27(11):1571–1572, 2011.
 - [17] Melissa J Landrum, Jennifer M Lee, Mark Benson, Garth R Brown, Chen Chao, Shanmuga Chitipiralla, Baoshan Gu, Jennifer Hart, Douglas Hoffman, Wonhee Jang, Karen Karapetyan, Kenneth Katz, Chunlei Liu, Zenith

Maddipatla, Adriana Malheiro, Kurt McDaniel, Michael Ovetsky, George Riley, George Zhou, J Bradley Holmes, Brandi L Kattman, and Donna R Maglott. Clinvar: improving access to variant interpretations and supporting evidence. *Nucleic Acids Research*, 46(D1):D1062–D1067, 2018.

- [18] Heng Li, Bob Handsaker, Alec Wysoker, Tim Fennell, Jue Ruan, Nils Homer, Gabor Marth, Goncalo Abecasis, Richard Durbin, and 1000 Genome Project Data Processing Subgroup. The sequence alignment/map format and samtools. *Bioinformatics*, 25(16):2078–2079, 2009.
- [19] Shane Neph, M. Scott Kuehn, Alex P. Reynolds, Eric Haugen, Robert E. Thurman, Audra K. Johnson, Eric Rynes, Matthew T. Maurano, Jeff Vierstra, Sean Thomas, Richard Sandstrom, Richard Humbert, and John A. Stamatoyannopoulos. Bedops: high-performance genomic feature operations. *Bioinformatics*, 28(14):1919–1920, 2012.
- [20] B. S. Pedersen, K. Eyring, S. De, I. V. Yang, and D. A. Schwartz. Fast and accurate alignment of long bisulfite-seq reads. *ArXiv e-prints*, January 2014.
- [21] Aaron R. Quinlan and Ira M. Hall. Bedtools: a flexible suite of utilities for comparing genomic features. *Bioinformatics*, 26(6):841–842, 2010.
- [22] Devon Ryan. MethylDackel. <https://github.com/dpryan79/MethylDackel>.
- [23] Dirk Schübeler. Function and information content of dna methylation. *Nature*, 517:321 EP –, Jan 2015.
- [24] Artem Tarasov, Albert J. Vilella, Edwin Cuppen, Isaac J. Nijman, and Pjotr Prins. Sambamba: fast processing of ngs alignment formats. *Bioinformatics*, 31(12):2032–2034, 2015.
- [25] Hao Zhao, Zhifu Sun, Jing Wang, Haojie Huang, Jean-Pierre Kocher, and Liguo Wang. CrossMap: a versatile tool for coordinate conversion between genome assemblies. *Bioinformatics (Oxford, England)*, 30(7):1006–1007, April 2014. Edition: 2013/12/18 Publisher: Oxford University Press.