







correlation

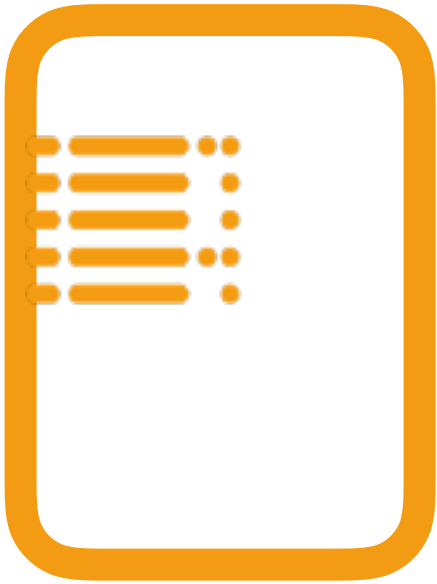

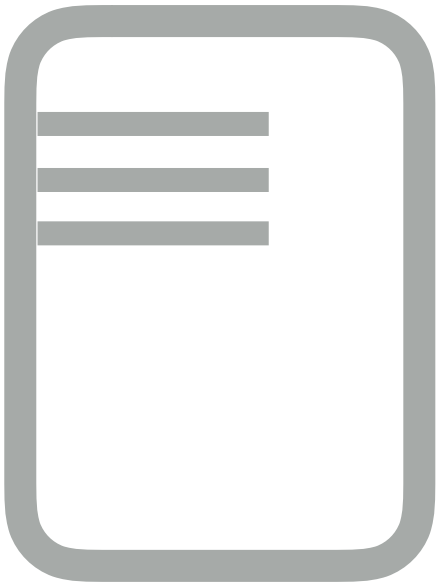









cld

$c|D$



$c|D$



c/D



c/D



cID










services

logs

Correlation ID

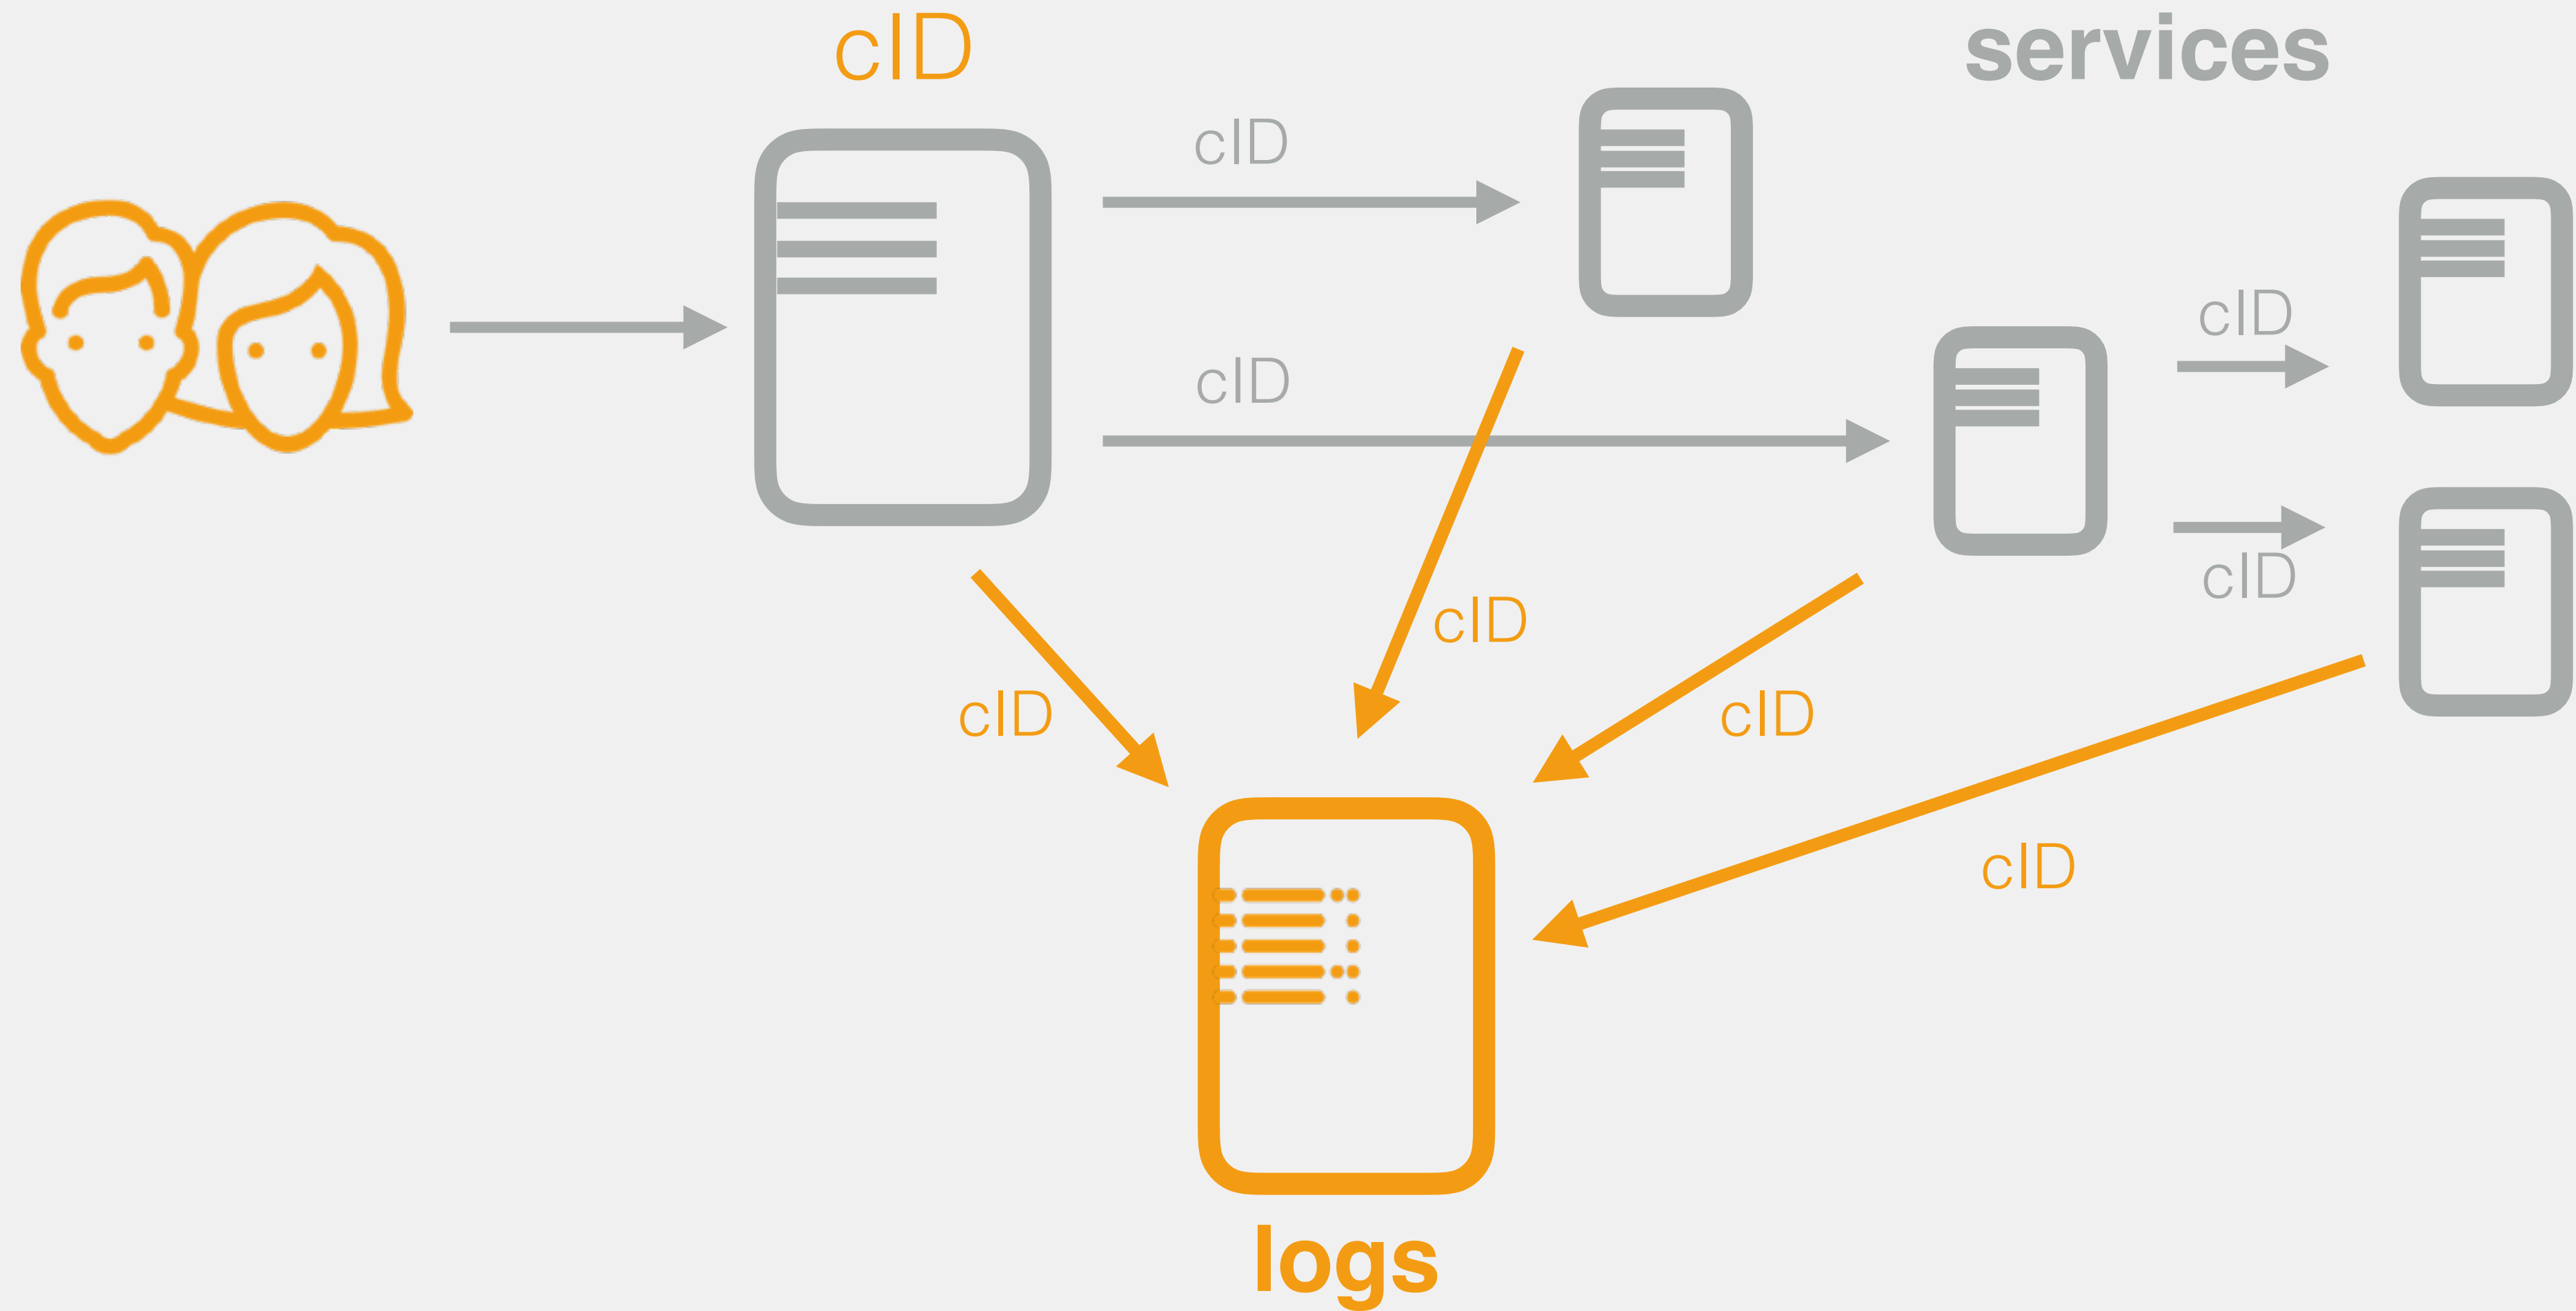

Best practices

- just put it to stdout
docker & kubernetes encourages this
- pipe stdout to a file
or wherever you need to
- debug mode runtime
use signals
- **never log secrets**
- let the log collector handle the rest

