




| Lnr | Mrk | Qty | Description | Width × Height |
|-----|----------|-----|--|----------------|
| 005 | W001-N-O | 1 | <p>ND NTech Villa Fixed frame w/sash NOBB 51260035 Construction 105/80, 113 mm frame incl. 8 mm alum. U-value product: 0,80W/m²K Weight 86 kg</p> <p>Without ventilator Outward opening sideswing reversible sash Toughened LowE w/Lam 33.2 LowE WES/Ar Construction 4ES#+16G+4+16G+ES6,76 Safety gl. externally & internally</p> <p>Aluminium cladded Product RAL 7033 matt Cement grey, Powder coated, gloss 30</p> <p>Surface finishing Product RAL 7033 Cement grey</p> <p>Details: Wallside frame finished No sub frame groove No fixing holes Classic profile, internally Drip-nose (NOR) Black glass spacer RAL9004 Max pallet width 80 cm</p> <p>Details (sash): a.: Black Line Black handles</p> <p>Bar: 62 = Solid transom/mullion</p> | 988 × 2188mm |

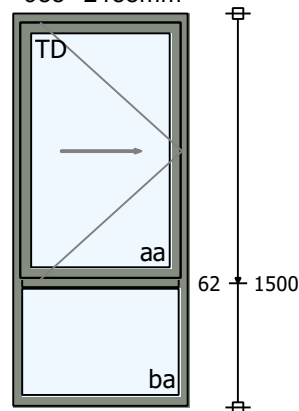



| Lnr | Mrk | Qty | Description | Width × Height |
|-----|----------|-----|--|----------------|
| 010 | W002-N-O | 1 | <p>ND NTech Villa Fixed frame w/sash NOBB 51260035 Construction 105/80, 113 mm frame incl. 8 mm alum. U-value product: 0,80W/m²K Weight 86 kg</p> <p>Without ventilator Outward opening sideswing reversible sash Toughened LowE w/Lam 33.2 LowE WES/Ar Construction 4ES#+16G+4+16G+ES6,76 Safety gl. externally & internally</p> <p>Aluminium cladded Product RAL 7033 matt Cement grey, Powder coated, gloss 30</p> <p>Surface finishing Product RAL 7033 Cement grey</p> <p>Details: Wallside frame finished No sub frame groove No fixing holes Classic profile, internally Drip-nose (NOR) Black glass spacer RAL9004 Max pallet width 80 cm</p> <p>Details (sash): a.: Black Line Black handles</p> <p>Bar: 62 = Solid transom/mullion</p> | 988 × 2188mm |

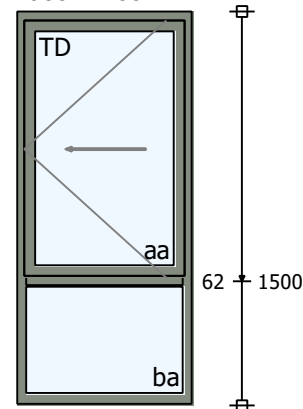


| Lnr | Mrk | Qty | Description | Width × Height |
|-----|-----------|-----|---|----------------|
| 015 | W003-5-NF | 3 | <p>ND NTech Villa Fixed frame NOBB 47543466 Construction 105/80, 113 mm frame incl. 8 mm alum. U-value product: 0,65W/m²K Weight 176 kg</p> <p>Without ventilator Lam 33.1 Low E 2s WES/Ar Construction 6,38ES+16G+4+16G+ES6,38 Safety gl. externally & internally</p> <p>Aluminium cladded Product RAL 7033 matt Cement grey, Powder coated, gloss 30</p> <p>Surface finishing Product RAL 7033 Cement grey</p> <p>Details: Wallside frame finished No sub frame groove No fixing holes Classic profile, internally Drip-nose (NOR) Black Line Black glass spacer RAL9004 Max pallet width 80 cm</p> | 1288 × 3198mm |




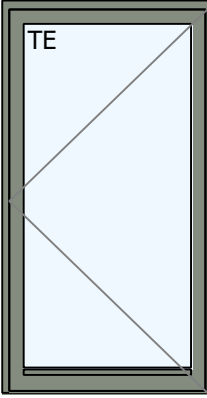
| Lnr | Mrk | Qty | Description | Width × Height |
|-----|---------------|-----|--|---|
| 017 | W0-06- E-F | 1 | <p>ND NTech Villa Fixed frame NOBB 47543466 Construction 105/80, 113 mm frame incl. 8 mm alum. U-value product: 0,70W/m²K Weight 92 kg</p> <p>Without ventilator Lam 33.1 Low E 2s WES/Ar Construction 6,38ES+16G+4+16G+ES6,38 Safety gl. externally & internally</p> <p>Aluminium cladded Product RAL 7033 matt Cement grey, Powder coated, gloss 30</p> <p>Surface finishing Product RAL 7033 Cement grey</p> <p>Details: Wallside frame finished No sub frame groove No fixing holes Classic profile, internally Drip-nose (NOR) Black Line Black glass spacer RAL9004 Max pallet width 80 cm</p> | <p>888 × 2388mm</p>  |

| Lnr | Mrk | Qty | Description | Width × Height |
|-----|---------------|-----|--|---|
| 020 | W0-07- N-O | 1 | <p>ND NTech Villa Sideswing reversible NOBB 47546985 Construction 105/80, 113 mm frame incl. 8 mm alum. U-value product: 0,82W/m²K Weight 59 kg</p> <p>Left hinge Without ventilator Outward opening sideswing reversible sash Lam 33.1 Low E 2s WES/Ar Construction 6,38ES+16G+4+16G+ES6,38 Safety gl. externally & internally</p> <p>Aluminium cladded Product RAL 7033 matt Cement grey, Powder coated, gloss 30</p> <p>Surface finishing Product RAL 7033 Cement grey</p> <p>Details: Wallside frame finished No sub frame groove No fixing holes Classic profile, internally Drip-nose (NOR) Black Line Black glass spacer RAL9004 Black handles Max pallet width 80 cm</p> | <p>888 × 1488mm</p>  |

| Lnr | Mrk | Qty | Description | Width × Height |
|-----|---------------|-----|---|---|
| 025 | W0-08- N-O | 1 | <p>ND NTech Villa Sideswing reversible NOBB 47546985 Construction 105/80, 113 mm frame incl. 8 mm alum. U-value product: 0,82W/m²K Weight 59 kg</p> <p>Right hinge Without ventilator Outward opening sideswing reversible sash Lam 33.1 Low E 2s WES/Ar Construction 6,38ES+16G+4+16G+ES6,38 Safety gl. externally & internally</p> <p>Aluminium cladded Product RAL 7033 matt Cement grey, Powder coated, gloss 30</p> <p>Surface finishing Product RAL 7033 Cement grey</p> <p>Details: Wallside frame finished No sub frame groove No fixing holes Classic profile, internally Drip-nose (NOR) Black Line Black glass spacer RAL9004 Black handles Max pallet width 80 cm</p> | <p>888 × 1488mm</p>  |


All drawings viewed externally

| Lnr | Mrk | Qty | Description | Width × Height |
|-----|---------------|-----|--|---|
| 030 | W0-09- W-F | 1 | <p>ND NTech Villa Fixed frame NOBB 47543466 Construction 105/80, 113 mm frame incl. 8 mm alum. U-value product: 0,75W/m²K Weight 39 kg</p> <p>Without ventilator Lam 33.1 LowE/Toughened Matelux/Toughened LowE MTECH/Ar Construction 6,38ES+16G+4#+16G+#ES6 Safety gl. externally & internally</p> <p>Aluminium cladded Product RAL 7033 matt Cement grey, Powder coated, gloss 30</p> <p>Surface finishing Product RAL 7033 Cement grey</p> <p>Details: Wallside frame finished No sub frame groove No fixing holes Classic profile, internally Drip-nose (NOR) Black Line Black glass spacer RAL9004 Max pallet width 80 cm</p> | <p>748 × 1188mm</p>  |


| Lnr | Mrk | Qty | Description | Width × Height |
|-----|---------|-----|--|--|
| 035 | D0-02-W | 1 | <p>ND NTech Villa Balcony door (security) NOBB 47547057 Construction 105/80, 113 mm frame incl. 8 mm alum. U-value product: 0,81W/m²K Weight 111 kg</p> <p>Right hinge Without ventilator Outward opening sidehinged door leaf Lam 33.1 Low E 2s WES/Ar Construction 6,38ES+16G+4+16G+ES6,38 Safety gl. externally & internally Threshold 25 mm</p> <p>Panel height 136 mm</p> <p>Aluminium cladded Product RAL 7033 matt Cement grey, Powder coated, gloss 30</p> <p>Surface finishing Product RAL 7033 Cement grey</p> <p>Details: Wallside frame finished No sub frame groove No fixing holes Classic profile, internally Handle int. thumbturn cylinder / ext. without hole for cylinder Max pallet width 80 cm Black Line Black glass spacer RAL9004 Black hinges Black handles</p> | <p>1188 × 2188mm</p>  |

| Lnr | Mrk | Qty | Description |
|-----|---------|-----|--|
| 040 | D0-03-W | 1 | <p>ND NTech Villa Balcony door (security)</p> <p>NOBB 47547057</p> <p>Construction 105/80, 113 mm frame incl. 8 mm alum.</p> <p>U-value product: 1,2W/m²K</p> <p>Weight 81 kg</p> <p>Right hinge</p> <p>With ventilator</p> <p>Outward opening sidehinged door leaf</p> <p>Toughened w/Lam 33.1 LowE WES/Ar</p> <p>Construction 4#+16G+ES6,38</p> <p>Safety gl. externally & internally</p> <p>Threshold 25 mm</p> <p>Panel height 136 mm</p> <p>Aluminium clad</p> <p>Product Standard RAL colour, Powder coated</p> <p>Surface finishing</p> <p>Product NCS S0502Y Std White</p> <p>Details:</p> <p>Wallside frame finished</p> <p>No sub frame groove</p> <p>No fixing holes</p> <p>Classic profile, internally</p> <p>Handle int. thumbturn cylinder / ext. without hole for cylinder</p> <p>Max pallet width 80 cm</p> <p>Black Line</p> <p>Black glass spacer RAL9004</p> <p>Black hinges</p> <p>Black handles</p> |

Width × Height
1188 × 2188mm

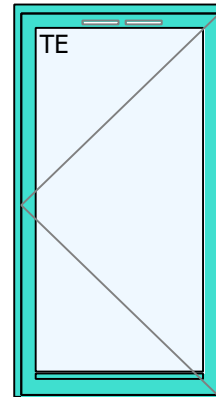

136

| Lnr | Mrk | Qty | Description | Width × Height |
|-----|---------------|-----|---|--|
| 045 | W0-10- W-F | 1 | <p>ND NTech Villa Fixed frame NOBB 47543466 Construction 105/80, 113 mm frame incl. 8 mm alum. U-value product: 0,68W/m²K Weight 112 kg</p> <p>Without ventilator Lam 33.1 Low E 2s WES/Ar Construction 6,38ES+16G+4+16G+ES6,38 Safety gl. externally & internally</p> <p>Aluminium cladded Product RAL 7033 matt Cement grey, Powder coated, gloss 30</p> <p>Surface finishing Product RAL 7033 Cement grey</p> <p>Details: Wallside frame finished No sub frame groove No fixing holes Classic profile, internally Drip-nose (NOR) Black Line Black glass spacer RAL9004 Max pallet width 80 cm</p> | <p>1188 × 2188mm</p>  |




0,68



112

| Lnr | Mrk | Qty | Description |
|-----|---------|-----|---|
| 050 | D0-04-S | 1 | ND NTech Villa Double Balcony door (security) NOBB 53289320 Construction 105/80, 113 mm frame incl. 8 mm alum. U-value product: 0,82W/m²K Weight 197 kg |

Width × Height
2088 × 2188mm

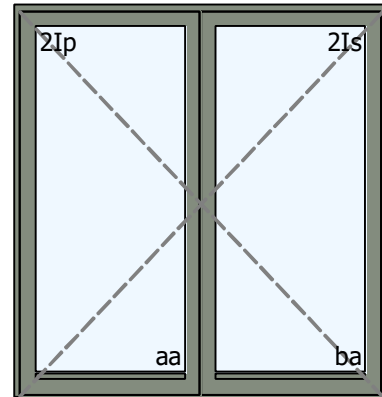

Right door leaf primary
 Without ventilator
 Inward opening sidehinged door leaf
 Lam 33.1 Low E 2s WES/Ar
 Construction 6,38ES+16G+4+16G+ES6,38
 Safety gl. externally & internally
 Threshold 25 mm

Panel height 136 mm

Aluminium cladded

Product RAL 7033 matt Cement grey, Powder coated,
 gloss 30

Surface finishing

Product RAL 7033 Cement grey

Details:

Wallside frame finished
 No sub frame groove
 No fixing holes
 Classic profile, internally
 Black Line
 Black glass spacer RAL9004
 Black hinges
 Max pallet width 80 cm

Details (sash):


a.: Handle int. thumbturn cylinder / ext. without hole for cylinder
 Black handles



0,82



197

| Lnr | Mrk | Qty | Description | Width × Height |
|-----|-----------|-----|---|--|
| 055 | W0-11-S-F | 1 | <p>ND NTech Villa Fixed frame NOBB 47543466 Construction 105/80, 113 mm frame incl. 8 mm alum. U-value product: 0,67W/m²K Weight 123 kg</p> <p>Without ventilator Lam 33.1 Low E 2s WES/Ar Construction 6,38ES+16G+4+16G+ES6,38 Safety gl. externally & internally</p> <p>Aluminium cladded Product RAL 7033 matt Cement grey, Powder coated, gloss 30</p> <p>Surface finishing Product RAL 7033 Cement grey</p> <p>Details: Wallside frame finished No sub frame groove No fixing holes Classic profile, internally Drip-nose (NOR) Black Line Black glass spacer RAL9004 Max pallet width 80 cm</p> | <p>1317 × 2188mm</p>  |


All drawings viewed externally

| Lnr | Mrk | Qty | Description | Width × Height |
|-----|-----------|-----|--|----------------|
| 060 | W0-12-S-F | 1 | <p>ND NTech Villa Fixed frame NOBB 47543466 Construction 105/80, 113 mm frame incl. 8 mm alum. U-value product: 0,68W/m²K Weight 99 kg</p> <p>Without ventilator Lam 33.1 Low E 2s WES/Ar Construction 6,38ES+16G+4+16G+ES6,38 Safety gl. externally & internally</p> <p>Aluminium cladded Product RAL 7033 matt Cement grey, Powder coated, gloss 30</p> <p>Surface finishing Product RAL 7033 Cement grey</p> <p>Details: Wallside frame finished No sub frame groove No fixing holes Classic profile, internally Drip-nose (NOR) Black Line Black glass spacer RAL9004 Max pallet width 80 cm</p> | 1788 × 1288mm |



| Lnr | Mrk | Qty | Description |
|-----|---------|-----|---|
| 065 | D0-05-S | 1 | ND NTech Villa Double Balcony door (security) NOBB 53289320 Construction 105/80, 113 mm frame incl. 8 mm alum. U-value product: 0,82W/m²K Weight 197 kg |

Width × Height
2088 × 2188mm

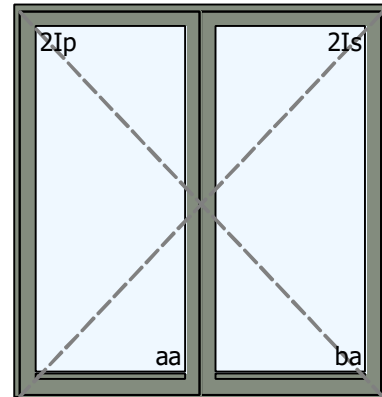

Right door leaf primary
Without ventilator
Inward opening sidehinged door leaf
Lam 33.1 Low E 2s WES/Ar
Construction 6,38ES+16G+4+16G+ES6,38
Safety gl. externally & internally
Threshold 25 mm

Panel height 136 mm

Aluminium cladded

Product RAL 7033 matt Cement grey, Powder coated, gloss 30

Surface finishing

Product RAL 7033 Cement grey

Details:

Wallside frame finished
No sub frame groove
No fixing holes
Classic profile, internally
Black Line
Black glass spacer RAL9004
Black hinges
Max pallet width 80 cm

Details (sash):


a.: Handle int. thumbturn cylinder / ext. without hole for cylinder
Black handles





0,82





197


| Lnr | Mrk | Qty | Description | Width × Height |
|-----|-----------|-----|--|---|
| 070 | W0-13-S-F | 1 | <p>ND NTech Villa Fixed frame NOBB 47543466 Construction 105/80, 113 mm frame incl. 8 mm alum. U-value product: 0,77W/m²K Weight 42 kg</p> <p>Without ventilator Lam 33.1 Low E 2s WES/Ar Construction 6,38ES+16G+4+16G+ES6,38 Safety gl. externally & internally</p> <p>Aluminium cladded Product RAL 7033 matt Cement grey, Powder coated, gloss 30</p> <p>Surface finishing Product RAL 7033 Cement grey</p> <p>Details: Wallside frame finished No sub frame groove No fixing holes Classic profile, internally Drip-nose (NOR) Black Line Black glass spacer RAL9004 Max pallet width 80 cm</p> | <p>738 × 1288mm</p>  |


| Lnr | Mrk | Qty | Description | Width × Height |
|-----|---------------|-----|--|---|
| 071 | W0-14- E-F | 1 | <p>ND NTech Villa Fixed frame NOBB 47543466 Construction 105/80, 113 mm frame incl. 8 mm alum. U-value product: 0,76W/m²K Weight 48 kg</p> <p>Without ventilator Lam 33.1 Low E 2s WES/Ar Construction 6,38ES+16G+4+16G+ES6,38 Safety gl. externally & internally</p> <p>Aluminium cladded Product RAL 7033 matt Cement grey, Powder coated, gloss 30</p> <p>Surface finishing Product RAL 7033 Cement grey</p> <p>Details: Wallside frame finished No sub frame groove No fixing holes Classic profile, internally Drip-nose (NOR) Black Line Black glass spacer RAL9004 Max pallet width 80 cm</p> | <p>738 × 1488mm</p>  |


| Lnr | Mrk | Qty | Description | Width × Height |
|-----|---------------|-----|--|---|
| 075 | W0-15- E-O | 1 | <p>ND NTech Villa Sideswing reversible NOBB 47546985 Construction 105/80, 113 mm frame incl. 8 mm alum. U-value product: 0,80W/m²K Weight 60 kg</p> <p>Right hinge Without ventilator Outward opening sideswing reversible sash Toughened LowE w/Lam 33.2 LowE WES/Ar Construction 4ES#+16G+4+16G+ES6,76 Safety gl. externally & internally</p> <p>Aluminium cladded Product RAL 7033 matt Cement grey, Powder coated, gloss 30</p> <p>Surface finishing Product RAL 7033 Cement grey</p> <p>Details: Wallside frame finished No sub frame groove No fixing holes Classic profile, internally Drip-nose (NOR) Black Line Black glass spacer RAL9004 Black handles Max pallet width 80 cm</p> | <p>988 × 1488mm</p>  |


| Lnr | Mrk | Qty | Description | Width × Height |
|-----|---------------|-----|--|---|
| 080 | W1-01- N-O | 1 | <p>ND NTech Villa Sideswing reversible NOBB 47546985 Construction 105/80, 113 mm frame incl. 8 mm alum. U-value product: 0,80W/m²K Weight 60 kg</p> <p>Right hinge Without ventilator Outward opening sideswing reversible sash Toughened LowE w/Lam 33.2 LowE WES/Ar Construction 4ES#+16G+4+16G+ES6,76 Safety gl. externally & internally</p> <p>Aluminium cladded Product RAL 7033 matt Cement grey, Powder coated, gloss 30</p> <p>Surface finishing Product RAL 7033 Cement grey</p> <p>Details: Wallside frame finished No sub frame groove No fixing holes Classic profile, internally Drip-nose (NOR) Black Line Black glass spacer RAL9004 Black handles Max pallet width 80 cm</p> | <p>988 × 1488mm</p>  |

| Lnr | Mrk | Qty | Description | Width × Height |
|-----|---------------|-----|--|--|
| 085 | W1-02- N-F | 1 | <p>ND NTech Villa Fixed frame NOBB 47543466 Construction 105/80, 113 mm frame incl. 8 mm alum. U-value product: 0,68W/m²K Weight 95 kg</p> <p>Without ventilator Lam 33.1 Low E 2s WES/Ar Construction 6,38ES+16G+4+16G+ES6,38 Safety gl. externally & internally</p> <p>Aluminium cladded Product RAL 7033 matt Cement grey, Powder coated, gloss 30</p> <p>Surface finishing Product RAL 7033 Cement grey</p> <p>Details: Wallside frame finished No sub frame groove No fixing holes Classic profile, internally Drip-nose (NOR) Black Line Black glass spacer RAL9004 Max pallet width 80 cm</p> | <p>1288 × 1723mm</p>  |


| Lnr | Mrk | Qty | Description | Width × Height |
|-----|---------------|-----|--|--|
| 090 | W1-03- N-F | 1 | <p>ND NTech Villa Fixed frame NOBB 47543466 Construction 105/80, 113 mm frame incl. 8 mm alum. U-value product: 0,68W/m²K Weight 95 kg</p> <p>Without ventilator Lam 33.1 Low E 2s WES/Ar Construction 6,38ES+16G+4+16G+ES6,38 Safety gl. externally & internally</p> <p>Aluminium cladded Product RAL 7033 matt Cement grey, Powder coated, gloss 30</p> <p>Surface finishing Product RAL 7033 Cement grey</p> <p>Details: Wallside frame finished No sub frame groove No fixing holes Classic profile, internally Drip-nose (NOR) Black Line Black glass spacer RAL9004 Max pallet width 80 cm</p> | <p>1288 × 1723mm</p>  |

| Lnr | Mrk | Qty | Description | Width × Height |
|-----|---------------|-----|--|--|
| 095 | W1-04- N-F | 1 | <p>ND NTech Villa Fixed frame NOBB 47543466 Construction 105/80, 113 mm frame incl. 8 mm alum. U-value product: 0,68W/m²K Weight 95 kg</p> <p>Without ventilator Lam 33.1 Low E 2s WES/Ar Construction 6,38ES+16G+4+16G+ES6,38 Safety gl. externally & internally</p> <p>Aluminium cladded Product RAL 7033 matt Cement grey, Powder coated, gloss 30</p> <p>Surface finishing Product RAL 7033 Cement grey</p> <p>Details: Wallside frame finished No sub frame groove No fixing holes Classic profile, internally Drip-nose (NOR) Black Line Black glass spacer RAL9004 Max pallet width 80 cm</p> | <p>1288 × 1723mm</p>  |


| Lnr | Mrk | Qty | Description | Width × Height |
|-----|---------------|-----|---|---|
| 100 | W1-05- W-O | 1 | <p>ND NTech Villa Sideswing reversible NOBB 47546985 Construction 105/80, 113 mm frame incl. 8 mm alum. U-value product: 0,83W/m²K Weight 52 kg</p> <p>Right hinge Without ventilator Outward opening sideswing reversible sash Lam 33.1 Low E 2s WES/Ar Construction 6,38ES+16G+4+16G+ES6,38 Safety gl. externally & internally</p> <p>Aluminium cladded Product RAL 7033 matt Cement grey, Powder coated, gloss 30</p> <p>Surface finishing Product RAL 7033 Cement grey</p> <p>Details: Wallside frame finished No sub frame groove No fixing holes Classic profile, internally Drip-nose (NOR) Black Line Black glass spacer RAL9004 Black handles Max pallet width 80 cm</p> | <p>988 × 1188mm</p>  |

| Lnr | Mrk | Qty | Description | Width × Height |
|-----|-----------|-----|--|---|
| 105 | W1-06-S-F | 1 | <p>ND NTech Villa Fixed frame NOBB 47543466 Construction 105/80, 113 mm frame incl. 8 mm alum. U-value product: 0,80W/m²K Weight 32 kg</p> <p>Without ventilator Lam 33.1 Low E 2s WES/Ar Construction 6,38ES+16G+4+16G+ES6,38 Safety gl. externally & internally</p> <p>Aluminium cladded Product RAL 7033 matt Cement grey, Powder coated, gloss 30</p> <p>Surface finishing Product RAL 7033 Cement grey</p> <p>Details: Wallside frame finished No sub frame groove No fixing holes Classic profile, internally Drip-nose (NOR) Black Line Black glass spacer RAL9004 Max pallet width 80 cm</p> | <p>1088 × 663mm</p>  |

| Lnr | Mrk | Qty | Description | Width × Height |
|-----|-----------|-----|---|----------------|
| 110 | W1-07-S-F | 1 | <p>ND NTech Villa Fixed frame NOBB 47543466 Construction 105/80, 113 mm frame incl. 8 mm alum. U-value product: 0,74W/m²K Weight 104 kg</p> <p>Without ventilator Lam 33.1 Low E 2s WES/Ar Construction 6,38ES+16G+4+16G+ES6,38 Safety gl. externally & internally</p> <p>Aluminium cladded Product RAL 7033 matt Cement grey, Powder coated, gloss 30</p> <p>Surface finishing Product RAL 7033 Cement grey</p> <p>Details: Wallside frame finished No sub frame groove No fixing holes Classic profile, internally Drip-nose (NOR) Black Line Black glass spacer RAL9004 Max pallet width 80 cm</p> | 3588 × 663mm |



| Lnr | Mrk | Qty | Description | Width × Height |
|-----|---------|-----|---|----------------|
| 115 | D0-06-S | 1 | <p>ND NTech Patio door NOBB 47547076 Construction 172 mm frame incl. 8 mm alum. U-value product: 0,80W/m²K Weight 289 kg</p> <p>Right door leaf primary Without ventilator Lifting sliding door leaf Lam 33.1 Low E 2s WES/Ar Construction 6,38ES+16G+4+16G+ES6,38 Safety gl. externally & internally Threshold 25 mm</p> <p>Panel height 136 mm</p> <p>Aluminium cladded Product RAL 7033 matt Cement grey, Powder coated, gloss 30</p> <p>Surface finishing Product RAL 7033 Cement grey</p> <p>Details: Wallside frame finished No sub frame groove No fixing holes Classic profile, internally Max pallet width 80 cm Black glass spacer RAL9004</p> <p>Details (sash): b.: Handle int. thumbturn / ext. without hole for cyl. Black handles Black Line</p> | 2838 × 2188mm |

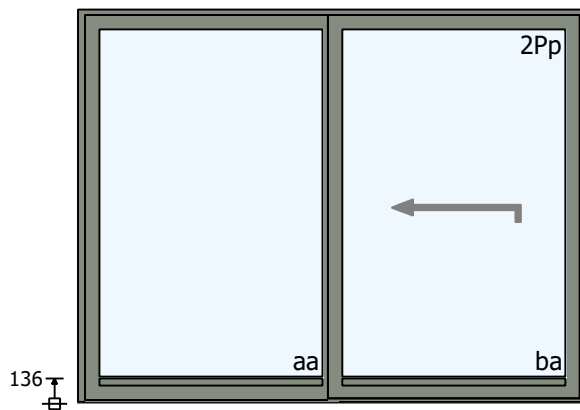

All drawings viewed externally

| Lnr | Mrk | Qty | Description | Width × Height |
|-----|-----|-----|--|----------------|
| 991 | | 1 | Non standard stain colour NOBB 26924910 | |
| 992 | | 1 | Non standard finishing NOBB 26924910 | |

Averaged U-value: 0,76W/m²K

Calculation of U-value in accordance to NS-EN ISO 10077-1, 10077-2 and the programme "Therm".

Centre U-value of glass is calculated in accordance to NS-EN 673.

The calculation methodology is independently quality assured by SINTEF Building and Infrastructure.

Reservation regarding the ongoing war situation and sanctions

In the event an Order(s) – or parts thereof – is delayed due to a war situation and/or subsequent sanctions; NorDan disclaims all responsibilities for any financial loss and/or other liabilities attributable to such delay.

Risk of colour deviation

NorDan's products are coated using standard coating systems intended for normal UV exposure and UK/Ireland/Scandinavian climate conditions. NorDan have no liability for any discrepancies related to matching of colours with other products which are not coated by NorDan. This includes, but is not limited to, other products and/or facade elements.

Be aware about possible significant/noticeable colour deviations for different manufacturers of paint, applicators and described parameters:

- Significant - differences in special finish colours: pearl, mica, metallic
- Noticeable - connected elements with different gloss finishes
- Noticeable - difference between color batches
- Noticeable - various base material and surface structure smooth to rough and difference in thickness

General: Comparison and assessment of coated surfaces is carried out according to EN ISO 3668

Aluminum: Difference in shades for Standard Colors meets CEPE regulations.

Colours can be verified by customer by ordering a sample from NorDan

Important information

Glass must be pressure equalized due to the difference in air pressure in the lowlands in relation to the air pressure at altitudes above 800m. It is the customer's responsibility to inform if the windows are to be used above this height before ordering.

NorDan products may not be modified without the written consent of NorDan.

Goods liability

Important information regarding goods liability:

NorDan's responsibility for the goods ends upon delivery in accordance with the order's agreed-upon delivery terms. All handling and treatment of goods after takeover is the buyer's responsibility.

NB! It is always the receiver's responsibility that the goods are handled and moved in a safe and approved manner. When handling goods, the receiver must have approved certificates in accordance with the operation to be performed. When lifting, a safety zone must be created, and straps must be attached so that goods cannot fall should an accident occur.