


Relational Database Service-Task

1. Create MariaDB DB on EC2.

- **MariaDB** is an **open-source relational database management system (RDBMS)**.

It is a drop-in replacement for **MySQL** and is used to store, manage, and retrieve data efficiently. It was created by the **original developers of MySQL** after Oracle bought MySQL.

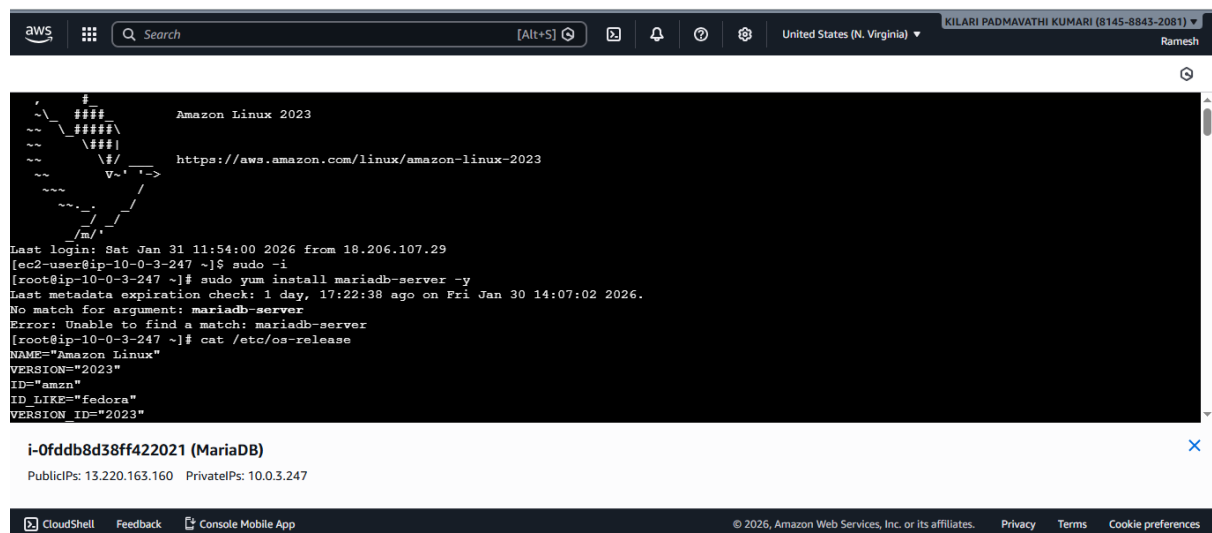

```
aws
Search [Alt+S]
United States (N. Virginia) KILARI PADMAVATHI KUMARI (8145-8843-2081) Ramesh


Amazon Linux 2023
https://aws.amazon.com/linux/amazon-linux-2023

Last login: Sat Jan 31 11:54:00 2026 from 18.206.107.29
[ec2-user@ip-10-0-3-247 ~]$ sudo -i
[root@ip-10-0-3-247 ~]# sudo yum install mariadb-server -y
Last metadata expiration check: 1 day, 17:22:38 ago on Fri Jan 30 14:07:02 2026.
No match for argument: mariadb-server
Error: Unable to find a match: mariadb-server
[root@ip-10-0-3-247 ~]# cat /etc/os-release
NAME="Amazon Linux"
VERSION="2023"
ID="amazon"
ID_LIKE="fedora"
VERSION_ID="2023"

i-Ofddb8d38ff422021 (MariaDB)
PublicIPs: 13.220.163.160 PrivateIPs: 10.0.3.247

CloudShell Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences
```

- Go AWS console
- Create a Instance
- Connect to instance through ssh
- And install Maria-DB in instance.

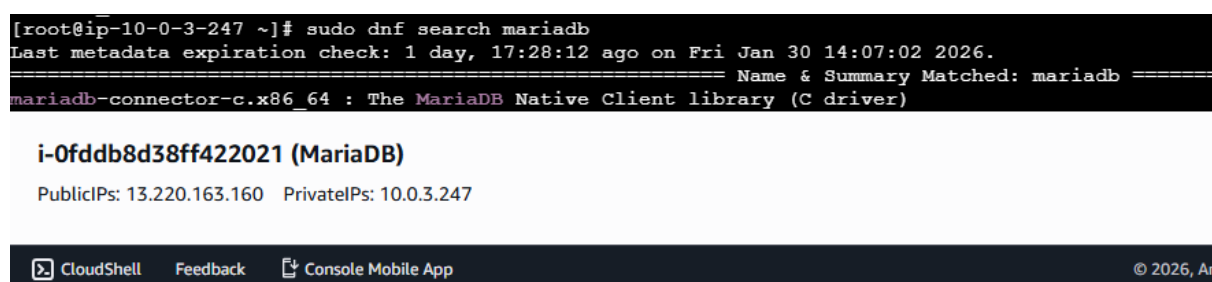

```
[root@ip-10-0-3-247 ~]# sudo dnf search mariadb
Last metadata expiration check: 1 day, 17:28:12 ago on Fri Jan 30 14:07:02 2026.
===== Name & Summary Matched: mariadb =====
mariadb-connector-c.x86_64 : The MariaDB Native Client library (C driver)

i-Ofddb8d38ff422021 (MariaDB)
PublicIPs: 13.220.163.160 PrivateIPs: 10.0.3.247

CloudShell Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences
```

- `sudo dnf search mariadb`

Relational Database Service-Task

```
[root@ip-10-0-3-247 ~]# sudo dnf install mariadb105-server -y
Last metadata expiration check: 1 day, 17:28:37 ago on Fri Jan 30 14:07:02 2026.
Dependencies resolved.
```

Package	Architecture	Version	Repository	Size
Installing:				
mariadb105-server	x86_64	3:10.5.29-1.amzn2023.0.1	amazonlinux	10 M
Installing dependencies:				
mariadb-connector-c	x86_64	3.3.10-1.amzn2023.0.1	amazonlinux	211 k
mariadb-connector-c-config	noarch	3.3.10-1.amzn2023.0.1	amazonlinux	9.9 k
mariadb105	x86_64	3:10.5.29-1.amzn2023.0.1	amazonlinux	1.5 M
mariadb105-common	x86_64	3:10.5.29-1.amzn2023.0.1	amazonlinux	28 k
mariadb105-errmsg	x86_64	3:10.5.29-1.amzn2023.0.1	amazonlinux	212 k
mysql-secure	noarch	1.0.4-2.amzn2023.0.3	amazonlinux	36 k
perl-B	x86_64	1.80-477.amzn2023.0.7	amazonlinux	177 k
perl-DBD-MariaDB	x86_64	1.22-1.amzn2023.0.4	amazonlinux	153 k
perl-DBI	x86_64	1.643-7.amzn2023.0.3	amazonlinux	700 k
perl-Data-Dumper	x86_64	2.174-460.amzn2023.0.2	amazonlinux	55 k
perl-File-Copy	noarch	2.34-477.amzn2023.0.7	amazonlinux	20 k
perl-FileHandle	noarch	2.03-477.amzn2023.0.7	amazonlinux	15 k

i-0fddb8d38ff422021 (MariaDB)

PublicIPs: 13.220.163.160 PrivateIPs: 10.0.3.247

CloudShell

Feedback

Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

- sudo dnf install mariadb105-server -y

```
[root@ip-10-0-3-247 ~]# sudo systemctl start mariadb
[root@ip-10-0-3-247 ~]# sudo systemctl enable mariadb
Created symlink /etc/systemd/system/mysql.service → /usr/lib/systemd/system/mariadb.service.
Created symlink /etc/systemd/system/mysqld.service → /usr/lib/systemd/system/mariadb.service.
Created symlink /etc/systemd/system/multi-user.target.wants/mariadb.service → /usr/lib/systemd/system/mariadb.service.
[root@ip-10-0-3-247 ~]# sudo systemctl status mariadb
● mariadb.service - MariaDB 10.5 database server
   Loaded: loaded (/usr/lib/systemd/system/mariadb.service; enabled; preset: disabled)
   ● mariadb.service - MariaDB 10.5 database server
   ● mariadb.service - MariaDB 10.5 database server
   Loaded: loaded (/usr/lib/systemd/system/mariadb.service; enabled; preset: disabled)
   ● mariadb.service - MariaDB 10.5 database server
   Loaded: loaded (/usr/lib/systemd/system/mariadb.service; enabled; preset: disabled)
   Active: active (running) since Sun 2026-02-01 07:37:20 UTC; 54s ago
     Docs: man:mariadb(8).
           https://mariadb.com/kb/en/library/systemd/
   Main PID: 4803 (mariadbd)
```

i-0fddb8d38ff422021 (MariaDB)

PublicIPs: 13.220.163.160 PrivateIPs: 10.0.3.247

CloudShell

Feedback

Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

- sudo systemctl start mariadb
- sudo systemctl enable mariadb
- sudo systemctl status mariadb

➤ Set Environment Variables

```
[root@ip-10-0-3-247 ~]# DBName=ec2db
DBPassword=admin123456
DBRootPassword=admin123456
DBUser=ec2dbuser
```

➤ Create SQL Setup File

```
[root@ip-10-0-3-247 ~]# cat <<EOF > /tmp/db.setup
CREATE DATABASE ${DBName};
CREATE USER '${DBUser}'@'%' IDENTIFIED BY '${DBPassword}';
GRANT ALL PRIVILEGES ON ${DBName}.* TO '${DBUser}'@'%' ;
FLUSH PRIVILEGES;
EOF
```

Relational Database Service-Task

➤ Set Root Password and Run Setup

```
[root@ip-10-0-3-247 ~]# sudo mysqladmin -u root password "${DBRootPassword}"
[root@ip-10-0-3-247 ~]# mysql -u root -p"${DBRootPassword}" < /tmp/db.setup
-----
CREATE DATABASE ec2db
-----
```

➤ Test

```
[root@ip-10-0-3-247 ~]# mysql -u ec2dbuser -p ec2db
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 10
Server version: 10.5.29-MariaDB MariaDB Server

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [ec2db]>
```

i-0fddb8d38ff422021 (MariaDB)

PublicIPs: 13.220.163.160 PrivateIPs: 10.0.3.247

 CloudShell [Feedback](#)  Console Mobile App

2. Insert some dummy data.

Step 1: Login to Database

```
[root@ip-10-0-3-247 ~]# mysql -u ec2dbuser -p ec2db
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 10
Server version: 10.5.29-MariaDB MariaDB Server

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [ec2db]>
```

i-0fddb8d38ff422021 (MariaDB)

PublicIPs: 13.220.163.160 PrivateIPs: 10.0.3.247

 CloudShell [Feedback](#)  Console Mobile App

Step 2:

- Create a Table and insert data into table.

Relational Database Service-Task

```
MariaDB [ec2db]> create table Neelima(id int,Name varchar(45),dept varchar(45));
Query OK, 0 rows affected (0.010 sec)

MariaDB [ec2db]> insert into Neelima values(1,'Neelu','devops');
Query OK, 1 row affected (0.002 sec)

MariaDB [ec2db]> insert into Neelima values(2,'kavya','Linux');
Query OK, 1 row affected (0.001 sec)
```

Step 3:

- Select * from table name

```
MariaDB [ec2db]> select * from Neelima;
+-----+-----+-----+
| id    | Name  | dept  |
+-----+-----+-----+
| 1     | Neelu | devops|
| 2     | kavya | Linux |
+-----+-----+-----+
2 rows in set (0.000 sec)

MariaDB [ec2db]> 
```

3. Take the backup of dummy data on EC2.

Step 1:

- Take Database Backup
- mysqldump -u ec2dbuser -p ec2db > backup_ec2bd.sql

```
[root@ip-10-0-3-247 ~]# mysqldump -u ec2dbuser -p ec2db > backup_ec2db.sql
Enter password:
[root@ip-10-0-3-247 ~]# ls
backup_ec2db.sql
[root@ip-10-0-3-247 ~]# 
```


i-0fddb8d38ff422021 (MariaDB)

PublicIPs: 13.220.163.160 PrivateIPs: 10.0.3.247


 CloudShell [Feedback](#)  Console Mobile App

Relational Database Service-Task

4. Launch MariaDB RDS instance.

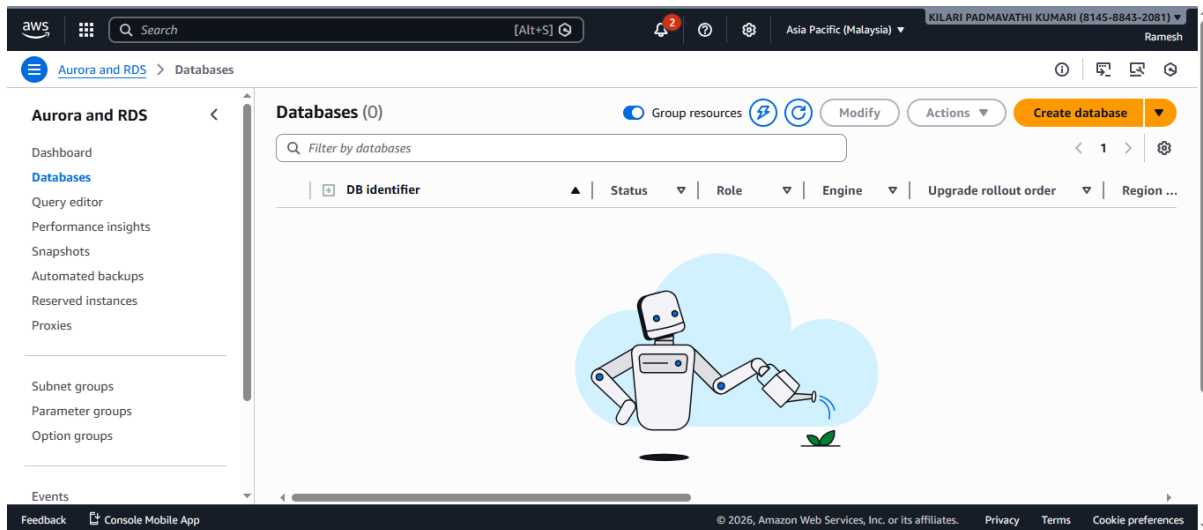


- Go AWS console and select RDS
- Click on Databases
- Click on Create Database

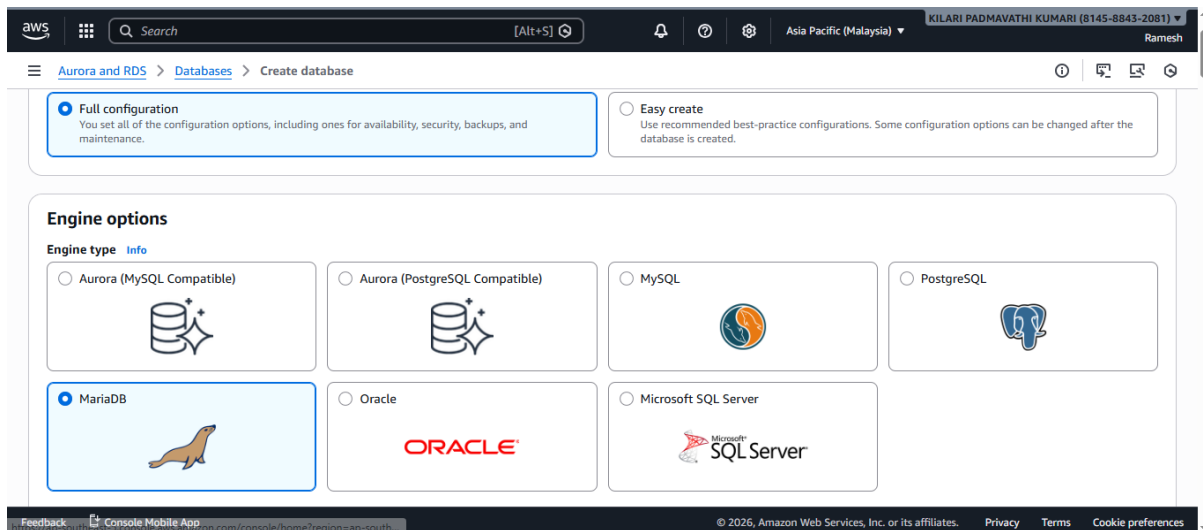

- In Engine options we have choose MariaDB

Relational Database Service-Task

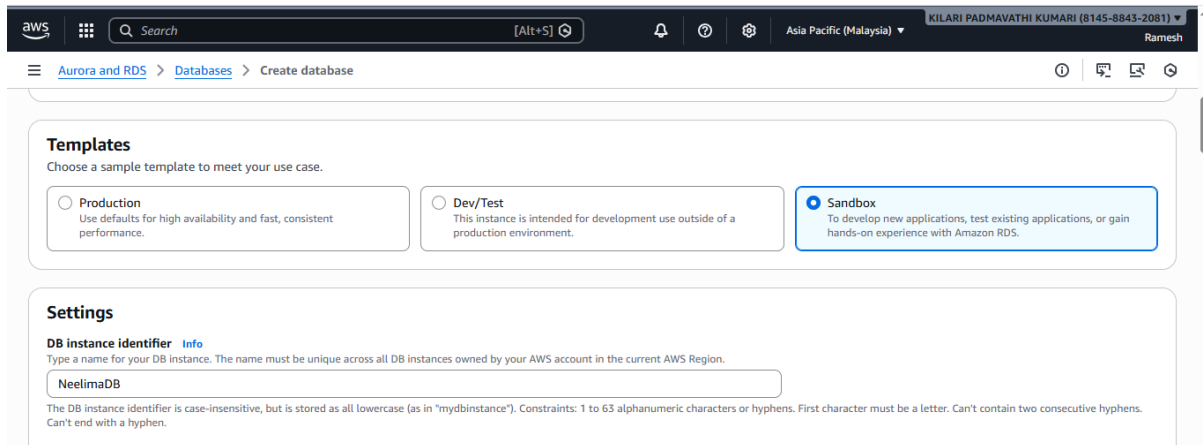

The screenshot shows the 'Create database' page in the AWS Management Console. The 'Templates' section is active, showing three options: 'Production', 'Dev/Test', and 'Sandbox'. The 'Sandbox' option is selected. Below the templates, the 'Settings' section is visible, showing the 'DB instance identifier' field with the value 'NeelimaDB'.

Templates
Choose a sample template to meet your use case.


- ☐ **Production**
Use defaults for high availability and fast, consistent performance.
- ☐ **Dev/Test**
This instance is intended for development use outside of a production environment.
- ☒ **Sandbox**
To develop new applications, test existing applications, or gain hands-on experience with Amazon RDS.

Settings
DB instance identifier [Info](#)
Type a name for your DB instance. The name must be unique across all DB instances owned by your AWS account in the current AWS Region.

NeelimaDB

The DB instance identifier is case-insensitive, but is stored as all lowercase (as in "mydbinstance"). Constraints: 1 to 63 alphanumeric characters or hyphens. First character must be a letter. Can't contain two consecutive hyphens. Can't end with a hyphen.

- In templates click on sandbox

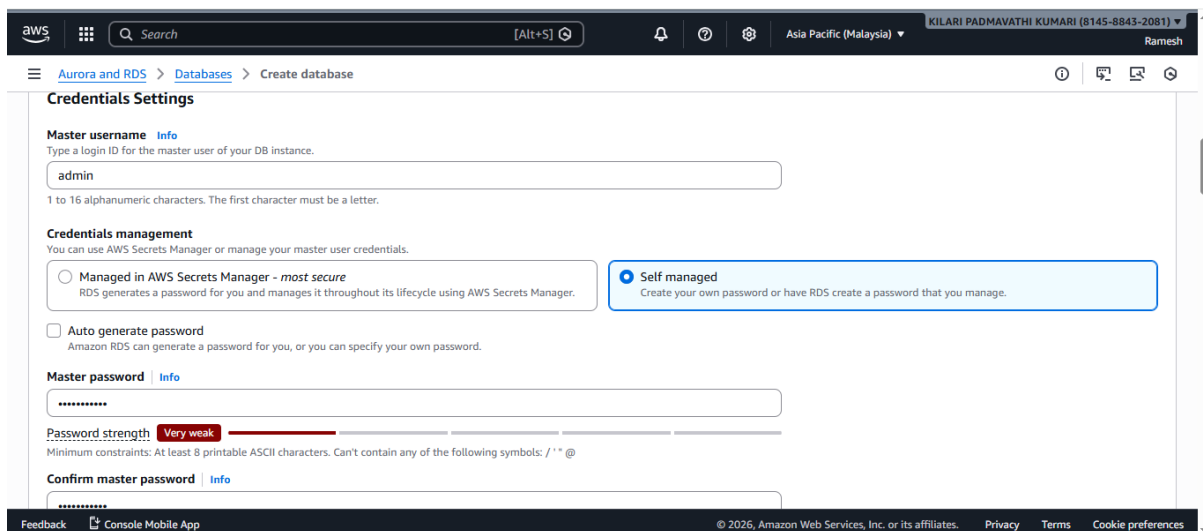

The screenshot shows the 'Create database' page in the AWS Management Console, specifically the 'Credentials Settings' section. The 'Master username' field is set to 'admin'. Under 'Credentials management', the 'Self managed' option is selected. The 'Master password' field is visible, and the 'Password strength' indicator shows 'Very weak'.

Credentials Settings

Master username [Info](#)
Type a login ID for the master user of your DB instance.

admin

1 to 16 alphanumeric characters. The first character must be a letter.

Credentials management
You can use AWS Secrets Manager or manage your master user credentials.

- ☐ **Managed in AWS Secrets Manager - most secure**
RDS generates a password for you and manages it throughout its lifecycle using AWS Secrets Manager.
- ☒ **Self managed**
Create your own password or have RDS create a password that you manage.

☐ **Auto generate password**
Amazon RDS can generate a password for you, or you can specify your own password.


Master password [Info](#)

Password strength **Very weak**

Minimum constraints: At least 8 printable ASCII characters. Can't contain any of the following symbols: / ' * @

Confirm master password [Info](#)

- Credentials settings
- Mastername and Master password

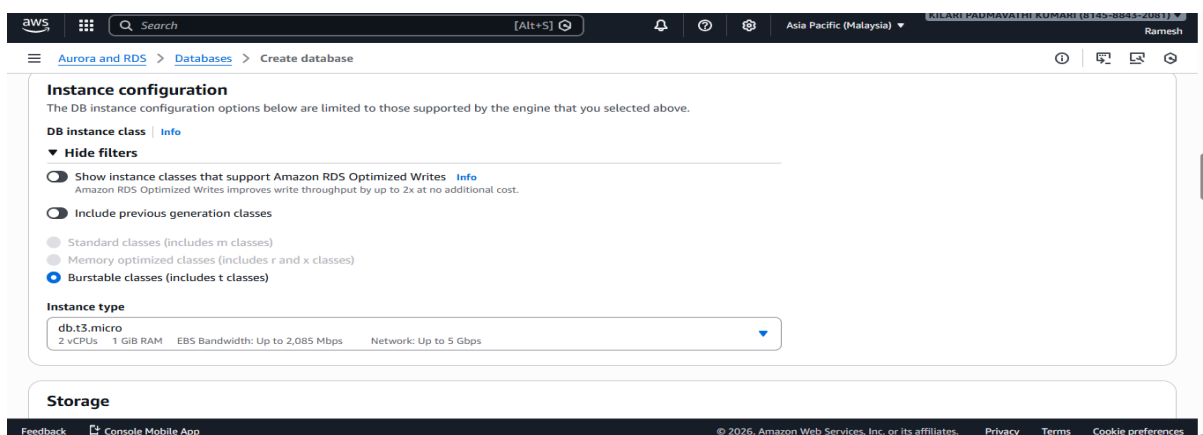

The screenshot shows the 'Create database' page in the AWS Management Console, specifically the 'Instance configuration' section. The 'DB instance class' is set to 'db.t3.micro'. The 'Instance type' dropdown is also set to 'db.t3.micro'.

Instance configuration
The DB instance configuration options below are limited to those supported by the engine that you selected above.

DB instance class [Info](#)

▼ **Hide filters**

- ☐ **Show instance classes that support Amazon RDS Optimized Writes** [Info](#)
Amazon RDS Optimized Writes improves write throughput by up to 2x at no additional cost.
- ☐ **Include previous generation classes**

- ☐ Standard classes (includes m classes)
- ☐ Memory optimized classes (includes r and x classes)
- ☒ **Burstable classes (includes t classes)**

Instance type

db.t3.micro
2 vCPUs 1 GiB RAM EBS Bandwidth: Up to 2,085 Mbps Network: Up to 5 Gbps

Storage

In Instance configuration

- Instance type select db.t3.micro

Relational Database Service-Task

The screenshot shows the 'Create database' page in the AWS Management Console, specifically the 'Storage' tab. The page is for the 'Asia Pacific (Malaysia)' region. The user is logged in as KILARI PADMAVATHI KUMARI (8145-8843-2081). The breadcrumb navigation shows 'Aurora and RDS' > 'Databases' > 'Create database'. The 'Storage' section has a 'Storage type' dropdown set to 'General Purpose SSD (gp2)' with a note 'Provisioned IOPS SSD (io2) storage volumes are now available.' and 'Baseline performance determined by volume size'. The 'Allocated storage' is set to '20' GiB, with a note 'Allocated storage value must be 20 GiB to 6,144 GiB'. There is a link for 'Additional storage configuration'. Below this is the 'Availability & durability' section with a 'Multi-AZ deployment' dropdown set to 'Do not create a standby instance'.

Storage

Storage type [Info](#)
Provisioned IOPS SSD (io2) storage volumes are now available.

General Purpose SSD (gp2)
Baseline performance determined by volume size

Allocated storage [Info](#)
20 GiB
Allocated storage value must be 20 GiB to 6,144 GiB

► **Additional storage configuration**

Availability & durability

Multi-AZ deployment [Info](#)

☐ Create a standby instance (recommended for production usage)
Creates a standby in a different Availability Zone (AZ) to provide data redundancy, eliminate I/O freezes, and minimize latency spikes during system backups.

☒ Do not create a standby instance

- Storage General purpose SSD (gp2)
- Allocate storage 20

The screenshot shows the 'Create database' page in the AWS Management Console, specifically the 'Connectivity' tab. The page is for the 'Asia Pacific (Malaysia)' region. The user is logged in as KILARI PADMAVATHI KUMARI (8145-8843-2081). The breadcrumb navigation shows 'Aurora and RDS' > 'Databases' > 'Create database'. The 'Connectivity' section has a 'Compute resource' dropdown set to 'Don't connect to an EC2 compute resource' with a note 'Don't set up a connection to a compute resource for this database. You can manually set up a connection to a compute resource later.' and a link 'Connect to an EC2 compute resource' with a note 'Set up a connection to an EC2 compute resource for this database.' Below this is the 'Network type' section with a dropdown set to 'IPv4' with a note 'Your resources can communicate only over the IPv4 addressing protocol.' and a link 'Dual-stack mode' with a note 'Your resources can communicate over IPv4, IPv6, or both.' Below this is the 'Virtual private cloud (VPC)' section with a dropdown set to 'Default VPC (vpc-0fab1647e41a4a523)' with a note '3 Subnets, 3 Availability Zones' and a link 'After a database is created, you can't change its VPC.'.

Connectivity [Info](#)

Compute resource
Choose whether to set up a connection to a compute resource for this database. Setting up a connection will automatically change connectivity settings so that the compute resource can connect to this database.

☒ Don't connect to an EC2 compute resource
Don't set up a connection to a compute resource for this database. You can manually set up a connection to a compute resource later.

☐ Connect to an EC2 compute resource
Set up a connection to an EC2 compute resource for this database.

Network type [Info](#)
To use dual-stack mode, make sure that you associate an IPv6 CIDR block with a subnet in the VPC you specify.

☒ IPv4
Your resources can communicate only over the IPv4 addressing protocol.

☐ Dual-stack mode
Your resources can communicate over IPv4, IPv6, or both.

Virtual private cloud (VPC) [Info](#)
Choose the VPC. The VPC defines the virtual networking environment for this DB instance.

Default VPC (vpc-0fab1647e41a4a523)
3 Subnets, 3 Availability Zones

After a database is created, you can't change its VPC. Only VPCs with a corresponding DB subnet group are listed.

After a database is created, you can't change its VPC.

- In Connectivity
- Choose default Vpc

Relational Database Service-Task

The screenshot shows the 'Create database' page in the AWS Management Console. The breadcrumb navigation is 'Aurora and RDS > Databases > Create database'. The page is divided into several sections:

- DB subnet group**: A dropdown menu is set to 'default'. Below it, a note states: 'Choose the DB subnet group. The DB subnet group defines which subnets and IP ranges the DB instance can use in the VPC that you selected.'
- Public access**: Two radio buttons are present. 'Yes' is unselected, and 'No' is selected. A note explains: 'RDS assigns a public IP address to the database. Amazon EC2 instances and other resources outside of the VPC can connect to your database. Resources inside the VPC can also connect to the database. Choose one or more VPC security groups that specify which resources can connect to the database.'
- VPC security group (firewall)**: Two radio buttons are present. 'Choose existing' is selected, and 'Create new' is unselected. A note states: 'Choose one or more VPC security groups to allow access to your database. Make sure that the security group rules allow the appropriate incoming traffic.'
- Existing VPC security groups**: A dropdown menu is set to 'default'.

The footer of the console shows 'Feedback', 'Console Mobile App', '© 2026, Amazon Web Services, Inc. or its affiliates.', 'Privacy', 'Terms', and 'Cookie preferences'.

- DB subnet group as default
- Public access-No
- Existing VPC security groups as default


This screenshot shows the 'Additional configuration' section of the 'Create database' page. The breadcrumb navigation remains 'Aurora and RDS > Databases > Create database'. The page shows:

- Additional configuration**: A section with a dropdown menu set to 'Expiry: May 16, 2064'. Below it, a note states: 'If you don't select a certificate authority, RDS chooses one for you.'
- Database port**: A text input field contains '3306'. A note states: 'TCP/IP port that the database will use for application connections.'
- Tags - optional**: A section with a note: 'A tag consists of a case-sensitive key-value pair. No tags associated with the resource.' Below it is an 'Add new tag' button and a note: 'You can add up to 50 more tags.'
- Monitoring**: A section with an 'Info' link.


The footer of the console shows 'Feedback', 'Console Mobile App', '© 2026, Amazon Web Services, Inc. or its affiliates.', 'Privacy', 'Terms', and 'Cookie preferences'.

- Additional Configuration shows database port as 3306


Relational Database Service-Task

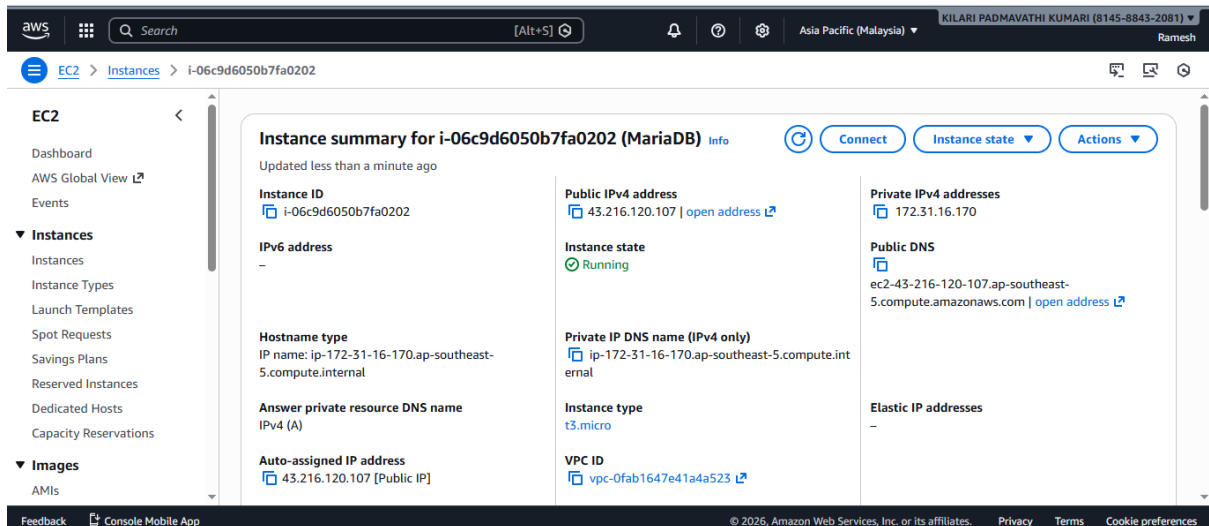

- Create Instance and connect through ssh

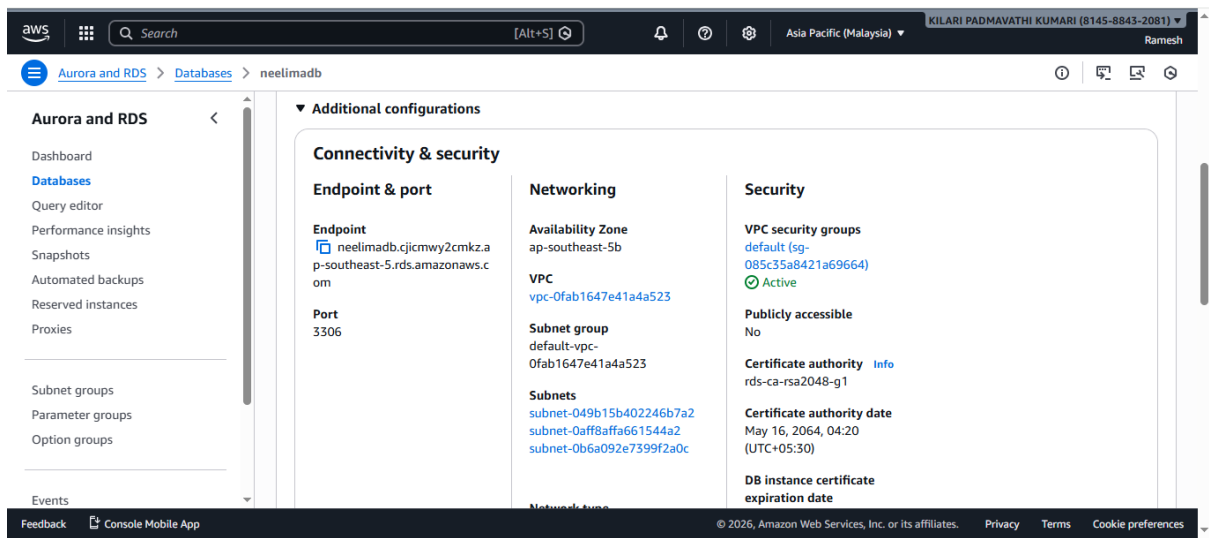

- After creating DB → neelimadb
- Copy endpoint from additional configurations

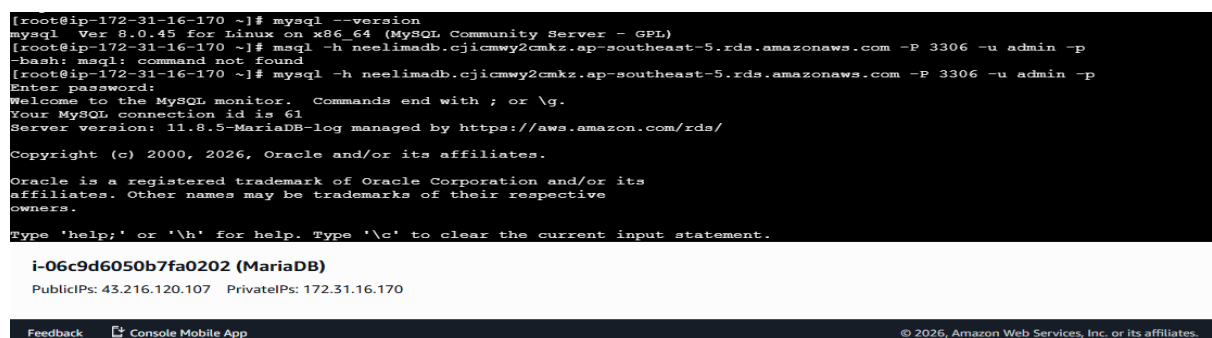

- To check connectivity command is
mysql -h endpoint -P 3306 -u admin -p

Relational Database Service-Task

5. Migrate database from EC2 to RDS.

- On EC2: Check source DB

```
[root@ip-172-31-16-170 ~]# mysql -h neelimadb.cjicmwy2cmkz.ap-southeast-5.rds.amazonaws.com -P 3306 -u admin -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 69
Server version: 11.8.5-MariaDB-log managed by https://aws.amazon.com/rds/

Copyright (c) 2000, 2026, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.
```

- SHOW DATABASES;

```
mysql> show databases;
+-----+
| Database |
+-----+
| information_schema |
| innodb      |
| mysql       |
| performance_schema |
| sys        |
+-----+
5 rows in set (0.01 sec)

mysql>
```

i-06c9d6050b7fa0202 (MariaDB)

PublicIPs: 43.216.120.107 PrivateIPs: 172.31.16.170

[Feedback](#) [Console Mobile App](#)

- Create database Neelima;
- show databases; command to check databases present in it.

```
mysql> create database Neelima;
Query OK, 1 row affected (0.00 sec)

mysql> show databases;
+-----+
| Database |
+-----+
| Neelima   |
| information_schema |
| innodb      |
| mysql       |
| performance_schema |
| sys        |
+-----+
6 rows in set (0.00 sec)

mysql>
```

i-06c9d6050b7fa0202 (MariaDB)

PublicIPs: 43.216.120.107 PrivateIPs: 172.31.16.170

[Feedback](#) [Console Mobile App](#)

Relational Database Service-Task

```
[root@ip-172-31-16-170 ~]# mysqldump -h neelimadb.cjicmwy2cmkz.ap-southeast-5.rds.amazonaws.com -P 3306 -u admin -p Neelima >Neelima.sql
Enter password:
[root@ip-172-31-16-170 ~]# ls
Neelima.sql
[root@ip-172-31-16-170 ~]#
```

i-06c9d6050b7fa0202 (MariaDB)

PublicIPs: 43.216.120.107 PrivateIPs: 172.31.16.170

Feedback Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie

- Migrate database from EC2 to RDS command as follow
- `mysqldump -h endpoint -P 3306 -u admin -p Neelima >Neelima.sql`
- To check we have command ls it shows Neelima.sql

6. Install MySQL DB on EC2.

Instance summary for i-0c241fd5a2b073c97 (MYSQL-DB) Info

Updated less than a minute ago

Instance ID
i-0c241fd5a2b073c97

Public IPv4 address
16.144.245.251 | open address

Private IPv4 addresses
172.31.11.19

Instance state
Running

Public DNS
ec2-16-144-245-251.us-west-2.compute.amazonaws.com | open address

IPv6 address
-

Hostname type
IP name: ip-172-31-11-19.us-west-2.compute.internal

Private IP DNS name (IPv4 only)
ip-172-31-11-19.us-west-2.compute.internal

Instance type
t2.micro

Answer private resource DNS name
IPv4 (A)

VPC ID
vpc-053cd67ddad0fb3d

Auto-assigned IP address
16.144.245.251 [Public IP]

Elastic IP addresses
-

AWS Compute Optimizer finding
Opt-in to AWS Compute Optimizer for recommendations.

- Go to aws console
- Launch instance and connect through ssh

```
Amazon Linux 2023
https://aws.amazon.com/linux/amazon-linux-2023

[ec2-user@ip-172-31-11-19 ~]$ sudo -i
[root@ip-172-31-11-19 ~]# sudo yum install -y https://dev.mysql.com/get/mysql80-community-release-el7-7.noarch.rpm
Amazon Linux 2023 Kernel Livepatch repository
mysql80-community-release-el7-7.noarch.rpm
Dependencies resolved.

Package Architecture Version Repository Size
Installing:
mysql80-community-release noarch el7-7 @commandline 11 k

Transaction Summary
```

i-0c241fd5a2b073c97 (MYSQL-DB)

PublicIPs: 16.144.245.251 PrivateIPs: 172.31.11.19

CloudShell Feedback Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Relational Database Service-Task

- Switch to root user command sudo -i
- Install mysql in EC2 instance.

```
[root@ip-172-31-11-19 ~]# sudo rpm --import https://repo.mysql.com/RPM-GPG-KEY-mysql
[root@ip-172-31-11-19 ~]# sudo yum install -y mysql-community-server
MySQL 8.0 Community Server                                29 MB/s | 4.5 MB    00:00
MySQL Connectors Community                               1.9 MB/s | 90 kB    00:00
MySQL Tools Community                                   18 MB/s | 2.0 MB    00:00
Error:
Problem: conflicting requests
- nothing provides libcrypto.so.10()(64bit) needed by mysql-community-server-8.0.11-1.el7.x86_64 from mysql80-community
- nothing provides libcrypto.so.10(libcrypto.so.10)(64bit) needed by mysql-community-server-8.0.11-1.el7.x86_64 from mysql80-community
- nothing provides libssl.so.10()(64bit) needed by mysql-community-server-8.0.11-1.el7.x86_64 from mysql80-community
- nothing provides libssl.so.10(libssl.so.10)(64bit) needed by mysql-community-server-8.0.11-1.el7.x86_64 from mysql80-community
- nothing provides libcrypto.so.10()(64bit) needed by mysql-community-server-8.0.12-1.el7.x86_64 from mysql80-community
- nothing provides libcrypto.so.10(libcrypto.so.10)(64bit) needed by mysql-community-server-8.0.12-1.el7.x86_64 from mysql80-community
- nothing provides libssl.so.10()(64bit) needed by mysql-community-server-8.0.12-1.el7.x86_64 from mysql80-community
- nothing provides libssl.so.10(libssl.so.10)(64bit) needed by mysql-community-server-8.0.12-1.el7.x86_64 from mysql80-community
- nothing provides libcrypto.so.10()(64bit) needed by mysql-community-server-8.0.13-1.el7.x86_64 from mysql80-community
- nothing provides libcrypto.so.10(libcrypto.so.10)(64bit) needed by mysql-community-server-8.0.13-1.el7.x86_64 from mysql80-community
- nothing provides libssl.so.10()(64bit) needed by mysql-community-server-8.0.13-1.el7.x86_64 from mysql80-community
```

i-0c241fd5a2b073c97 (MYSQL-DB)

PublicIPs: 16.144.245.251 PrivateIPs: 172.31.11.19

CloudShell Feedback Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

```
[root@ip-172-31-11-19 ~]# sudo dnf install -y mysql-community-server --nogpgcheck
Last metadata expiration check: 0:00:10 ago on Sun Feb  1 12:54:18 2026.
Dependencies resolved.

```

Package	Architecture	Version	Repository	Size
Installing:				
mysql-community-server	x86_64	8.0.45-1.el9	mysql80-community	50 M
Installing dependencies:				
mysql-community-client	x86_64	8.0.45-1.el9	mysql80-community	3.3 M
mysql-community-client-plugins	x86_64	8.0.45-1.el9	mysql80-community	1.4 M
mysql-community-common	x86_64	8.0.45-1.el9	mysql80-community	556 k
mysql-community-icu-data-files	x86_64	8.0.45-1.el9	mysql80-community	2.3 M
mysql-community-libs	x86_64	8.0.45-1.el9	mysql80-community	1.5 M

```
Transaction Summary
Install 6 Packages

Total download size: 59 M
Installed size: 337 M
Downloading Packages:
```

i-0c241fd5a2b073c97 (MYSQL-DB)

PublicIPs: 16.144.245.251 PrivateIPs: 172.31.11.19

CloudShell Feedback Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

```
[root@ip-172-31-11-19 ~]# sudo systemctl start mysqld
[root@ip-172-31-11-19 ~]# sudo systemctl enable mysqld
[root@ip-172-31-11-19 ~]# sudo grep "temporary password" /var/log/mysqld.log
2026-02-01T12:54:56.049979Z 6 [Note] [MY-010454] [Server] A temporary password is generated for root@localhost: kQpyrjh;ylhV
[root@ip-172-31-11-19 ~]# sudo mysql_secure_installation

Securing the MySQL server deployment.

Enter password for user root:
Error: Access denied for user 'root'@'localhost' (using password: YES)
[root@ip-172-31-11-19 ~]# mysql -u root -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 10
Server version: 8.0.45

Copyright (c) 2000, 2026, Oracle and/or its affiliates.
Oracle is a registered trademark of Oracle Corporation and/or its
```

i-0c241fd5a2b073c97 (MYSQL-DB)

PublicIPs: 16.144.245.251 PrivateIPs: 172.31.11.19

CloudShell Feedback Console Mobile App


© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

- After installation done
- sudo systemctl start mysqld
- sudo systemctl enable mysqld
- sudo mysql_secure_installation
- enter password:xxxx
- After authentication done it switch to DB.

Relational Database Service-Task


7. Launch MySQL RDS image.

1. Login to AWS Console → Go to RDS → Databases → Create database.

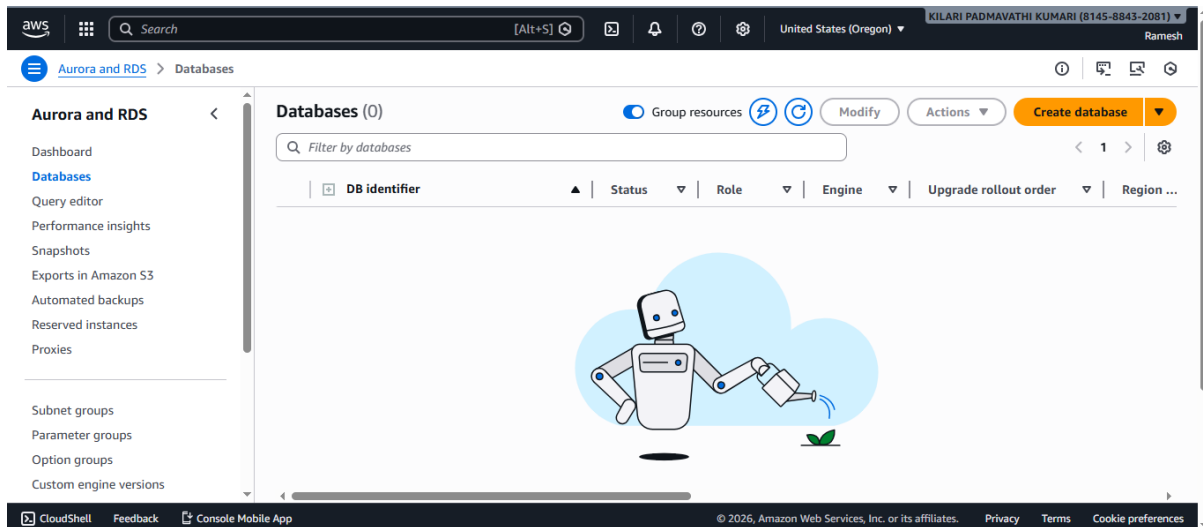

2. Engine options

- Engine type: MySQL

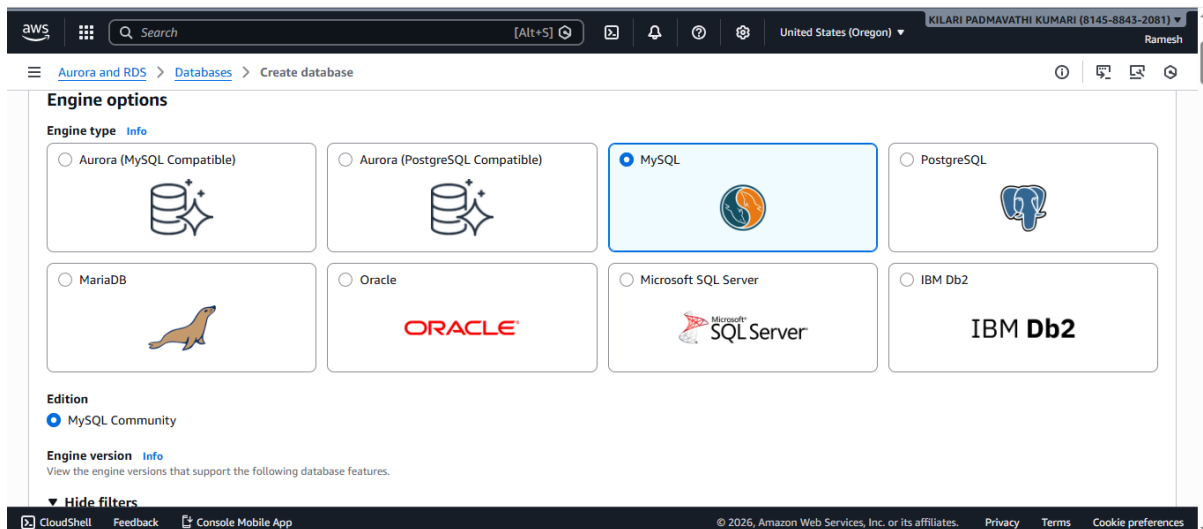

- Version: choose latest supported (e.g., 8.0.x)

3. Templates

- For learning/testing: Free tier

Relational Database Service-Task

Templates
Choose a sample template to meet your use case.

- ☐ **Production**
Use defaults for high availability and fast, consistent performance.
- ☐ **Dev/Test**
This instance is intended for development use outside of a production environment.
- ☒ **Sandbox**
To develop new applications, test existing applications, or gain hands-on experience with Amazon RDS.

Availability and durability
Choose the deployment option that provides the availability and durability needed for your use case. AWS is committed to a certain level of uptime depending on the deployment option you choose. Learn more in the [Amazon RDS service level agreement \(SLA\)](#).

- ☐ **Multi-AZ DB cluster deployment (3 instances)**
Creates a primary DB instance with two readable standbys in separate Availability Zones. This setup provides:
 - 99.95% uptime
 - Redundancy across Availability Zones
 - Increased read capacity
 - Reduced write latency
- ☐ **Multi-AZ DB instance deployment (2 instances)**
Creates a primary DB instance with a non-readable standby instance in a separate Availability Zone. This setup provides:
 - 99.95% uptime
 - Redundancy across Availability Zones
- ☒ **Single-AZ DB instance deployment (1 instance)**
Creates a single DB instance without standby instances. This setup provides:
 - 99.5% uptime
 - No data redundancy

Write/read endpoint Reader endpoints Write/read endpoint Standby (no endpoint) Write/read endpoint

4. DB instance identifier

- Example: NeelimaDB

Settings

DB instance identifier [Info](#)
Type a name for your DB instance. The name must be unique across all DB instances owned by your AWS account in the current AWS Region.

NeelimaDB

The DB instance identifier is case-insensitive, but is stored as all lowercase (as in "mydbinstance"). Constraints: 1 to 63 alphanumeric characters or hyphens. First character must be a letter. Can't end with a hyphen.

Credentials Settings

Master username [Info](#)
Type a login ID for the master user of your DB instance.

admin

1 to 16 alphanumeric characters. The first character must be a letter.

Credentials management
You can use AWS Secrets Manager or manage your master user credentials.

- ☐ **Managed in AWS Secrets Manager - most secure**
RDS generates a password for you and manages it throughout its lifecycle using AWS Secrets Manager.
- ☒ **Self managed**
Create your own password or have RDS create a password that you manage.

☐ Auto generate password

5. Master username & password

Username: admin

- Password: MyStrongPass1

Relational Database Service-Task

The screenshot shows the AWS Management Console for the 'Create database' page under 'Aurora and RDS > Databases'. The 'Credentials management' section is active, showing two options: 'Managed in AWS Secrets Manager - most secure' (unselected) and 'Self managed' (selected). Below these, there is a section for 'Master password' with a text input field, a 'Password strength' indicator showing 'Strong', and a 'Confirm master password' field. The 'Additional credentials settings' section is collapsed. The bottom of the console shows the AWS logo, search bar, navigation icons, region (United States (Oregon)), user name (KILARI PADMAVATHI KUMARI), and various footer links like CloudShell, Feedback, and Console Mobile App.

6. Instance size / capacity

- Free tier: db.t3.micro

7. Storage

- General Purpose (SSD) default is fine
- Enable autoscaling if needed

The screenshot shows the AWS Management Console for the 'Create database' page, specifically the 'Instance type' and 'Storage' sections. The 'Instance type' section shows 'db.t3.micro' selected, with details: 2 vCPUs, 1 GiB RAM, EBS Bandwidth: Up to 2,085 Mbps, and Network: Up to 5 Gbps. The 'Storage' section shows 'General Purpose SSD (gp2)' selected, with details: Provisioned IOPS SSD (io2) storage volumes are now available. Below this, the 'Allocated storage' is set to '20' GiB, with a note: 'Allocated storage value must be 20 GiB to 6,144 GiB'. There is a link for 'Additional storage configuration'. The bottom of the console shows the AWS logo, search bar, navigation icons, region (United States (Oregon)), user name (KILARI PADMAVATHI KUMARI), and various footer links like CloudShell, Feedback, and Console Mobile App.

8. Connectivity

- VPC: select the same VPC as your EC2 if your app runs there
- Subnet group: default is fine

Relational Database Service-Task

The screenshot shows the 'Create database' page in the AWS Management Console. The 'Connectivity' section is active, showing options for 'Compute resource' and 'Virtual private cloud (VPC)'. The 'Compute resource' section has two radio buttons: 'Don't connect to an EC2 compute resource' (selected) and 'Connect to an EC2 compute resource'. The 'Virtual private cloud (VPC)' section has a dropdown menu showing 'Default VPC (vpc-053cd67ddad0fb3d)' with 4 Subnets and 4 Availability Zones. Below this, a note states: 'After a database is created, you can't change its VPC.' The 'DB subnet group' section has a dropdown menu showing 'default'.

- Public access: No (recommended)
- VPC security group: add a rule to allow 3306 TCP inbound from EC2's SG

The screenshot shows the 'Create database' page in the AWS Management Console, specifically the 'Public access' and 'VPC security group' sections. The 'Public access' section has two radio buttons: 'Yes' and 'No' (selected). The 'VPC security group (firewall)' section has two radio buttons: 'Choose existing' (selected) and 'Create new'. Below the 'Choose existing' radio button, there is a dropdown menu labeled 'Existing VPC security groups' with the text 'Choose one or more options' and a 'default' button.

9. Click Create database

- It will take a few minutes to launch.

Relational Database Service-Task

The screenshot displays the AWS Management Console for an Amazon RDS instance named 'neelimadb'. The left sidebar shows the navigation menu with 'Aurora and RDS' selected. The main content area is titled 'Connectivity & security' and is divided into three columns: 'Endpoint & port', 'Networking', and 'Security'. The 'Endpoint & port' column shows the endpoint 'neelimadb.chgeegaa89h.us-west-2.rds.amazonaws.com' and port '3306'. The 'Networking' column shows the availability zone 'us-west-2d', VPC 'vpc-053cd67ddadf0fb3d', subnet group 'default-vpc-053cd67ddadf0fb3d', and subnets 'subnet-086e9a6efafb137e7', 'subnet-064a462d67f45c436', 'subnet-07e30b9db7fd994e2', and 'subnet-06a103578c96e2e28'. The 'Security' column shows VPC security groups 'default (sg-03ae532468d881544)' and 'Active', publicly accessible status 'No', certificate authority 'rds-ca-rsa2048-g1', certificate authority date 'May 25, 2061, 04:29 (UTC+05:30)', and DB instance certificate expiration date 'February 01, 2027, 18:55 (UTC+05:30)'. Below the console, a terminal window shows a successful MySQL connection command: `mysql -h neelimadb.chgeegaa89h.us-west-2.rds.amazonaws.com -P 3306 -u admin -p`. The terminal output includes the MySQL welcome message, connection ID 44, server version 8.4.7, and copyright information.

```
[root@ip-172-31-11-19 ~]# mysql -h neelimadb.chgeegaa89h.us-west-2.rds.amazonaws.com -P 3306 -u admin -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 44
Server version: 8.4.7 Source distribution

Copyright (c) 2000, 2026, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql>
```

- Test connectivity command `mysql -h endpoint -P 3306 -u admin -p` to connect to Database.

8. Configure Multi-AZ.

- Go to **RDS → Databases**.
- Select your existing database (neelimadb).
- Click **Modify**.
- Scroll to **Availability & durability**.
- Set **Multi-AZ deployment**: Create a standby instance in another AZ.

Relational Database Service-Task

Additional storage configuration

Availability & durability

Multi-AZ deployment [Info](#)

☒ Create a standby instance (recommended for production usage)
Creates a standby in a different Availability Zone (AZ) to provide data redundancy, eliminate I/O freezes, and minimize latency spikes during system backups.

☐ Do not create a standby instance

Connectivity [Info](#)

Network type [Info](#)
To use dual-stack mode, make sure that you associate an IPv6 CIDR block with a subnet in the VPC you specify.

☒ IPv4
Your resources can communicate only over the IPv4 addressing protocol.

☐ Dual-stack mode
Your resources can communicate over IPv4, IPv6, or both.

DB subnet group

- Choose **Apply immediately**
- Click **Modify database**.

Multi-AZ deployment

No Yes

Schedule modifications

When to apply modifications

☐ Apply during the next scheduled maintenance window
Current maintenance window: February 06, 2026 12:13 - 12:43 (UTC+05:30)

☒ Apply immediately
The modifications in this request and any pending modifications will be asynchronously applied as soon as possible, regardless of the maintenance window setting for this database instance.

Potential performance impact when converting to Multi-AZ
Your DB instance can experience a significant performance impact during and after converting to a Multi-AZ deployment. The impact is greater on DB instances with large amounts of storage and write-intensive workloads. We don't recommend this conversion on a production DB instance.

[Cancel](#) [Back](#) [Modify DB instance](#)

Aurora and RDS

Dashboard

Databases

Query editor

Performance insights

Snapshots

Exports in Amazon S3

Automated backups

Reserved instances

Proxies

Subnet groups

Parameter groups

Option groups

Custom engine versions

Successfully modified neelimadb.


Databases (1)

☒ Group resources [Refresh](#) [Reset](#) [Modify](#) [Actions](#) [Create database](#)

DB identifier	Status	Role	Engine	Upgrade rollout order	Region
neelimadb	Available	Instance	MySQL Co...	SECOND	us-west-2d

Relational Database Service-Task

- Create Users and add permissions to user AmazonRDSFullAccess.

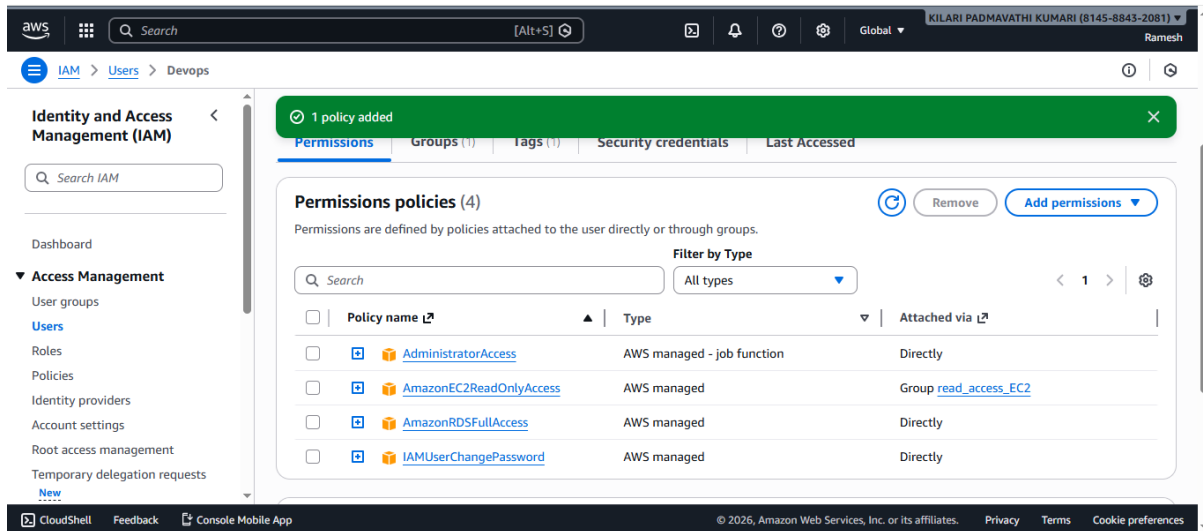

- aws configure and check configuration
- aws sts get-caller-identity and
- aws rds describe-db-instance --region us-west-2 --db-instance-identifier neelimadb shows details

```
MINGW64:/c/Users/user
user@DESKTOP-3KHLIRE MINGW64 ~ (master)
$ aws sts get-caller-identity
{
  "UserId": "AIDA33KKBB3I7WAJYC3J",
  "Account": "814588432081",
  "Arn": "arn:aws:iam::814588432081:user/Devops"
}

user@DESKTOP-3KHLIRE MINGW64 ~ (master)
$ aws rds describe-db-instances --db-instance-identifier neelimadb

An error occurred (DBInstanceNotFound) when calling the DescribeDBInstances operation: DBInstance neelimadb not found.

user@DESKTOP-3KHLIRE MINGW64 ~ (master)
$
user@DESKTOP-3KHLIRE MINGW64 ~ (master)
$ aws rds describe-db-instances \
> --region us-west-2 \
> --db-instance-identifier neelimadb
{
  "DBInstances": [
    {
      "DBInstanceIdentifier": "neelimadb",
      "DBInstanceClass": "db.t3.micro",
      "Engine": "mysql",
      "DBInstanceStatus": "available",
      "MasterUsername": "admin",
      "Endpoint": {
        "Address": "neelimadb.chgeegaa89h.us-west-2.rds.amazonaws.com",
        "Port": 3306,
        "HostedZoneId": "Z1PVIF0B656C1W"
      },
      "AllocatedStorage": 20,
      "InstanceCreateTime": "2026-02-01T13:26:41.483000+00:00",
      "PreferredBackupWindow": "07:13-07:43",
      "BackupRetentionPeriod": 1,
      "DBSecurityGroups": [],
      "VpcSecurityGroups": [
        {
          "VpcSecurityGroupId": "sg-03ae532468d881544",
          "Status": "active"
        }
      ],
      "DBParameterGroups": [
```

Relational Database Service-Task

9. Take backup of DB and restore the DB.

```
[root@ip-172-31-11-19 ~]# mysql -h neelimadb.chgeegaa89h.us-west-2.rds.amazonaws.com -P 3306 -u admin -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 57
Server version: 8.4.7 Source distribution

Copyright (c) 2000, 2026, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.
```



```
mysql> show databases;
+-----+
| Database          |
+-----+
| information_schema |
| mysql              |
| performance_schema |
| sys                |
+-----+
4 rows in set (0.02 sec)

mysql> create database employee;
Query OK, 1 row affected (0.02 sec)
```

```
mysql> create database employee;
Query OK, 1 row affected (0.02 sec)

mysql> show databases;
+-----+
| Database          |
+-----+
| employee           |
| information_schema |
| mysql              |
| performance_schema |
| sys                |
+-----+
5 rows in set (0.00 sec)

mysql>
```

i-0c241fd5a2b073c97 (MYSQL-DB)

PublicIPs: 16.144.245.251 PrivateIPs: 172.31.11.19

Relational Database Service-Task

The screenshot shows two terminal sessions in AWS CloudShell. The first session shows the installation of the telnet package on an Amazon Linux instance. The second session shows a telnet connection to a MySQL database instance named 'neelimadb'.

```
[root@ip-172-31-11-19 ~]# sudo yum install telnet -y
Last metadata expiration check: 1:54:03 ago on Sun Feb 1 12:54:18 2026.
Dependencies resolved.
Package Architecture Version Repository Size
Installing:
telnet x86_64 1:0.17-83.amzn2023.0.2 amazonlinux 64 k
Transaction Summary
Install 1 Package
Total download size: 64 k
Installed size: 121 k
Downloading Packages:
telnet-0.17-83.amzn2023.0.2.x86_64.rpm 1.6 MB/s | 64 kB 00:00
Total 748 kB/s | 64 kB 00:00
Running transaction check
Transaction check succeeded.
Running transaction test
```

i-0c241fd5a2b073c97 (MYSQL-DB)
PublicIPs: 16.144.245.251 PrivateIPs: 172.31.11.19

```
[root@ip-172-31-11-19 ~]# telnet neelimadb.chgeegaa89h.us-west-2.rds.amazonaws.com 3306
Trying 172.31.54.98...
Connected to neelimadb.chgeegaa89h.us-west-2.rds.amazonaws.com.
Escape character is '^['.
I
8.4.7Br-5'(|
```

(Or)

The screenshot shows the AWS Management Console for Aurora and RDS. The 'Databases (1)' section is active, showing a table with one database instance named 'neelimadb'. The 'Actions' menu is open, showing options like 'Stop temporarily', 'Reboot', 'Delete', 'Set up EC2 connection', 'Set up Lambda connection', 'Migrate data from EC2 database', 'Create read replica', 'Create Aurora read replica', 'Create blue/green deployment', 'Promote', 'Convert to Multi-AZ deployment', 'Take snapshot', 'Restore to point in time', and 'Migrate snapshot'.

Aurora and RDS > Databases

Databases (1)

DB identifier	Status	Role	Engine
neelimadb	Available	Instance	MySQL Co...

Actions

- Stop temporarily
- Reboot
- Delete
- Set up EC2 connection
- Set up Lambda connection
- Migrate data from EC2 database
- Create read replica
- Create Aurora read replica
- Create blue/green deployment
- Promote
- Convert to Multi-AZ deployment
- Take snapshot
- Restore to point in time
- Migrate snapshot

- Go to AWS console
- Select Database and click on database create previously
- Click on Action and select Take a snapshot

Relational Database Service-Task

The screenshot shows the 'Take snapshot' page in the AWS Management Console. The breadcrumb navigation is 'Aurora and RDS > Snapshots > Take snapshot'. The 'Preferences' section contains the following fields:

- Snapshot type:** Radio buttons for 'DB instance' (selected) and 'DB cluster'.
- DB instance:** A dropdown menu with 'neelimadb' selected.
- Snapshot name:** A text input field containing 'Backup-DB1'.

Below the input fields, there is a 'Cancel' button and a 'Take snapshot' button.

- In preference
- Snapshot type DB instance
- select instance name:neelimadb
- Add Snapshot name:Backup_DB1
- Click on Take snapshot

The screenshot shows the 'backup-db1' details page in the AWS Management Console. The breadcrumb navigation is 'Aurora and RDS > Snapshots > backup-db1'. The 'Details' section displays the following information:


Property	Value
ARN	arn:aws:rds:us-west-2:814588432081:snapshot:backup-db1
Instance/Cluster Name	neelimadb
Master username	admin
DB snapshot name	backup-db1
Snapshot type	manual
DB engine	mysql
Option group	default:mysql-8-4
Zone	us-west-2d
KMS key ID	ee869fae-1cfc-4098-a8d6-92951db56cfd
Source region	N/A
Snapshot Creation Time	February 01, 2026, 21:21 (UTC+05:30)
Original Snapshot Creation Time	February 01, 2026, 21:21 (UTC+05:30)
VPC	vpc-053cd67ddadfc
Status	Available
Storage type	General Purpose SSD (gp2)
DB storage	20 GiB
IOPS	-
Storage throughput	0

The 'Actions' menu is open, showing the following options:


- Restore snapshot
- Copy snapshot
- Share snapshot
- Migrate snapshot
- Upgrade snapshot
- Export to Amazon S3
- Delete snapshot

- After Creating backup of Database
- To restore snapshot click on action select Restore snapshot


Relational Database Service-Task

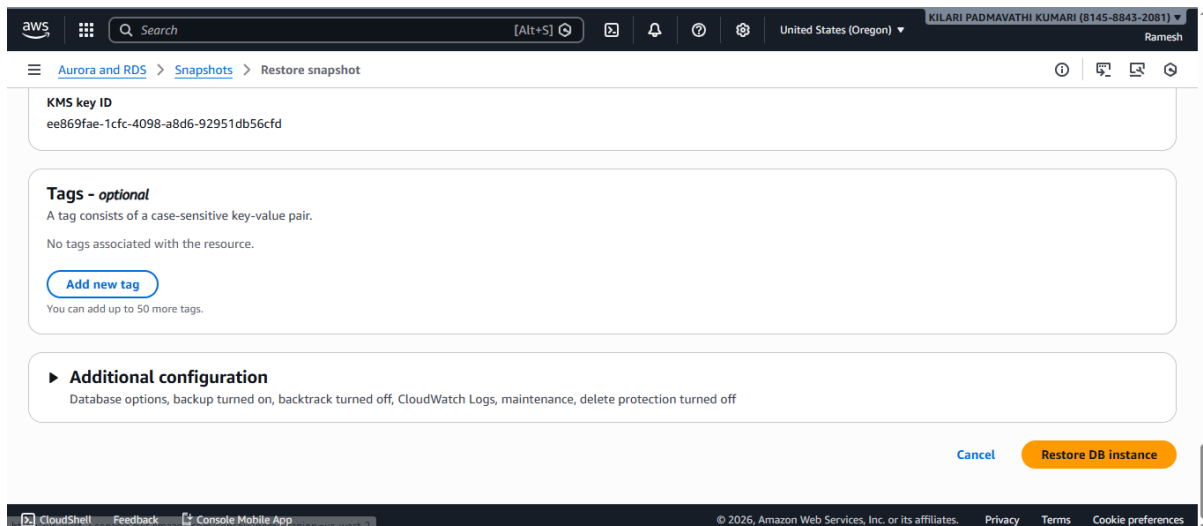

- Click on Restore DB instance

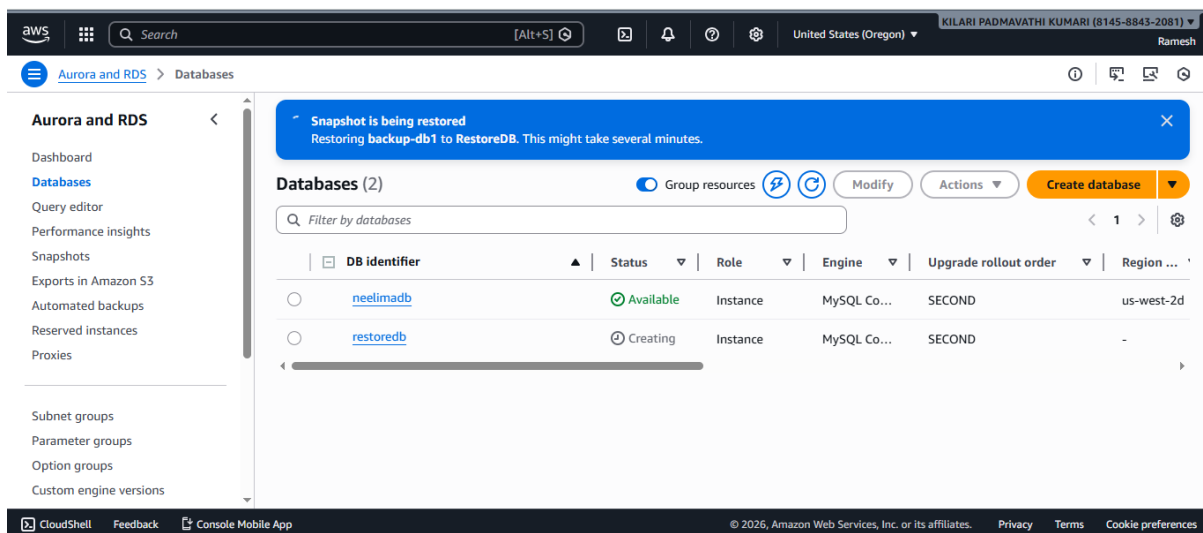

- The above image shows restoreDB from snapshot.

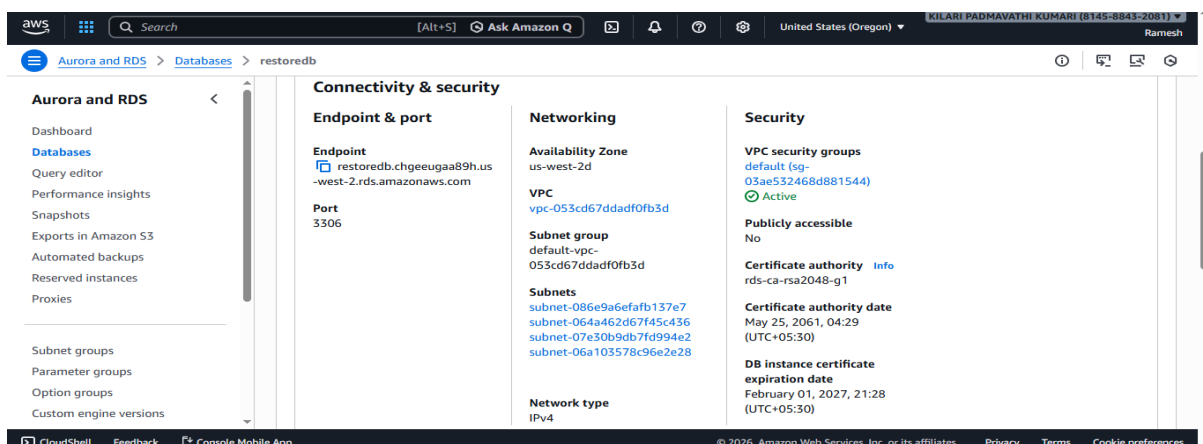

- From connectivity and security copy endpoint for testing purpose

Relational Database Service-Task

```
[root@ip-172-31-11-19 ~]# mysql -h restoredb.chgeegaa89h.us-west-2.rds.amazonaws.com -P 3306 -u admin -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 15
Server version: 8.4.7 Source distribution

Copyright (c) 2000, 2026, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql>
```

i-0c241fd5a2b073c97 (MYSQL-DB)

PublicIPs: 16.144.245.251 PrivateIPs: 172.31.11.19

CloudShell Feedback Console Mobile App


© 2026, Amazon Web Services, Inc. or

- Test connectivity command
- Mysql -h endpoint -P 3306 -u admin -p
- Enter password :xxxx
- Check authentication and switch into DB

10. Create read replica.

Step 1: Open RDS

1. Go to AWS Console → RDS
2. Click Databases
3. Select your DB: neelimadb

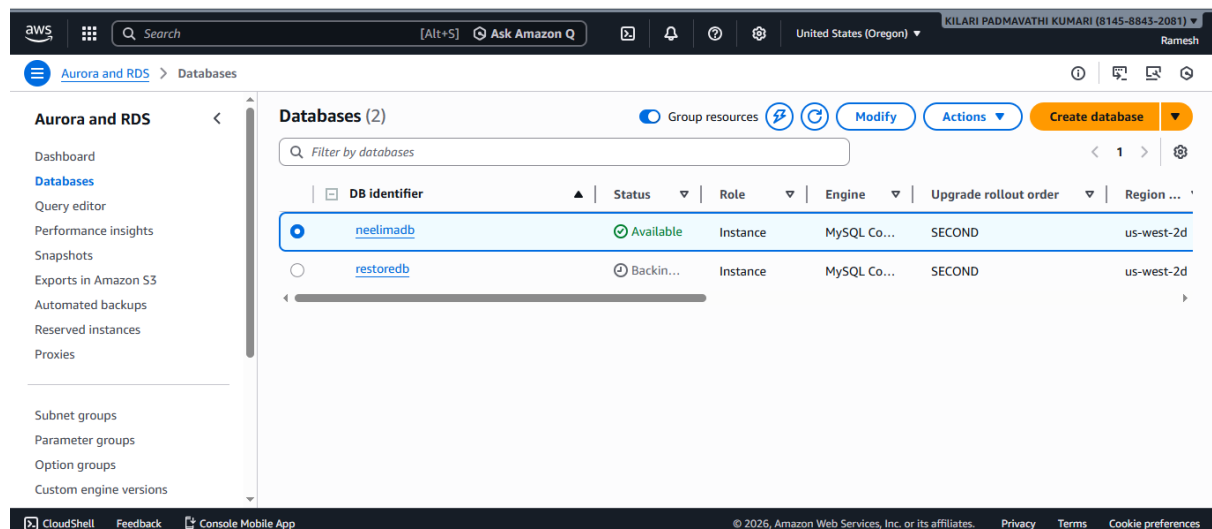


DB identifier	Status	Role	Engine	Upgrade rollout order	Region
neelimadb	Available	Instance	MySQL Co...	SECOND	us-west-2d
restoredb	Backin...	Instance	MySQL Co...	SECOND	us-west-2d

Step 2: Create Read Replica

1. Click Actions

Relational Database Service-Task

2. Choose Create read replica

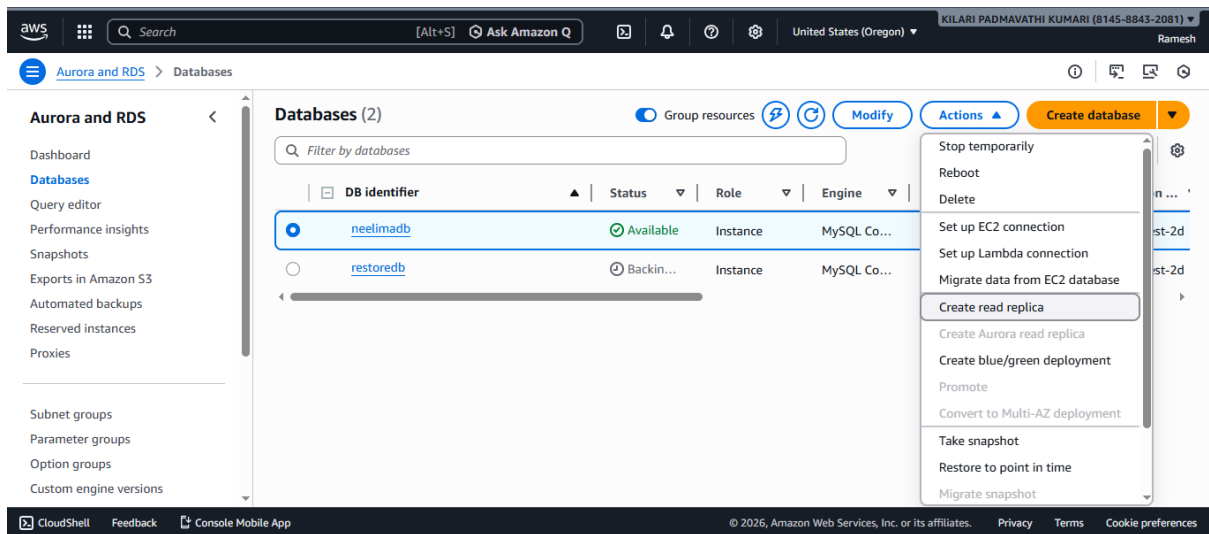


Step 3: Create

Click Create read replica

Status will show:

Creating → Modifying → Available

This takes 5–10 minutes.

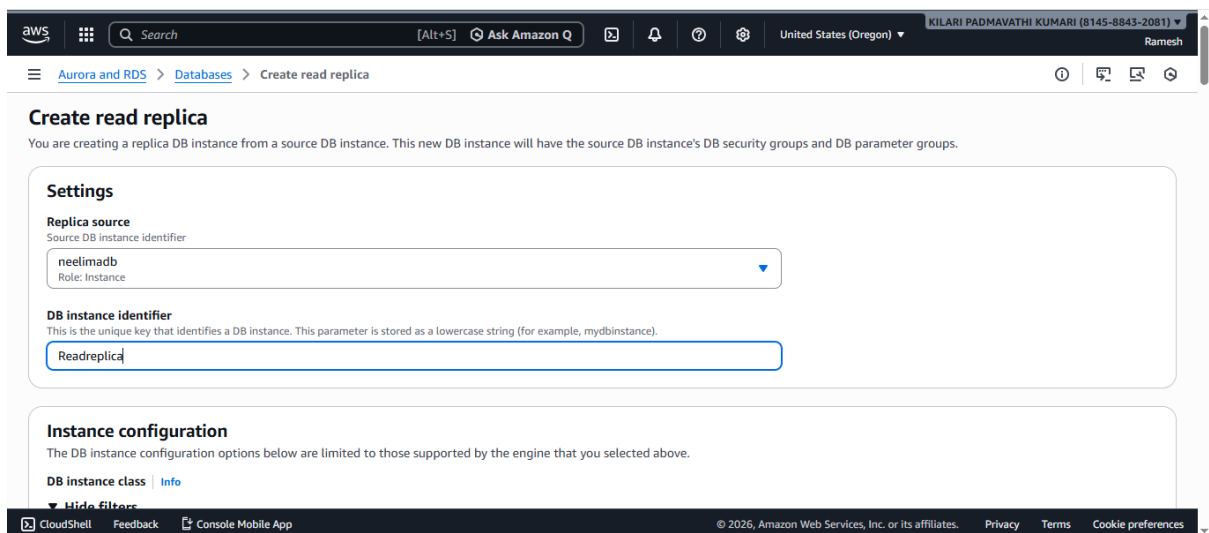

Relational Database Service-Task

The screenshot shows the 'Create read replica' page in the AWS Management Console. The breadcrumb navigation is 'Aurora and RDS > Databases > Create read replica'. The page displays the following information:

- Account:** 814588432081
- KMS key ID:** ee869fae-1cfc-4098-a8d6-92951db56cfd
- Maintenance:**
 - ☒ **Enable auto minor version upgrade**
Enabling auto minor version upgrade will automatically upgrade your database minor version. For limitations and more details, see Automatically upgrading the minor engine version [documentation](#).
 - ☐ **Enable deletion protection**
Protects the database from being deleted accidentally. While this option is enabled, you can't delete the database.

At the bottom right, there are two buttons: 'Cancel' and 'Create read replica'.


- Click on read replica.

The screenshot shows the 'Create role' page in the AWS Management Console. The breadcrumb navigation is 'IAM > Roles > Create role'. The page displays the following information:

- Use case:** Allow an AWS service like EC2, Lambda, or others to perform actions in this account.
- Service or use case:** RDS
- Choose a use case for the specified service.**
 - ☐ **RDS - Directory Service**
Allows RDS to manage Directory Service resources on your behalf.
 - ☒ **RDS - Enhanced Monitoring**
Allows RDS to manage CloudWatch Logs resources for Enhanced Monitoring on your behalf.
 - ☐ **RDS - Add Role to Database**
Allows you to grant RDS access to additional resources on your behalf.
 - ☐ **RDS**
Allows RDS to perform operations using AWS resources on your behalf.
 - ☐ **RDS - Beta**
Allows RDS to perform operations using AWS resources on your behalf in the Beta region.
 - ☐ **RDS - Preview**
Allows RDS Preview to manage AWS resources on your behalf.

- Create a IAM role and attach uscase as RDS
- Specified service asRDS-Enhance Monitoring

Relational Database Service-Task

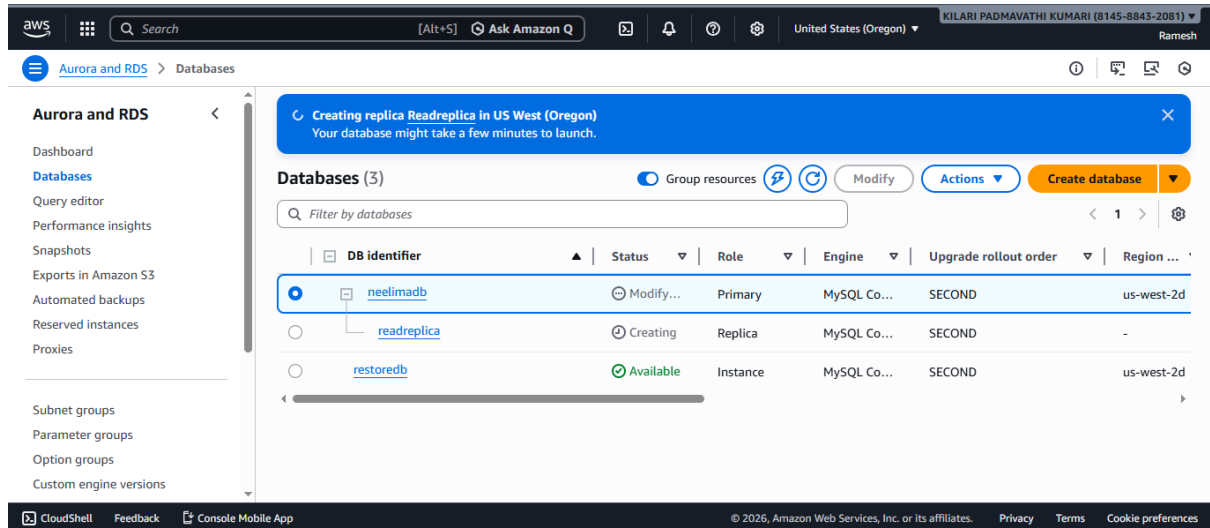

- The above image shows created read replica from primary DB