Laxmi Charitable Trust's
Sheth L.U.J College of Arts & Sir M.V. College of Science and Commerce
Department of Information Technology (B.Sc.I.T Semester V)
MERN STACK

Practical – IV

Roll No.: T021	Name: Neeraj Mishra
Class: TYIT	Batch:1
Date of Assignment:15-7-26	Date/Time of Submission:15-7-26

4.React Components, Props, and State
b. Pass data between components using props.
Code :
App.jsx

```
import Header from "./components/Header";
import Footer from "./components/Footer";
import HotelCard from "./components/HotelCard";
import "./App.css";

function App() {
  return (
    <div className="container">
      <Header />
      <HotelCard
        resturant = "Domino's Pizza"
        food = "Pizza, Pasta, Beverages"
        price = {1599}
        rating = {4.5}
        discount = {20}/>
      <HotelCard
        resturant = "McDonald's"
        food = "Burgers, Fries, Beverages"
        price = {1699}
        rating = {4.5}
        discount = {20}/>
      <HotelCard
        resturant = "Pizza Hut"
        food = "Pizza, Pasta, Beverages"
        price = {599}
        rating = {4.5}
        discount = {20}/>
      <HotelCard
```

```
        resturant = "Chicken Hut"
        food = "chicken Pizza, chicken hande Pasta, Beverages"
        price = {1099}
        rating = {4.5}
        discount = {20}/>
      <Footer />
    </div>
  );
}

export default App;
```

Header.jsx

```
function Header() {
  return (
    <div>
      <h1>Online Food Delivery Dashboard</h1>
      <h3>Neeraj MIshra</h3>
      <hr />
    </div>
  );
}

export default Header;
```

HotelCard.jsx

```
function HotelCard(props) {
    const discount = (props.price * props.discount) / 100;
    const finalPrice = props.price - discount;

    return(
        <div>
            <h2>{props.restaurant}</h2>
            <p>Food Item : {props.food}</p>
            <p>Original Price : ₹{props.price}</p>
            <p>Discount : {props.discount}%</p>
            <p>Final Price : ₹{finalPrice}</p>
            <p>Rating : {props.rating}</p>
        </div>
    );
}


export default HotelCard;
```

Footer.jsx

```
function Footer() {
  return (
    <div>
      <p>© 2026 Online Food Delivery App</p>
    </div>
  );
}

export default Footer;
```

Output:

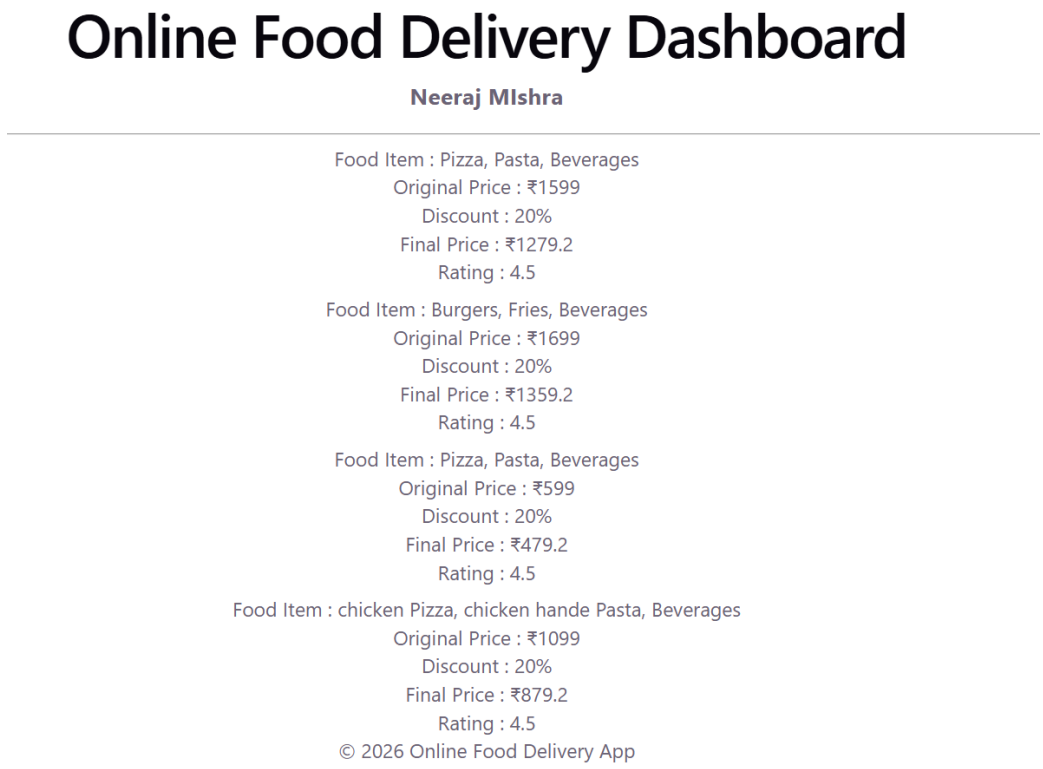

c. Use the useState hook to manage and update data.
Code-:
App jsx-:

```
import { useState } from "react";

function Apps() {
  const [count, setCount] = useState(0);

  return (
    <div>
      <h1>Button Click Counter</h1>
      <hr />
      <h2>User clicks: {count} times</h2>
      <h3>neeraj</h3>
      <button onClick={() => setCount(count + 1)}>Click Me</button>
    </div>
  );
}

export default Apps;
```

Output-:



d. Create a form component to accept user input and display it dynamically.
Code-:
App jsx-:

```
import StudentForm from "./components/StudentForm"
function Apps() {

  return(
    <div>
      <StudentForm> </StudentForm>
    </div>
  );
}
```

```
export default Apps;
```

Student form jsx-:

```
import { useState } from "react";


function StudentRegisterForm() {
   const [name, setName] = useState("");
   const [email, setEmail] = useState("");
   const [phone, setPhone] = useState("");
   const [CGPA, setCgpa] = useState("");


   return (
   <div>
      <h1>Student Registration Form</h1>
      <hr/>
      <label>Name:</label>
      <input type="text" placeholder="Enter Name" value={name}
onChange={(e) => setName(e.target.value)} />
      <br/>
      <label>Email:</label>
      <input type="email" placeholder="Enter Email" value={email}
onChange={(e) => setEmail(e.target.value)} />
      <br/>
      <label>Phone Number:</label>
      <input type="text" placeholder="Enter Phone Number" value={phone}
onChange={(e) => setPhone(e.target.value)} />
      <br/>
      <label>CGPA:</label>
      <input type="text" placeholder="Enter CGPA" value={CGPA}
onChange={(e) => setCgpa(e.target.value)} />
      <br/>
      <button type="submit" onClick={() => {}}>Submit</button>
      <hr/>
      <h2>Student details</h2>
      <p>Name: {name}</p>
      <p>Email: {email}</p>
      <p>Phone Number: {phone}</p>
      <p>CGPA: {CGPA}</p>
   </div>

   );
}
```

export default StudentRegisterForm;

Output-:

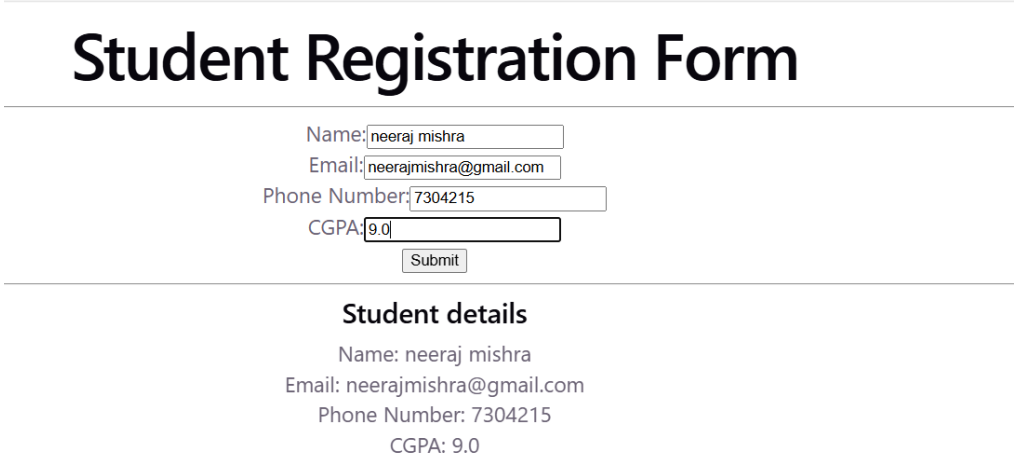

e. Display a list of items stored in the state using map().
Code-:

App.jsx

```
import CompanyList from './components/CompanyList';
import './App.css';

function App() {
  return (
    <div className="App">
      <h1>Company List</h1>
      <CompanyList />
    </div>
  );
}

export default App;
```

CompanyList.jsx

```
import {useState} from 'react';

function CompanyList() {
    const [companies] = useState([
        "TCS",
        "Infosys",
        "Wipro",
        "HCL",
        "Tech Mahindra"
    ]);
```

```
    return (
        <div>
            <h2>Placement Companies</h2>
            <h3>Neeraj</h3>
            <hr/>
            <ol>
                {companies.map((company, index) => (
                    <li key={index}>{company}</li>
                ))}
            </ol>
        </div>
    );
}

export default CompanyList;
```

Output-:



f. Build a small interactive component (e.g., counter or to-do list).

Code-:

```
import {useState} from 'react';
function App() {
  const [count, setCount] = useState(0);
  return (


    <div className="App">

      <h1>React Counter App</h1>
      <h2>User Clicks : {count} times</h2>
      <button onClick={() => setCount(count + 1)}>Increment</button>
      <br/>
      <button onClick={() => setCount(count - 1)}>Decrement</button>
      <br/>
      <button onClick={() => setCount(0)}>Reset</button>
      <hr/>
```

```
      <h3>Neeraj</h3>
    </div>
  );
}

export default App;
```

output-:

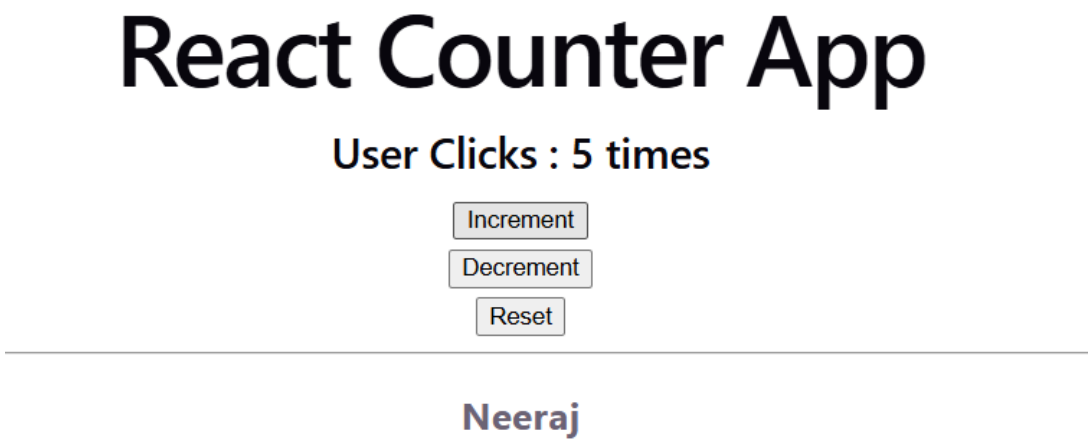

(to do list) code-:

```
import { useState } from "react";
function App() {
const [task, setTask] = useState("");
const [tasks, setTasks] = useState([]);
// Add a new task
const addTask = () => {
if (task.trim() === "") {
alert("Please enter a task!");
return;
}
setTasks([...tasks, task]);
setTask("");
};
return (
<div style={{ textAlign: "center", marginTop: "30px" }}>
<h2>To-Do List</h2>
<input
type="text"
placeholder="Enter a task"
value={task}
```

```
onChange={(e) => setTask(e.target.value)}
/>
<button onClick={addTask} style={{ marginLeft: "10px" }}>
Add
</button>
<hr />
<h3>Task List</h3>
<ol>
{tasks.map((item, index) => (
<li key={index}>{item}</li>
))}
</ol>
</div>
);
}
export default App;
```

Output-:

