

Lesson 9 Notes Iterative Statement in java :

```
class A
{
    public static void main(String args[])
    {
        int x;
        x=1;
        while(x<=10)
        {
            System.out.println("Hello India..");
            x++;
        }
    }
}
```

```
class A
{
    public static void main(String args[])
    {
```

```
int x;

x=12;

while(x<=10)

{

System.out.println("Hello India..");//blank output

    x++;

}

}

}
```

```
class A

{

    public static void main(String args[])

    {

        int x;

        x=1;

        while(x<=20)

        {

            System.out.println("Hello India..");
```

```
        x++;  
    }  
  
}  
  
}
```

```
class A  
{  
    public static void main(String args[])  
    {  
        int x;  
        x=1;  
        while(x<=200)  
        {  
            System.out.println(x);  
            x++;  
        }  
    }  
}
```

```
class A
```

```
{
```

```
    public static void main(String args[])
```

```
    {
```

```
        int x;
```

```
        x=1;
```

```
        while(x<=10)
```

```
        {
```

```
            System.out.println(x);
```

```
            x+=2;
```

```
        }
```

```
    }
```

```
}
```

```
class A
```

```
{
```

```
    public static void main(String args[])
```

```
    {
```

```
int x;

x=11;

do

{

System.out.println(x);//11

    x+=2;

}

while(x<=10);

}

}
```

```
class A

{

    public static void main(String args[])

    {

        int x;

        x=115;

        do

        {

            System.out.println(x);//115
```

```
        x+=2;
    }
    while(x<=10);

}
}
```

```
class A
{
    public static void main(String args[])
    {
        for(int x=1;x<=10;x++)
        {
            System.out.println(x);
        }
    }
}
```

```
class A
{
```

```
public static void main(String args[])
{
    for(int x=12;x<=10;x++)
    {
        System.out.println(x); //blank output
    }
}
}
```

```
class A
{
    public static void main(String args[])
    {
        for(int x=1;;x++)
        {
            System.out.println(x);
        }
    }
}
```

```
}
```

```
class A
```

```
{
```

```
    public static void main(String args[])
```

```
    {
```

```
        for(int x=1;x<=10;x++)
```

```
        {
```

```
            if(x==5)
```

```
            {
```

```
                continue;
```

```
            }
```

```
            System.out.println(x);
```

```
        }
```

```
    }
```

```
}
```

```
class A
```

```
{
```

```
    public static void main(String args[])
```



```
{  
    for(int x=1;x<=10;x++)  
    {  
        if(x>=4 && x<=8)  
        {  
            continue;  
        }  
        System.out.println(x);  
    }  
  
}  
}
```

```
class A  
{  
    public static void main(String args[])  
    {  
        for(int x=1;x<=10;x++)  
        {  
            if(x>=4 && x<=8)  
            {
```

```
                break;
            }
            System.out.println(x);
        }

    }
}



---



---


import java.util.Scanner;

class A
{
    public static void main(String args[])
    {
        Scanner so=new Scanner(System.in);

        int n;

        System.out.println("Enter any number to print its
table:");

        n=so.nextInt();

        for(int x=1;x<=10;x++)
        {
```

```
        System.out.println(n*x);
    }

}

}


```

```
import java.util.Scanner;

class A
{
    public static void main(String args[])
    {
        Scanner so=new Scanner(System.in);

        int n,upto;

        System.out.println("Enter any number to print its
table:");

        n=so.nextInt();

        System.out.println("Enter upto:");

        upto=so.nextInt();

        for(int x=1;x<=upto;x++)
        {
```


```
System.out.println(n*x);
```

```
}
```

```
}
```


```
}
```

```
→ int x;  
→ x=1;  
→ do  
  {  
    System.out.println(x);  
    → x++;  
  }  
→ while(x<=10);
```

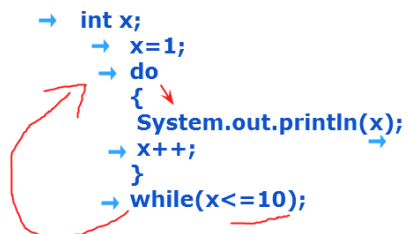

The diagram shows a do-while loop in Java. A red arrow points from the 'do' keyword to the opening curly brace '{'. Another red arrow points from the closing curly brace '}' to the 'while' keyword. A red arrow points from the 'while' keyword to the condition 'x<=10'. A red arrow points from the 'x++' statement to the 'x' variable. A red arrow points from the 'println' statement to the 'x' variable. A red arrow points from the 'x' variable in the 'println' statement to the 'x' variable in the 'x++' statement. A red arrow points from the 'x' variable in the 'x++' statement to the 'x' variable in the 'while' condition. A red arrow points from the 'x' variable in the 'while' condition to the 'x' variable in the 'do' block.

```
→ int x;  
→ x=1;  
→ do  
  {  
    System.out.println(x);  
    → x++;  
  }  
→ while(x<=10);
```

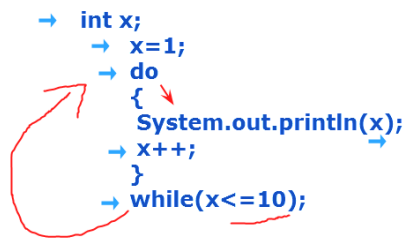

=====


while loop

1
2
3
4
5
6
7
8
9
10

do while loop

1
2
3
4
5
6
7
8
9
10

```
for(int x=1;x<=10;x++)  
{  
    System.out.println(x);  
}
```




1
2
...
10

while loop 100 to 0 (-3)

do while loop 80 to 10 (-2)

for loop (10 to 100) +4

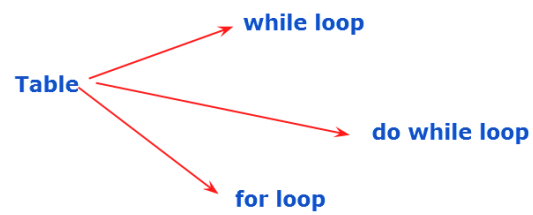

6
