
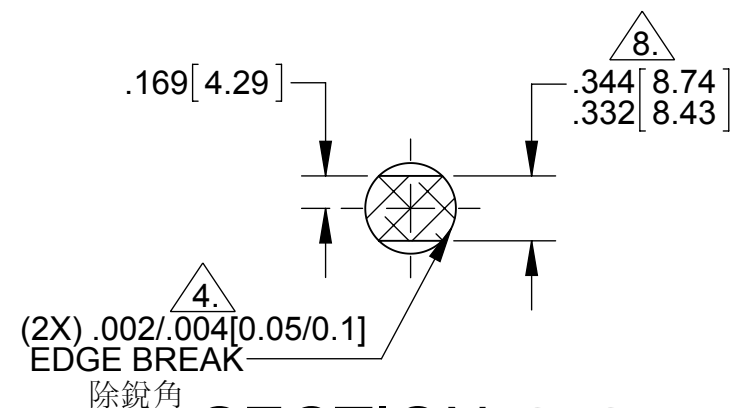


6. 允許有中心鑽點 $\varnothing.06$ [1.5] MAX
7. 允許在此表面有接觸點
8. 對其他特徵的角度關係不重要
9. 去毛邊

DRAWING REVISION INFORMATION			
REV	DESCRIPTION	DRAWN BY	ISSUE DATE
1	PROTO/QUOTE	JLB	12/15/15

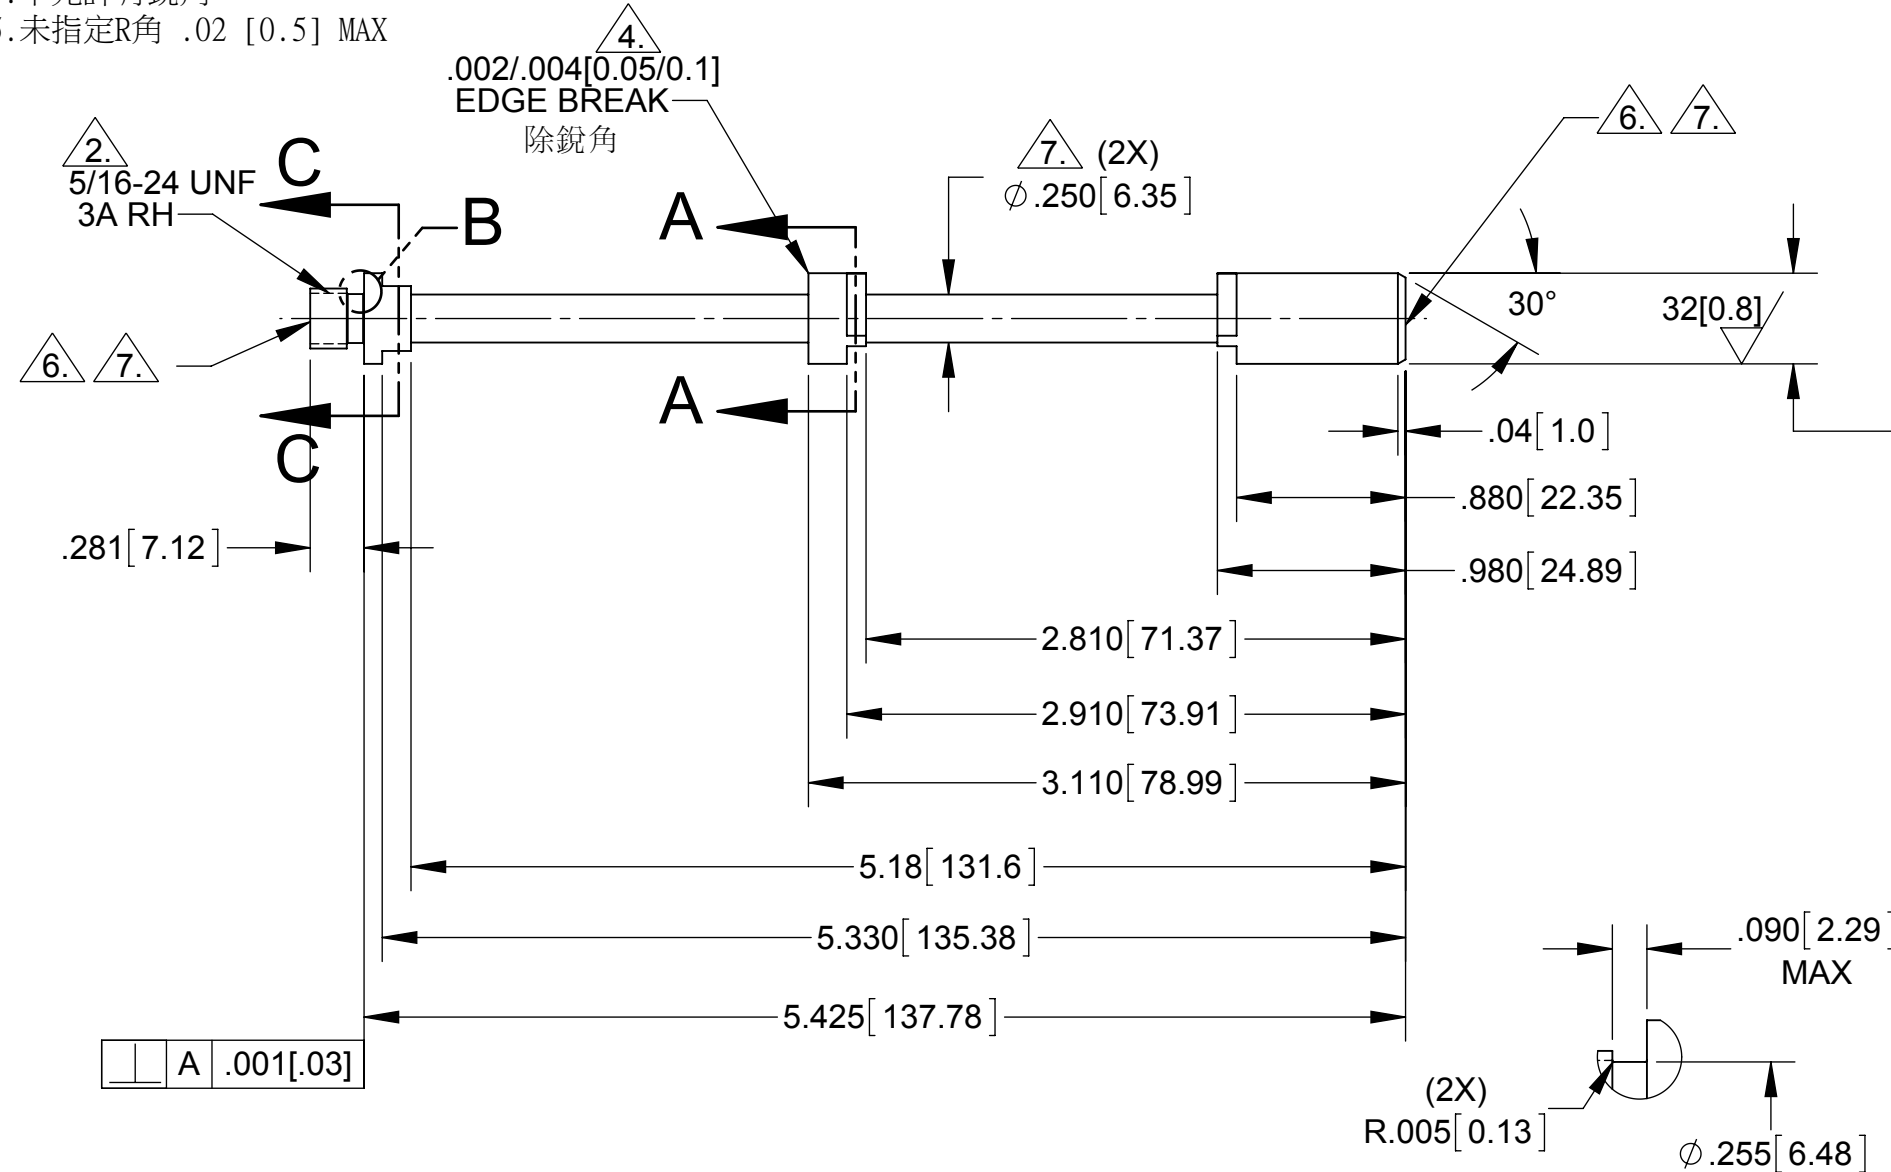

SECTION C-C

1. MATERIAL, 6262-T8/T9 OR 6061-T6 ALUM. MATERIAL
2. HARD ANODIZE TO YIELD .0008 +/- .0004 [0.02±0.01] BUILD-UP PER SURFACE, PER MIL-A-8625, TYPE III, CLASS 2. MASK 5/16-24 THREAD
3. ALL DIMENSIONS APPLY AFTER ANODIZING
4. SHARP EDGES WILL NOT BE TOLERATED
5. BREAK/RADIUS UNSPECIFIED EDGES/CORNERS, .02 [0.5]MAX
6. CENTER DRILL PERMISSABLE, Ø.06[1.5] MAX
7. CONTACT POINT PERMITTED ON THIS DIAMETER/SURFACE
8. ANGULAR ORIENTATION TO OTHER FEATURES IS NOT CRITICAL
9. REMOVE BURRS

<div>UNLESS OTHERWISE SPECIFIED</div> <div>DRAFTING PER ASME Y14.5M-1994</div> <div>DIMENSIONS ARE IN INCHES [MILLIMETERS]</div> <div><div>.XX [X.X] ± .015 [0.38]</div><div>.XXX [X.XX] ± .005 [0.13]</div><div>ANGLES ± 1°</div></div> <div>SURFACE FINISH 125 [3.2]✓</div>			CURRENT ISSUE		DATE		TITLE VALVE, MANUAL								
			DRAWN		12/15/15										
			CHECKED		12/16/15										
			MFG ENG		-										
			APPROVED		-		SIZE			DWG NO.		REV			
			ISSUED		-		B			104740-26		1			
<div>KEY CHARACTERISTIC SYMBOLS</div> <div><div>Cr</div><div>CRITICAL</div></div> <div><div>Ma</div><div>MAJOR</div></div>		THIRD ANGLE PROJECTION			PRJ		-		SCALE	1:1	EST. WT.	0.04 LBS	SHEET	1 OF 1	

PROTO/QUOTE