DRAWING REVISION INFORMATION			
REV	DESCRIPTION	DRAWN BY	ISSUE DATE
-	PRELIMINARY	DGP	05/09/13

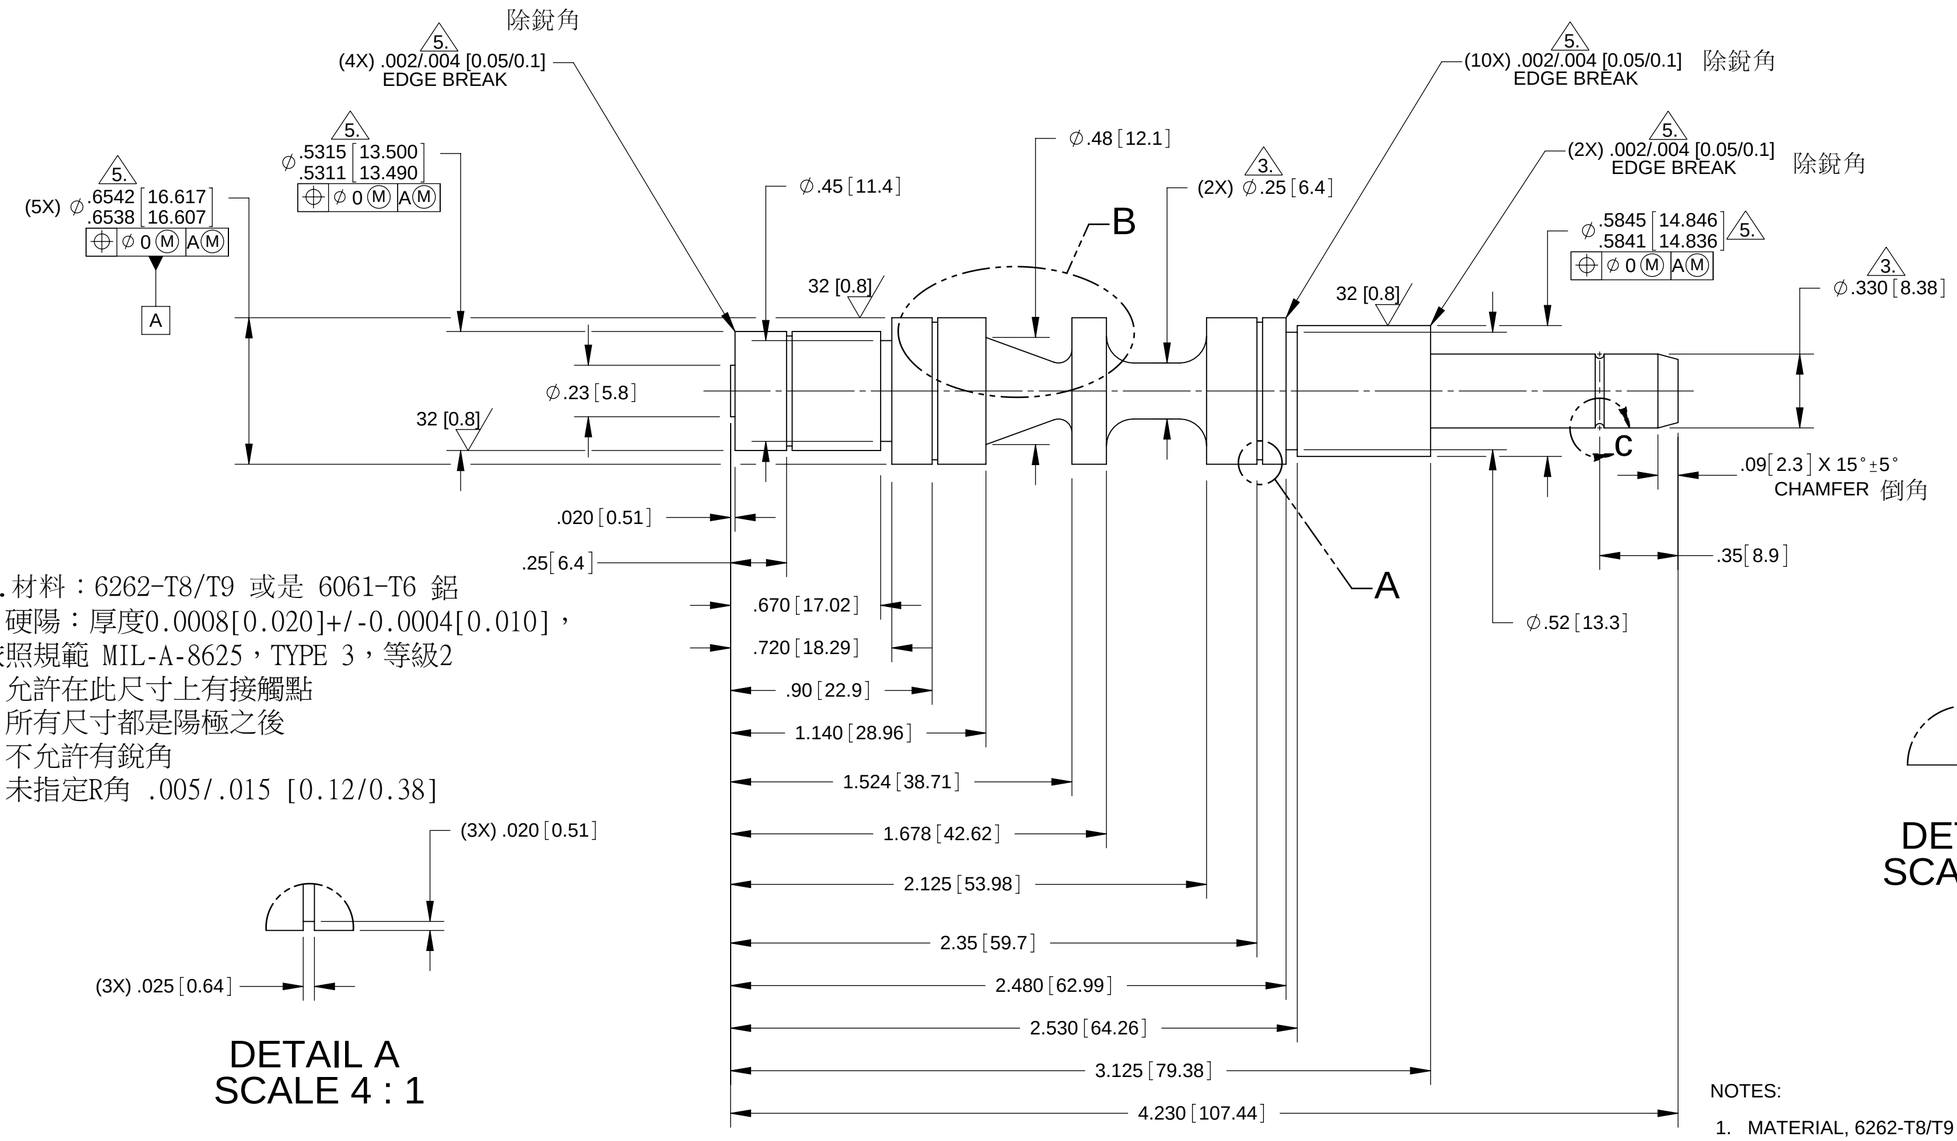

1.材料：6262-T8/T9 或是 6061-T6 鋁
2.硬陽：厚度0.0008[0.020]+/-0.0004[0.010]，
依照規範 MIL-A-8625，TYPE 3，等級2
3.允許在此尺寸上有接觸點
4.所有尺寸都是陽極之後
5.不允許有銳角
6.未指定R角 .005/.015 [0.12/0.38]

DETAIL A
SCALE 4 : 1

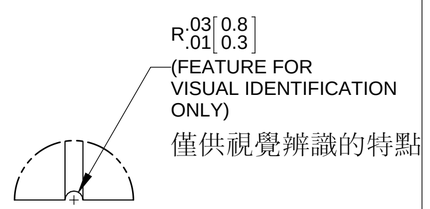

DETAIL c
SCALE 4 : 1

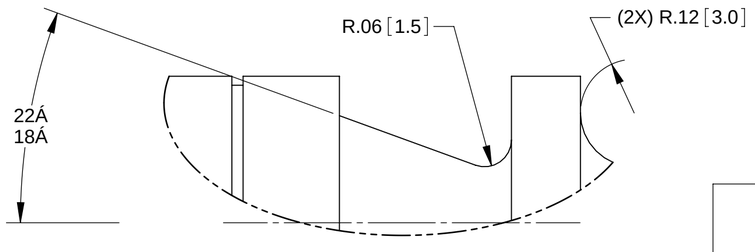

DETAIL B
SCALE 4 : 1

NOTES:

1. MATERIAL, 6262-T8/T9 OR 6061-T6 ALUMINUM
2. HARD ANODIZE TO YIELD .0008[0.020] ±.0004[0.010]
   BUILD-UP PER SURFACE, PER MIL-A-8625, TYPE III, CLASS 2
3. CONTACT POINTS PERMITTED ON THIS DIAMETER
4. ALL DIMENSIONS APPLY AFTER ANODIZING
5. SHARP EDGES WILL NOT BE TOLERATED.
6. UNSPECIFIED FILLETS & RADII .005/.015 [0.12/0.38]

KEY CHARACTERISTIC SYMBOLS
Cr CRITICAL
Ma MAJOR

UNLESS OTHERWISE SPECIFIED
DRAFTING PER ASME Y14.5M-1994
DIMENSIONS ARE IN INCHES [MILLIMETERS]
.XX [X.X] Ñ .010 [0.25]
.XXX [X.XX] Ñ .005 [0.13]
ANGLES Ñ 1Á
SURFACE FINISH 63 [1.6]
THIRD ANGLE PROJECTION

CURRENT ISSUE	DATE
DRAWN DGP	03/29/13
CHECKED TVM	04/09/13
MFG ENG -	-
APPROVED DGP	
ISSUED PRJ	

TITLE: VALVE, O/S PR, GEN II

SIZE	DWG NO.	REV
C	95740-69	-

SCALE 2:1 | EST. WT. 0.08 LBS | SHEET 1 OF 1

PRELIMINARY