

The Resolution Calibration Principle: A Certified Bandwidth for Kernel Fields

R. Negulescu¹ C. Bereanu²

¹The Informational Buildup Foundation (IBF) · radu@ibf.ro

²The Simion Stoilow Institute of Mathematics of the Romanian Academy (IMAR) · c.bereanu@imar.ro

SUPPLEMENTARY INFORMATION

Abstract

This document collects the full proofs of the propositions, theorem, and corollary stated in the main paper. Each Supplementary Note restates the result exactly as it appears in the main text and then gives the complete derivation; the main paper carries only the statements and short proof sketches. Equation and symbol conventions are those of the main text: a kernel field $F=(z_i, v_i)$ with Gaussian kernel $K_\sigma(t)=e^{-t^2/2\sigma^2}$, far set $F=i: ||y-z_i||>d$, effective mass $A=V_{\max} N_{\text{eff}}$ with participation ratio $N_{\text{eff}}=(\sum_{i \in F} \omega_i)^2 / \sum_{i \in F} \omega_i^2$, and certified frontier $\sigma^*=d/\sqrt{(2\ln(A/\epsilon))}$ under assumptions (A1) bounded weights $V_{\max}=1$, (A2) a meaningful near/far radius d , and (A3) budget below mass $0<\epsilon<A$.

SUPPLEMENTARY NOTE 1 — SAFETY FRONTIER AND AGGREGATE TAIL BOUND

Proposition 1 (Safety frontier). For fixed $A>0$, $d>0$, and tolerance $0<\epsilon<A$, the equation $\text{cert}(A, \sigma, d)=A K_\sigma(d^2)=\epsilon$ has the unique solution

$$\sigma^*(A, \epsilon, d) = \frac{d}{\sqrt{2\ln(A/\epsilon)}}$$

and the safe set $\sigma>0: \text{cert}(A, \sigma, d) \leq \epsilon$ is the interval $(0, \sigma^*]$.

Proof. cert is continuous and strictly increasing in σ on $(0, \infty)$, from 0^+ to $A>\epsilon$; solving $A e^{-d^2/2\sigma^2}=\epsilon$ for σ gives the stated σ^* , and monotonicity gives the interval. ■

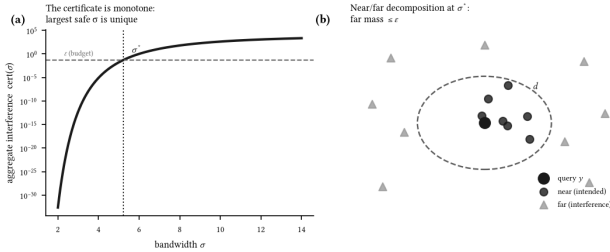


Figure 1. The certificate. (a) Aggregate interference $\text{cert}(\sigma)$ is strictly increasing in σ ; the largest σ holding it below the budget ϵ is the unique frontier σ^* (Proposition 1). (b) At a query, sources split into near (intended) and far (interference); σ^* bounds the far mass by ϵ .

Aggregate tail bound.

The single-source frontier extends to the whole far tail. Every far source satisfies $||y-z_i||>d$, so by monotonicity of the Gaussian its weight obeys $\omega_i=K_\sigma(||y-z_i||^2) \leq K_\sigma(d^2)$. Hence $\sum_{i \in F} \omega_i^2 \leq K_\sigma(d^2) \sum_{i \in F} \omega_i$, which rearranges to $\sum_{i \in F} \omega_i \leq N_{\text{eff}} K_\sigma(d^2)$. Therefore

$$\text{Tail}_\sigma(y, d) = \sum_{i \in F} |\omega_i| \leq V_{\max} N_{\text{eff}} K_\sigma(d^2) = \text{cert}(A, \sigma, d)$$

with $A=V_{\max} N_{\text{eff}}$ using $|v_i| \leq V_{\max}$ then the rearranged inequality. The only assumption is $\omega_i \leq K_\sigma(d^2)$ for far sources, which the near/far partition (A2) guarantees by construction. The bound is tight when all far sources sit exactly at radius d : there $\omega_i=K_\sigma(d^2)$ for every $i \in F$, both inequalities become equalities, and the aggregate tail attains $\text{cert}(A, \sigma, d)$. Setting $\sigma=\sigma^*$ makes this aggregate leakage at most ϵ .

SUPPLEMENTARY NOTE 2 — CONSERVATIVENESS OF ONE-SHOT MASS MEASUREMENT

Proposition 2 (Conservativeness). The effective mass $N_{\text{eff}}(\sigma)$ is nondecreasing in σ . Consequently $\sigma^* \leq \sigma_{\text{pair}}$, the mass measured at σ_{pair} satisfies $A(\sigma_{\text{pair}}) \geq A(\sigma^*)$, and the true tail at the deployed bandwidth obeys $\text{Tail}_{\sigma^*}(y, d) \leq A(\sigma_{\text{pair}}) K_{\sigma^*}(d^2)=\epsilon$.

Proof. The far set F is fixed by the geometric radius d and does not depend on σ , so we may differentiate over a fixed index set. Write the far kernel weights as $w_i=(r_i^2 u)$, $i \in F$, with $u=1/(2\sigma^2)$, so $N_{\text{eff}}=S_1^2/S_2$ with $S_1=\sum_{i \in F} w_i>0$, $S_2=\sum_{i \in F} w_i^2>0$, and each w_i is a strictly decreasing function of u . Differentiating with $\partial_u w_i=-r_i^2 w_i$ gives $\partial_u S_1=-\sum_{i \in F} r_i^2 w_i$ and $\partial_u S_2=-2\sum_{i \in F} r_i^2 w_i^2$, so $\partial_u N_{\text{eff}}=(2S_1/S_2^2) B$ with $B=S_1 \sum_{i \in F} r_i^2 w_i^2 - S_2 \sum_{i \in F} r_i^2 w_i$. Expanding this as a double sum over index pairs and symmetrising by averaging the (i, j) and (j, i) terms,

$$B = \frac{1}{2} \sum_{i, j} (r_j^2 - r_i^2) (w_j - w_i) w_i w_j$$

In each summand the map $r_k^2 w_k = e^{-rk^2 u}$ is strictly decreasing, so $(r_j^2 - r_i^2)$ and $(w_j - w_i)$ always carry opposite signs; their product is ≤ 0 , and with $w_i w_j > 0$ every summand is ≤ 0 . Hence $B \leq 0$, giving $\partial_u N_{\text{eff}} \leq 0$; since $u=1/(2\sigma^2)$ is decreasing in σ , N_{eff} is nondecreasing in σ . For the ordering, note it does not depend on the measured value of A . The frontier $\sigma^*(A)=d/\sqrt{(2\ln(A/\epsilon))}$ is a strictly decreasing function of A on $A>\epsilon$, and $\sigma_{\text{pair}}=\sigma^*(1)$ by definition. Since the normalisation $V_{\max}=1$ and the bound $N_{\text{eff}} \geq 1$ give $A=V_{\max} N_{\text{eff}} \geq 1$ for any field and any measurement bandwidth, we have $\sigma^*(A) \leq \sigma^*(1)=\sigma_{\text{pair}}$ before A is evaluated—the inequality is structural, not a consequence of the particular measured mass. Measuring the mass at $\sigma_{\text{pair}} \geq \sigma^*$ therefore samples N_{eff} at a larger bandwidth than deployment, and monotonicity gives $A(\sigma_{\text{pair}}) \geq A(\sigma^*)$. Substituting this larger mass into the aggregate bound $\text{Tail}_{\sigma^*}(y, d) \leq A(\sigma^*) K_{\sigma^*}(d^2) \leq A(\sigma_{\text{pair}}) K_{\sigma^*}(d^2)=\epsilon$ yields the claim; the one-shot measurement can only over-state the mass, so the certificate holds without iteration. ■

Fixed-point interpretation.

The one-shot value already certifies, so no iteration is required. If one nonetheless iterates the re-measurement $A \rightarrow \sigma^*(A) \rightarrow A$, each step deploys at a smaller bandwidth and re-measures a smaller mass; the map is monotone and bounded below by $A(\sigma) \geq 1$, so it converges to the self-consistent fixed point where the measurement and deployment bandwidths coincide. Empirically this takes six to seven steps, but every intermediate value is

already a valid certificate.

General kernels: the monotonicity is not Gaussian.

The proof above used the Gaussian form $w_i = (-r_i^2/u)$ only through the sign of $\partial_u w_i$; the conclusion holds for a whole class of tails. Let the kernel be $K(r/\sigma)$ for a positive, strictly decreasing K , and write $\ln K$. For any far pair $r_i < r_j$, the weight ratio is $w_i/w_j = K(r_i/\sigma)/K(r_j/\sigma)$, and

$$\frac{d}{d\sigma} \ln \frac{w_i}{w_j} = \frac{1}{\sigma} [\psi(r_i/\sigma) - \psi(r_j/\sigma)], \psi(x) := x\varphi'(x) = \frac{xK'(x)}{K(x)}$$

the elasticity of K . If K is non-increasing—equivalently, $\ln K$ is concave in $\ln x$ —then $(r_i/\sigma) \geq (r_j/\sigma)$, so every pairwise ratio $w_i/w_j \leq 1$ rises toward unity as σ grows: the far-weight vector becomes more uniform in the majorisation order. Since $N_{\text{eff}} = (\sum w_i^2) / \sum w_i$ is symmetric and Schur-concave, it is nondecreasing under this majorisation. Hence:

Proposition 3 (Conservativeness, general tail). *If K is positive, strictly decreasing, and $\ln K(x)$ is concave in $\ln x$, then $N_{\text{eff}}(\sigma)$ is nondecreasing in σ , and the one-shot mass measurement is conservative exactly as in the Gaussian case.*

The Gaussian ($=-x^2$), Laplace ($=-x$), stretched-exponential ($=-12x^{1/2}$), Cauchy ($=-2x^2/(1+x^2)$), and inverse-power ($=-p x^p/(1+x^p)$) tails all satisfy the elasticity condition, and we confirm zero monotonicity violations for each on the four public datasets over a 30-point bandwidth grid. The conservativeness is therefore a property of monotone, log-concave-in-log-distance kernels, not of the Gaussian tail.

SUPPLEMENTARY NOTE 3 — DECISION STABILITY AND PERFORMANCE FLOOR

Theorem 1 (Decision stability). *If $\sigma \leq \sigma^*$ and the local margin $m(y) > 2\epsilon$, then the deployed prediction equals the local prediction: the far field cannot change the decision.*

Proof. Let a be the local top class and b any other. Then $S_a - S_b = (S_a^{\text{near}} - S_b^{\text{near}}) + (S_a^{\text{far}} - S_b^{\text{far}}) \geq m(y) - 2\epsilon > 0$, since each far term is bounded in magnitude by ϵ . So a remains the deployed argmax. ■

Corollary 1 (Performance floor). *At $\sigma \leq \sigma^*$, deployed accuracy $\geq (\text{near-field accuracy}) - [m(y) \leq 2\epsilon]$, where $[m(y) \leq 2\epsilon]$ is the fraction of queries whose local margin does not clear the budget.*

Proof. By Theorem 1 every query with $m(y) > 2\epsilon$ has its deployed prediction equal to its local prediction, so it is correct whenever the local prediction is correct. The deployed error can therefore exceed the near-field error only on the set $m(y) \leq 2\epsilon$, whose measure is $[m(y) \leq 2\epsilon]$; subtracting this fraction from the near-field accuracy gives the stated floor. ■

The role of 2ϵ .

The budget ϵ bounds the far part of *each* class score, $|S_c^{\text{far}}| \leq \epsilon$. A pairwise score gap $S_a - S_b$ combines two such scores, so its far perturbation is bounded by 2ϵ ; this is why the stability threshold is 2ϵ rather than ϵ . A query whose near margin fails to clear 2ϵ is not necessarily misclassified—it is merely *uncertified*, and a deployer may abstain on exactly this set, which is the abstention reading of the same inequality.

SUPPLEMENTARY NOTE 4 — UNIFORM-OVER-REGION CERTIFICATE

Proposition 4 (Uniform-over-region certificate). *Let $B(c, \delta)$ be a ball of radius δ whose points all remain at distance $> d \geq \sigma$ from every far source. Then*

$$\sup_{y \in B(c, \delta)} \text{Tail}_\sigma(y, d) \leq \text{Tail}_\sigma(c, d) + L\delta, L = V_{\max} |\mathcal{F}| \frac{d}{\sigma^2} K_\sigma(d^2)$$

with Lipschitz constant L independent of the ambient dimension n . Choosing σ so the right-hand side is $\leq \epsilon$ certifies the whole region.

Proof. Tail_σ is a sum over the far set of Gaussians in y ; each summand $|v_i| K_\sigma(\rho_i^2)$ with $\rho_i = \|y - z_i\|$ has gradient of norm $|v_i| (\rho_i/\sigma^2) K_\sigma(\rho_i^2)$. The map $\rho(\rho/\sigma^2) K_\sigma(\rho^2) = (\rho/\sigma^2) e^{-\rho^2/2\sigma^2}$ is decreasing for $\rho \geq \sigma$, so for every far source, where $\rho_i > d \geq \sigma$, the per-source slope is bounded by $|v_i| (d/\sigma^2) K_\sigma(d^2) \leq V_{\max} (d/\sigma^2) K_\sigma(d^2)$. Summing over the $|\mathcal{F}|$ far sources and applying the mean-value inequality from c to $y \in B(c, \delta)$ gives the stated L . ■

Why the far-set count, not the participation ratio.

The Lipschitz constant sums the *gradient magnitudes* of the individual far Gaussians, and a bound on a sum of $|\mathcal{F}|$ per-source slopes cannot be replaced by the participation ratio N_{eff} : N_{eff} compresses the far weights through a ratio of 1 and 2 norms, an operation valid for the tail *value* (Note 1) but not for a sum of slopes, where every far source contributes its full gradient. The Lipschitz constant therefore carries the raw count $|\mathcal{F}|$, not N_{eff} . It remains exponentially small through $K_\sigma(d^2)$: at $\sigma = \sigma^*$, $K_{\sigma^*}(d^2) = \epsilon/A$, so $L = (|\mathcal{F}|/A)(d\epsilon/\sigma^{*2})$, larger than the erroneous constant when $|\mathcal{F}|_{\text{eff}}$ and comparable when the far set overlaps little.

Practical interpretation.

On the flagship ResNet-18 field at $\epsilon = 0.05$ the certified ball radius is $\delta \approx 0.5$ in the standardised feature metric—strictly positive, so the region certificate is non-vacuous, but small, about 1.6% of the median inter-query distance (ResNet-50 gives $\delta \approx 1.0$, also 1.6%; ViT gives $\delta \approx 0.9$, about 2.2%). The uniform-over-region certificate is therefore genuine but tight; the per-query certificate of Theorem 1, which needs no such ball, carries the main deployment claims.

SUPPLEMENTARY NOTE 5 — ROBUSTNESS OF THE CERTIFICATE

Is the near/far radius meaningful?

Assumption (A2) asks that the radius d separate “intended” from “interfering” sources. We test this directly by measuring, at σ^* , the kernel-weighted fraction of near-set mass that shares the query’s class—the quantity the vote actually uses. It is 0.31, 0.25, and 0.47 on ResNet-18, ResNet-50, and ViT-B/16, against a chance level of 0.01 for 100 classes: a 25–47× enrichment, so the near set is strongly class-aligned. Two honest qualifications. This is a *plurality*, not a majority—on two of three backbones most individual near sources are other-class—so “intended sources” should be read as “near sources,” and the decision-equality guarantee of Theorem 1 is equality with the near-field vote, which is itself only weakly pure: the certificate guarantees *which* sources decide, not that they decide correctly. Accuracy is a separate, measured outcome (Table 1 of the main paper), not a corollary of the certificate.

Sensitivity to the budget and radius.

The budget ϵ and the radius percentile are inputs, so we sweep them: $\epsilon \in 0.01, 0.05, 0.1, 0.2$ crossed with the 5, 10, 20th distance percentile for d . Deployed accuracy varies by only 2.2 points (ResNet-18), 6.7 (ResNet-50), and 2.0 (ViT) across the whole

grid. This flatness must be read correctly: over that grid the realised σ^* itself spans only a $1.34\text{--}1.41\times$ range (in concentrated high-dimensional geometry the distance percentiles are close and $\sqrt{2\ln(A/\epsilon)}$ moves slowly), so the informative statement is the *conjunction*—across the grid, accuracy is flat *and* the certified tail stays below budget, while a bandwidth only $4\text{--}6\times$ larger (the distance heuristics) fails catastrophically. The budget is a genuine dial with a mild, monotone effect on the operating point, not a hidden accuracy knob.

Pointwise versus average.

The certificate is derived per query, but A is measured as an *average* N_{eff} over the deployment queries, so the reported tail/ ϵ is strictly an average-case quantity; a per-query guarantee requires the tail to hold at *every* query, not on average. We therefore measure the full per-query distribution on the ResNet-18 field ($10,000$ held-out queries at σ^*): tail/ ϵ has mean 0.08 , 95th percentile 0.18 , 99th percentile 0.20 , and *maximum* 0.24 —not a single query exceeds the budget. The average- A certificate is thus empirically pointwise here, with fourfold headroom at the worst query.

An a-priori certificate by quantile choice.

The average is a convenience, not a requirement: the same closed form delivers a strict per-query certificate if A is chosen as an upper quantile of N_{eff} rather than its mean. This is not empirical luck but a direct reading of the frontier. Because $\sigma^*(A)$ is decreasing in A and $\text{Tail}_{\sigma^*(A)}(y, d) \leq V_{\max} N_{\text{eff}}(y) K_{\sigma^*(A)}(d^2)$ pointwise, deploying at $\sigma^*(A)$ with A the $(1-\alpha)$ -quantile of N_{eff} over the region guarantees the budget at *every* query whose $N_{\text{eff}}(y) \leq A$ —that is, at all but at most an α -fraction of the region by construction; taking $A = N_{\text{eff}}^q(y)$ ($\alpha=0$) certifies the whole region uniformly. The quantile level is thus a dial on the allowed per-query failure rate, read off the same geometry, at no labels. Empirically the tail is far below this worst case: at $\alpha=0.01$ (the 99th percentile) the *measured* maximum tail/ ϵ over $10,000$ queries stays inside the budget on all three backbones— 0.19 on ResNet-18, 0.17 on ResNet-50, 0.27 on ViT-B/16, with zero exceedances anywhere—while accuracy is unchanged to within 0.2 points because $\sigma^*(A)$ is only about one percent smaller than $\sigma^*(A_{\text{mean}})$. Even the fully uniform choice $A_{\max} = N_{\text{eff}}(y)$ costs essentially nothing: accuracy changes by at most 0.21 points from the mean- A field on all three backbones (marginally higher, in fact), again with zero exceedances by construction. So the per-query certificate the theory states is deployable a priori across the suite at negligible cost, with the quantile level set to the failure rate a deployment will tolerate.

Drift of the radius d .

The conservativeness result (Proposition 2) is stated at fixed near/far radius d . Because d is the tenth percentile of pairwise centre distances, as the field densifies from fixed class-conditional distributions d converges to its population quantile at the sample-quantile rate $O(n^{-1/2})$ (Bahadur representation); empirically it drifts by only 1.0% across a $40\times$ increase in field size (a log-log rate exponent of -0.71 , consistent with the $-1/2$ theory), so re-estimating d per stage corrects a vanishing term and the fixed- d theorem is asymptotically exact.

SUPPLEMENTARY NOTE 6 — SELECTIVE-PREDICTION OPERATING POINT

The abstention readout gives a label-free, per-query support signal: a query with no near mass carries no certificate, and the field declines it. To place its operating point quantitatively, we

compare against a margin-threshold selective predictor on the same σ^* vote. At the certificate's 27% coverage on ResNet-18 a labelled margin threshold reaches 68% accuracy, against the field's full-coverage 57% (74% vs 51% on ResNet-50, 93% vs 72% on ViT-B/16). The certified-stable set therefore sits *on* the field's accuracy-coverage curve rather than above it: σ^* 's distinguishing property is not a higher accuracy at matched coverage but that its selection rule is label-free and carries an a-priori interference guarantee, where the margin threshold needs labels to set. This is the sense in which σ^* is a single object—one bound on the far field, read three ways—rather than a competitor to labelled selective prediction.

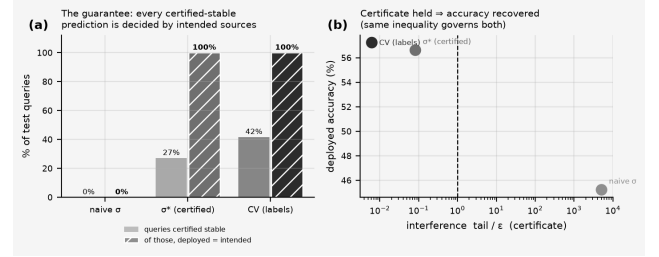


Figure 2. The performance certificate (frozen ResNet-18, CIFAR-100). (a) Fraction of test queries flagged certified-stable (light), and—of those—the fraction whose deployed prediction equals the intended local prediction (hatched); at σ^* and at the grid-search σ this is exactly 100% (Theorem 1). (b) The certificate and deployed accuracy move together: holding tail $\leq \epsilon$ is what recovers accuracy.

SUPPLEMENTARY NOTE 7 — REPRODUCIBILITY

Computational specification.

All reported quantities are computed as follows. Features are standardised per dimension (z-score using the training mean and standard deviation); distances are Euclidean in that standardised space. The radius d is the 10th percentile of pairwise centre distances over a $4,000$ -centre subsample; A and N_{eff} are the far-mask participation ratio averaged over $2,000$ held-out queries measured at σ_{pair} ; the reported tail/ ϵ is the *average* far mass over held-out queries divided by ϵ (the full per-query distribution, including the maximum, is reported for the flagship field above); the giant-component percentage is the largest connected component as a fraction of $5,000$ sampled centres, with an edge whenever two centres lie within 3σ (this diagnostic is *illustrative* of field locality, not itself the certificate—a larger σ mechanically connects more centres, so it visualises the collapse rather than measuring the interference bound). The labelled comparator ('grid') selects the bandwidth that maximises held-out accuracy over a 30 -point log-spaced grid; it is a grid search on labelled accuracy, not a k -fold procedure. The grid spans $[0.5, 30]$ for the vision fields and $[0.3, 40]$ for the text and modality fields; for the lower-dimensional public datasets it is log-spaced to cover the data scale of each dataset. The accompanying result files for the vision, text, and modality experiments record the exact grid and selected bandwidth for each. The interference budget is $\epsilon=0.05$ throughout. Every run uses a fixed seed; the five-seed re-samples vary only the drawn centres and queries. Scripts and result files accompany the manuscript.

Growing-field experiments.

The re-certification result (main text Section 5) uses two growth protocols on CIFAR-100 penultimate features. *Density growth* (three backbones: ResNet-18, ResNet-50, ViT-B/16) densifies the field from 3 to 120 examples per class over five stages (300 to $12,000$ centres, all 100 classes present throughout so the test set is

fixed); a labelled grid search fixes σ once on the sparse 3-per-class field, and at each stage we report σ^* (re-measured), that frozen bandwidth, and a per-stage re-tuned oracle grid. *Class-incremental growth* (ResNet-18) instead adds classes over five stages ($10 \rightarrow 25 \rightarrow 50 \rightarrow 75 \rightarrow 100$) at a fixed 120 examples per class, restricting the test set to classes seen so far (standard class-incremental protocol); the labelled grid is fixed once on the initial 10-class field. All bandwidth selection, radius, mass, and tail definitions match the computational specification above ($\epsilon=0.05$, d at the 10th distance percentile, A over 3,000 held-out queries). The class-incremental run is a reported *null*: adding classes at fixed density leaves the field geometry essentially unchanged (the radius d drifts by -3.5% over the full range and σ^* shrinks only from 6.26 to 5.43), so the frozen bandwidth stays within budget (tail/ ϵ from 0.01 to 0.23, never violating) and ties σ^* on accuracy—confirming that the re-certification advantage is driven by densification, not by class count. Both scripts and their result files accompany the manuscript.

SUPPLEMENTARY NOTE 8 — INDEPENDENT NUMERICAL VERIFICATION OF PROPOSITIONS 1–2

Purpose.

The construction rests on two facts: the participation-ratio tail bound (Proposition 1) and the monotonicity of N_{eff} in σ that makes the one-shot measurement conservative (Proposition 2). Because a certificate is only as good as these, we verify them directly on random configurations, independently of the deep-network experiments.

Tail bound (Proposition 1).

Over 20,000 random all-far configurations—each with a radius d , a far-set size $|F|$ drawn in $[5, 200]$, radii $r_i > d$, and a bandwidth σ spanning a wide range of d —we evaluate the worst-case aligned tail $\Sigma_{j \in F} \omega_i$ (all $|v_i| = V_{\text{max}}$) against the certificate $\text{cert}(A, \sigma, d) = N_{\text{eff}} K_{\sigma}(d^2)$. The ratio never exceeds one (maximum 0.98, mean 0.76; zero violations), and Fig. 3a shows where the tightening lives: it approaches one only as $N_{\text{eff}}/|F| \rightarrow 1$ (near-uniform weights), and is strictly below the union/count bound $|F| K_{\sigma}(d^2)$ whenever the far weights are unequal—so the participation ratio is not merely valid but strictly tighter than the count it replaces.

Conservativeness (Proposition 2).

Over 3,000 random far-sets evaluated on a 40-point σ grid at 60-digit precision, $N_{\text{eff}}(\sigma)$ is monotone nondecreasing with zero violations (smallest consecutive increment 2.1×10^{-49} , i.e. numerically non-negative); Fig. 3b shows representative curves. Apparent violations at ordinary floating precision are underflow artifacts as $\sigma \rightarrow 0$ and vanish at high precision.

A shorter route to Proposition 2.

The monotonicity has a one-line reading worth recording. The far weights $\omega_i = (-r_i^2/2\sigma^2)$ are a tempered family with inverse temperature $\beta = 1/2\sigma^2$, and $N_{\text{eff}} = (\Sigma_i \omega_i)^2 / \Sigma_i \omega_i^2$ is exactly the inverse-Simpson (Rényi-2) diversity of the normalised weights. Diversity indices are nondecreasing as a distribution is tempered toward uniformity (increasing σ , decreasing β , flattens the weights), which is Proposition 2. The explicit differencing proof of Note 2 is self-contained; this identity connects it to the diversity-index literature and makes the direction of the monotonicity immediate.

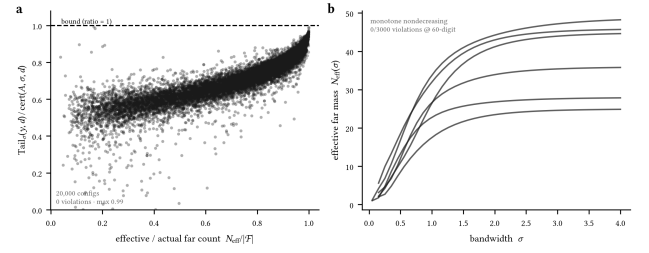


Figure 3. Independent verification of the two load-bearing results. (a) Tail-bound tightness over 20,000 random far configurations: the ratio stays below one everywhere (max 0.98, zero violations), nearing one only as $N_{\text{eff}}/|F| \rightarrow 1$. (b) $N_{\text{eff}}(\sigma)$ is monotone nondecreasing (Proposition 2), zero violations at 60-digit precision over 3,000 trials.

SUPPLEMENTARY NOTE 9 — ATTENTION AS A GAUSSIAN KERNEL FIELD

The reduction.

Single-head softmax attention assigns query q the weight $a_i = \text{softmax}(q, k_i)$ over keys k_i . The polarisation identity $q, k_i = 12(\|q\|^2 + \|k_i\|^2 - \|q - k_i\|^2)$ gives

$$\exp(\langle q, k_i \rangle / \tau) = e^{\|q\|^2 / 2\tau} \cdot e^{\|k_i\|^2 / 2\tau} \cdot e^{-\|q - k_i\|^2 / 2\tau}$$

The three factors are, in order, a query-only term $e^{\|q\|^2 / 2\tau}$, a per-key source weight $v_i = e^{\|k_i\|^2 / 2\tau}$, and the Gaussian kernel $K_{\sigma}(\|q - k_i\|^2)$ with $\sigma^2 = \tau$. The query-only factor is independent of i and cancels in the softmax normalisation. Hence

$$a_i = \frac{v_i K_{\sigma}(\|q - k_i\|^2)}{\sum_j v_j K_{\sigma}(\|q - k_j\|^2)}, \quad v_i = e^{\|k_i\|^2 / 2\tau}, \quad \sigma = \sqrt{\tau}$$

which is exactly the normalised Gaussian kernel field of the main text with source weights v_i and bandwidth $\sigma = \sqrt{\tau}$. The safety frontier (Proposition 1) and conservativeness (Proposition 2) apply unchanged, with certified temperature $\tau = (\sigma^*)^2 = d^2 / (2 \ln(A/\epsilon))$ and $A = V_{\text{max}} N_{\text{eff}} / V_{\text{max}} = \max_i v_i$.

Scope: bounded versus unbounded weights.

Assumption (A1) sets $V_{\text{max}} = 1$; attention's $v_i = e^{\|k_i\|^2 / 2\tau}$ are unbounded, so V_{max} enters the mass A as a measured quantity rather than being normalised away. The interference-tail certificate (Proposition 1, stated in units of V_{max}) is therefore what transfers; the far-set locality readout (Corollary 2), which compares to the full output magnitude, is ϵ -tight only when the keys are norm-bounded—the case $\|k_i\| \equiv \text{const}$, where v_i is constant and attention is a *pure* Gaussian field. When key norms vary, V_{max} still bounds the far interference tail but the normalised far-attention mass is looser: measured at V_{max} it is 0.35 (BERT) and 0.62 (GPT-2), decreasing in but not to ϵ (it is 0.80–0.84 at 4^*).

Empirical confirmation.

On the real query/key vectors of every sampled head of BERT-base and GPT-2 over long contexts (360 keys/head), the identity holds to the models' float32 precision ($< 10^{-4}$ over all heads; it is an algebraic equality, exact up to floating-point rounding), and at V_{max} the certified far-key tail $\text{Tail}/V_{\text{max}}$ stays below ϵ across 35,000 queries per model with zero violations, rising $18\text{--}33\times$ over budget at 4^* (Fig. 6 of the main text; script and outputs in the repository).

SUPPLEMENTARY NOTE 10 — PROTOTYPICAL NETWORKS: THE BOUNDED-WEIGHT CASE

The reduction.

A prototypical network assigns a query x to class k by $p(k|x) = \text{softmax}_k(-\|f(x) - c_k\|^2)$, where f is the embedding and c_k the class prototype (the mean support embedding). This is *immediately* a Gaussian kernel field over the prototypes: with $\sigma^2=2$,

$$p(k|x) = \frac{K_\sigma(\|f(x) - c_k\|^2)}{\sum_j K_\sigma(\|f(x) - c_j\|^2)}, v_k = 1, \sigma = \sqrt{\tau/2}$$

No polarisation is needed—the readout is already a squared-distance kernel—and every source weight is $v_k=1$, so assumption (A1) holds with $V_{\max}=1$ *exactly*. Unlike attention, both the interference-tail certificate (Proposition 1) and the full far-set locality readout (Corollary 2), which compares the far mass to the total output, transfer with ϵ -tightness.

Empirical confirmation.

We train a standard 4-layer convolutional ProtoNet (64-dimensional embedding) on Omniglot (20-way episodes) to 91.5% held-out accuracy, and certify its prototype fields on 12,000 held-out queries from 60-way episodes, with d the tenth-percentile query–prototype distance and $A=N_{\text{eff}}$ measured at the single-source scale σ_{pair} (as in Note 9). The identity holds to float32 ($<10^{-6}$); at σ^* the certified far-prototype tail is 0.25ϵ with zero violations over all 12,000 queries, rising $560\times$ over budget at $4\sigma^*$. Because the weights are bounded, the normalised far mass at σ^* is a genuinely ϵ -small 0.08 (against $0.35\text{--}0.62$ for attention), confirming that the full locality guarantee—not only the interference tail—transfers in the bounded-weight case (Fig. 7 of the main text; script and outputs in the repository).

SUPPLEMENTARY NOTE 11 — FROM A SINGLE HEAD TO THE FULL ATTENTION LAYER

Setup.

Note 9 certifies a *single* head: at the certified temperature * , the output-relevant far weight for query q is the normalised far mass $m^h = \sum_{i \in F} a_i^h$, where a_i^h are the softmax weights of head h and F is the far-key set. A transformer layer runs H heads in parallel and combines them: head h emits $o^h = \sum_i a_i^h \text{val}_i^h$ with value vectors $\text{val}_i^h = W_V^h x_i$, and the layer output is $O = W_O [o^1; \dots; o^H]$ for an output projection W_O . We propagate the per-head guarantee to O .

Proposition 5 (Multi-head layer perturbation).

Let O be the attention-layer output at query q and $\tilde{O}$ the output recomputed with the far-key set F deleted (softmax renormalised over the near keys). Then

$$\|O - \tilde{O}\|_2 \leq \|W_O\|_2 \left(\sum_{h=1}^H (2m^h \|W_V^h\|_2 X)^2 \right)^{1/2}, X = \max_i \|x_i\|_2$$

with m^h the normalised far mass of head h at * . The bound is computable from the pretrained weights and the per-head far masses alone; no labels and no gradient are required.

Proof. Fix head h . Deleting F replaces $o^h = \sum_i a_i^h \text{val}_i^h$ by the near-only average $\tilde{o}^h = \sum_{i \notin F} (a_i^h / n^h) \text{val}_i^h$ with $n^h = \sum_{i \notin F} a_i^h = 1 - m^h$. Writing $o^h - \tilde{o}^h = \sum_{i \in F} a_i^h (1/n^h - 1) \text{val}_i^h = \sum_{i \in F} a_i^h \text{val}_i^h / n^h$ and bounding each value vector by $V_{\max}^h := \max_i \|\text{val}_i^h\|_2$, the first sum has total weight $n^h (1/n^h - 1) = m^h$ and the second has total weight m^h , so $\|o^h - \tilde{o}^h\|_2 \leq 2m^h V_{\max}^h$. Since $\text{val}_i^h = W_V^h x_i$, $V_{\max}^h \leq \|W_V^h\|_2 X$. Stacking the heads, $O - \tilde{O} = W_O [o^1 - \tilde{o}^1; \dots; o^H - \tilde{o}^H]$, and $\|O - \tilde{O}\|_2 \leq \|W_O\|_2 \| [o^h - \tilde{o}^h] \|_2 = \|W_O\|_2 (\sum_h \|o^h - \tilde{o}^h\|_2^2)^{1/2}$. Substituting the per-head bound gives the statement.

Scope: bounded versus loose.

The layer bound inherits the single-head scope. In the bounded-weight regime ($V_{\max}=1$, as for prototypical networks) each $m^h \leq \epsilon$, and the layer perturbation is ϵ -small up to the fixed weight-norm factor. For attention the far masses are the measured $0.24\text{--}0.38$ (Note 9), so the bound is a genuine, computable perturbation guarantee but not ϵ -small: it certifies that the far field moves the layer output by a bounded amount, not that the amount is negligible. This is the honest statement—a label-free, geometry-only far-field bound for the full attention layer—and it is loose by a measured factor, not vacuous.

Empirical confirmation.

On a real bert-base-uncased layer ($H=12$ heads) over long contexts, we compute the bound from the pretrained W_V^h and W_O (spectral norms $\|W_O\|_2 \approx 2.4\text{--}2.8$, $\|W_V^h\|_2 \approx 1.1\text{--}1.4$) and the per-head far masses, and compare it to the *actual* $\|O - \tilde{O}\|_2$ from literally deleting the far keys and recomputing the layer output. Across four sampled layers (0,3,6,9) and all sampled queries the bound holds without exception. The actual far-deletion perturbation is a non-trivial 12–28% of the layer-output norm—attention genuinely moves under far-key deletion, as the unbounded weights predict—and the weight-norm bound exceeds it by a median factor of $\approx 47\text{--}70\times$ (tightening to $\approx 12\text{--}19\times$ if $V_{\max}^h$ is measured rather than bounded by $\|W_V^h\|_2 X$). The bound is thus valid and conservative; its looseness is the price of a purely weight-computable, geometry-only certificate (script and outputs in the repository).