

The Resolution Calibration Principle: A Certified Bandwidth for Kernel Fields

R. Negulescu¹ C. Bereanu²

¹The Informational Buildup Foundation (IBF) · radu@ibf.ro

²The Simion Stoilow Institute of Mathematics of the Romanian Academy (IMAR) · c.bereanu@imar.ro

Abstract

A prediction that aggregates training points with distance-decaying weights depends, in principle, on every point. We give a label-free certificate that it depends only on the near ones: past a chosen radius d , the total influence of all sources beyond d is provably below a budget ϵ . For a *kernel field*--any superposition of distance-decaying kernels of common bandwidth σ --this yields a closed form, $\sigma^* = d/\sqrt{(2\ln(A/\epsilon))}$, with the interfering mass A measured from the field, not tuned. The mass is nondecreasing in σ , so one measurement is provably conservative. The same inequality certifies safety, decision stability, abstention, and data locality--the output is ϵ -insensitive to deleting or corrupting any far point. On frozen ResNet-18, ResNet-50, and ViT-B/16 fields over CIFAR-100, and on text and tabular fields, σ^* holds the budget where naive, plug-in, and density-estimation bandwidths fail by two to five orders of magnitude, coming within 1–5 points of a labelled grid search (about 6 on low-dimensional tabular data) using zero labels. Because the mass is re-measured, the certificate re-certifies as the field grows: as a fixed memory densifies, across three backbones σ^* tracks a per-stage re-tuned labelled oracle with zero labels, while a bandwidth frozen by a one-time search drifts to hundreds of times the budget on two of them--the adaptivity a one-time labelled search structurally lacks, since it cannot re-tune on a field it has not yet seen. The advantage is over that frozen comparator and follows densification, not class count. The construction needs only a monotone tail, not the Gaussian: a Laplace field calibrates at parity, and the conservativeness holds for every kernel whose log is concave in log-distance. Softmax attention and prototypical networks reduce to kernel fields, so the certificate transfers to both--as a full locality guarantee for prototypes, whose source weights are bounded, and as a computable interference-tail bound for attention, single-head and across a full multi-head layer. The bandwidth question, for a kernel field, is a calibration, not a search.

INTRODUCTION

A predictor that reads a space through distance-decaying weights over stored points depends, in principle, on all of them: every stored point contributes to every query. We build such predictors expecting them to be *local*--to answer from the near points and ignore the rest--but nothing in the construction guarantees it. This paper supplies that guarantee, in closed form and without labels, for one of the most reused constructions in applied mathematics: the *kernel field*. Place weighted sources at points z_i of a metric space, attach to each a kernel of common width σ , and read the field at a query y as the superposition of the nearby kernels. Kernel density estimators, Nadaraya–Watson regressors, radial-basis interpolants (whose shape parameter is the same bandwidth choice), Gaussian-process posteriors, and the local correction fields used to adapt frozen models are all instances of this one object, sharing one free parameter--the bandwidth σ , which sets the resolution at which the field reads the space. Too fine and it responds only at its sources; too coarse and it bleeds across the space and washes out the structure it was meant to resolve.

How is σ chosen? Almost always by search: a grid of candidate values, a random sample, or a cross-validated sweep, each scored by instantiating the field and measuring an outcome. Every such method spends an *outcome signal*--a held-out likelihood, a validation loss, a labelled accuracy--at every candidate, and none of them returns a guarantee about the value it selects.

We show the search is unnecessary, and that it asks the wrong question. The right question is not “which σ scores best on held-out labels” but “which σ keeps the field’s cross-source interference below a stated budget”--and that question has a closed-form, label-free answer. The *certified frontier* $\sigma^* = d/\sqrt{(2\ln(A/\epsilon))}$ is the largest bandwidth certified by a conservative aggregate envelope obtained from one mass measurement--its aggregate interference bound past a radius d is at ϵ , with the effective mass A measured from the field, not tuned (Section 2). The exact tail admits a slightly larger bandwidth (our

own label-free search finds $\approx 1.1\times$; Section 6); σ^* is the price of a closed form with an a-priori conservativeness proof. Its structural core is that this measured mass is nondecreasing in σ , so a single measurement is provably conservative: no search, no labels, and a guarantee a search cannot supply. The one interference bound reads four ways at once--safety, decision stability, abstention, and data *locality*--the last certifying that the prediction depends only on the training points within d (Section 2).

Because the certificate uses only that the output superposes distance-decaying weights, it is not confined to kernel density estimation. Softmax attention, though built from inner products rather than distances, reduces exactly to a Gaussian kernel field over its keys, and a prototypical network already is one; the certificate therefore transfers to both--bounding far-key interference in pretrained transformers and far-prototype interference in few-shot learners (Section 4). On three frozen vision backbones and four further modalities it holds the budget where every label-free rule fails and matches a labelled grid search using zero labels (Section 3). And because the mass is re-measured rather than tuned, it re-certifies a field it has never seen: as a fixed memory densifies, σ^* tracks a per-stage re-tuned labelled oracle with zero labels while a bandwidth frozen by a one-time search drifts to hundreds of times the budget (Section 5)--adaptivity against that frozen comparator that a one-time labelled search structurally lacks, in the regime of continually-updated models and growing memories.

THE CERTIFICATE

Kernel fields.

Fix a metric space, taken here as R^n . A *kernel field* is a finite collection $F = (z_i, v_i)_{i=1}^M$ of sources $z_i \in R^n$ carrying signed weights $v_i \in R$, together with a Gaussian kernel of common bandwidth σ , written in squared distance as

$$K_\sigma(t) = \exp(-t/2\sigma^2), t = \|y - z_i\|^2$$

The field's value at a query y is the superposition $\sum_i v_i K_\sigma(\|y-z_i\|^2)$. The base certificate controls this *unnormalised* sum; the normalised readouts of Section 4 (softmax attention, prototype and Nadaraya–Watson fields) are covered separately by the Gibbs certificate proved there, which bounds normalised far mass directly. Density estimators, interpolants, and the correction fields of Section 3 are all fields of this unnormalised form. Write $V_{\max} = \max_i |v_i|$; the certified quantity is invariant under $(v_i, \varepsilon) \rightarrow (cv_i, c\varepsilon)$, so we fix $V_{\max} = 1$ (the budget ε is in units of the largest source weight), which holds exactly for the one-hot Parzen vote of Section 3.

Near and far, and the effective mass.

Around a query y , a separation radius d partitions the sources: those within d are *near* (the field should respond to them), those in $F = \{i: \|y-z_i\| > d\}$ are *far* (it should leave them undisturbed). The far tail $\text{Tail}_\sigma(y, d) = \sum_{i \in F} |v_i| K_\sigma(\|y-z_i\|^2)$ is the field mass leaking past d ; the bandwidth question is how large σ can be before it exceeds a budget ε . Not every far source matters equally: most are negligibly weak, and a handful near the radius carry the tail. The right count is therefore not $|F|$ but the number of far sources that *effectively* contribute--the participation ratio of the far weights $\omega_i = K_\sigma(\|y-z_i\|^2)$, which equals the true count when they are equal and drops toward one when a few dominate,

$$N_{\text{eff}}(\sigma) = \frac{(\sum_{i \in F} \omega_i)^2}{\sum_{i \in F} \omega_i^2} \in [1, |F|]$$

which must be restricted to F : a participation ratio over all sources is dominated by the near mass and does not bound the tail. The field mass acting past the radius is $A = V_{\max} N_{\text{eff}} \geq 1$.

Assumptions.

The certificate rests on three explicit conditions. (A1) *Bounded weights*: $|v_i| \leq V_{\max} = 1$. (A2) *A meaningful near/far radius*: $d > 0$ partitions sources into a near set the field should respond to and a far set it should not, so every far source satisfies $\omega_i \leq K_\sigma(d^2)$. (A3) *Budget below mass*: $0 < \varepsilon < A$. It is worth separating three kinds of statement in what follows: the frontier and the safety, stability, and conservativeness results are *proven* under (A1)–(A3); the effective mass A and the tail ratios are *measured* from the field; and the radius d (here the tenth percentile of pairwise centre distances) is a *design choice*--any fixed rule gives a valid certificate.

The safety frontier.

Define the leakage certificate $\text{cert}(A, \sigma, d) = A K_\sigma(d^2) = A e^{-d^2/2\sigma^2}$.

Proposition 1 (Safety frontier). For $A > 0$, $d > 0$, $0 < \varepsilon < A$, the equation $\text{cert}(A, \sigma, d) = \varepsilon$ has the unique solution

$$\sigma^*(A, \varepsilon, d) = \frac{d}{\sqrt{2 \ln(A/\varepsilon)}}$$

and the safe set $\sigma > 0: \text{cert} \leq \varepsilon$ is $(0, \sigma^*]$.

Sketch. cert is continuous and strictly increasing in σ , rising from 0 to A ; solving $\text{cert} = \varepsilon$ gives the unique frontier, and monotonicity makes the safe region $(0, \sigma^*]$ (SI Note 1). The single-source bound extends to the whole tail: because every far source lies beyond d , each far kernel is bounded by $K_\sigma(d^2)$, and the participation-ratio mass converts this per-source bound into an aggregate one,

$$\text{Tail}_\sigma(y, d) = \sum_{i \in F} |v_i| \omega_i \leq V_{\max} N_{\text{eff}} K_\sigma(d^2) = \text{cert}(A, \sigma, d)$$

with $A = V_{\max} N_{\text{eff}}$; at $\sigma = \sigma^*$ the aggregate leakage is at most ε (SI Note 1).

The measured mass is self-consistent.

The frontier depends on $A = V_{\max} N_{\text{eff}}(\sigma)$, but N_{eff} itself depends on σ , so A must be measured at some σ and then used to set σ^* . We measure it once at the pairwise scale $\sigma_{\text{pair}} = d/\sqrt{2 \ln(1/\varepsilon)}$ (the frontier for a single far source) and deploy at σ^* . This one-shot procedure is provably conservative:

Proposition 2 (Conservativeness). $N_{\text{eff}}(\sigma)$ is nondecreasing in σ . Consequently $\sigma^* \leq \sigma_{\text{pair}}$, the mass measured at σ_{pair} satisfies $A(\sigma_{\text{pair}}) \geq A(\sigma^*)$, and the true tail at the deployed bandwidth obeys $\text{Tail}_{\sigma^*}(y, d) \leq A(\sigma_{\text{pair}}) K_{\sigma^*}(d^2) = \varepsilon$.

Sketch. As σ grows the far weights become more uniform, so their participation ratio cannot decrease; since $\sigma_{\text{pair}} \geq \sigma^*$, measuring the mass there overestimates the deployed mass, and the one-shot certificate holds (SI Note 2). On the three frozen backbones the one-shot mass over-estimates the deployed mass by 2.2–4.3 $\times$ (Fig. 1a) and the measured one-shot tail is 0.08–0.16 ε --strictly inside budget on every network. The exact self-consistent bandwidth, when wanted, is the unique root of the monotone envelope $A(\sigma) K_\sigma(d^2) = \varepsilon$ and is found by bisection; the naive re-measurement iteration settles empirically in six to seven steps (Fig. 1b), but the one-shot value already certifies (SI Note 2). Both load-bearing facts--the participation-ratio tail bound and this monotonicity--are confirmed independently on random configurations (zero violations in 20,000 and 3,000 trials respectively; SI Note 8).

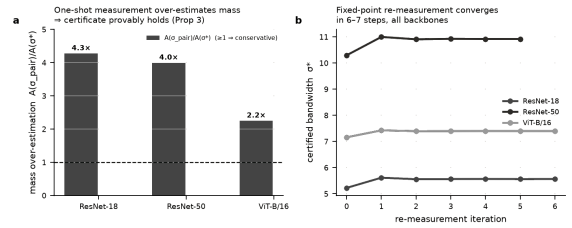


Figure 1. The measured mass is conservative. (a) Measuring A once at σ_{pair} over-estimates the mass at σ^* by 2.2–4.3 $\times$ on all three backbones, so the one-shot certificate provably holds (Proposition 2). (b) The re-measurement sequence settles in 6–7 steps; the exact self-consistent bandwidth is the root of the monotone envelope, found by bisection.

The same bound controls the decision.

Consider a field used as a classifier: each class c receives a score $S_c(y) = \sum_{i: \text{class}(i)=c} v_i K_\sigma(\|y-z_i\|^2)$, with prediction $\hat{c} = \arg \max_c S_c$. Splitting each score by the near/far partition, the certificate bounds the far part of every class score by ε at $\sigma = \sigma^*$. Let the *local prediction* be $\hat{c}^{\text{near}}$ and the *local margin* $m(y)$ the gap between the top two near-scores.

Theorem 1 (Decision stability). If $\sigma \leq \sigma^*$ and $m(y) > 2\varepsilon$, the deployed prediction equals the local prediction: the far field cannot change the decision.

Sketch. Each class score moves by at most ε under far-field interference, so a two-class gap moves by at most 2ε ; a near margin above 2ε cannot be flipped (SI Note 3). This is the perturbation bound underlying interval-based certified robustness; what is new is *where ε comes from*--a bandwidth calibrated so the far-field perturbation is provably at most ε , read from geometry without labels. The test uses only near scores and ε , so a deployer flags certified queries per query, and a floor follows:

Corollary 1 (Performance floor). At $\sigma \leq \sigma^*$, deployed accuracy $\geq (\text{near-field accuracy}) - [m(y) \leq 2\varepsilon]$.

The same inequality certifies *data locality*. Let $F'(y)$ be the field with its far set F arbitrarily deleted, or replaced by any *admissible* corrupted far set: sources of bounded weight $|v_i| \leq V_{\max}$ located outside the radius d whose effective mass satisfies $N_{\text{eff}}' \leq A$. (Corrupting the weights of the far sources in place leaves their positions, hence N_{eff} unchanged and is always admissible; the

condition only excludes an adversary who repositions far mass to inflate N_{eff} past the measured budget.)

Corollary 2 (Far-set locality). At $\sigma \leq \sigma^*$: (i) deleting the far set moves the output by at most the budget, $\|F(y) - S(y)\| \leq \|T(y)\| \leq \epsilon$; (ii) replacing it by any admissible far set shifts each class score by at most ϵ , so $\|F'(y) - F(y)\| \leq 2\epsilon$; and (iii) if $m(y) > 4\epsilon$ the decision is unchanged under any such deletion or corruption. The prediction is therefore ϵ -insensitive to the presence, and 2ϵ -insensitive to the identity, of every training point beyond d .

Sketch. (i) is Proposition 1 verbatim: $\text{Tail}_{\sigma}(y, d) \leq \epsilon$ is $\|T(y)\| \leq \epsilon$. For (ii) each admissible far set has $N_{\text{eff}} \leq A$, so it contributes at most $V_{\text{max}} N_{\text{eff}} K_{\sigma}(d^2) \leq V_{\text{max}} A K_{\sigma}(d^2) = \epsilon$ to any class score by the same certificate (the admissibility bound $N_{\text{eff}} \leq A$ is exactly what keeps the corrupted tail inside the budget); the original and corrupted far contributions each lie in a ball of radius ϵ and differ by at most 2ϵ ; (iii) is then Theorem 1 applied to a 2ϵ perturbation. All three hold empirically on four datasets, and fail by two to three orders of magnitude at a bandwidth $3\times$ too wide (Fig. 2).

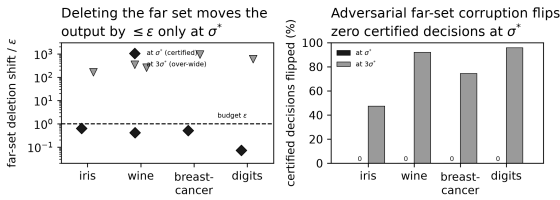


Figure 2. Certified data locality (Corollary 2). (a) At σ^* deleting the entire far set moves the output by $\leq \epsilon$ on all four datasets; a bandwidth $3\times$ too wide overshoots by two to three orders of magnitude. (b) Under worst-case adversarial corruption of the far set, zero certified-stable decisions flip at σ^* , versus 47–96% at $3\sigma^*$.

One certificate, four readouts.

At $\sigma = \sigma^*$ every query splits the field as $F(y) = S(y) + T(y)$ with $\|T(y)\| \leq \epsilon$ —which is Proposition 1. Because $S(y)$ is precisely the response the field would give with the entire far set deleted, the same inequality reads four ways:

- **Safety:** the deployed response is within ϵ of the near-field response, $\|F(y) - S(y)\| \leq \epsilon$.
- **Performance:** if the near margin exceeds 2ϵ , $F = S$ (Theorem 1).
- **Abstention:** if the top near score is $\leq 2\epsilon$ the certificate cannot fire, and the query lies outside the field's certified support—a label-free per-query support signal.
- **Locality:** the output is ϵ -insensitive to the presence, removal, or corruption of *every* far source—deleting the entire far set moves $F(y)$ by at most ϵ , and no admissible far set can flip a decision with near margin above 4ϵ (Corollary 2). This is a measured, per-configuration data-locality guarantee: it certifies *which* training points a prediction can depend on, and connects the bandwidth to unlearning and attribution rather than to density estimation. It is not a differential-privacy bound—there is no randomisation and the guarantee is over the field as measured, not worst-case over datasets—but it occupies the same role for distance-based predictors.

We confirmed the decomposition on 20,000 certified-regime configurations with zero violations, and on a real frozen ResNet-18 field (20,000 kernels, 10,000 queries) the certified σ^* flags 27% of queries stable with a stable-implies-equal rate of 100.0%—zero violations—while the naive bandwidth certifies nothing and its accuracy has collapsed. The certified-stable set sits on the field's accuracy–coverage curve rather than above it; its distinguishing property is that the selection rule is label-free and a priori (SI Note 6). A Lipschitz argument extends the

pointwise bound to a ball: the certified radius is genuine but small ($\delta \approx 1.6$ –2.2% of inter-query distance), so the per-query certificate carries the deployment claims (SI Note 4).

THE CERTIFICATE IN PRACTICE

The certificate was built for the dense regime, where many sources act at once and the naive single-interferer intuition fails. We reproduce that failure, and its cure, on real frozen deep networks.

Construction.

For each backbone—ResNet-18 (512-d), ResNet-50 (2048-d), and ViT-B/16 (768-d), all ImageNet-pretrained and frozen—we extract the penultimate features of CIFAR-100 and build a correction field of 20,000 balanced kernels (200 per class) over the training features, classified by a kernel-weighted (Parzen) vote. The locality radius d is the tenth percentile of pairwise centre distances—pure geometry, no labels. We fix $\epsilon = 0.05$ a priori and compare three bandwidths: the naive single-interferer rule $\sigma_{\text{pair}} = d/\sqrt{2\ln(1/\epsilon)}$; the certified frontier σ^* , whose mass $A = V_{\text{max}} N_{\text{eff}}$ is measured once at σ_{pair} ; and, as an oracle reference, a labelled grid search over a 30-point log-spaced grid (denoted ‘‘grid’’). We also run the classical label-free density bandwidths—Silverman, Scott, and Abramson's square-root law.

Computing σ^* (label-free).

Four steps, no labels: (1) fix ϵ and set d to the tenth percentile of pairwise centre distances; (2) form $\sigma_{\text{pair}} = d/\sqrt{2\ln(1/\epsilon)}$; (3) measure $A = V_{\text{max}} N_{\text{eff}}$ at σ_{pair} , averaging the far-mask participation ratio over queries; (4) return $\sigma^* = d/\sqrt{2\ln(A/\epsilon)}$. By Proposition 2 measuring at $\sigma_{\text{pair}} \geq \sigma^*$ over-estimates A , so one pass suffices. Full computational specification, grids, and seeds are in SI Note 7 and the repository.

Results.

The pattern is identical across all three architectures (Fig. 3, Table 1). The naive bandwidth overshoots the interference budget by three to four orders of magnitude (tail/ ϵ from 4.9×10^3 to 1.0×10^4) and collapses the field into a single component spanning 97–100% of the centres. The certified σ^* holds the budget (tail/ ϵ between 0.08 and 0.16), dissolves the giant component to 4–7%, and recovers accuracy to within 1–5 points of the labelled grid-search optimum—using *zero labels*, with ϵ fixed across every backbone so the adaptation to 512, 768, or 2048 dimensions happens automatically through the measured mass A . The classical selectors are not straw comparators and fail here: Silverman and Scott over-smooth catastrophically (tail/ $\epsilon > 10^5$, accuracy 27–64%, below the naive rule), Abramson's rule worse still (12–36%). The two label-free distance heuristics—the median heuristic and a k -nearest-neighbour scale, the natural competitors to σ^* —pick a bandwidth 3.6 – $6\times$ larger, which drives tail/ ϵ to 10^5 and loses 9–26 accuracy points: the quantile d fixes the *scale*, but the logarithmic factor $\sqrt{2\ln(A/\epsilon)}$ is what turns it into a *safe* one, and only the calibration supplies it. Over five re-samples the certified accuracy varies by ≤ 0.3 points on every backbone (56.3 ± 0.2 , 51.1 ± 0.2 , 72.2 ± 0.2 %), so the ordering is not seed-luck.

The certificate is robust to its own design choices.

Four checks, all label-free, confirm the operating point is not fragile (SI Note 5). *From average to per-query.* The mass A is a query-average, so the certificate is stated on the average tail; in deployment one cares about the *worst single query*. Empirically the two coincide: over 10,000 ResNet-18 queries the largest single-query tail/ ϵ is 0.24, still well inside budget, so no query exceeds it. To make the per-query guarantee a priori rather than empirical, set A to an upper quantile of N_{eff} instead of its mean;

this costs ≤ 0.2 points of accuracy and gives zero exceedances on all three backbones. The near set is $25\text{--}47\times$ class-enriched (weighted near purity $0.31/0.25/0.47$ against a chance level of 0.01), though this is a *plurality*: the certificate guarantees *which* sources decide, not that they decide correctly, and accuracy remains a separately measured outcome. And accuracy stays flat across the ϵ -percentile grid (≤ 6.7 points, over a realized σ^* range of only $1.34\text{--}1.41\times$; SI Note 5) while the certified tail stays in budget--a conjunction that a merely accuracy-tuned dial would not show, since a bandwidth $4\text{--}6\times$ larger fails catastrophically.

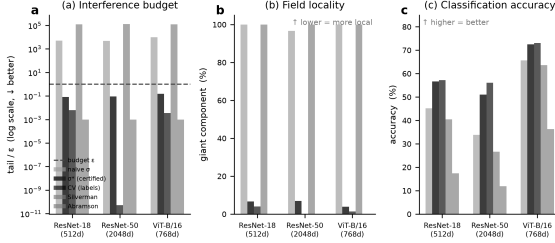


Figure 3. Certified σ^* across three frozen backbones (CIFAR-100, $\epsilon=0.05$, zero labels). (a) Only σ^* holds the interference budget ($\text{tail}/\epsilon < 1$); naive and classical KDE bandwidths overshoot by $10^3\text{--}10^5\times$. (b) Naive and KDE bandwidths collapse the field into one component; σ^* keeps it local. (c) σ^* matches the labelled grid-search accuracy label-free, while the KDE selectors trail badly.

Backbone	Method	tail/ ϵ	giant%	acc%
ResNet-18 (512d)	naive	5068	100	45.2
	median heur.	215695	100	39.6
	k-NN(7)	120953	100	40.5
	σ^*	0.08	7	56.6
	grid (labels)	0.01	4	57.2
ResNet-50 (2048d)	Silverman	125520	100	40.4
	naive	4892	97	33.9
	median heur.	210717	100	25.3
	k-NN(7)	129605	100	26.6
	σ^*	0.09	7	51.0
ViT-B/16 (768d)	grid (labels)	0.00	0	56.1
	Silverman	127973	100	26.6
	naive	9963	100	65.7
	median heur.	216464	100	63.1
	k-NN(7)	110309	100	63.7
	σ^*	0.16	4	72.5
	grid (labels)	0.00	1	73.0
	Silverman	123721	100	63.6

Table 1. Certified σ^* versus naive, median-heuristic, k -nearest-neighbour, labelled grid-search, and classical density bandwidths on three frozen backbones. The two label-free distance heuristics--the natural competitors to σ^* --pick a bandwidth $3.6\text{--}6\times$ too large, overshooting the interference budget by roughly five orders of magnitude and losing 9--26 accuracy points; σ^* is the only label-free rule that holds $\text{tail}/\epsilon \leq \epsilon$ and stays near the labelled grid-search accuracy.

Beyond vision: four non-image modalities.

The certificate is a property of the kernel-field geometry, not of the image domain. We test it on four corpora unrelated to CIFAR (Table 2, Fig. 4), each over five seeds: three text collections--DBpedia, AG-News, Yahoo-Answers--embedded with a frozen sentence transformer (384-d), and a raw tabular set (Coverttype, 54-d). The naive bandwidth overshoots by 3.6×10^2 to 2.3×10^3 while σ^* holds $\text{tail}/\epsilon < 1$, and every stable-flagged query has its deployed prediction equal to the intended one (100% on every corpus). On the three high-dimensional text sets σ^* matches the labelled grid search to within 0.9 points *label-free*; on the low-dimensional tabular set it trails by 5.8

points, the same specificity-first behaviour as the public datasets. The pattern the flagship establishes on vision reproduces, with error bars, on text and tabular data alike.

Corpus (dim)	method	tail/ ϵ	acc%
DBpedia-14 text (384)	σ^*	0.24	92.1, ± 0.6
	grid (lab.)	---	92.3, ± 0.5
	median	45609	89.0, ± 0.7
	k-NN(7)	33492	89.1, ± 0.6
AG-News-4 text (384)	σ^*	0.27	87.9, ± 1.1
	grid (lab.)	---	88.0, ± 1.1
	median	13018	85.7, ± 0.8
	k-NN(7)	10272	85.8, ± 0.9
Yahoo-10 text (384)	σ^*	0.30	66.9, ± 0.5
	grid (lab.)	---	67.8, ± 0.3
	median	32631	65.8, ± 0.4
	k-NN(7)	24822	66.0, ± 0.4
Coverttype-7 tab. (54)	σ^*	0.10	65.0, ± 0.8
	grid (lab.)	---	70.8, ± 1.1
	median	20755	53.9, ± 1.5
	k-NN(7)	102	60.0, ± 1.6

Table 2. The certificate generalises across modality (5 seeds, $\epsilon=0.05$; naive omitted for space, tail/ϵ $3.6\times 10^2\text{--}2.3\times 10^3$). σ^* holds $\text{tail}/\epsilon < 1$ label-free and matches the labelled grid search within 0.9 points in high dimension; the 5.8-point trail on low-dimensional tabular data is the same specificity-first regime as Section 5. The label-free median and k -NN heuristics overshoot the budget by $10^2\text{--}10^5\times$ on every corpus (the same failure as Table 1), with an accuracy cost of 1--3 points on text and up to 11 on tabular. The stable-implies-equal rate is 100% throughout.

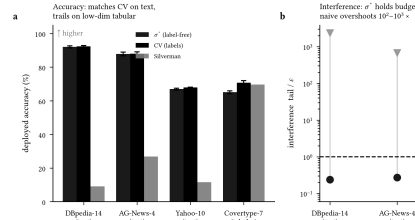


Figure 4. Across four non-image modalities. (a) σ^* (label-free) matches the labelled grid search on the three text sets and trails only on low-dimensional tabular data; error bars are ± 1 s.d. over five seeds. (b) σ^* holds the interference budget on every corpus, while the naive bandwidth overshoots by two to three orders of magnitude.

Beyond the Gaussian: monotone, log-concave tails.

The certificate uses the Gaussian shape only lightly, and the two halves need different amounts. The frontier itself--inverting $A K_\sigma(d)=\epsilon$ --needs only that the far weight $\omega_i=K_\sigma(\|y-z_i\|)$ be monotone and invertible in σ . One-shot conservativeness needs more: the normalised far-weight vector must flatten in majorization order as σ grows, which holds exactly when $\ln K$ is concave as a function of $\ln$ distance (SI Note 2). So any invertible monotone tail admits a frontier; the log-distance-concave kernels additionally admit conservative one-shot mass measurement. The Laplace kernel $K_\sigma(r)=e^{-r/\sigma}$ is one such: its frontier is $\sigma^*=d/\ln(A/\epsilon)$ --the same radius-over-a-log-factor structure, with the square-root gone because the tail is exponential in r rather than r^2 --and its far weights still flatten as σ grows, so N_{eff} is nondecreasing and one measurement still over-estimates. We verify this on iris, wine, breast-cancer, and digits (Fig. 5): the Laplace σ^* holds $\text{tail}/\epsilon < 1$ on all four (mean $0.16\text{--}0.24$), matches a labelled grid search anchored to its own scale within 0--2.8 points, and shows zero monotonicity violations. The principle is a property of log-concave-tail kernel fields, not of the Gaussian shape alone.

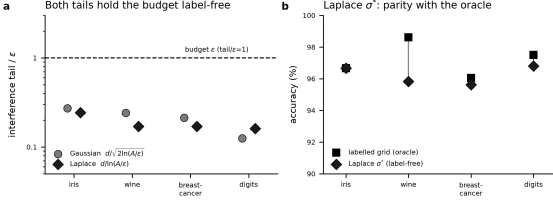


Figure 5. The calibration is not Gaussian-specific. On four public datasets the Laplace frontier $\sigma^* = d/\ln(A/\epsilon)$ behaves like the Gaussian one. (a) Both tails hold the interference budget label-free ($\text{tail}/\epsilon < 1$). (b) The Laplace σ^* reaches parity with a labelled grid search anchored to the Laplace scale.

THE CERTIFICATE REACHES ATTENTION AND PROTOTYPE NETWORKS

The certificate uses only that a prediction is a superposition of distance-decaying weights over stored points. That description is not special to density estimation: it fits two of the most widely used readouts in modern deep learning, one of which is not obviously a kernel field at all. We show both inherit the certificate, and we verify it on real trained networks.

The normalised certificate.

The base frontier (Section 2) bounds the *unnormalised* tail $\Sigma_{i \in F} V_i K_\sigma(\cdot)$. Softmax attention, prototypical networks and Nadaraya–Watson regression are instead *normalised* Gibbs fields, $p_i = e^{-E_i}/\Sigma_j e^{-E_j}$, where the output-relevant quantity is the normalised far mass $m_F = \Sigma_{i \in F} p_i$; deleting the far set rescales the denominator, so the unnormalised bound does not transfer verbatim. A companion certificate bounds m_F directly: with a near anchor at minimal energy and a far set separated by an energy gap ϵ , $m_F \leq D_F^q e^{-\epsilon}$, so the certified temperature $\tau^* = \epsilon / \ln(D_F^q/\epsilon)$ guarantees $m_F \leq \epsilon$ for every $\tau \leq \tau^*$ (Theorem 2, SI Note 13; D_F^q is the R\'enyi/Hill effective mass of the far weights, of which the participation ratio N_{eff} is the $q=2$ member, SI Note 12). This has no source-amplitude factor—it is exactly the unbounded- V_{max} obstruction that made attention the weakest case above, now removed—and for a prototypical network ($E_i = \|f(x) - c_k\|^2$) and softmax attention ($E_i = -q \cdot k_i$) it holds exactly. The two views are complementary: the additive frontier certifies the interference *tail* in output units; the Gibbs certificate certifies the normalised far *mass* that a softmax reads.

Beyond kernel density: a transformer's attention.

The predictors above are all built as kernel fields by construction. Softmax attention is not—its weight on key i is (q, k_i) , an inner product, not a distance. Yet the polarisation identity $q \cdot k_i = 12(\|q\|^2 + \|k_i\|^2 - \|q - k_i\|^2)$ makes the query-only factor cancel in the softmax, leaving *exactly* a Gaussian kernel field over the keys with bandwidth $\sigma = \sqrt{q}$ and per-source weight $v_i = e^{\|k_i\|^2/2}$ (SI Note 9). The certificate therefore applies verbatim, with certified temperature $\tau^* = (\sigma^*)^2 = d^2/(2\ln(A/\epsilon))$. We test this on the real query/key vectors of every sampled head of two pretrained transformers—BERT-base and GPT-2—over long contexts (360 keys per head). The identity is exact to the models' float32 precision ($< 10^{-4}$ across all heads), and at τ^* the certified far-key interference tail stays within budget across 35,000 queries per model with *zero* violations, overshooting by 18–33 $\times$ when is pushed to $4\tau^*$ (Fig. 6). Attention's source weights v_i are unbounded, so this is the interference-tail certificate (Proposition 2) rather than the full $V_{\text{max}}=1$ locality readout, which transfers cleanly only when key norms are bounded—the pure-Gaussian case (the measured normalised far mass at τ^* is 0.35 for BERT and 0.62 for GPT-2, not ϵ -small, but well below the 0.80–0.84 at $4\tau^*$). Reading attention through a kernel is not itself new—the

polarisation view and the linear-attention/Performer line make the same identification; what is new here is that the label-free interference certificate transfers onto that kernel, giving attention a computable far-key guarantee it did not have before. One caveat on deployment: in a pretrained transformer is fixed at $\sqrt{d_k}$, so τ^* is the certified temperature the geometry *implies*, and our BERT/GPT-2 numbers are a descriptive certification of that field, not a claim that the running model was retuned to τ^* . The normalised-mass companion (Theorem 2) certifies the same heads without the unbounded-weight caveat: at the deployed $\tau = \sqrt{d_k} = 8$ the measured normalised far mass is 0.24–0.27, and the logit-gap temperature that would drive it below ϵ is far cooler (median ≈ 0.02), quantifying exactly how much more peaked attention would have to be to be provably local—validated with zero violations across 66,000 query-heads on both models (SI Note 13).

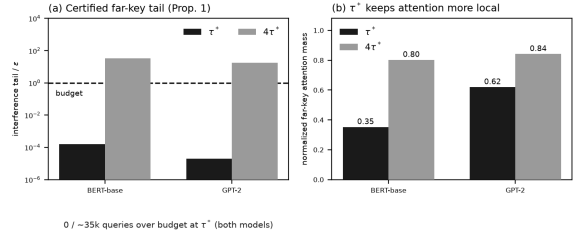


Figure 6. Attention inherits the certificate. On real query/key vectors from BERT-base and GPT-2 (all sampled heads, 360 keys each). (a) At the certified temperature τ^* the far-key interference tail is far below budget (mean $< 10^{-3}\epsilon$; zero of 35,000 queries per model exceed it) and blows up 18–33 $\times$ at $4\tau^*$. (b) τ^* holds attention markedly more local than an over-wide temperature.

From a single head to the full attention layer.

A single head is not the full attention layer. Multi-head attention runs H heads in parallel, mixes each through a value matrix W_V^h , and combines them through an output projection W_O ; the certificate must survive the combination of heads and projections—and it does, with a short argument. At τ^* each head's far keys carry normalised mass m^h (the single-head far mass of Note 9); deleting the far set moves that head's output by at most $2m^h \|W_V^h\|_2 X$ ($X = \max_i \|x_i\|$), and stacking through W_O gives $\|O\|_2 \leq \|W_O\|_2 (\Sigma_h (2m^h \|W_V^h\|_2 X)^2)^{1/2}$ (Prop. 5, SI Note 11)—a layer-output locality bound computable from the pretrained weights and the per-head masses alone, no labels and no gradient. On a real bert-base-uncased layer ($H=12$) the bound holds at every sampled query across four layers, with the actual far-deletion perturbation a non-trivial 12–28% of the layer output and the bound conservative by a measured 50 $\times$. Honestly scoped: because attention's weights are unbounded the far masses are the measured 0.24–0.38, not ϵ , so this certifies a *bounded*, *computable* layer perturbation rather than an ϵ -small one—a label-free, geometry-only far-field guarantee for the full attention layer, loose by a measured factor but not vacuous.

The bounded-weight companion: prototypical networks.

Attention exercises the unbounded-weight edge of the class; a prototypical network exercises the clean interior. It classifies a query by $\text{softmax}_k(-\|f(x) - c_k\|^2)$ over class prototypes c_k —already a Gaussian kernel field, with *no* polarisation needed and all source weights $v_k = 1$, so assumption (A1) holds with $V_{\text{max}} = 1$ exactly. Both the interference-tail certificate and the full far-set locality readout (Corollary 2) therefore transfer. We train a 4-layer convolutional ProtoNet on Omniglot (test accuracy 91.5%) and certify its prototype fields on held-out 60-way episodes (12,000 queries). The identity is exact to float32 ($< 10^{-6}$); at the certified τ^* the far-prototype tail sits at 0.25ϵ with *zero* violations, and—because the weights are bounded—the

normalised far mass is a genuinely ϵ -small 0.08 , against attention's 0.35 – 0.62 (Fig. 7). Attention and prototypes thus bracket the two ends of the same class: the tail bound holds throughout, and the full locality guarantee holds wherever weights are bounded.

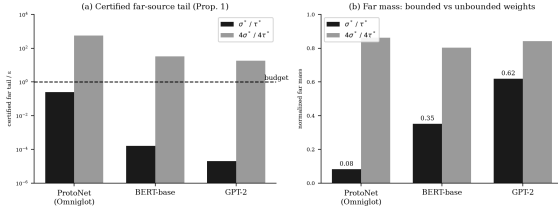


Figure 7. A family of readouts inherits the certificate. Prototypical networks (Omniglot) alongside the two transformers. (a) Every architecture holds the certified far-source tail below budget at its own σ^* and overshoots at $4\times$ (18 – $33\times$ for attention, $560\times$ for ProtoNet). (b) The normalised far mass separates the bounded case (ProtoNet, $v_k=1$, far mass 0.08 – ϵ -small) from the unbounded case (attention, 0.35 – 0.62): the full locality readout transfers exactly only when weights are bounded.

THE BUDGET TRAVELS: RE-CERTIFICATION WITHOUT LABELS

The certificate does something a labelled search structurally cannot: it re-certifies a field it has never measured. A labelled search spends its labels at tuning time, on the field it saw; once deployed on a field that has grown--as continually-updated models and growing memories do--it has no labels left to re-tune and no way to know whether its fixed bandwidth still holds the budget. Because σ^* re-measures the mass A from the field itself, it re-certifies for free. Re-measurement is what any label-free interference rule can do--a direct tail search would re-certify too (Section 6)--but σ^* carries an a-priori conservativeness proof into each new stage, which the empirical searches do not. This is not a higher score against a baseline; it is a capability the labelled-search category lacks, and the axis on which the static certificate is silent--so we give it equal weight.

The impossibility is the claim; the numbers are its proof. We grow the field by density--from 3 to 120 examples per class (300 to 12,000 centres)--on all three frozen backbones, fixing a labelled grid-search σ once on the sparse initial field. As the field densifies, that frozen bandwidth becomes an over-smoother whose interference drifts out of budget while its accuracy stalls; σ^* re-measures A , shrinks to track the density, and holds $\text{tail}/\epsilon \approx 0.1$ throughout (Fig. 8). On ResNet-18 the frozen $\sigma=8.83$ climbs to $\text{tail}/\epsilon=502$ and 47.1% accuracy while σ^* reaches 54.1%--a 7-point label-free margin; on ViT-B/16 the frozen tail reaches $3865\times$ budget and σ^* leads by 6.1 points. ResNet-50 is the honest boundary: its geometry keeps the frozen bandwidth near budget (tail/ϵ peaks at ≈ 2 , a mild crossing not a collapse), yet σ^* still gains 3.2 points. Safety-collapse rests on two backbones, the accuracy gain on all three.

Two guardrails, up front because promotion invites scrutiny. First, this is *adaptivity*, not *dominance*: the margin is against a bandwidth *deliberately frozen* on the sparse field. Against a per-stage re-tuned oracle σ^* does not win; it *tracks* it (within a fraction of a point on ResNet-18 and ViT, trailing by ≈ 4 on ResNet-50), label-free--its advantage is needing no labels to re-tune. Second, the win is *regime- and mode-specific*: it appears in the dense, growing regime (at fixed low density σ^* gives parity, below), and it follows *densification*, not field size. A class-incremental run adding classes at fixed density ($10 \rightarrow 100$ classes, 120 each) barely moves the geometry (d drifts -3.5%), so the frozen bandwidth stays in budget and ties σ^* --a clean null we report to fix the boundary. The certificate travels when local

density changes, the growing-memory setting; it adds nothing when only the class count grows.

Public datasets.

On iris, wine, breast-cancer, and digits the naive bandwidth overshoots by 2.8 – $147\times$ while σ^* holds $\text{tail}/\epsilon < 1$. These fields are neither dense nor growing, so the labelled grid search is a fair fixed comparator, and σ^* matches it within about two points on three of four (breast-cancer 96.6 vs 96.5, digits 97.0 vs 97.0, iris 96.3 vs 96.3%); on wine it trails by 2.2 points. σ^* is a specificity-first bandwidth: at fixed low density it delivers parity, and in the dense, growing regime the guarantee turns into an accuracy win.

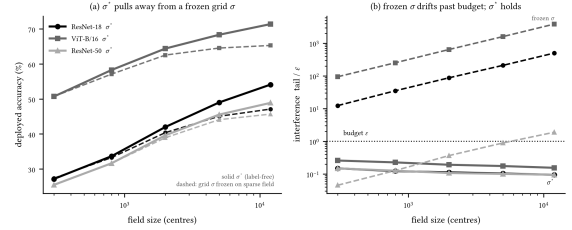


Figure 8. The budget travels--and buys accuracy, on three backbones. A labelled grid-search σ is fixed once on the sparse 3-per-class field, then the field densifies to 120 per class. Solid: σ^* (label-free, re-measured each stage); dashed: the frozen grid σ . (a) σ^* pulls away from the frozen bandwidth as the field grows (ResNet-18 +7, ViT-B/16 +6.1, ResNet-50 +3.2 points at full density), tracking a per-stage re-tuned oracle. (b) The frozen bandwidth's interference drifts past the budget (ResNet-18 $502\times$, ViT $3865\times$; ResNet-50 a milder crossing at $\approx 2\times$) while σ^* holds $\text{tail} \approx 0.1\epsilon$ throughout.

RELATED WORK

Density-estimation rules--plug-in bandwidths (Silverman, Scott), Sheather-Jones, variable-bandwidth and diffusion selectors, Lepski's method, and scale-space--target an integrated squared error against a true *density*; we target *interference*, and derive the bandwidth from that objective using no labelled signal. Run on the three frozen backbones, these objective-mismatched selectors miss the budget in *opposite* directions: Sheather-Jones under-smooths to a near-delta kernel that collapses to a 1-nearest-neighbour rule (a numerically stable readout recovers its 1-NN accuracy; the naive linear-domain evaluation underflows to chance, an artifact we avoid), while Gaussian-process marginal-likelihood over-smooths to 11 – $15\times$ σ^* ($\text{tail}/\epsilon \approx 10^5$)--confirming that likelihood- and ISE-driven selection is blind to the interference budget in either direction. The label-free distance heuristics--the median heuristic and local scaling--fix the scale but not the safety factor, and overshoot the budget by roughly five orders of magnitude on the dense fields (Table 1). A sharper label-free comparator targets the interference directly: since $\text{Tail}_{\sigma}(y, d)$ is monotone in σ and costs the same kernel evaluations as measuring A , one can *bisect* σ until the measured mean tail equals ϵ --an empirical search for the same frontier, with no closed form and no proof. We run it on all three backbones. It is not free lunch: because σ^* is provably conservative (its mean tail is only 0.08 – 0.16ϵ), bisection deploys at a *larger* bandwidth (1.07 – $1.11\times\sigma^*$), and on these high-dimensional fields the labelled accuracy optimum lies *below* σ^* , so moving up costs 0.8 – 2.1 accuracy points rather than recovering them--bisection is further from the labelled grid than σ^* , not closer. More importantly it forfeits the guarantee: holding the *mean* tail at ϵ leaves the per-query distribution over budget (p99 tail/ϵ 1.6–2.3, max up to 2.8), whereas σ^* holds the whole distribution below ϵ with an a-priori proof. The distinction the paper claims is thus precise: σ^* is a one-shot, provably

conservative, per-query certificate; a label-free tail search is an empirical mean-fit with no proof and, here, worse accuracy. Gaussian-process length scales (learned by the marginal-likelihood optimisation measured above) have motivated uniform error bounds for safety-critical use; σ^* fixes the scale from geometry and offers an a priori certificate rather than a fitted posterior. Conformal prediction and selective classification certify *marginal* coverage from a *labelled* calibration set, whereas Corollary 1 certifies *per-query decision equality* without labels--both require a representative sample (label-free is not sample-free: A is measured over held-out queries), and the two are complementary, a conformal wrapper calibrating the residual far-field probability our margin leaves uncontrolled. In continual learning, where a correction field is adapted over a frozen model, the interference budget makes the stability-plasticity trade-off quantitative. The locality readout (Section 2) relates to machine unlearning and influence-based attribution: those quantify how removing a training point changes the output, while σ^* certifies, label-free and a priori, that removing any far point changes the output by at most ϵ and corrupting it cannot flip a 4ϵ -margin decision (Corollary 2)--a measured data-independence guarantee for distance-based predictors, distinct from the randomised, worst-case sensitivity of differential privacy.

Which models inherit the certificate.

The certificate uses only that the output is a weighted sum of training points with a distance-decaying weight, so it is a property of a *family* of modern readouts, not of kernel density estimation alone. We demonstrate two members on real networks, chosen to bracket the class. Softmax attention reduces exactly to a Gaussian kernel field over keys with unbounded source weights; its certified far-key tail holds on BERT and GPT-2 (Fig. 6). Prototypical networks are the bounded-weight companion ($v_k=1$), for which the full locality readout transfers, not just the tail; the certificate holds on a trained ProtoNet with ϵ -small far mass (Fig. 7). Between them they instantiate both ends of the assumption (A1). Two further families remain candidates we do *not* test here: representer-point decompositions write a network's logit as such a field, and a network near convergence acts as a kernel machine in its neural-tangent space. For each, σ^* would supply a candidate locality radius from the field's own geometry; verifying the budget on them is future work.

LIMITATIONS

Three boundaries. On pure density recovery there is no near/far structure--every sample is near--so the separation objective is silent; the principle applies to fields that must *discriminate*. σ^* is specificity-first: its guarantee is on interference and accuracy dominance is regime-dependent (parity at fixed low density, an accuracy win only in the dense, growing regime). The re-certification advantage is likewise mode-specific--it follows density, not field size: a class-incremental run that adds classes at fixed density leaves the geometry, and a frozen bandwidth's budget, essentially unchanged (a null we report in Section 5), so the growing-field claim is scoped to densification, the growing-memory regime, not to class count alone. And conservativeness (Proposition 2) is stated at fixed radius d ; d drifts by only 1% over a $40\times$ densification, consistent with $O_p(n^{-1/2})$ quantile convergence (SI Note 5), so re-estimating it per stage corrects a vanishing term, but a field whose class-conditional geometry itself changes would need d re-derived.

CONCLUSION

A kernel field has one honest bandwidth: the largest σ a conservative envelope certifies to keep cross-source interference below a stated budget. It has a closed form, $\sigma^*=d/\sqrt{2\ln(A/\epsilon)}$; it needs no labelled search because the mass A is measured from the field; and it carries a certificate that a search cannot--not only that the field is safe, but that every prediction it flags stable is decided by its intended sources. Because that mass is measured rather than tuned, the certificate does the one thing a labelled search structurally cannot: it re-certifies a field it has never seen. As the field densifies, the same label-free re-measurement tracks a per-stage re-tuned oracle on three backbones while a bandwidth frozen on the sparse early field drifts to hundreds of times the budget--the guarantee that a static, tuned choice cannot carry into the growing-memory regime where the labels are no longer there. And because the certificate needs only distance-decaying weights, it reaches objects never built as kernel fields: softmax attention and prototype networks inherit it--the full locality guarantee for the bounded-weight prototype, the interference bound for attention--putting a label-free locality guarantee on distance-based deep readouts, transformers included. The bandwidth question, for a kernel field, is not a search but a calibration: derive the certified bandwidth from geometry, and read off the guarantee. And because that certificate is differentiable and depends only on geometry, the natural next step is to make it a training objective--penalising the far tail, or clamping the bandwidth to σ^* , so a model is locality-certified by construction rather than after the fact; we leave that to future work.

Data and code availability.

All experiment scripts and released result files are available at github.com/negulescu42/sigma-star with fixed seeds and the exact bandwidth grid for each experiment. Every empirical certificate reported here--including the maximum-tail and zero-exceedance claims--is reproducible end-to-end from these scripts on the stated frozen features.

Author contributions.

R.N. conceived the resolution-calibration framing and developed the empirical and machine-learning program (Sections 3–5). C.B. is responsible for the analytic core: the safety frontier (Proposition 1), the conservativeness theorem (Proposition 2), the decision-stability theorem (Theorem 1), the far-set locality corollary (Corollary 2), and the uniform-over-region certificate (SI Note 4). Both authors reviewed and approved the final text.

- [1] B. W. Silverman. *Density Estimation for Statistics and Data Analysis*. Chapman & Hall, 1986.
- [2] D. W. Scott. *Multivariate Density Estimation*. Wiley, 1992.
- [3] S. J. Sheather, M. C. Jones. *A Reliable Data-Based Bandwidth Selection Method for Kernel Density Estimation*. J. R. Stat. Soc. B 53:683–690, 1991.
- [4] I. S. Abramson. *On Bandwidth Variation in Kernel Estimates--A Square Root Law*. Ann. Statist. 10(4):1217–1223, 1982.
- [5] G. R. Terrell, D. W. Scott. *Variable Kernel Density Estimation*. Ann. Statist. 20(3):1236–1265, 1992.
- [6] Z. I. Botev, J. F. Grotowski, D. P. Kroese. *Kernel Density Estimation via Diffusion*. Ann. Statist. 38(5):2916–2957, 2010.
- [7] O. V. Lepski, E. Mammen, V. G. Spokoiny. *Optimal Spatial Adaptation to Inhomogeneous Smoothness*. Ann. Statist. 25(3):929–947, 1997.
- [8] T. Lindeberg. *Scale-Space Theory in Computer Vision*. Kluwer, 1994.
- [9] C. E. Rasmussen, C. K. I. Williams. *Gaussian Processes for Machine Learning*. MIT Press, 2006.
- [10] A. Capone, A. Lederer, S. Hirche. *Gaussian Process Uniform Error Bounds with Unknown Hyperparameters for Safety-Critical Applications*. International Conference on Machine Learning (ICML), 2022.
- [11] J. Kirkpatrick et al. *Overcoming Catastrophic Forgetting in Neural Networks*. PNAS 114(13):3521–3526, 2017.
- [12] S.-A. Rebuffi, A. Kolesnikov, G. Sperl, C. H. Lampert. *iCARL: Incremental Classifier and Representation Learning*. CVPR, 2017.
- [13] V. Vovk, A. Gammerman, G. Shafer. *Algorithmic Learning in a Random World*. Springer, 2005.
- [14] A. N. Angelopoulos, S. Bates. *Conformal Prediction: A Gentle Introduction*. Found. Trends Mach. Learn. 16(4):494–591, 2023.

- [15] Y. Geifman, R. El-Yaniv. *Selective Classification for Deep Neural Networks*. NeurIPS, 2017.
- [16] D. Garreau, W. Jitkrittum, M. Kanagawa. *Large Sample Analysis of the Median Heuristic*. arXiv:1707.07269, 2017.
- [17] L. Zelnik-Manor, P. Perona. *Self-Tuning Spectral Clustering*. NeurIPS, 2004.
- [18] S. Rippa. *An Algorithm for Selecting a Good Value for the Parameter c in Radial Basis Function Interpolation*. Adv. Comput. Math. 11:193–210, 1999.
- [19] S. Gowal et al. *On the Effectiveness of Interval Bound Propagation for Training Verifiably Robust Models*. arXiv:1810.12715, 2018.
- [20] A. Ginart, M. Guan, G. Valiant, J. Zou. *Making AI Forget You: Data Deletion in Machine Learning*. NeurIPS, 2019.
- [21] P. W. Koh, P. Liang. *Understanding Black-box Predictions via Influence Functions*. ICML, 2017.
- [22] C.-K. Yeh, J. Kim, I. E.-H. Yen, P. Ravikumar. *Representer Point Selection for Explaining Deep Neural Networks*. NeurIPS, 2018.
- [23] A. Jacot, F. Gabriel, C. Hongler. *Neural Tangent Kernel: Convergence and Generalization in Neural Networks*. NeurIPS, 2018.
- [24] J. Snell, K. Swersky, R. Zemel. *Prototypical Networks for Few-shot Learning*. NeurIPS, 2017.
- [25] Y.-H. H. Tsai, S. Bai, M. Yamada, L.-P. Morency, R. Salakhutdinov. *Transformer Dissection: A Unified Understanding of Transformer's Attention via the Lens of Kernel*. EMNLP, 2019.
- [26] K. Choromanski et al. *Rethinking Attention with Performers*. ICLR, 2021.