

Postman interface showing a REST client request to `localhost:3000/` using the `GET` method. The response is a JSON object representing a student profile.

Request:

- Method: `GET`
- URL: `localhost:3000/`

Response:

Status: `200 OK`, Time: `62 ms`, Size: `329 B`

Body (JSON):

```
[
  {
    "_id": "661a916c49147baf3140610e",
    "name": "Neha",
    "email": "nrmundase@gmail.com",
    "city": "Pune"
  }
]
```

MongoDB Compass interface showing the `student` collection in the `profile` database. The document is displayed in the `Documents` tab.



Database: `localhost:27017`

Collection: `student`



Document:

```
{
  "_id": ObjectId('661a916c49147baf3140610e'),
  "name": "Neha",
  "email": "nrmundase@gmail.com",
  "city": "Pune"
}
```



> _MONGOSH

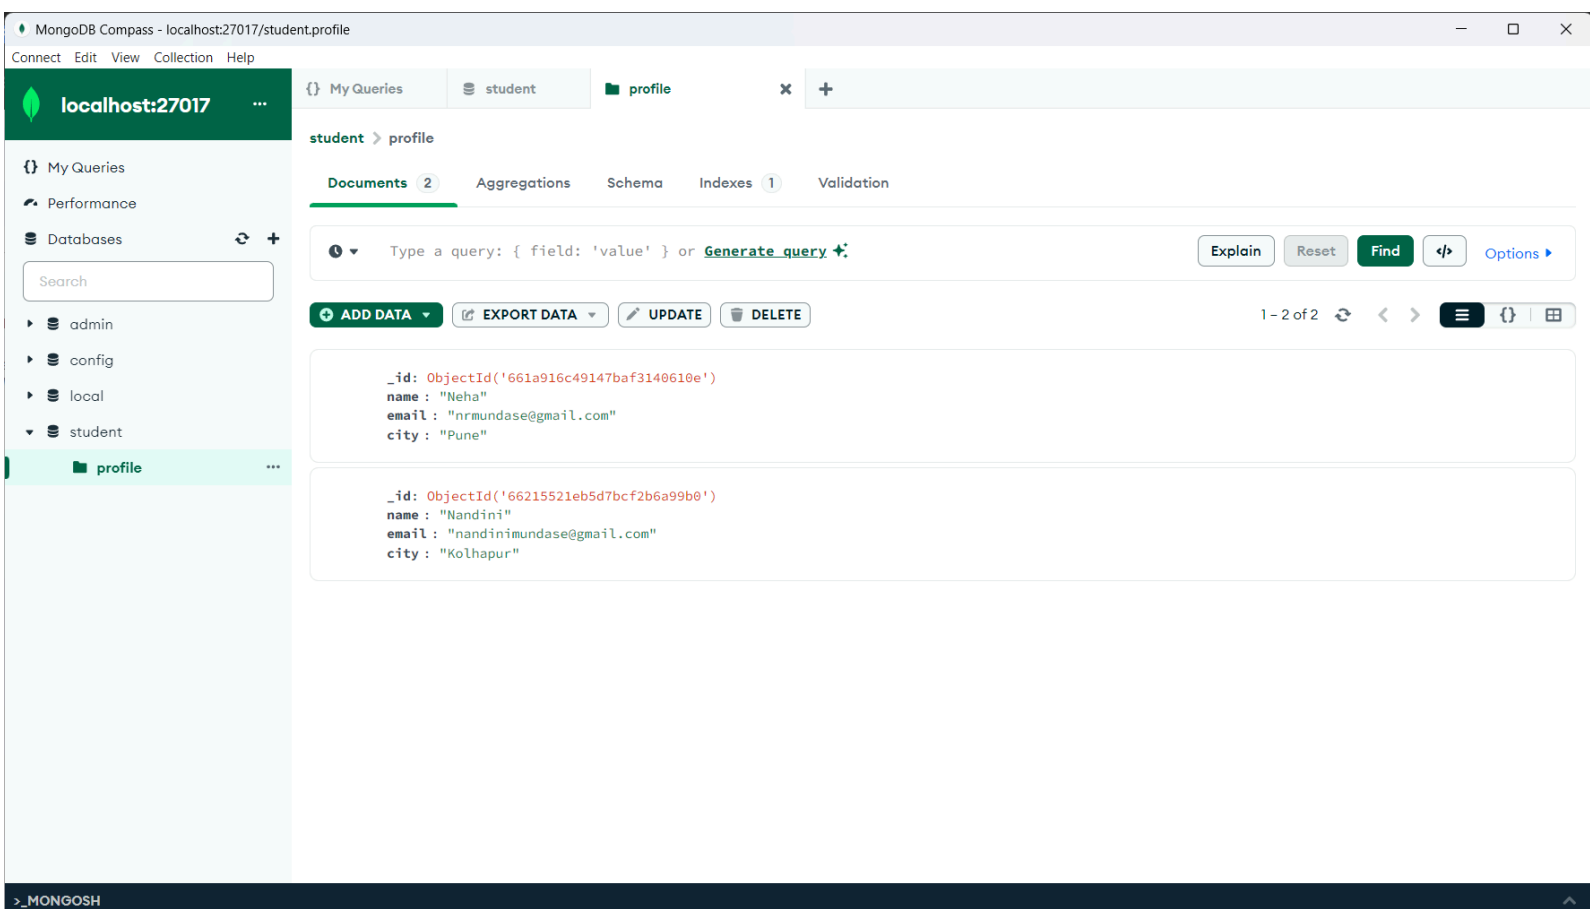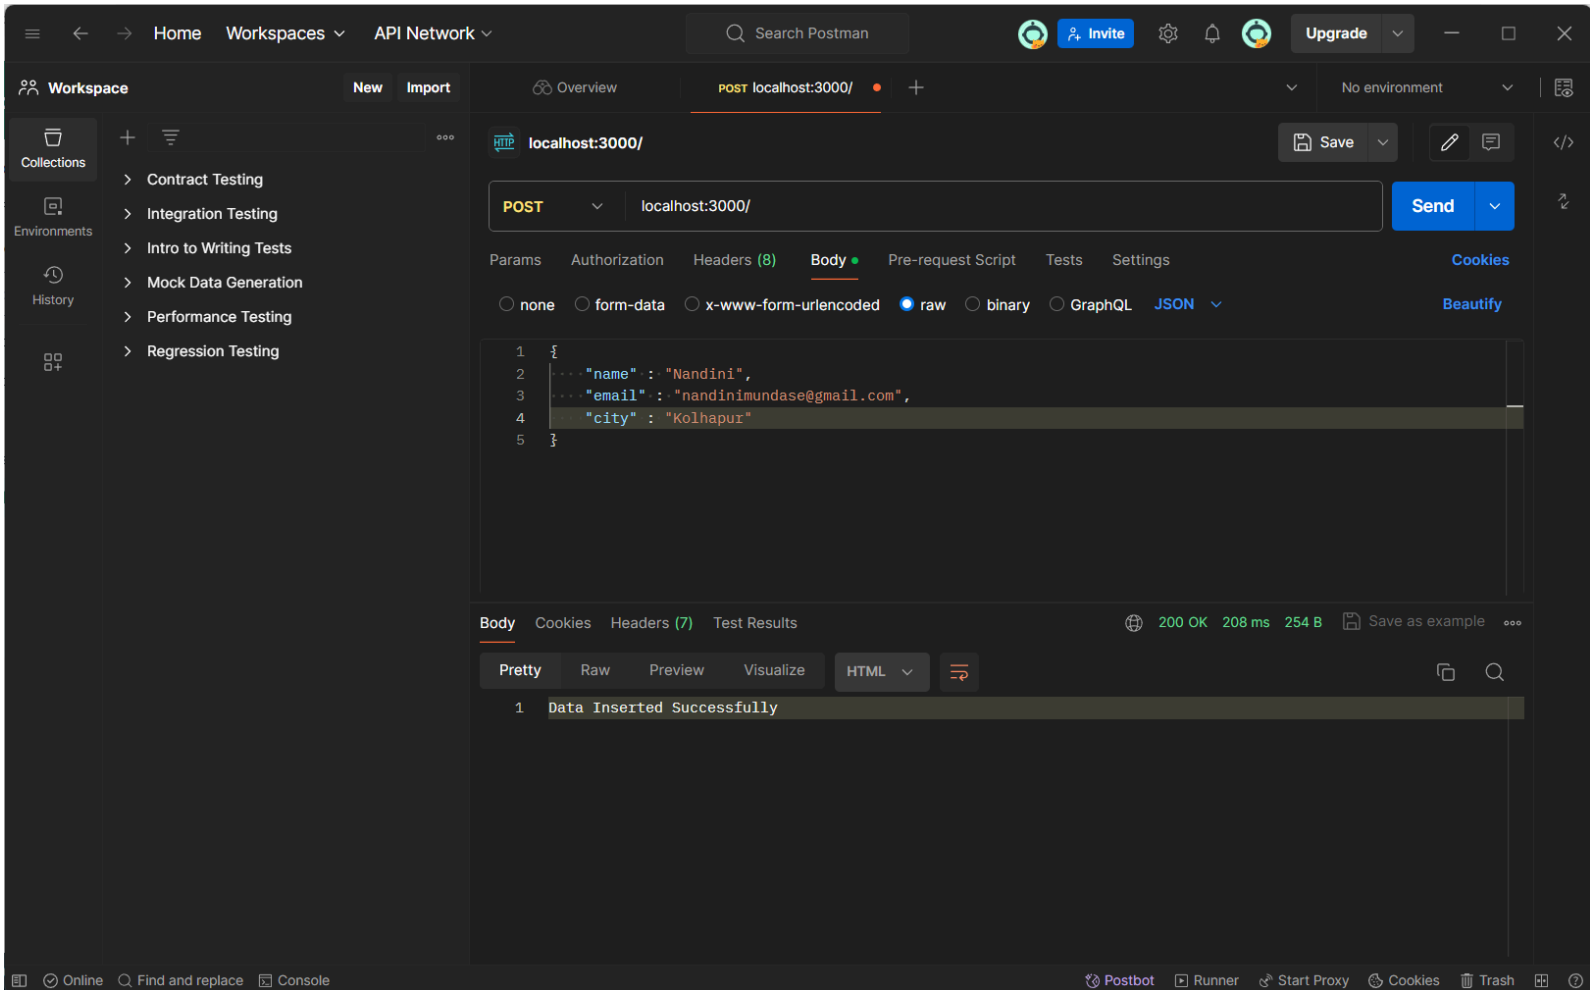

> _MONGOSH

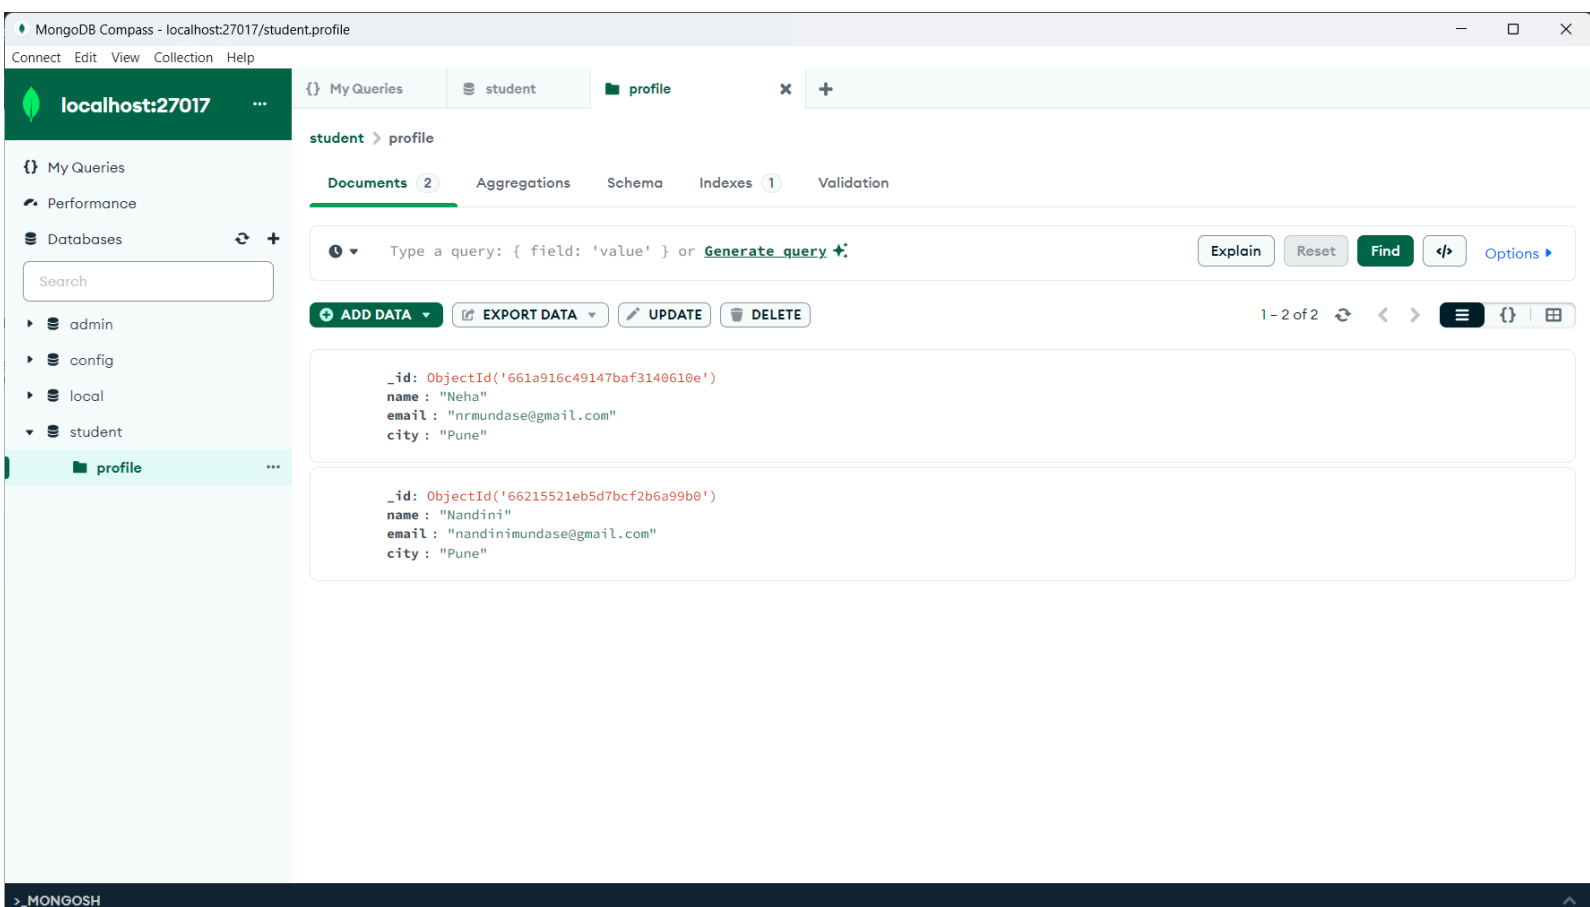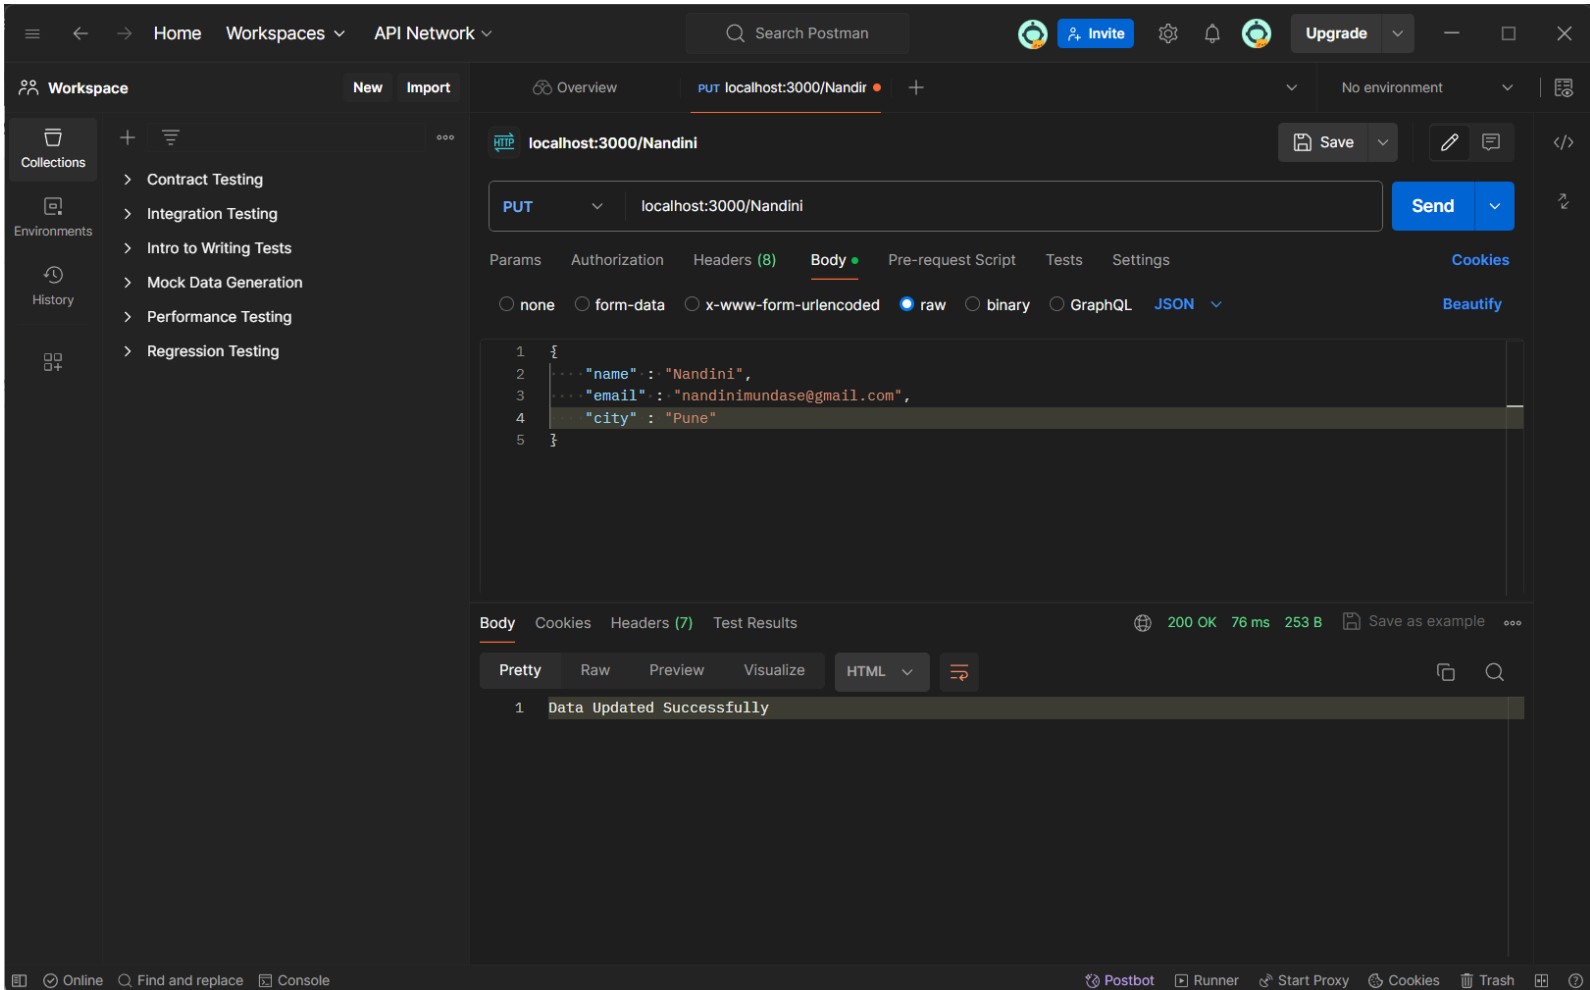

>_MONGOSH

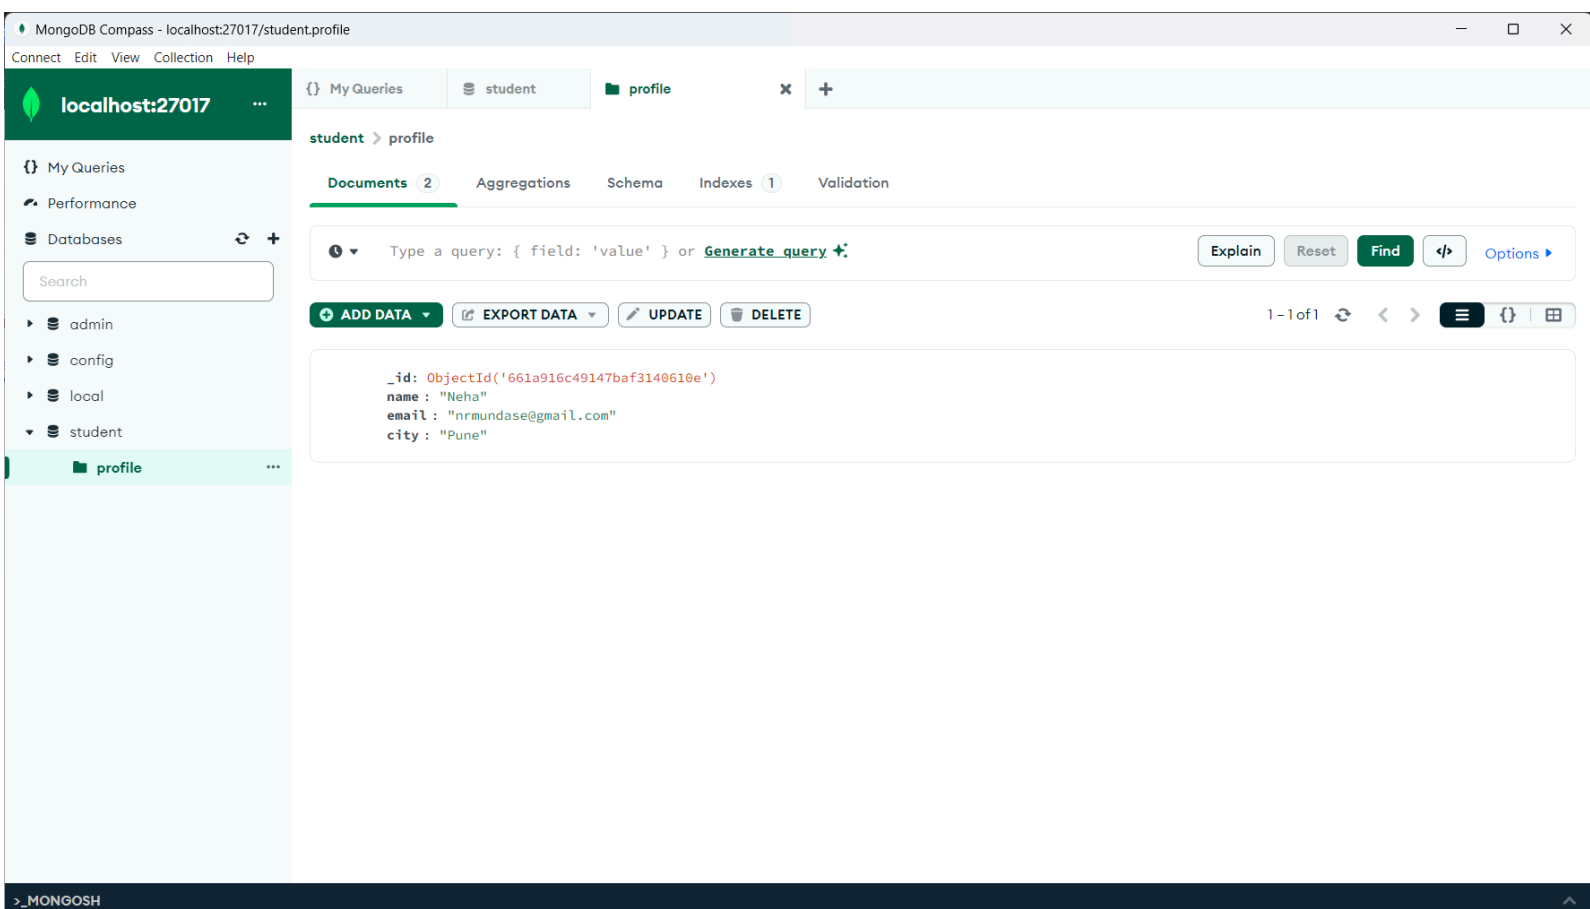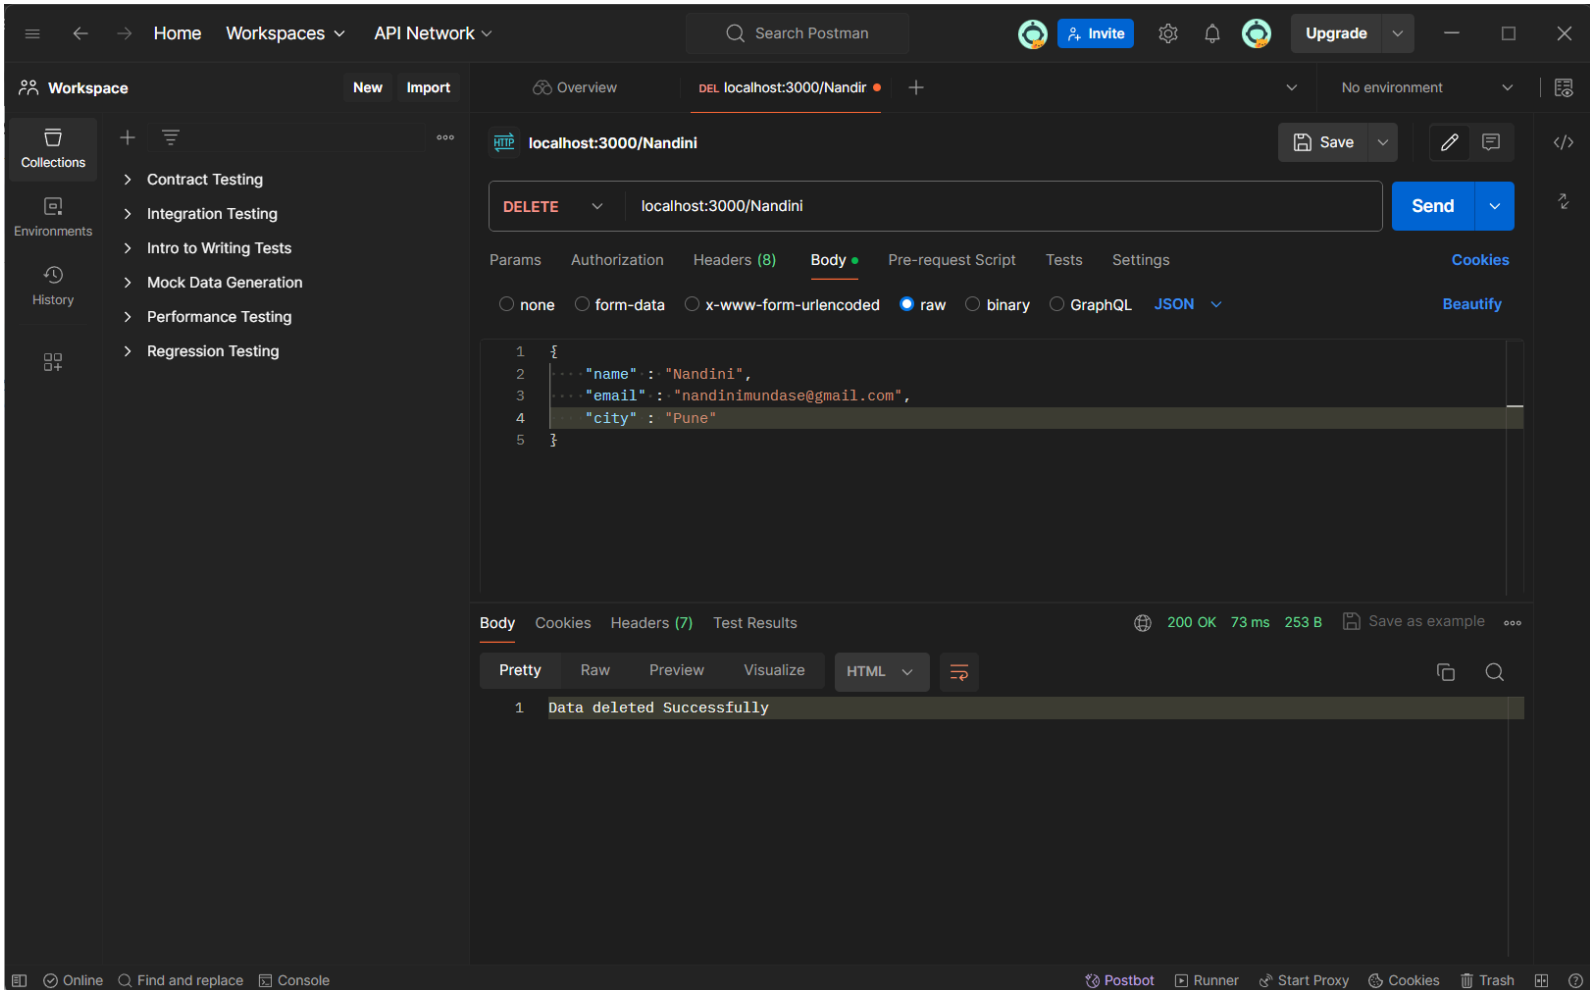

> _MONGOSH