

DG INTERNS HUB

CYBERSECURITY INTERSHIP

WEEK 4 - CYBER SECURITY INTERNSHIP WITH MINI PROJECT

STUDENT NAME: NEHA FULE.

EMAIL:neha.dgintershub@gmail.com.

Date of submission: 30 SEPTEMBER 2026

Task 1 - Setup Basic Network (Lab)

Objective

Create a small virtual network using Oracle VirtualBox with Kali Linux as the attacker and Ubuntu Linux as the target. Both machines were connected through a Host-Only network for safe lab communication.

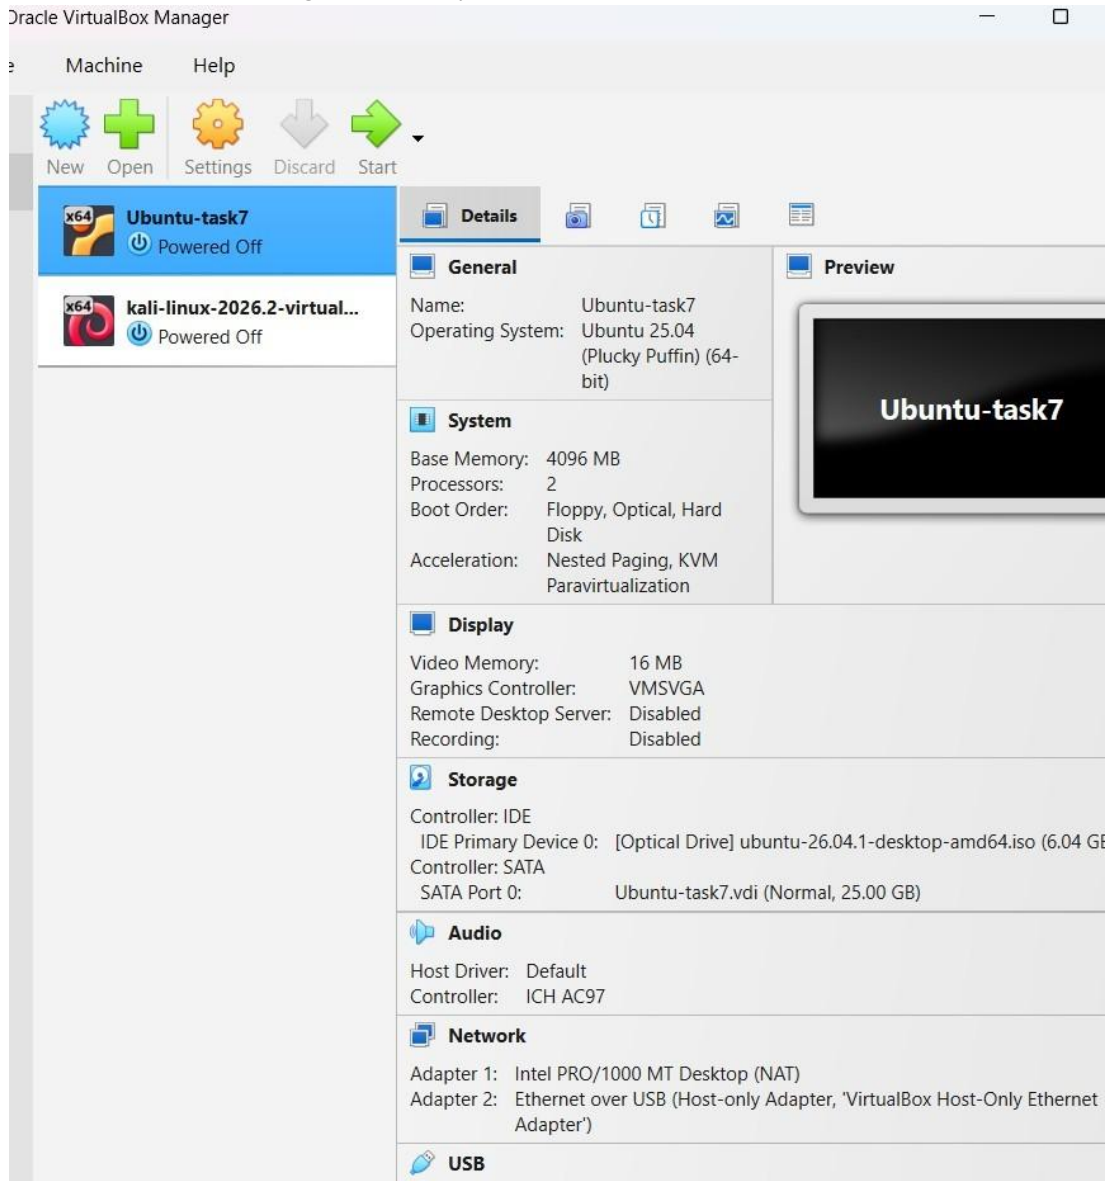


Figure 1: Kali Linux and Ubuntu virtual machines in Oracle VirtualBox.

Network Configuration

Ubuntu received the Host-Only IP address 192.168.56.101. Kali Linux used 192.168.56.102 on the same lab network.

```
student@student-VirtualBox: ~  
student@student-VirtualBox:~$ ip a  
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000  
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00  
    inet 127.0.0.1/8 scope host lo  
        valid_lft forever preferred_lft forever  
    inet6 ::1/128 scope host noprefixroute  
        valid_lft forever preferred_lft forever  
2: enx08002707e447: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000  
    link/ether 08:00:27:07:e4:47 brd ff:ff:ff:ff:ff:ff  
    inet 192.168.56.101/24 brd 192.168.56.255 scope global dynamic noprefixroute enx08002707e447  
        valid_lft 405sec preferred_lft 405sec  
    inet6 fe80::1c0e:16ec:632f:a7a8/64 scope link noprefixroute  
        valid_lft forever preferred_lft forever  
3: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000  
    link/ether 08:00:27:01:1d:b7 brd ff:ff:ff:ff:ff:ff  
    inet 10.0.2.15/24 brd 10.0.2.255 scope global dynamic noprefixroute enp0s3  
        valid_lft 83165sec preferred_lft 83165sec  
    inet6 fd17:625c:f037:2:a00:27ff:fe01:1db7/64 scope global dynamic noprefixroute  
        valid_lft 86386sec preferred_lft 14386sec  
    inet6 fe80::a00:27ff:fe01:1db7/64 scope link noprefixroute  
        valid_lft forever preferred_lft forever  
student@student-VirtualBox:~$
```

Figure 2: Ubuntu target network interface showing 192.168.56.101.

Connectivity Test `ping -c 4`
192.168.56.101

```
kali@kali: ~  
Session Actions Edit View Help  
[kali@kali]~  
$ ping -c 4 192.168.56.101  
PING 192.168.56.101 (192.168.56.101) 56(84) bytes of data.  
64 bytes from 192.168.56.101: icmp_seq=1 ttl=64 time=6.06 ms  
64 bytes from 192.168.56.101: icmp_seq=2 ttl=64 time=4.64 ms  
64 bytes from 192.168.56.101: icmp_seq=3 ttl=64 time=2.88 ms  
64 bytes from 192.168.56.101: icmp_seq=4 ttl=64 time=3.32 ms  
  
— 192.168.56.101 ping statistics —  
4 packets transmitted, 4 received, 0% packet loss, time 3005ms  
rtt min/avg/max/mdev = 2.882/4.224/6.059/1.239 ms  
[kali@kali]~  
$
```

Figure 3: Successful ping from Kali Linux to Ubuntu with 0% packet loss.

Result: Kali Linux and Ubuntu were successfully connected and could communicate over the isolated HostOnly network.

Task 2 - Install & Configure Services

Objective

Install and configure Apache2 on Ubuntu, verify that the service is running, and confirm remote access from Kali Linux.

Apache2 Service Verification `sudo`

```
systemctl status apache2
```

```

Sep 28 14:19
student@student-VirtualBox: ~ -- sudo systemctl status apache2

Enabling conf charset.
Enabling conf localized-error-pages.
Enabling conf other-vhosts-access-log.
Enabling conf security.
Enabling conf serve-cgi-bin.
Enabling site 000-default.
invoke-rc.d: policy-rc.d denied execution of start.
Created symlink /etc/systemd/system/multi-user.target.wants/apache2.service' -> /usr/lib/systemd/system/apache2.service'.
/usr/sbin/policy-rc.d returned 101, not running 'start apache2.service'
Created symlink /etc/systemd/system/multi-user.target.wants/apache-htcacheclean.service' -> /usr/lib/systemd/system/apache-htcacheclean.service'.
/usr/sbin/policy-rc.d returned 101, not running 'start apache-htcacheclean.service'
Processing triggers for ufw (0.36.2-9build1)...
Processing triggers for man-db (2.13.1-1build1)...
Processing triggers for libc-bin (2.43-2ubuntu2.3)...
student@student-VirtualBox:~$ student@student-VirtualBox:~$
student@student-VirtualBox:~$ command not found
student@student-VirtualBox:~$ student@student-VirtualBox:~$
student@student-VirtualBox:~$ command not found
student@student-VirtualBox:~$ sudo systemctl start apache2
student@student-VirtualBox:~$ sudo systemctl status apache2
● apache2.service - The Apache HTTP Server
   Loaded: loaded (/usr/lib/systemd/system/apache2.service; enabled; preset: enabled)
   Active: active (running) since Mon 2026-09-28 14:17:44 IST; 24s ago
     Invoc: aa35ee0a49394e08c6453754079a093
       Docs: https://httpd.apache.org/docs/2.4/
    Main PID: 13442 (apache2)
      Status: "Total requests 0; Idle/Busy workers 100/0;Requests/sec: 0; Bytes served/sec:  0 B/sec"
        Tasks: 85 (limit: 4010)
       Memory: 5.7M (peak: 6.1M)
          CPU: 130ms
    CGroup: /system.slice/apache2.service
            └─13442 /usr/sbin/apache2 -k start -DFOREGROUND
            └─13458 /usr/sbin/apache2 -k start -DFOREGROUND
            └─13460 /usr/sbin/apache2 -k start -DFOREGROUND

Sep 28 14:17:44 student-VirtualBox systemd[1]: Starting apache2.service - The Apache HTTP Server...
Sep 28 14:17:44 student-VirtualBox apache2[13442]: AH00558: apache2: Could not reliably determine the server's fully qualified domain name, using
Sep 28 14:17:44 student-VirtualBox systemd[1]: Started apache2.service - The Apache HTTP Server.
lines 1-18 (END)

```

Figure 4: Apache2 service status showing Active: active (running).

Web Server Verification

The Apache2 default page was verified locally on Ubuntu and remotely from Kali Linux.

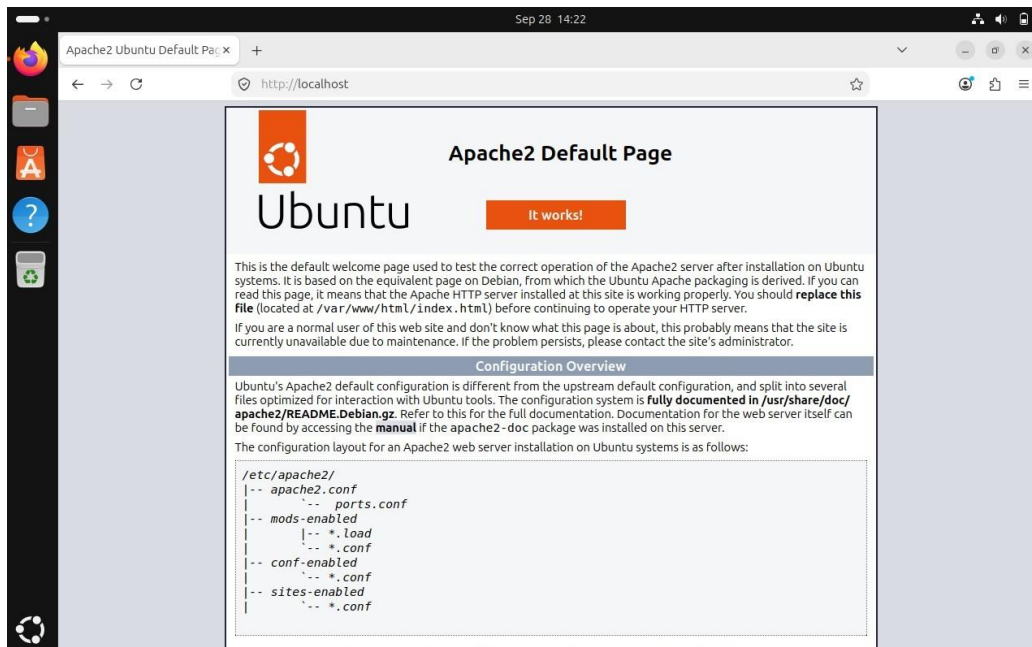


Figure 5: Apache2 Default Page opened locally on Ubuntu.

`http://192.168.56.101`

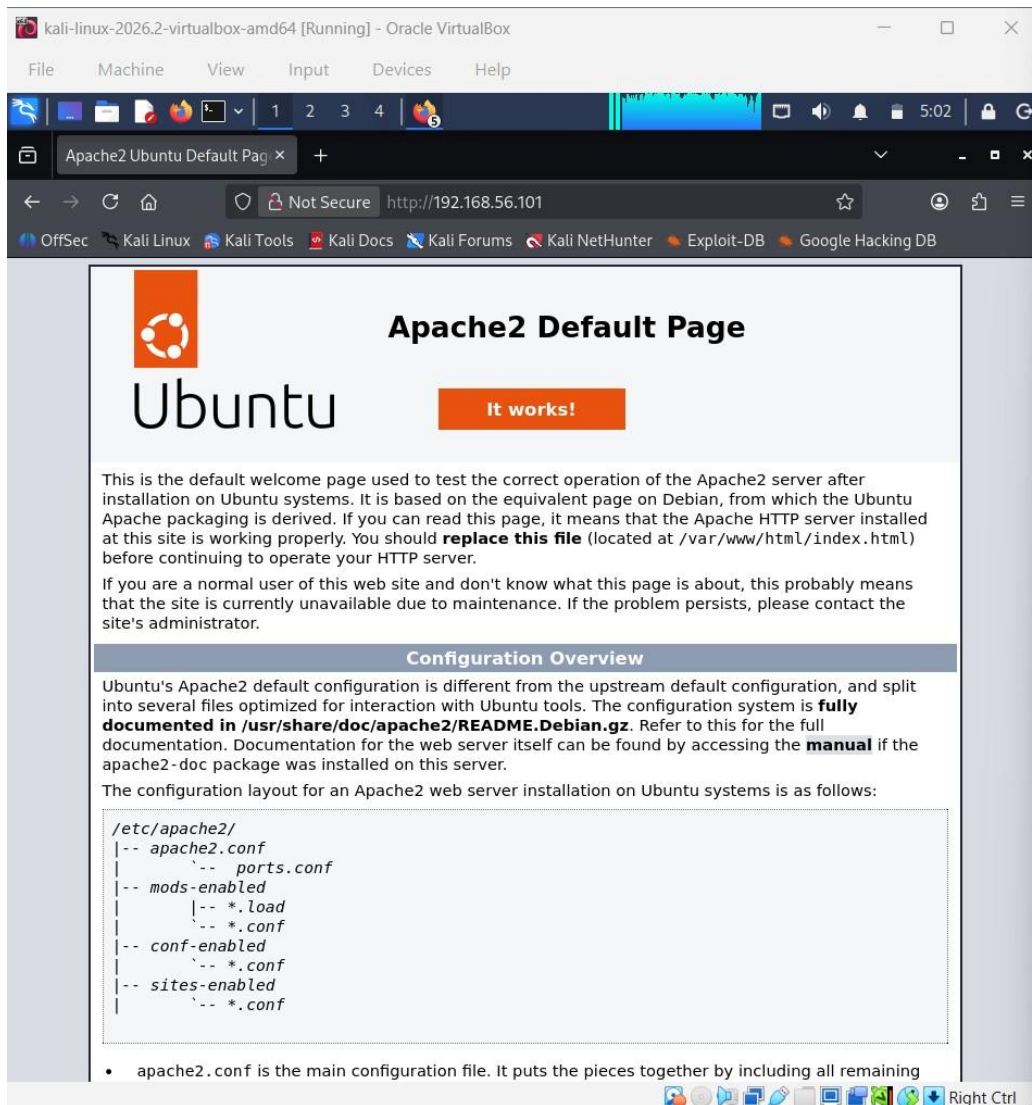


Figure 6: Apache2 Default Page accessed remotely from Kali Linux.

Result: Apache2 was active and the target web server was reachable from Kali Linux over HTTP.

Task 3 - Network Scanning Using Nmap

Objective

Scan the Ubuntu target from Kali Linux, identify open ports and running services, detect the service version, and save the scan output.

Basic Port Scan `nmap`


192.168.56.101

```
kali@kali: ~  
Session Actions Edit View Help  
Platform: x86_64-pc-linux-gnu  
Compiled with: liblua-5.4.8 openssl-3.6.2 libssh2-1.11.1 libz-1.3.1 libpcap-1.0.46 libpcap-1.10.6 nmap-libdnet-1.18.0 ipv6  
Compiled without:  
Available nsock engines: epoll poll select  
  
(kali@kali)-[~]  
$ nmap version ...  
Starting Nmap 7.99 ( https://nmap.org ) at 2026-09-28 05:06 -0400  
Failed to resolve "version".  
Failed to resolve "...".  
WARNING: No targets were specified, so 0 hosts scanned.  
Nmap done: 0 IP addresses (0 hosts up) scanned in 4.07 seconds  
  
(kali@kali)-[~]  
$ nmap 192.168.56.101  
Starting Nmap 7.99 ( https://nmap.org ) at 2026-09-28 05:08 -0400  
Nmap scan report for 192.168.56.101  
Host is up (0.015s latency).  
Not shown: 999 closed tcp ports (reset)  
PORT      STATE SERVICE  
80/tcp    open  http  
MAC Address: 08:00:27:07:E4:47 (Oracle VirtualBox virtual NIC)  
Nmap done: 1 IP address (1 host up) scanned in 0.98 seconds  
  
(kali@kali)-[~]  
$
```

Figure 7: Basic Nmap scan showing TCP port 80 open for HTTP.

Service and Version Detection

```
nmap -sV 192.168.56.101
```

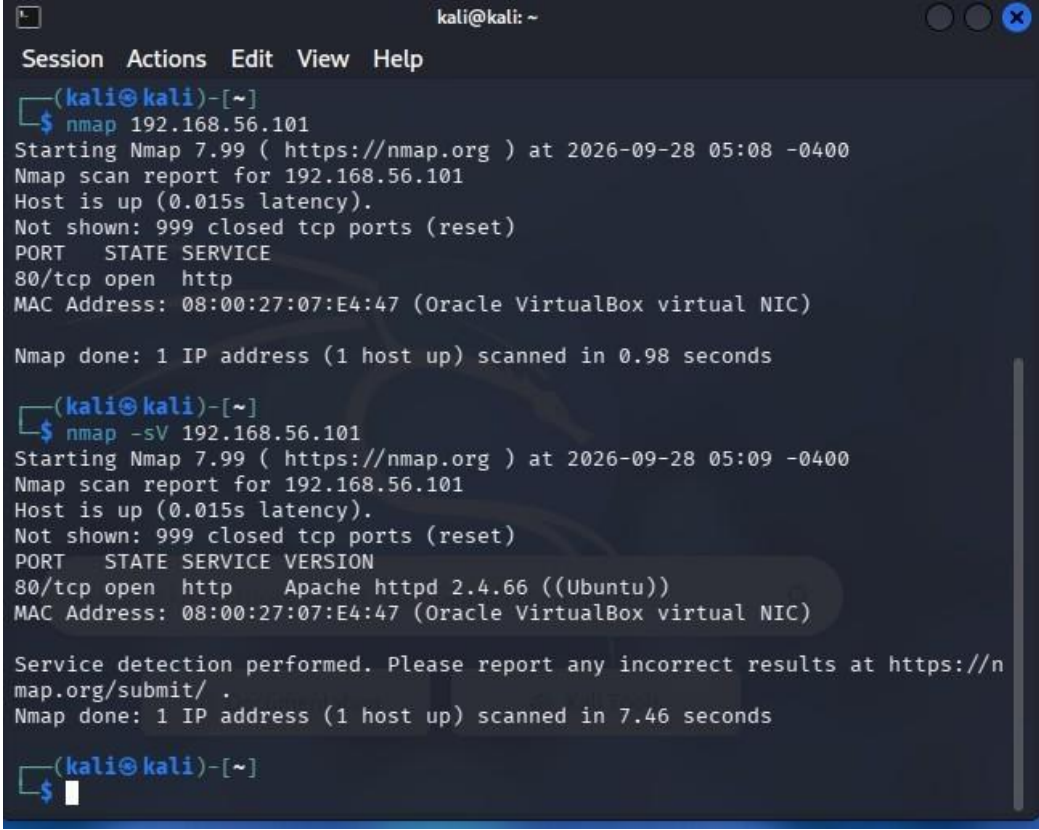

The screenshot shows a terminal window titled 'kali@kali: ~'. It displays the output of two Nmap commands. The first command is 'nmap 192.168.56.101', which shows a basic scan report indicating the host is up and port 80/tcp is open with the service 'http'. The second command is 'nmap -sV 192.168.56.101', which performs service and version detection. This scan identifies the service as 'http' on port 80/tcp, with the version 'Apache httpd 2.4.66 ((Ubuntu))'. The terminal also shows the MAC address '08:00:27:07:E4:47 (Oracle VirtualBox virtual NIC)' and the scan completion time of 7.46 seconds.

```
kali@kali: ~
Session Actions Edit View Help
(kali@kali)-[~]
$ nmap 192.168.56.101
Starting Nmap 7.99 ( https://nmap.org ) at 2026-09-28 05:08 -0400
Nmap scan report for 192.168.56.101
Host is up (0.015s latency).
Not shown: 999 closed tcp ports (reset)
PORT      STATE SERVICE
80/tcp    open  http
MAC Address: 08:00:27:07:E4:47 (Oracle VirtualBox virtual NIC)

Nmap done: 1 IP address (1 host up) scanned in 0.98 seconds

(kali@kali)-[~]
$ nmap -sV 192.168.56.101
Starting Nmap 7.99 ( https://nmap.org ) at 2026-09-28 05:09 -0400
Nmap scan report for 192.168.56.101
Host is up (0.015s latency).
Not shown: 999 closed tcp ports (reset)
PORT      STATE SERVICE VERSION
80/tcp    open  http      Apache httpd 2.4.66 ((Ubuntu))
MAC Address: 08:00:27:07:E4:47 (Oracle VirtualBox virtual NIC)

Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 7.46 seconds

(kali@kali)-[~]
$
```

Figure 8: Nmap -sV identified Apache httpd 2.4.66 (Ubuntu).

Saving Scan Output `nmap -sV 192.168.56.101 -oN task3_nmap_scan.txt`

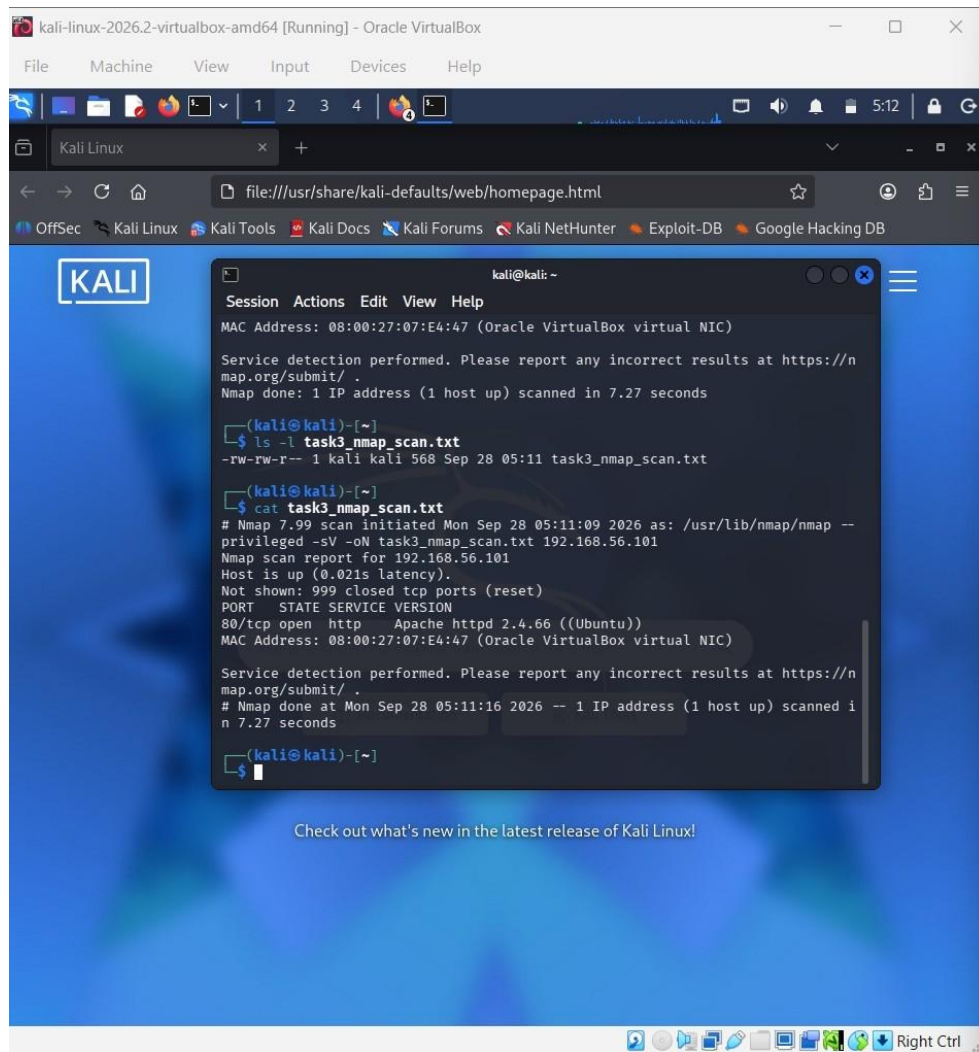


Figure 9: Saved Nmap scan output verified from task3_nmap_scan.txt. **Result:** Nmap

found 80/tcp open and identified the Apache HTTP service on the Ubuntu target.

Task 4 - Traffic Analysis Using Wireshark

Objective

Capture network traffic in Wireshark and analyze ICMP, HTTP, and DNS using display filters.

ICMP Traffic

Display filter: icmp

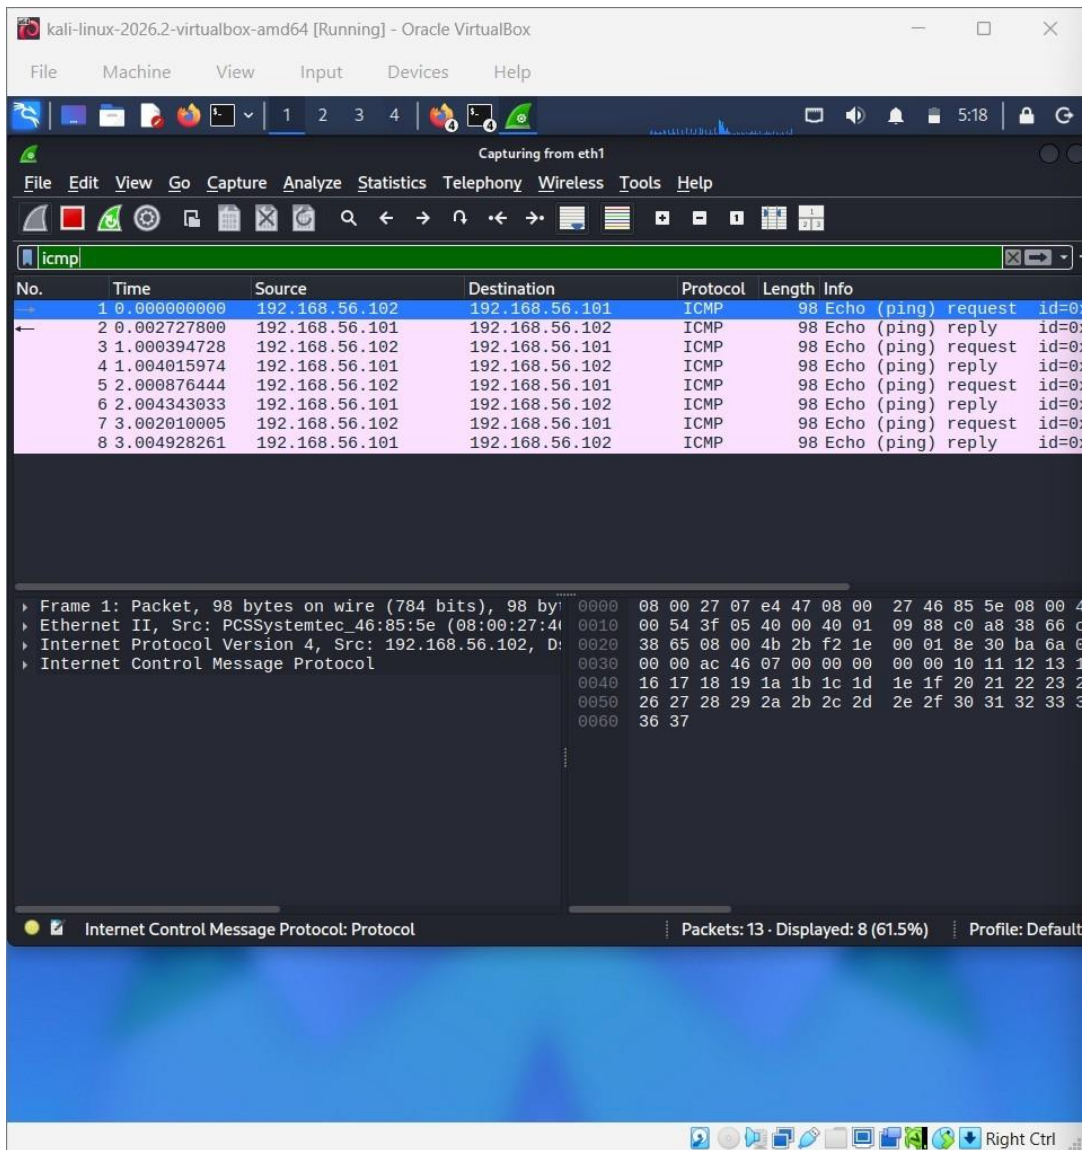


Figure 10: ICMP Echo Request and Echo Reply packets between Kali and Ubuntu.

Finding: Echo requests from 192.168.56.102 and replies from 192.168.56.101 confirmed successful IP connectivity.

HTTP Traffic

Display filter: http

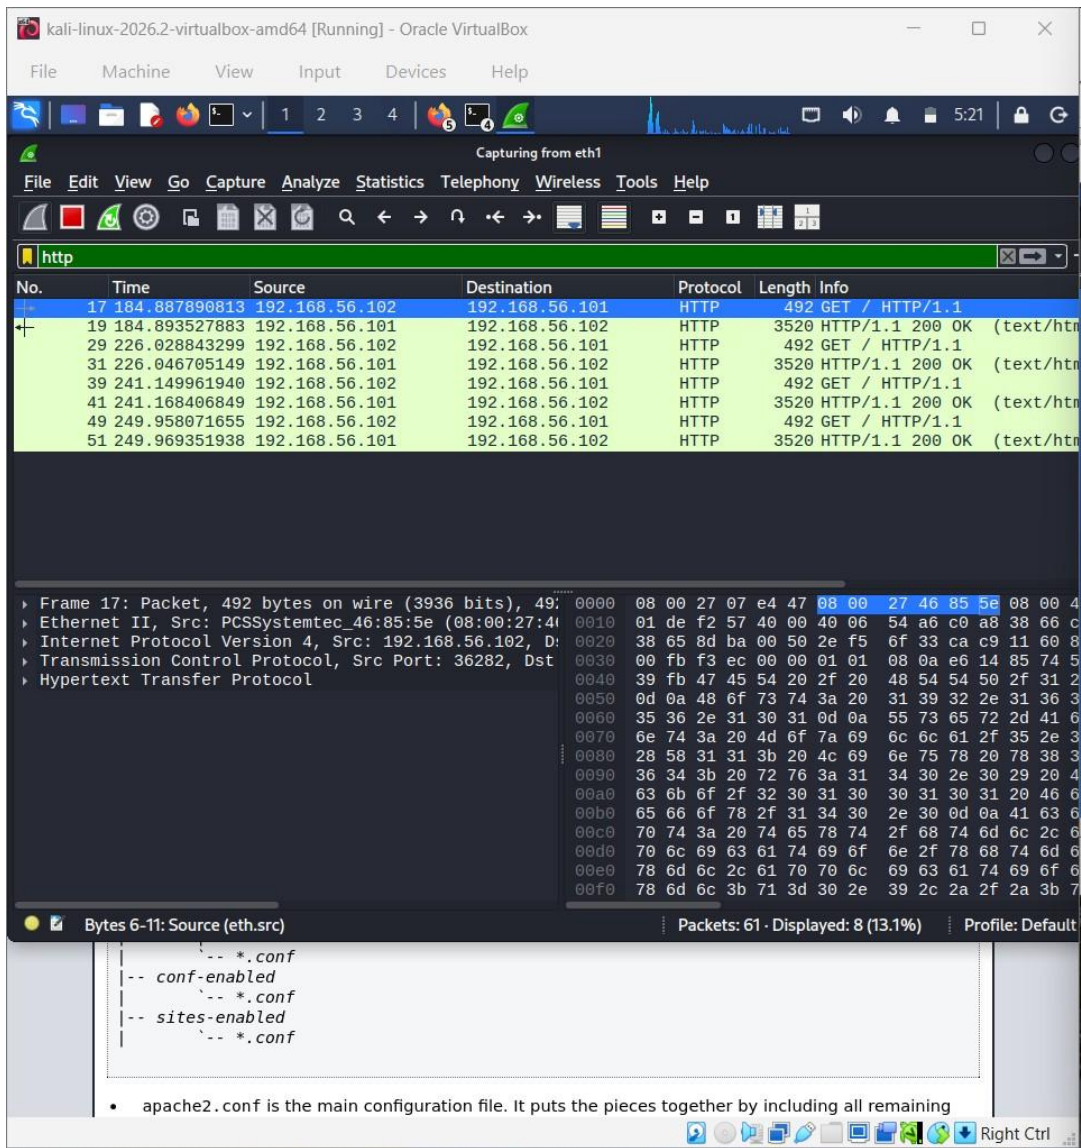


Figure 11: HTTP GET requests and HTTP/1.1 200 OK responses captured in Wireshark.

Finding: HTTP requests from Kali and successful 200 OK responses from Ubuntu confirmed web communication over TCP port 80.

DNS Traffic

Display filter: dns

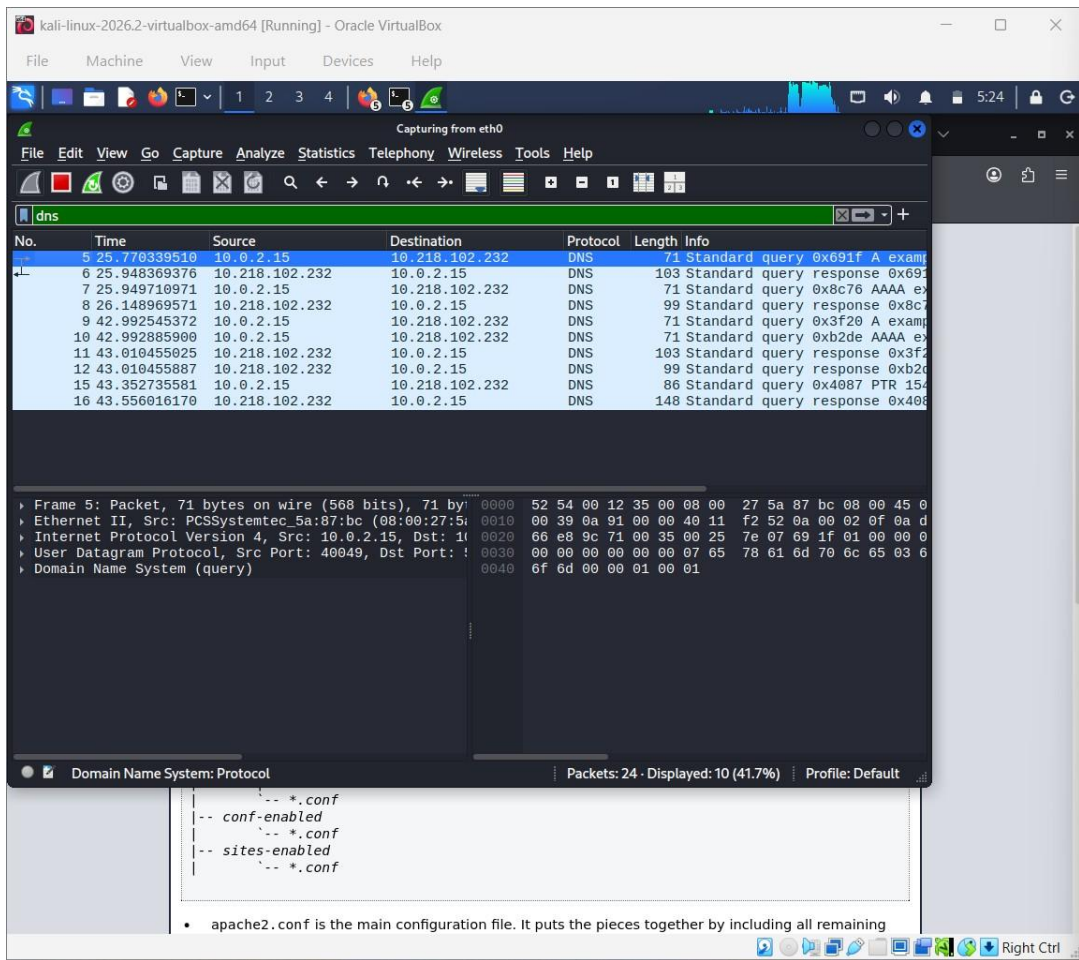


Figure 12: DNS Standard Query and Standard Query Response packets captured in Wireshark.

Finding: DNS query and response packets demonstrated domain-name resolution traffic.

TASK 5 MINI PROJECT:

Basic Network Setup and Initial Security Testing

Lab Environment: Oracle VirtualBox

Attacker: Kali Linux (192.168.56.102)

Target: Ubuntu Linux (192.168.56.101)

Project	Week 4 Cyber Security Lab
Attacker Machine	Kali Linux
Target Machine	Ubuntu Linux
Target Service	Apache2 HTTP Server
Tools Used	VirtualBox, Nmap, Wireshark

1. Project Objective

The objective of this mini project was to build a small isolated virtual lab, configure a web service on a target machine, verify communication between the machines, perform basic network scanning, and analyze captured network traffic. The complete workflow combines the results of Tasks 1 to 4 into one final project report.

2. Complete Lab Workflow

Kali Linux (Attacker) -> Host-Only Network -> Ubuntu (Target) -> Apache2 -> Nmap -> Wireshark

3. Tools and Addressing

Component	Role / Purpose	Address / Detail
Kali Linux	Attacker / testing machine	192.168.56.102
Ubuntu Linux	Target / web server	192.168.56.101
Apache2	HTTP web service	TCP port 80
Nmap	Port and service scanning	Kali Linux
Wireshark	Packet capture and protocol analysis	Kali Linux

4. Task 1 - Basic Network Setup

Kali Linux and Ubuntu were created as separate virtual machines in Oracle VirtualBox. A Host-Only network was used so the two systems could communicate safely inside the lab. Ubuntu received the target IP address 192.168.56.101.

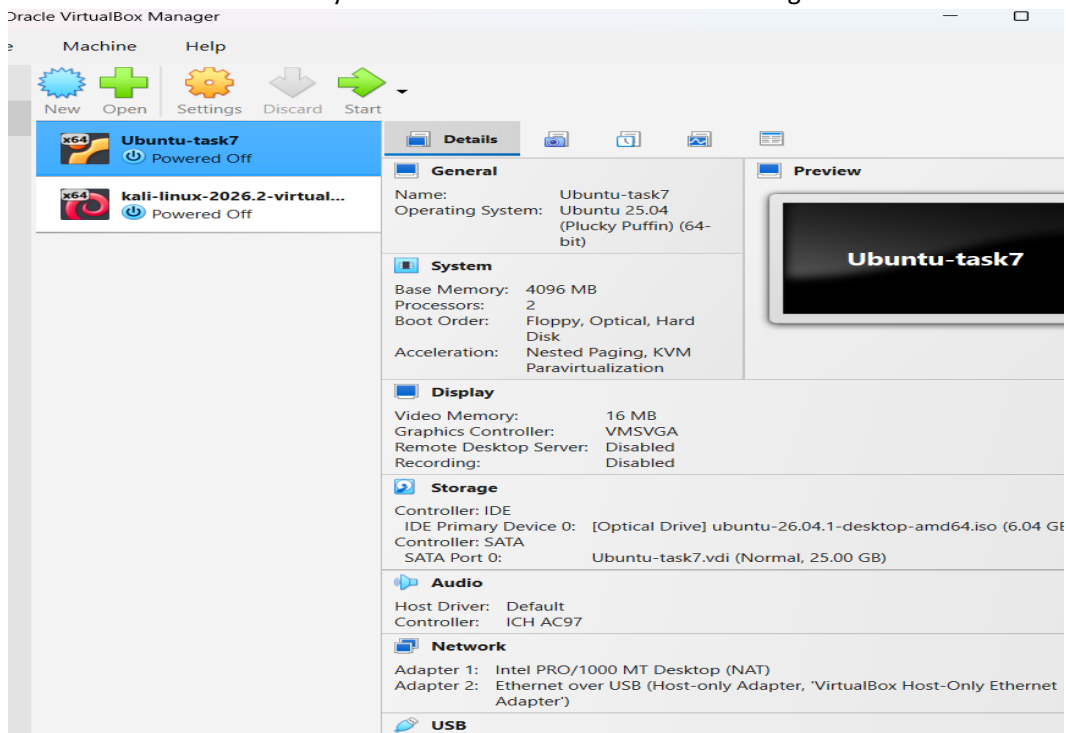


Figure 1: Kali Linux and Ubuntu virtual machines configured in Oracle VirtualBox.

```
student@student-VirtualBox: ~  
student@student-VirtualBox:~$ ip a  
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000  
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00  
    inet 127.0.0.1/8 scope host lo  
        valid_lft forever preferred_lft forever  
    inet6 ::1/128 scope host noprefixroute  
        valid_lft forever preferred_lft forever  
2: enx08002707e447: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000  
    link/ether 08:00:27:07:e4:47 brd ff:ff:ff:ff:ff:ff  
    inet 192.168.56.101/24 brd 192.168.56.255 scope global dynamic noprefixroute enx08002707e447  
        valid_lft 405sec preferred_lft 405sec  
    inet6 fe80::1c0e:16ec:632f:a7a8/64 scope link noprefixroute  
        valid_lft forever preferred_lft forever  
3: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000  
    link/ether 08:00:27:01:1d:b7 brd ff:ff:ff:ff:ff:ff  
    inet 10.0.2.15/24 brd 10.0.2.255 scope global dynamic noprefixroute enp0s3  
        valid_lft 83165sec preferred_lft 83165sec  
    inet6 fd17:625c:f037:2:a00:27ff:fe01:1db7/64 scope global dynamic noprefixroute  
        valid_lft 86386sec preferred_lft 14386sec  
    inet6 fe80::a00:27ff:fe01:1db7/64 scope link noprefixroute  
        valid_lft forever preferred_lft forever  
student@student-VirtualBox:~$
```

Figure 2: Ubuntu target network interface showing 192.168.56.101.

Connectivity was verified from Kali Linux using:

```
ping -c 4 192.168.56.101
```

```
kali@kali: ~  
Session Actions Edit View Help  
[kali@kali]~  
$ ping -c 4 192.168.56.101  
PING 192.168.56.101 (192.168.56.101) 56(84) bytes of data.  
64 bytes from 192.168.56.101: icmp_seq=1 ttl=64 time=6.06 ms  
64 bytes from 192.168.56.101: icmp_seq=2 ttl=64 time=4.64 ms  
64 bytes from 192.168.56.101: icmp_seq=3 ttl=64 time=2.88 ms  
64 bytes from 192.168.56.101: icmp_seq=4 ttl=64 time=3.32 ms  
  
— 192.168.56.101 ping statistics —  
4 packets transmitted, 4 received, 0% packet loss, time 3005ms  
rtt min/avg/max/mdev = 2.882/4.224/6.059/1.239 ms  
[kali@kali]~  
$
```


Figure 3: Successful ping from Kali Linux to Ubuntu with 0% packet loss.

Task 1 Result: The attacker and target machines were successfully connected on the same Host-Only lab network.

5. Task 2 - Install and Configure Web Service

Apache2 was installed on the Ubuntu target. The service was started and checked with systemctl. The status showed Active: active (running), confirming that the web server was operational.

```
sudo systemctl status apache2
```

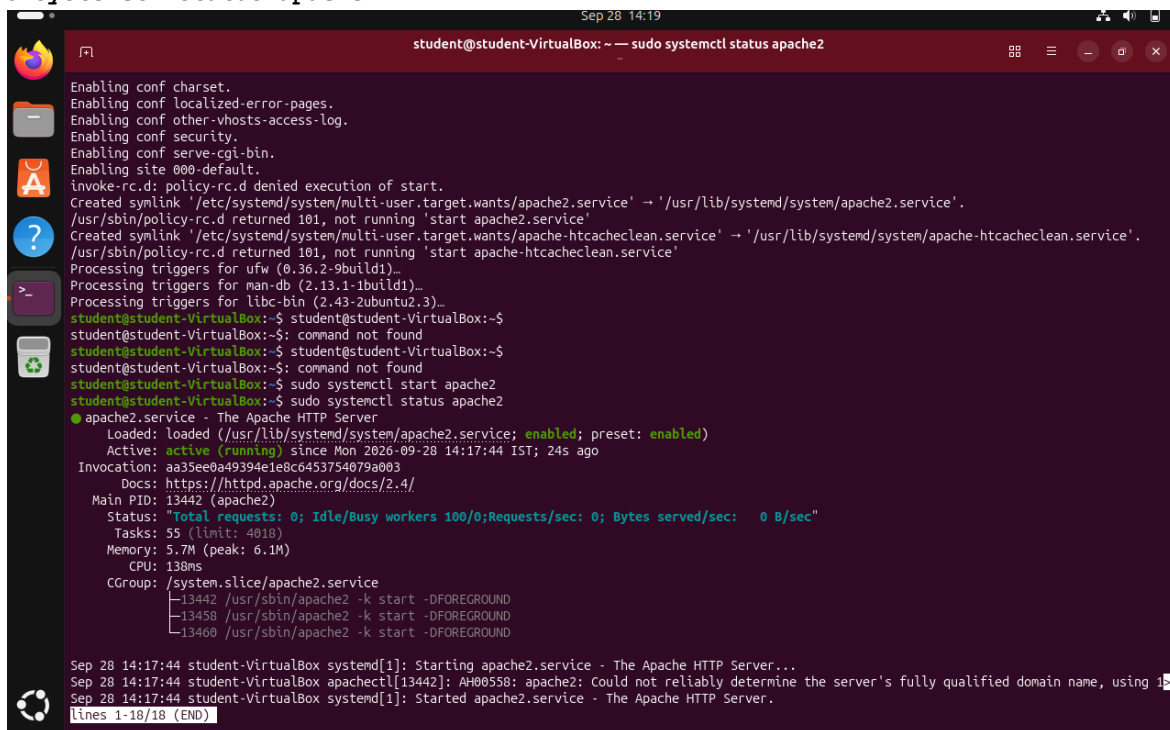

```
Sep 28 14:19
student@student-VirtualBox: ~ — sudo systemctl status apache2

Enabling conf charset.
Enabling conf localized-error-pages.
Enabling conf other-vhosts-access-log.
Enabling conf security.
Enabling conf serve-cgi-bin.
Enabling site 000-default.
invoke-rc.d: policy-rc.d denied execution of start.
Created symlink '/etc/systemd/system/multi-user.target.wants/apache2.service' -> '/usr/lib/systemd/system/apache2.service'.
/usr/sbin/policy-rc.d returned 101, not running 'start apache2.service'
Created symlink '/etc/systemd/system/multi-user.target.wants/apache-htcacheclean.service' -> '/usr/lib/systemd/system/apache-htcacheclean.service'.
/usr/sbin/policy-rc.d returned 101, not running 'start apache-htcacheclean.service'
Processing triggers for ufw (0.36.2-9build1)...
Processing triggers for man-db (2.13.1-1build1)...
Processing triggers for libc-bin (2.43-2ubuntu2.3)...
student@student-VirtualBox:~$ student@student-VirtualBox:~$
student@student-VirtualBox:~$ command not found
student@student-VirtualBox:~$ student@student-VirtualBox:~$
student@student-VirtualBox:~$ command not found
student@student-VirtualBox:~$ sudo systemctl start apache2
student@student-VirtualBox:~$ sudo systemctl status apache2
● apache2.service - The Apache HTTP Server
   Loaded: loaded (/usr/lib/systemd/system/apache2.service; enabled; preset: enabled)
   Active: active (running) since Mon 2026-09-28 14:17:44 IST; 24s ago
     Invocation: aa35ee0a49394e1e8c6453754079a003
       Docs: https://httpd.apache.org/docs/2.4/
    Main PID: 13442 (apache2)
      Status: "Total requests: 0; Idle/Busy workers 100/0;Requests/sec: 0; Bytes served/sec:  0 B/sec"
        Tasks: 55 (limit: 4018)
       Memory: 5.7M (peak: 6.1M)
          CPU: 138ms
       CGroup: /system.slice/apache2.service
               └─13442 /usr/sbin/apache2 -k start -DFOREGROUND
                 └─13458 /usr/sbin/apache2 -k start -DFOREGROUND
                   └─13460 /usr/sbin/apache2 -k start -DFOREGROUND

Sep 28 14:17:44 student-VirtualBox systemd[1]: Starting apache2.service - The Apache HTTP Server...
Sep 28 14:17:44 student-VirtualBox apachectl[13442]: AH00558: apache2: Could not reliably determine the server's fully qualified domain name, using 1
Sep 28 14:17:44 student-VirtualBox systemd[1]: Started apache2.service - The Apache HTTP Server.
lines 1-18/18 (END)
```

Figure 4: Apache2 service status on Ubuntu showing active (running)

The web server was then tested remotely from Kali Linux by opening the Ubuntu target IP address in Firefox <http://192.168.56.101>

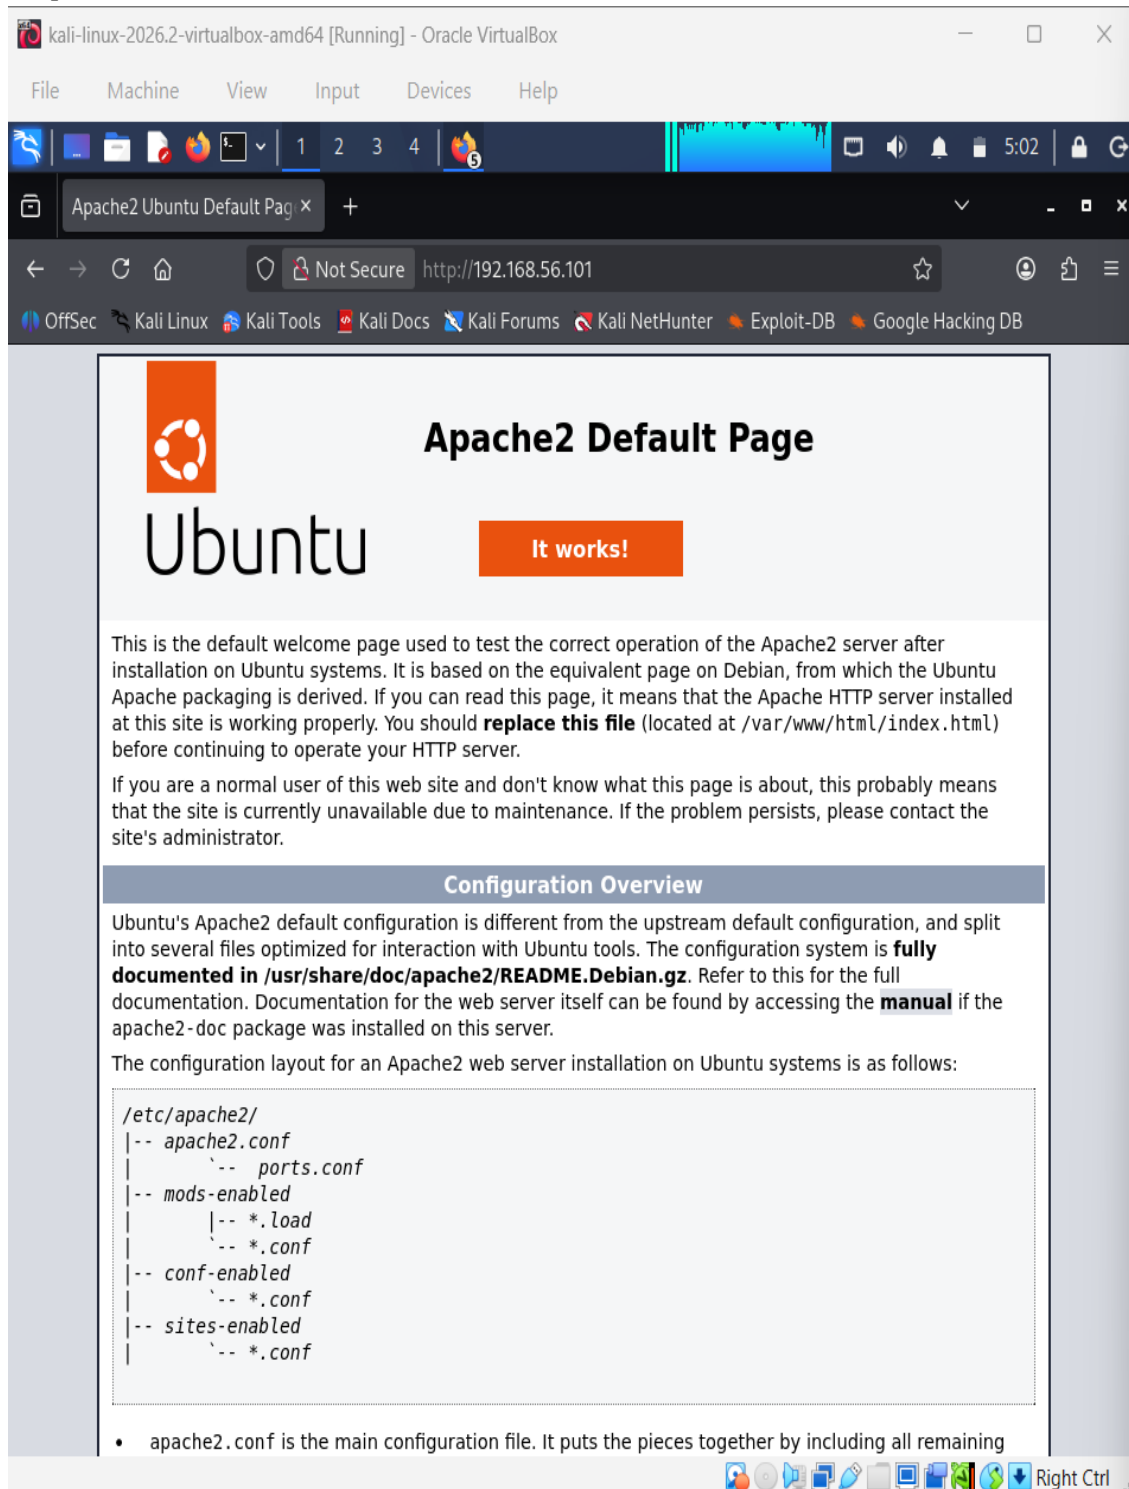



Figure 5: Apache2 Default Page accessed from Kali Linux using 192.168.56.101.

Task 2 Result: Apache2 was successfully configured and the target web server was reachable from the Kali attacker machine over HTTP.

6. Task 3 - Network Scanning Using Nmap

The Ubuntu target was scanned from Kali Linux with Nmap. Service/version detection was used to identify the service running on the open port.

```
nmap -sV 192.168.56.101
```

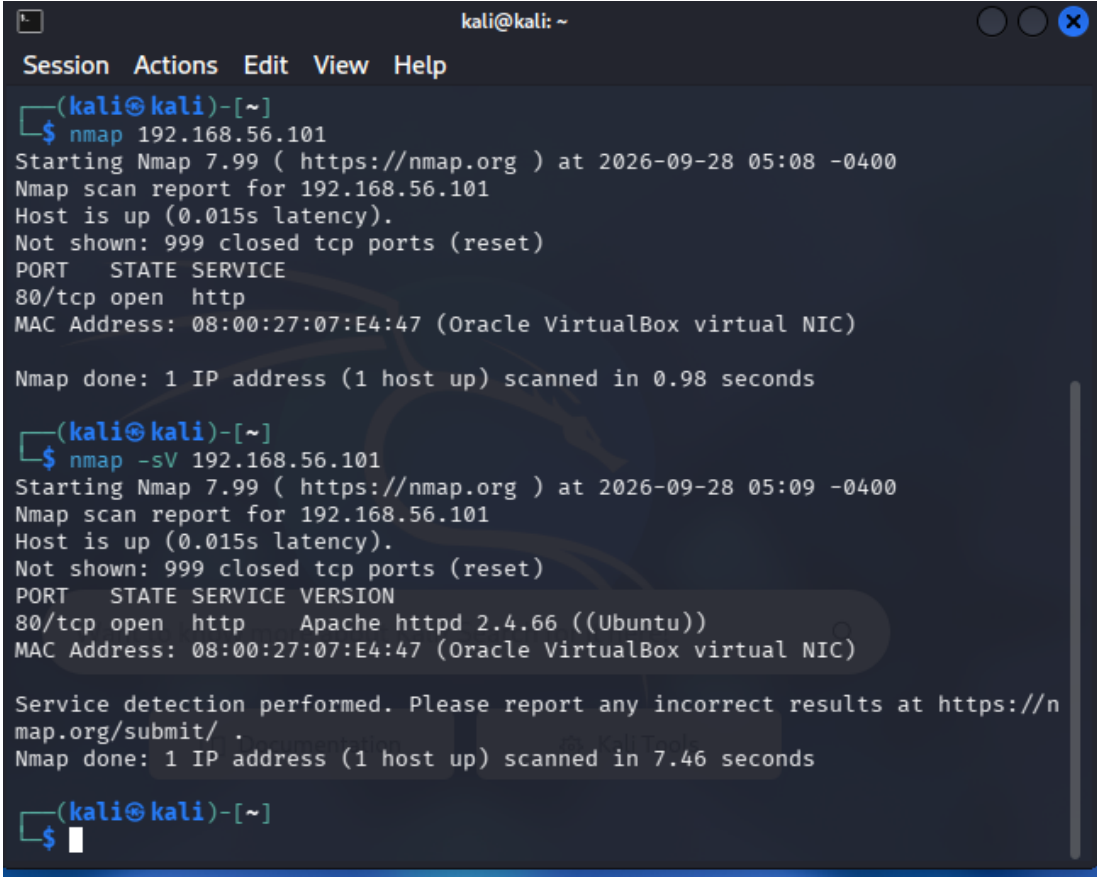

```
kali@kali: ~  
Session Actions Edit View Help  
(kali@kali)-[~]  
$ nmap 192.168.56.101  
Starting Nmap 7.99 ( https://nmap.org ) at 2026-09-28 05:08 -0400  
Nmap scan report for 192.168.56.101  
Host is up (0.015s latency).  
Not shown: 999 closed tcp ports (reset)  
PORT      STATE SERVICE  
80/tcp    open  http  
MAC Address: 08:00:27:07:E4:47 (Oracle VirtualBox virtual NIC)  
  
Nmap done: 1 IP address (1 host up) scanned in 0.98 seconds  
  
(kali@kali)-[~]  
$ nmap -sV 192.168.56.101  
Starting Nmap 7.99 ( https://nmap.org ) at 2026-09-28 05:09 -0400  
Nmap scan report for 192.168.56.101  
Host is up (0.015s latency).  
Not shown: 999 closed tcp ports (reset)  
PORT      STATE SERVICE VERSION  
80/tcp    open  http      Apache httpd 2.4.66 ((Ubuntu))  
MAC Address: 08:00:27:07:E4:47 (Oracle VirtualBox virtual NIC)  
  
Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .  
Nmap done: 1 IP address (1 host up) scanned in 7.46 seconds  
  
(kali@kali)-[~]  
$
```

Figure 6: Nmap service/version scan showing TCP port 80 open and Apache HTTP service.

The scan identified the target as reachable and reported 80/tcp open with Apache httpd 2.4.66 (Ubuntu). The scan result was also saved to a text file for evidence.

```
nmap -sV 192.168.56.101 -oN task3_nmap_scan.txt
```

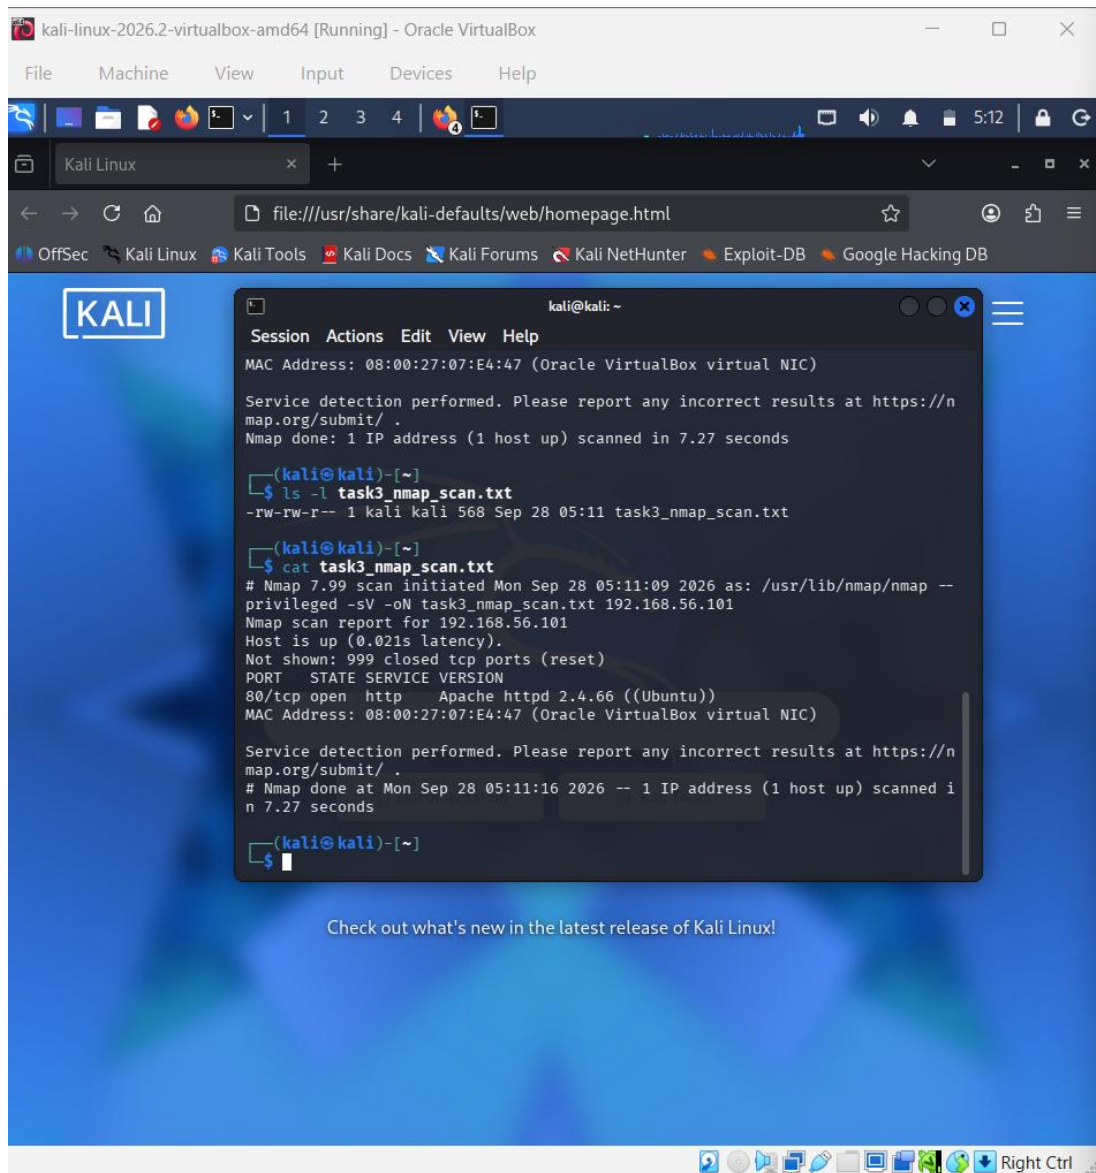


Figure 7: Nmap scan output saved and verified in task3_nmap_scan.txt.

Task 3 Result: Nmap successfully identified the open HTTP port and the Apache service running on the Ubuntu target.

7. Task 4 - Traffic Analysis Using Wireshark

Wireshark was used on Kali Linux to capture and filter network traffic. ICMP, HTTP, and DNS were analyzed separately.

7.1 ICMP Traffic

Display filter: icmp

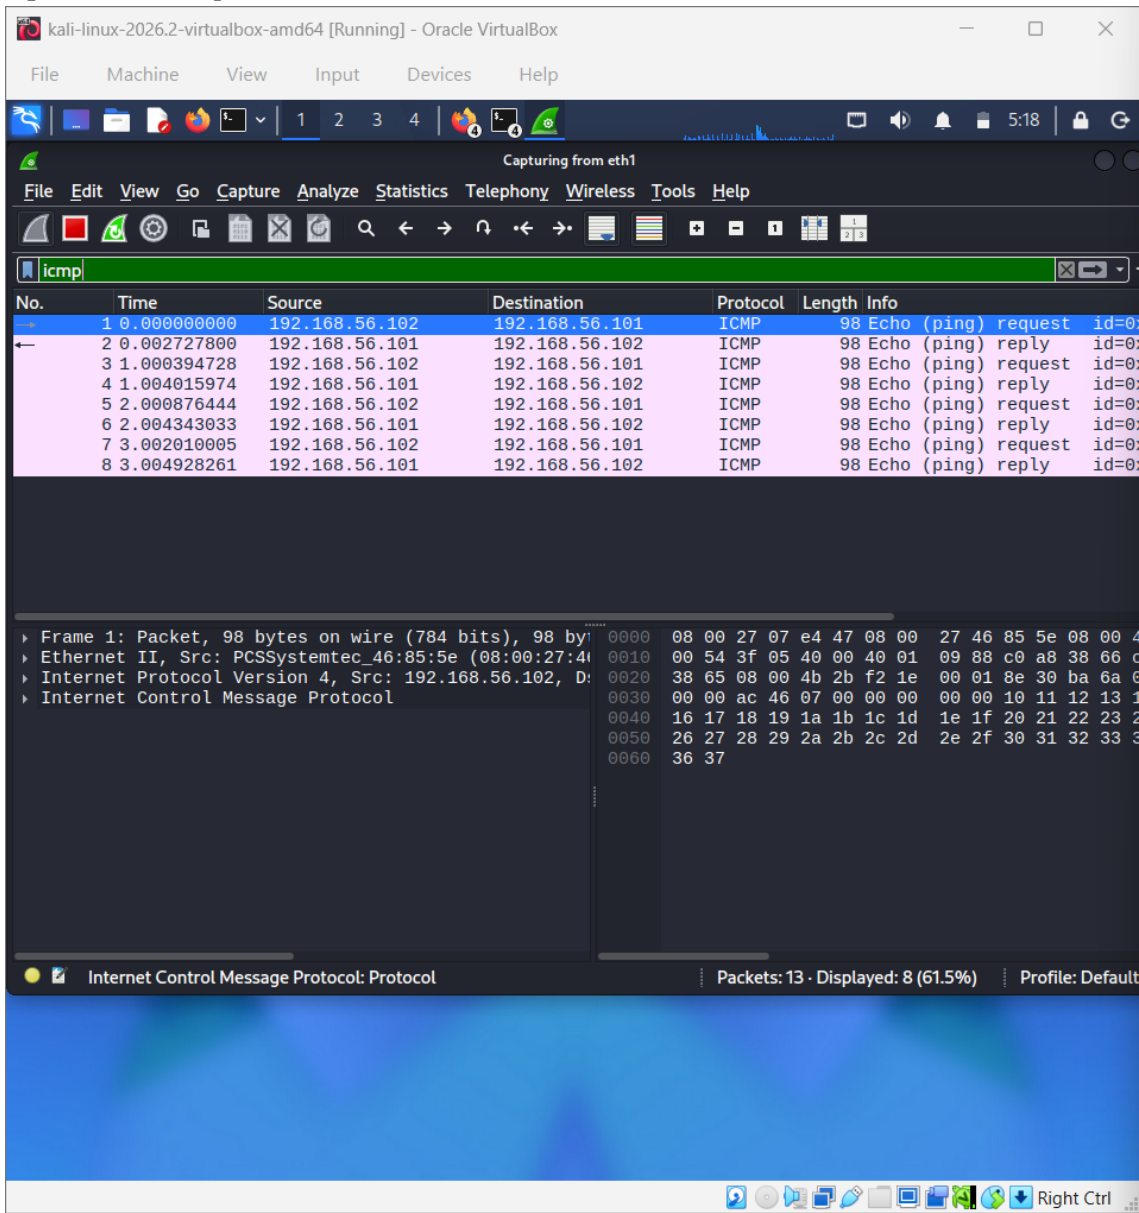


Figure 8: ICMP Echo Request and Echo Reply packets between Kali and Ubuntu.

Finding: Echo requests from 192.168.56.102 and replies from 192.168.56.101 confirmed successful IP connectivity.

7.2 HTTP Traffic

Display filter: http

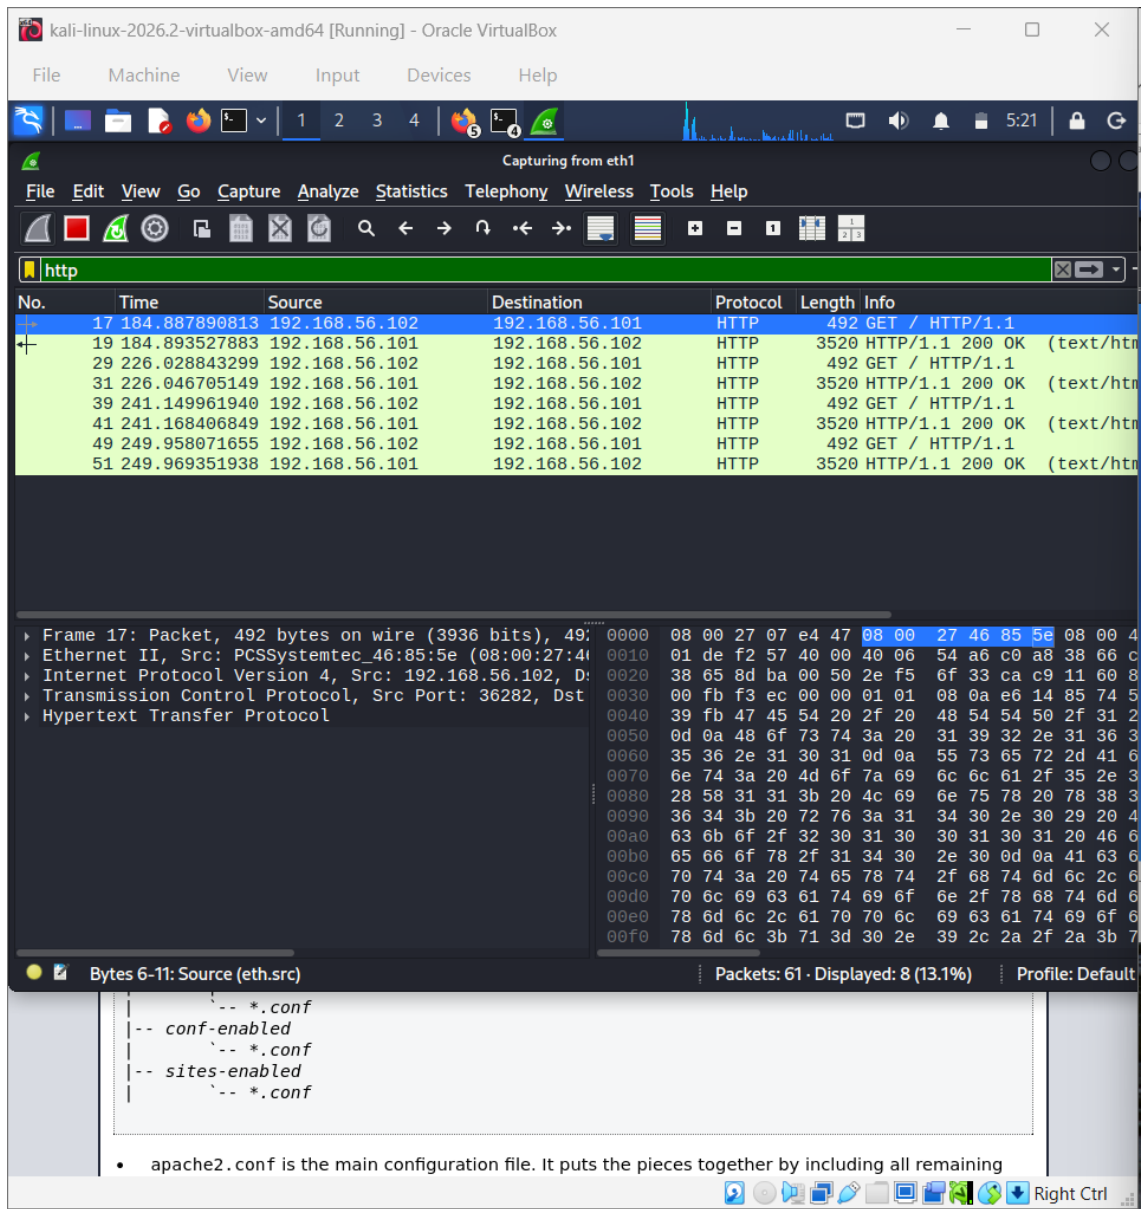


Figure 9: HTTP GET requests and HTTP/1.1 200 OK responses captured in Wireshark.

Finding: HTTP requests from Kali and successful 200 OK responses from the Ubuntu Apache server confirmed web communication over TCP port 80.

7.3 DNS Traffic

Display filter: dns

The image shows a Wireshark capture window titled "kali-linux-2026.2-virtualbox-amd64 [Running] - Oracle VirtualBox". The display filter is set to "dns". The packet list shows 16 packets, with the first 10 displayed. The first packet is a DNS Standard query from 10.0.2.15 to 10.218.102.232. The second packet is a DNS Standard query response from 10.218.102.232 to 10.0.2.15. The packet details pane shows the structure of the first packet, including Ethernet II, Internet Protocol Version 4, User Datagram Protocol, and Domain Name System (query). The packet bytes pane shows the raw data of the first packet.

No.	Time	Source	Destination	Protocol	Length	Info
5	25.770339510	10.0.2.15	10.218.102.232	DNS	71	Standard query 0x691f A exam
6	25.948369376	10.218.102.232	10.0.2.15	DNS	103	Standard query response 0x691f
7	25.949710971	10.0.2.15	10.218.102.232	DNS	71	Standard query 0x8c76 AAAA ex
8	26.148969571	10.218.102.232	10.0.2.15	DNS	99	Standard query response 0x8c76
9	42.992545372	10.0.2.15	10.218.102.232	DNS	71	Standard query 0x3f20 A exam
10	42.992885900	10.0.2.15	10.218.102.232	DNS	71	Standard query 0xb2de AAAA ex
11	43.010455025	10.218.102.232	10.0.2.15	DNS	103	Standard query response 0x3f20
12	43.010455887	10.218.102.232	10.0.2.15	DNS	99	Standard query response 0xb2de
15	43.352735581	10.0.2.15	10.218.102.232	DNS	86	Standard query 0x4087 PTR 154
16	43.556016170	10.218.102.232	10.0.2.15	DNS	148	Standard query response 0x4087

Frame 5: Packet, 71 bytes on wire (568 bits), 71 bytes captured (568 bits) on interface eth0, from 10.0.2.15 to 10.218.102.232 on interface eth0

Ethernet II, Src: PCSysmtec_5a:87:bc (08:00:27:5a:87:bc), Dst: 10.218.102.232 (08:00:27:5a:87:bc)

Internet Protocol Version 4, Src: 10.0.2.15, Dst: 10.218.102.232

User Datagram Protocol, Src Port: 40049, Dst Port: 53

Domain Name System (query)

Domain Name System: Protocol

Packets: 24 · Displayed: 10 (41.7%) Profile: Default

```
-- *.conf
-- conf-enabled
-- *.conf
-- sites-enabled
-- *.conf
```

• apache2.conf is the main configuration file. It puts the pieces together by including all remaining

Figure 10: DNS Standard Query and Standard Query Response packets captured in Wireshark.