


Query 1: Retrieve all students

```
CREATE DATABASE IF NOT EXISTS college_dbms;
USE college_dbms;
CREATE TABLE Student (
Student_ID INT PRIMARY KEY,
Name VARCHAR(50),
Dept_ID INT,
Marks INT
);
INSERT INTO Student (Student_ID, Name, Dept_ID, Marks) VALUES
(101, 'neha', 10, 85),
(102, 'sneha', 20, 92),
(103, 'kaveri', 10, 76),
(104, 'vismaya', 30, 88),
(105, 'sampritha', 20, 95);
SELECT * FROM Student;
```

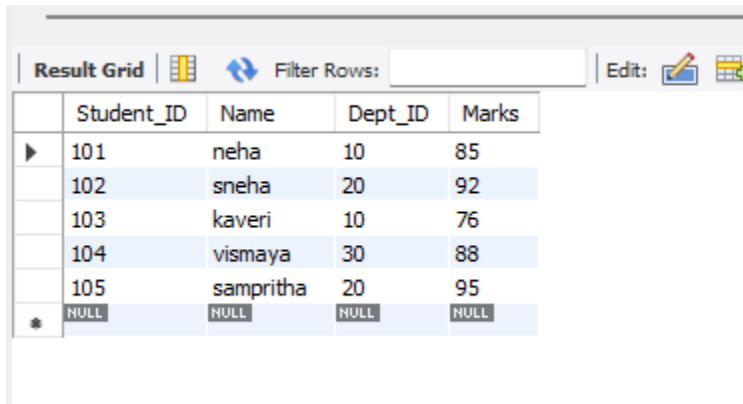

	Student_ID	Name	Dept_ID	Marks
▶	101	neha	10	85
	102	sneha	20	92
	103	kaveri	10	76
	104	vismaya	30	88
	105	sampritha	20	95
*	NULL	NULL	NULL	NULL

Query 2: Retrieve selected columns

```
CREATE DATABASE IF NOT EXISTS college_dbms;
USE college_dbms;
CREATE TABLE Student (
Student_ID INT PRIMARY KEY,
Name VARCHAR(50),
Dept_ID INT,
Marks INT
);
INSERT INTO Student (Student_ID, Name, Dept_ID, Marks) VALUES
(101, 'neha', 10, 85),
(102, 'sneha', 20, 92),
(103, 'sampi', 10, 76),
(104, 'vismaya', 30, 88),
(105, 'rithika', 20, 95);
```

```
SELECT Name, Marks  
FROM Student;
```

output

	Name	Marks
▶	neha	85
	sneha	92
	kaveri	76
	vismaya	88
	sampritha	95

Query 3: Find students scoring more than 80

```
CREATE DATABASE IF NOT EXISTS college_dbms;  
USE college_dbms;  
CREATE TABLE Student (  
Student_ID INT PRIMARY KEY,  
Name VARCHAR(50),  
Dept_ID INT,  
Marks INT  
);  
INSERT INTO Student (Student_ID, Name, Dept_ID, Marks) VALUES  
(101, 'neha', 10, 85),  
(102, 'spoorthi', 20, 92),  
(103, 'sneha', 10, 76),  
(104, 'manasvini', 30, 88),  
(105, 'sneha', 20, 95);  
SELECT Student_ID, Name, Dept_ID, Marks  
FROM Student  
WHERE Marks > 80;
```

Output

	Student_ID	Name	Dept_ID	Marks
▶	101	neha	10	85
	102	sneha	20	92
	104	vismaya	30	88
	105	sampritha	20	95
*	NULL	NULL	NULL	NULL

Query 4: Find CSE students

```
CREATE DATABASE IF NOT EXISTS college_dbms;  
USE college_dbms;  
CREATE TABLE Student (  
  Student_ID INT PRIMARY KEY,  
  Name VARCHAR(50),  
  Dept_ID INT,  
  Marks INT  
);  
INSERT INTO Student (Student_ID, Name, Dept_ID, Marks) VALUES  
(101, 'neha', 10, 85),  
(102, 'sampi', 20, 92),  
(103, 'sneha', 10, 76),  
(104, 'Manya', 30, 88),  
(105, 'kaveri', 20, 95);  
SELECT Student_ID, Name, Dept_ID, Marks  
FROM Student  
WHERE Dept_ID = 10;
```


Output

	Student_ID	Name	Dept_ID	Marks
▶	101	neha	10	85
	103	kaveri	10	76
*	NULL	NULL	NULL	NULL

Query 5: Find students from Delhi who scored above 80

```
CREATE DATABASE IF NOT EXISTS college_dbms;
USE college_dbms;
DROP TABLE IF EXISTS Student;
CREATE TABLE Student (
Student_ID INT PRIMARY KEY,
Name VARCHAR(50),
Dept_ID INT,
Marks INT,
City VARCHAR(50)
);
INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES
(101, 'neha', 10, 85, 'Delhi'),
(102, 'sneha', 20, 92, 'Mumbai'),
(103, 'Navya', 10, 76, 'Delhi'),
(104, 'varshi', 30, 88, 'Bangalore'),
(105, 'Tanisha', 20, 95, 'Delhi');
SELECT * FROM Student
WHERE City = 'Delhi' AND Marks > 80;
```

Output

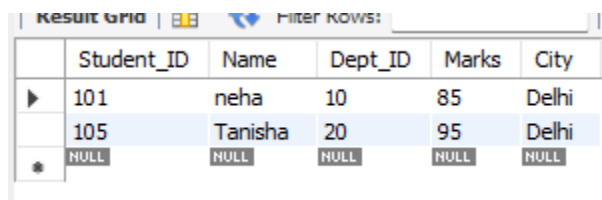

	Student_ID	Name	Dept_ID	Marks	City
▶	101	neha	10	85	Delhi
	105	Tanisha	20	95	Delhi
*	NULL	NULL	NULL	NULL	NULL

Query 6: Find the highest marks


```
CREATE DATABASE IF NOT EXISTS college_dbms;
USE college_dbms;
DROP TABLE IF EXISTS Student;
CREATE TABLE Student (
Student_ID INT PRIMARY KEY,
Name VARCHAR(50),
Dept_ID INT,
Marks INT,
City VARCHAR(50)
);
INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES
```

```

(101, 'neha', 10, 85, 'Delhi'),
(102, 'sneha', 20, 92, 'Mumbai'),
(103, 'Navya', 10, 76, 'Delhi'),
(104, 'Manya', 30, 88, 'Bangalore'),
(105, 'varshi', 20, 95, 'Delhi');
SELECT MAX(Marks) AS Highest_Marks
FROM Student;

```

Output

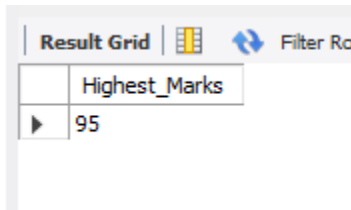

Highest_Marks
95

Query 7: Find the average marks

```
DROP TABLE IF EXISTS Student;
```

```

CREATE TABLE Student (
    Student_ID INT PRIMARY KEY,
    Name VARCHAR(50),
    Dept_ID INT,
    Marks INT,
    City VARCHAR(50)
);

```

```

INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES
    (101, 'Neha', 10, 85, 'Delhi'),
    (102, 'Sneha', 20, 92, 'Mumbai'),
    (103, 'Navya', 10, 76, 'Delhi'),
    (104, 'varshi', 30, 88, 'Bangalore'),
    (105, 'Tanisha', 20, 95, 'Delhi');

```

```

SELECT AVG(Marks) AS Average_Marks
FROM Student;

```

Output:

+-----+	
	Average_Marks
+-----+	
	87.2000
+-----+	