

Date: 16 July 2026

Name: Neha Kadam

Task 1

Write a PHP program to create a table in the database.

```
Task-1

<?PHP
$servername = "localhost";
$username = "root";
$password = "";
$dbname = "movie_booking";

$conn = mysqli_connect($servername, $username, $password,
$dbname);

if (!$conn) {
    die("Connection failed: " . mysqli_connect_error());
}

$sql1 = "CREATE TABLE Movies (
    movie_id INT AUTO INCREMENT PRIMARY
    KEY,
    movie_name VARCHAR (100),
    language VARCHAR (50)
)";


$sql2 = "CREATE TABLE Shows (
    show_id INT AUTO INCREMENT PRIMARY
    KEY,
    movie_id INT,
    show_time TIME,
    screen_no INT
)";

$sql3 = "CREATE TABLE Bookings (
    booking_id INT AUTO INCREMENT
    PRIMARY KEY,
    customer_name VARCHAR (100),
    movie_id INT,
```

mysql -u root -p
mysql> create database school;
mysql> use school;
mysql> create table student (
id int(4) primary key,
name varchar(50),
age int(2),
gender varchar(10),
address varchar(100),
email varchar(50),
password varchar(50),
created_at timestamp);
mysql> show tables;
mysql> exit;

Task 2

Write a PHP program to insert data into the 3 tables created earlier.

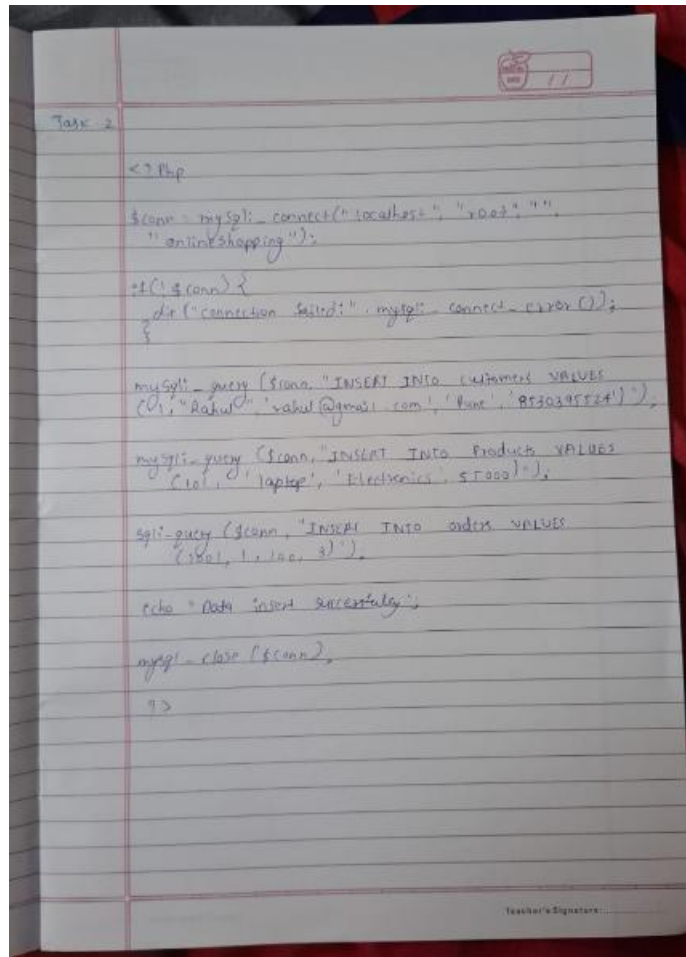

```
Task 2

<?php

$conn = mysqli_connect("localhost", "root", "",
    "onlineShopping");

if(!$conn){
    die("connection failed: ", mysqli_connect_error());
}

mysqli_query($conn, "INSERT INTO customers VALUES
(0, 'Aakul', 'aakul@gmail.com', 'Male', '8530395524')");

mysqli_query($conn, "INSERT INTO products VALUES
(101, 'laptop', 'Electronics', 55000)");

mysqli_query($conn, "INSERT INTO orders VALUES
(1001, 1, 100, 3)");

echo "Data insert successfully";

mysqli_close($conn);

?>
```

Teacher's Signature:

Task 3

Write SQL queries to perform the following operations:

Create a Table, Alter a Table, Drop a Table, Delete Records from a Table, Truncate a Table

The screenshot shows the Programiz Online SQL Editor interface. The browser address bar displays `programiz.com/sq`. The page header includes the Programiz logo, the text "Online SQL Editor", and a button labeled "Interactive SQL Course". Below the header, there is an "Input" section with a text area containing the following SQL query:

```
CREATE TABLE Employee(  
  EmpID INT PRIMARY KEY,  
  EmpName VARCHAR(50),  
  Salary DECIMAL(10,2)  
);
```

To the right of the text area are icons for undo, redo, and a "Run SQL" button. Below the input section, there are two tabs: "Output" and "Available Tables". The "Available Tables" tab is active, showing a table named "Employee". The table structure is as follows:

EmpID	EmpName	Salary
empty		

  programiz.com/sq   13 

  Online SQL Editor

Interactive SQL Course

Input  

Run SQL

```
ALTER TABLE Employee
ADD Department VARCHAR(50);
```

Output

Available Tables

SQL query successfully executed.
However, the result set is empty.

 programiz.com/sq   13 

 **programiz**
Online SQL Editor

Interactive SQL Course

Input   [Run SQL](#)

```
DROP TABLE Employee;
```

[Output](#) [Available Tables](#)

SQL query successfully executed.
However, the result set is empty.

Input



Run SQL

```
CREATE TABLE IF NOT EXISTS Employee (  
    EmpID INT PRIMARY KEY,  
    EmpName VARCHAR(50),  
    Salary DECIMAL(10,2)  
);  
DELETE FROM Customers  
WHERE age = 31;
```

Output

Available Tables

Customers

first_name	last_name	age	country
Robert	Luna	22	USA
David	Robinson	22	UK
John	Reinhardt	25	UK
Betty	Doe	28	UAE

Input



Run SQL

```
CREATE TABLE IF NOT EXISTS Employee (  
  EmpID INT PRIMARY KEY,  
  EmpName VARCHAR(50),  
  Salary DECIMAL(10,2)  
);  
TRUNCATE TABLE Customers;
```

Output

Available Tables

Customers

customer_id	first_name	last_name	
2	Robert	Luna	
3	David	Robinson	
4	John	Reinhardt	
5	Betty	Doe	