



Week 1 · Task 3 – Lab Setup – VirtualBox + Kali/Ubuntu + Windows VM


Internal Network Configuration and Connectivity Testing

Both the **Kali/Ubuntu VM** and **Windows 10/11 VM** were configured to use the same **Internal Network** in VirtualBox. The same network name was assigned to both virtual machines so that they could communicate with each other without using the external internet.

After configuring the network, the IP addresses of both VMs were checked using `ip addr` on Kali/Ubuntu and `ipconfig` on Windows. Connectivity was then tested using the `ping` command from each VM to the other. Successful ping replies confirmed that both virtual machines were connected to the same internal network and could communicate successfully.

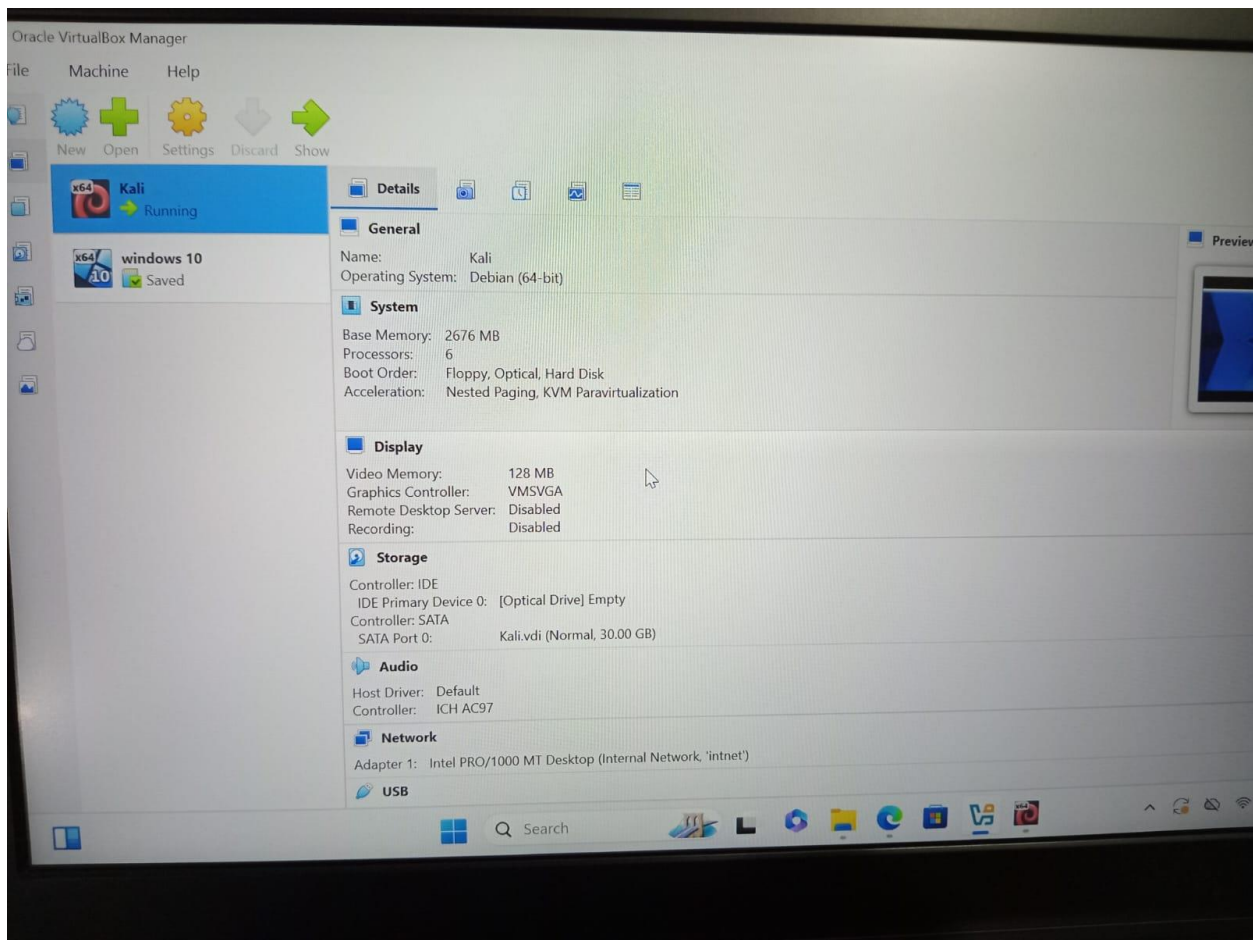

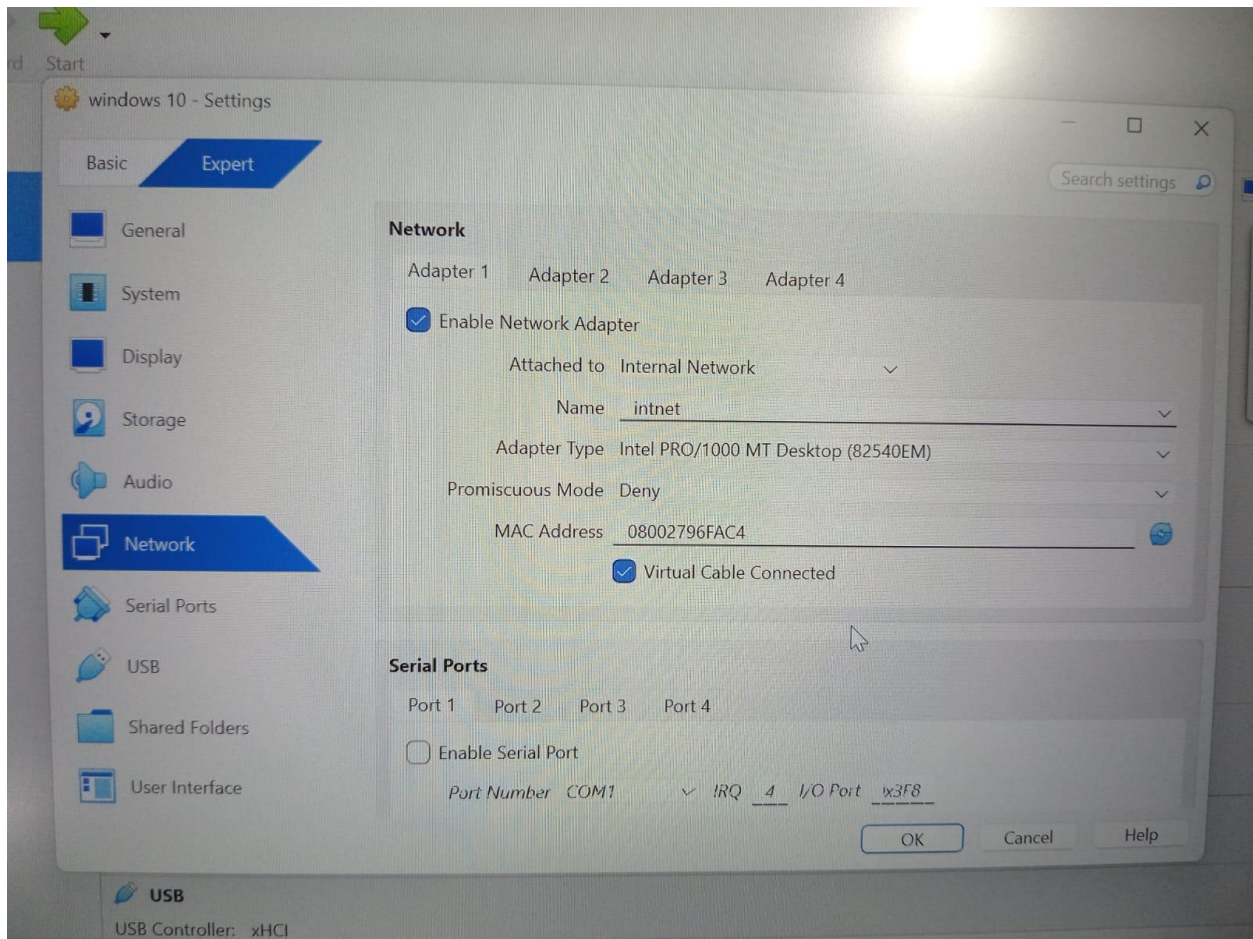

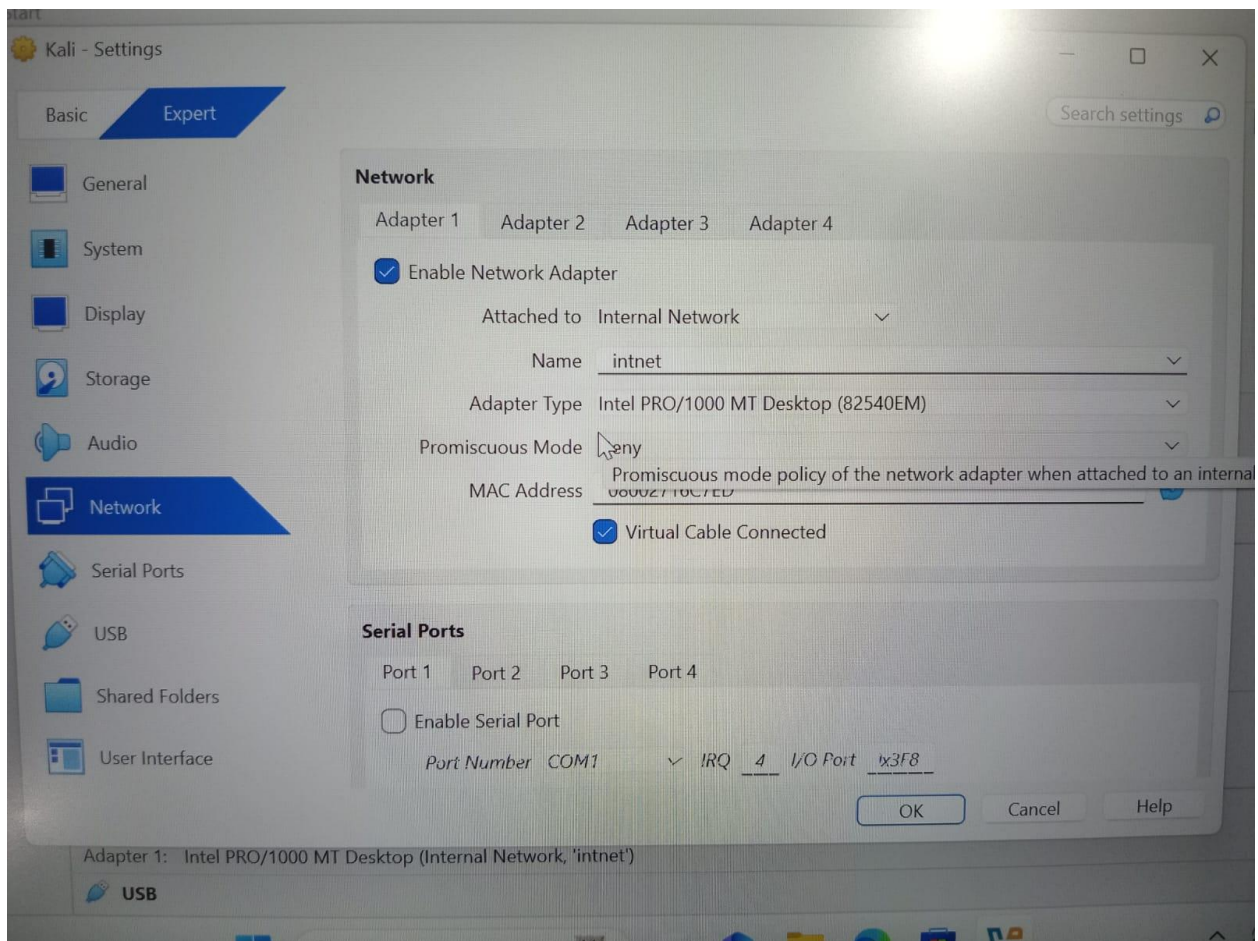



neha@kali: ~

Session Actions Edit View Help

(neha@kali)-[~]

\$ ip addr

1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000

link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00

inet 127.0.0.1/8 scope host lo

valid_lft forever preferred_lft forever

inet6 ::1/128 scope host noprefixroute

valid_lft forever preferred_lft forever

2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000

link/ether 08:00:27:16:c7:ed brd ff:ff:ff:ff:ff:ff

inet6 fe80::a00:27ff:fe16:c7ed/64 scope link noprefixroute

valid_lft forever preferred_lft forever

(neha@kali)-[~]

\$