


NEHA SHARMA - U24AI050 LAB-1_B

15 January 2026 06:51

1. Write a program to create an empty file named notes.txt inside the Assignment1 directory. Add the text "UNIX is fun!" to the file notes.txt using a single command.
2. Display the content of notes.txt on the terminal. Count the number of lines, words, and characters in notes.txt.
3. Create a directory named ProjectWorkspace. Inside ProjectWorkspace, create subdirectories Docs, Code, and Resources. In the Docs directory, create an empty file named README.txt. Move into the Code directory and create an empty file main.py. List all files and directories in ProjectWorkspace to verify the setup.

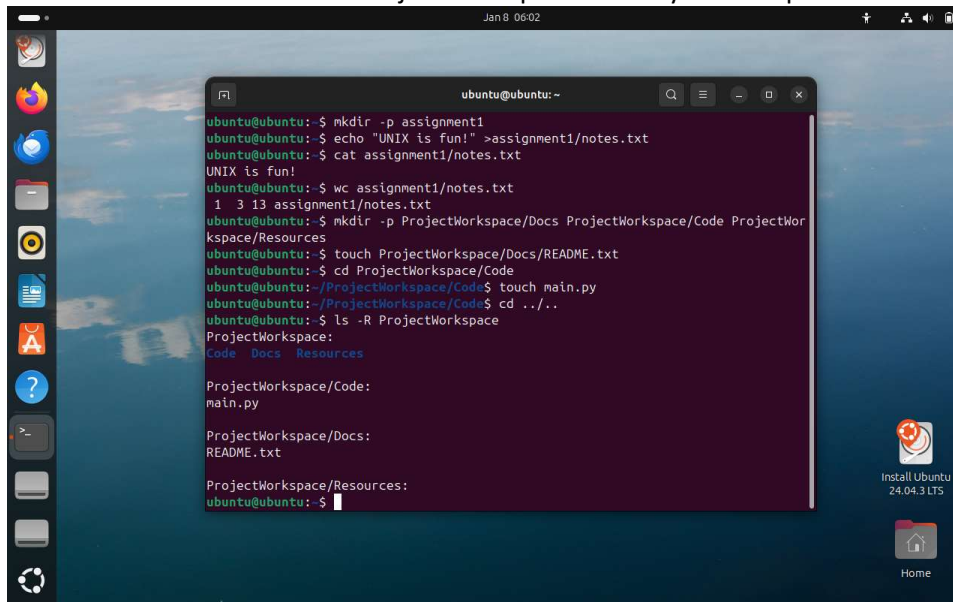


```
ubuntu@ubuntu: ~  
ubuntu@ubuntu:~$ mkdir -p assignment1  
ubuntu@ubuntu:~$ echo "UNIX is fun!" >assignment1/notes.txt  
ubuntu@ubuntu:~$ cat assignment1/notes.txt  
UNIX is fun!  
ubuntu@ubuntu:~$ wc assignment1/notes.txt  
1 3 13 assignment1/notes.txt  
ubuntu@ubuntu:~$ mkdir -p ProjectWorkspace/Docs ProjectWorkspace/Code ProjectWorkspace/Resources  
ubuntu@ubuntu:~$ touch ProjectWorkspace/Docs/README.txt  
ubuntu@ubuntu:~$ cd ProjectWorkspace/Code  
ubuntu@ubuntu:~/ProjectWorkspace/Code$ touch main.py  
ubuntu@ubuntu:~/ProjectWorkspace/Code$ cd ../..  
ubuntu@ubuntu:~$ ls -R ProjectWorkspace  
ProjectWorkspace:  
Code Docs Resources  
  
ProjectWorkspace/Code:  
main.py  
  
ProjectWorkspace/Docs:  
README.txt  
  
ProjectWorkspace/Resources:  
ubuntu@ubuntu:~$
```

```
mkdir ProjectWorkspace  
mkdir ProjectWorkspace\Docs  
mkdir ProjectWorkspace\Code  
mkdir ProjectWorkspace\Resources  
New-Item ProjectWorkspace\Docs\README.txt -ItemType File  
cd ProjectWorkspace\Code  
New-Item main.py -ItemType File  
tree ProjectWorkspace
```

4. In the current directory, create files old_report1.txt, old_report2.txt, and current_report.txt. Move all files starting with "old_" into a directory named OldReports. Verify the moved files by listing the content of OldReports.

```
New-Item old_report1.txt -ItemType File
New-Item old_report2.txt -ItemType File
New-Item current_report.txt -ItemType File
mkdir OldReports
Move-Item old_*.txt OldReports
ls OldReports
```

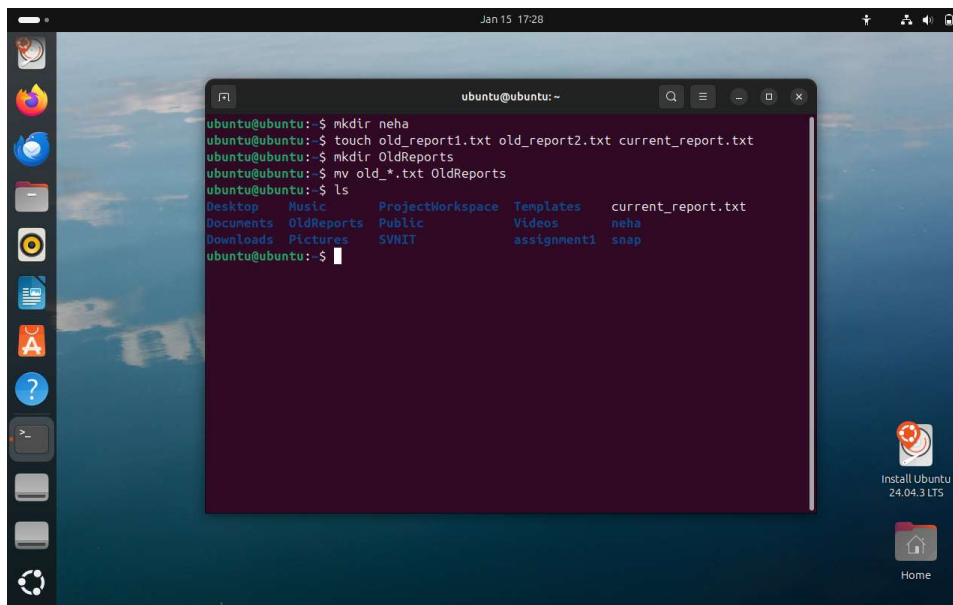

5. Write a Shell Script for counting the lines in the text file.


```
New-Item count_lines.ps1 -ItemType File
Get-Content Assignment1\notes.txt
.\count_lines.ps1 Assignment1\notes.txt
```

```
In notepad
param (
    [string]$filename
```

)

```
if (-Not (Test-Path $filename)) {  
    Write-Host "File not found!"  
    exit  
}
```

```
$lines = (Get-Content $filename).Count  
Write-Host "Number of lines in $filename : $lines"
```

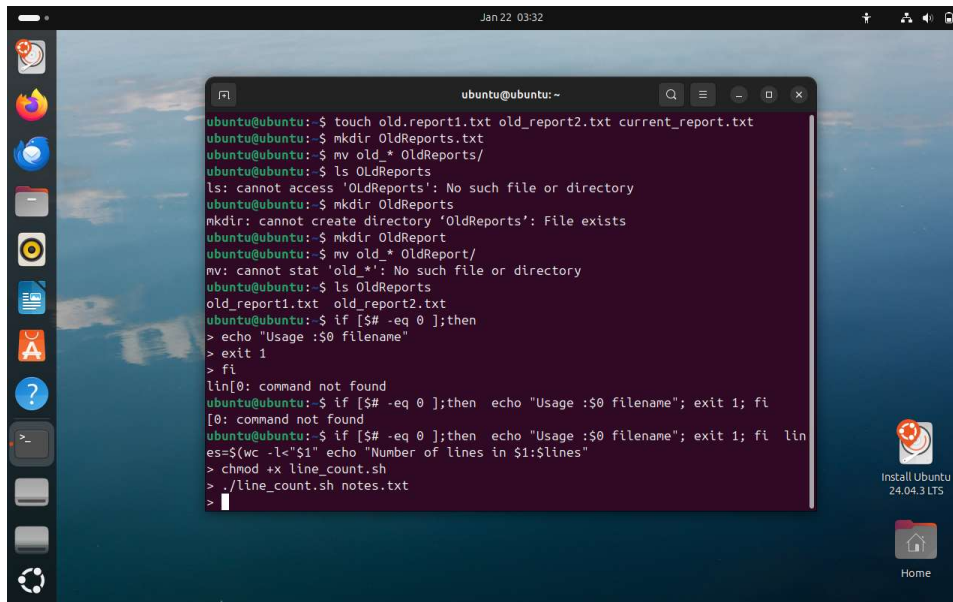

The screenshot shows a terminal window titled 'ubuntu@ubuntu: ~' with the following commands and output:

```
ubuntu@ubuntu:~$ touch old_report1.txt old_report2.txt current_report.txt  
ubuntu@ubuntu:~$ mkdir OldReports.txt  
ubuntu@ubuntu:~$ mv old * OldReports/  
ubuntu@ubuntu:~$ ls OldReports  
ls: cannot access 'OldReports': No such file or directory  
ubuntu@ubuntu:~$ mkdir OldReports  
mkdir: cannot create directory 'OldReports': File exists  
ubuntu@ubuntu:~$ mkdir OldReport  
ubuntu@ubuntu:~$ mv old * OldReport/  
mv: cannot stat 'old *': No such file or directory  
ubuntu@ubuntu:~$ ls OldReports  
old_report1.txt old_report2.txt  
ubuntu@ubuntu:~$ if [$# -eq 0 ];then  
> echo "Usage :$0 filename"  
> exit 1  
> fi  
lin[0]: command not found  
ubuntu@ubuntu:~$ if [$# -eq 0 ];then echo "Usage :$0 filename"; exit 1; fi  
[0]: command not found  
ubuntu@ubuntu:~$ if [$# -eq 0 ];then echo "Usage :$0 filename"; exit 1; fi lin  
es=$(wc -l<"$1" echo "Number of lines in $1:$lines"  
> chmod +x line_count.sh  
> ./line_count.sh notes.txt  
>
```

The desktop background is a blue and white abstract image. The left sidebar contains icons for various applications. The bottom right corner shows the 'Install Ubuntu 24.04.3 LTS' and 'Home' icons.