

Get Data URL using Fiddler http://localhost:57875/api/tasks

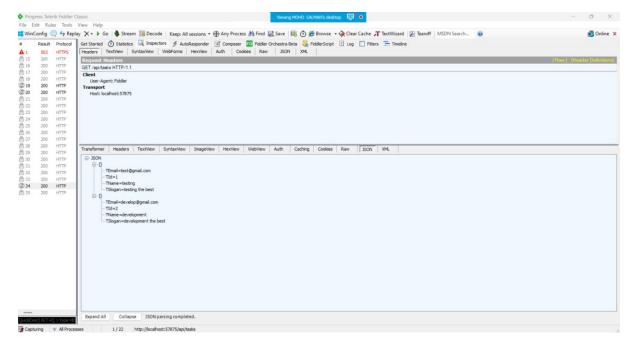


Post Data URL using Fiddler http://localhost:57875/api/tasks

{"TId":0,"TName":"Deployment","TEmail":"deploy@gmail.com","TSlogan":"deploy the best"}

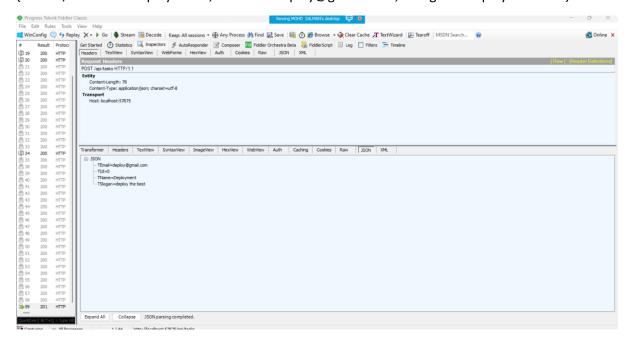


Output

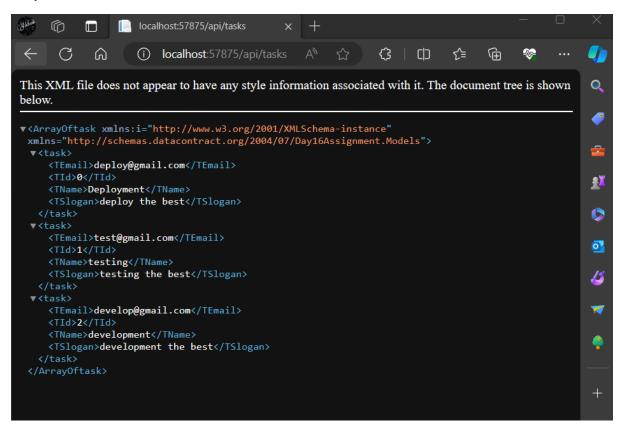

Put Data URL using Fiddler http://localhost:57875/api/tasks/0


{"TName":"DeploymentData","TEmail":"deploy@gmail.com","TSlogan":"deployment the best"}

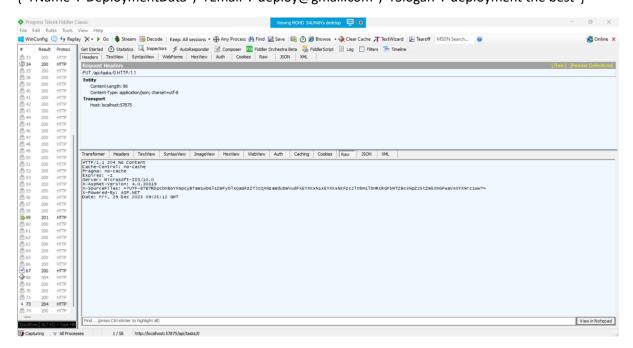

Output

```
localhost:57875/api/tasks
     6
           C
                                                              6
                                                                                        -⊗
                    i localhost:57875/api/tasks
This XML file does not appear to have any style information associated with it. The document tree is shown
below.
▼<ArrayOftask xmlns:i="http://www.w3.org/2001/XMLSchema-instance"
 xmlns="http://schemas.datacontract.org/2004/07/Day16Assignment.Models">
 ▼<task>
    <TEmail>deploy@gmail.com</TEmail>
    <TId>0</TId>
    <TName>DeploymentData</TName>
    <TSlogan>deployment the best</TSlogan>
 ▼<task>
    <TEmail>test@gmail.com</TEmail>
    <TId>1</TId>
    <TName>testing</TName>
    <TSlogan>testing the best</TSlogan>
   </task>
    <TEmail>develop@gmail.com</TEmail>
    <TId>2</TId>
    <TName>development</TName>
    <TSlogan>development the best</TSlogan>
   </task>
```

Delete Data URL using Fiddler http://localhost:57875/api/tasks/0

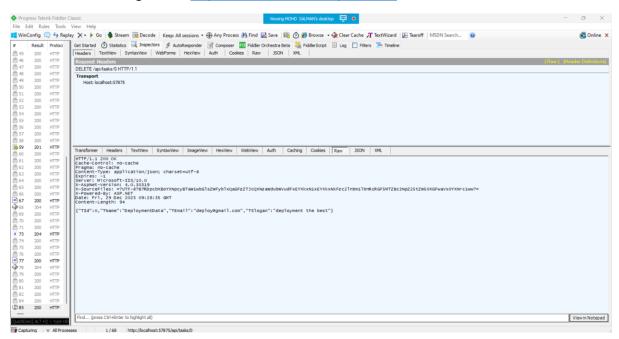

Output

