ENGINEERING ORDER

1. ENGINEERING ORDER NO. 2014A0237-T

DATE: 20140703 | PAGE 1 OF 3 PAGES

2. DWG TITLE: ACTUATOR ASSEMBLY - ESCAPE SPOILER		3. DWG CAGE CODE: 81205	4. DWG NO.: 5-84042
5. NEXT ASSY: 50-1574	6. USED ON: KC-135	7. OPR CAGE CODE: 98748	DWG SIZE: J; DWG SHEET(S): 1; LATEST DWG REV LTR: D

8. TYPE OF ENGINEERING ORDER		9. REASONS FOR CHANGE	
✓	ADVANCE CHANGE		ERROR CORRECTION
	DEVIATION AUTHORIZED		DESIGN CHANGE
	CHANGE NOTICE		DRAWING CLARIFICATION
	INFORMATION	✓	UPDATED DRAWING

11. DOCUMENTS AFFECTED *(TO/TCTO/SPEC/Other)*

10. DISPOSITION OF SPARES		OTHER COMMENTS
✓	REWORK	MODIFY ITEM TO INCLUDE UNIQUE ID (UID) PER DoD POLICY AND IUID PROGRAM.
	MODIFY	
	SCRAP	
	REPLACE	

12. EO PREPARED/REQUESTED BY: CARVALHO.KATHERINE.NICOLE.1501164280 (Digitally signed by CARVALHO.KATHERINE.NICOLE.1501164280 DN: c=US, o=U.S. Government, ou=DoD, ou=PKI, ou=CONTRACTOR, cn=CARVALHO.KATHERINE.NICOLE.1501164280 Date: 2014.07.03 10:58:53 -05'00')	SYMBOL: 424 SCMS	DATE: 20140703	14. CORROSION CONT. MON.	SYMBOL	DATE
	PHONE: 405-736-5064		15. NDI	SYMBOL	DATE
			16.	SYMBOL	DATE
			17. DWG CHANGED BY	SYMBOL	DATE
13. ENGINEERING APPROVAL: HANSEN.JAMES.LEE.1123544249 (Digitally signed by HANSEN.JAMES.LEE.1123544249 DN: c=US, o=U.S. Government, ou=DoD, ou=PKI, ou=USAF, cn=HANSEN.JAMES.LEE.1123544249 Date: 2014.08.05 08:42:01 -05'00')	SYMBOL: 424scms/GUEAA	DATE: 20140805	18. CHANGE CHECKED BY	SYMBOL	DATE
	PHONE: 405-736-5515		19. EO/DWG RELEASED BY: DIEHL.RODERICK.EVAN.1291884993 (Digitally signed by DIEHL.RODERICK.EVAN.1291884993 DN: c=US, o=U.S. Government, ou=DoD, ou=PKI, ou=USAF, cn=DIEHL.RODERICK.EVAN.1291884993 Date: 2014.08.06 07:07:14 -05'00')	SYMBOL: 424SCMS/GUEA	DATE: 20140806

20. DESCRIPTION OF CHANGES/REMARKS

- New and repaired Actuator assemblies 5-84042-2 shall be marked with a Unique Item Identifier (UII). (REF: MIL-STD-130)

- If no UID label is present, fabricate new UID label (200831032-121) to attach to the end item, located as shown on Page 2.

- After attaching IUID plate to end item, apply a thin overcoat to IUID plate ensuring the plate edges are sealed, using 1A20, 1A33 or equivalent Polyurethane Conformal Coating, per manufacturer's instructions. REF: MIL-I-46058C.

ENGINEERING ORDER *(Continuation Sheet)*		1. ENGINEERING ORDER NO. 2014A0237-T	
		DATE: 20140703	PAGE 2 OF 3 PAGES
2. DWG TITLE ACTUATOR ASSEMBLY - ESCAPE SPOILER	3. DWG CAGE CODE 81205	4. DWG NO. 5-84042	

5. DESCRIPTION OF CHANGES/REMARKS

REVISE DRAWING 5-84042-2 SHEET 1 - ZONE C6 AS SHOWN TO ADD UID LABEL ON SURFACE

ADD 200831032-121 (USE MIL-I-46058C TYPE UR
CONFORMAL COATING (1A20, 1A33, OR EQUIV)
TO OVERCOAT LABEL)

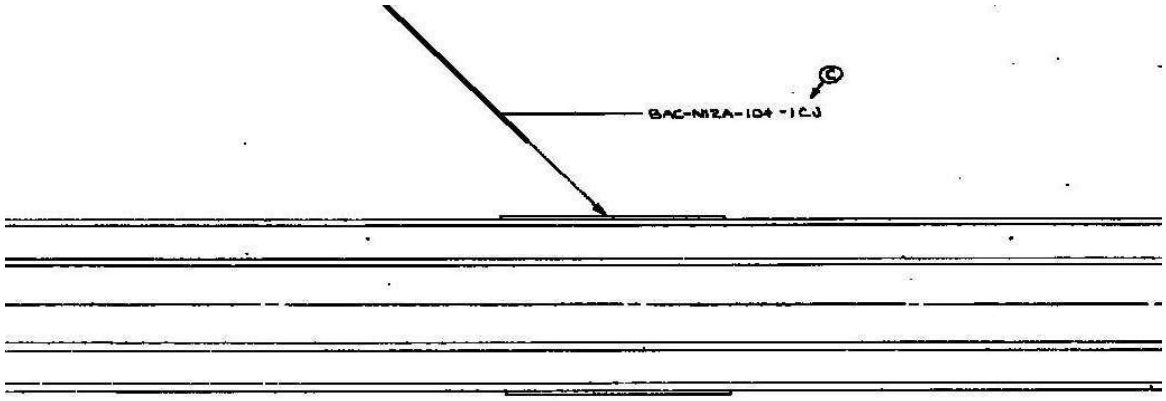

CALLOUTS NOT SHOWN ARE UNCHANGED

ENGINEERING ORDER - PARTS LIST CHANGES

1. ENGINEERING ORDER NO. 2014A0237-T

DATE: 20140703

2. DWG TITLE: ACTUATOR ASSEMBLY - ESCAPE SPOILER

3. DWG CAGE CODE: 81205

4. DWG NO. 5-84042

PARTS LIST CHANGE

ACTION	QTY REQ PER DASH NO -2			SYM	NOMENCLATURE	CAGE CODE	IDENTIFYING NO.	MATERIAL/SPECIFICATION	ZONE	FIND NO.
ADD	1				PLATE, IDENTIFICATION	98748	200831302-121			
ADD	AR				POLYURETHANE CONFORMAL COATING		1A20, 1A33, OR EQUIV	MIL-I-46058C TYPE UR		