

SPECIAL PACKAGING INSTRUCTION			CODE ID 98747	SPI NO. (TPD) F01-241-0074	
			SHEET 1 OF 10		
PART OR DRAWING NO. 380834-1-5	NATIONAL STOCK NO. 2835-01-241-0074 RP	CURRENT REV V	ILL. K. KNIGHTON P.S. W. MONSON CHK. D. GIBSON AUTH. J. BURLEIGH		
ITEM NOMENCLATURE ENGINE, GAS TURBINE, NONAIRCRAFT		ORIGINAL DATE 80304			
MILITARY PRESERVATION IAW MIL-STD-2073-1			PACKING AS SPECIFIED BELOW AND BILL OF MATERIALS		
SERVICEABLE METHOD: 53			LEVEL	SPEC	STYLE TYPE CL VRTY GR TR
UNSERVICEABLE METHOD: 53			A	ASTM D6256 (MOD)	A I 2 B
QUP 001			B	ASTM D6256 (MOD)	A I 2 A
ICQ 000			LEVEL A LEVEL B		
CLEANING & DRYING: IAW MIL-STD-2073-1			GROSS CU FT	52.671	52.671
PRESERVATIVE: N/A			GROSS WT LBS	470	470
			DESIGN FRAGILITY G	110	110
MARKING IAW MIL-STD-129			CNTR I.D.	LENGTH	WIDTH DEPTH
SPECIAL MARKINGS:			LEVEL A:	48	38 38
A) SPI NO. F01-241-0074			LEVEL B:	48	38 38
MARK THE SPI NUMBER ON THE IDENTIFICATION SIDE OF CONTAINER.			CNTR O.D.		
B) REUSABLE CONTAINER & DUNNAGE DO NOT DESTROY.			LEVEL A:	50 1/4	40 1/4 45
C) METHOD 50 LABEL			LEVEL B:	50 1/4	40 1/4 45
D) CAUTION: LIFT BY BASE ONLY			ITEM DIM	37	32 24
E) TO OPEN - REMOVE BOTTOM LAG BOLTS. LIFT			ITEM WT.	270 LBS	
STRUCTURE OFF AS ONE PIECE					
ADDITIONAL SPECIAL MARKINGS			REVISIONS		
FOR ITEMS WITH RESIDUAL FUEL:			LTR	DESCRIPTION	DATE
A) DANGEROUS GOODS IN APPARATUS			V	UPDATED DIMENSIONS AND BOM	23102
UN3363					
B) TYPE AND FLASH POINT OF FUEL					
C) CLASS 9 LABEL					
CLOSURE					
LEVEL A: IAW: ASTM D6256					
LEVEL B: IAW: ASTM D6256					
CAUTION: ITEMS CONTAINING RESIDUAL FUEL ARE CONSIDERED HAZARDOUS MATERIALS AND MUST BE PACKED IAW THE APPROPRIATE HAZARDOUS MATERIAL REGULATION AND CERTIFIED BY AUTHORIZED HAZARDOUS MATERIAL PERSONNEL					
DISTRIBUTION STATEMENT D: DISTRIBUTION AUTHORIZED TO DEPARTMENT OF DEFENSE AND U.S. DOD CONTRACTORS ONLY, ADMINISTRATIVE OR OPERATIONAL USE, 14 MARCH 2018. OTHER REQUESTS FOR THIS DOCUMENT SHALL BE REFERRED TO 406 SCMS/GULAA, (PACKAGING DIVISION), HILL AFB, UTAH 84056.					
DESTRUCTION NOTICE: IAW DoDI 5200.48 4.5.a; MUST DO SO IN A MANNER MAKING IT UNREADABLE, INDECIPHERABLE, AND IRRECOVERABLE.					

SPI NO. F01-241-0074

SPECIAL PACKAGING INSTRUCTION				CODE ID 98747	SPI NO. (TPD) F01-241-0074
ITEM NOMENCLATURE ENGINE, GAS TURBINE, NONAIRCRAFT					SHEET 2 OF 10
-43	16	STRAP, CORNER	12 X 3/4 X 0.015	ASTM D3953 TYPE 2, RD, FINISH A	
-42	14	WASHER, PLAIN	1/4	ASME B18.21.1	
-41	14	BOLT, LAG	3 X 1/4	ASME B18.2.1	
-40	1	JOIST	2 X 4 (NOM) X 38	ASTM D6199 CLASS 2	
-39	2	SUPPORT, VERTICAL JOIST	2 X 4 (NOM) X 34 1/2	ASTM D6199 CLASS 2	
-38	4	SUPPORT, LATERAL JOIST	2 X 4 (NOM) X 6	ASTM D6199 CLASS 2	
-37	A/R	TAPE, MASKING	1 X AS REQUIRED	ASTM D6123 TYPE I OR II	
-36	1	HUMIDITY INDICATOR	THREE SPOT	MS20003	F
-35	145	DESICCANT	UNITS	MIL-D-3464 TYPE I	F
-34	4	SPRING, HELICAL	3 1/2 X 7/8	SAE AS13572A TYPE I	F
-33	2	BOLT, CARRIAGE	5 X 3/8	ASME B18.5	F
-32	10	WASHER, LOCK	3/8	ASME B18.21.1	
-31	2	BOLT, CARRIAGE	1 1/2 X 3/8	ASME B18.5	
-30	4	BOLT, CARRIAGE	1 X 3/8	FF-B-575 TYPE II, FINE THREAD	F
-29	4	BOLT, CARRIAGE	3 1/2 X 3/8	ASME B18.5	C
-28	2	BOLT, CARRIAGE	4 X 3/8	ASME B18.5	F
-27	2	BOLT, CARRIAGE	14 X 3/8	ASME B18.5	F
-26	2	BOLT, CARRIAGE	13 X 3/8	ASME B18.5	F
-25	8	WASHER, TORQUE	3/8	LOCAL PURCHASE	F
-24	1	FRONT BRACKET COMPONENT	6 5/16 X 2 13/16 X 1/4	1/4 MILD LOW CARBON STEEL	D
-23	1	FRONT BRACKET COMPONENT	20 X 2 X 1/4	1/4 MILD LOW CARBON STEEL	D
-22	2	FRONT BRACKET COMPONENT	3 X 3 X 1/4	1/4 MILD LOW CARBON STEEL	D
-21	1	FRONT BRACKET COMPONENT	15 3/4 X 2 X 1/4	1/4 MILD LOW CARBON STEEL	D
-20	1	FRONT BRACKET COMPONENT	15 3/4 X 2 X 1/4	1/4 MILD LOW CARBON STEEL	D
-19	1	REAR BRACKET COMPONENT	12 X 3 X 1/4	1/4 MILD LOW CARBON STEEL	B C
-18	1	REAR BRACKET COMPONENT	3 X 3 X 1/4	1/4 MILD LOW CARBON STEEL	A C
-17	1	REAR BRACKET COMPONENT	3 1/2 X 1 1/2 X 1/4 (OD)	1/4 MILD LOW CARBON STEEL	C
-16	1	BLOCKING	36 X 5 1/2 X 5/16	A-A-55057 TYPE A	C F
-15	3	LOAD BEARING MEMBER	2 X 6 (NOM) X 35	ASTM D6199 CLASS 2	C F
-14	1	FALSE BASE	37 3/4 X 35 X 3/4	A-A-55057 TYPE A	5 F
-13	1	CUSHION	37 3/4 X 35 X 2	A-A-59136 CLASS 1, GRADE A	F
-12	1	WRAP	AS REQUIRED	MIL-PRF-121 TYPE I	F
-11	A/R	SORBENT MATERIAL	AS REQUIRED	A-A-59759 TYPE II	4
-10	1	BARRIER BAG	76 X 62 (ID)	MIL-DTL-6060	5 F
-9	8	GASKET	4 X 4 X 1/8	MIL-PRF-1149 TYPE I, CLASS 1	F
-8	1	CHAFFING CUSHION	48 X 38 X 3/4	PPP-C-1797 TYPE I	F
-7	6	NUT	3/8	ASME B18.2.2	
-6	6	WASHER, PLAIN	3/8	ASME B18.21.1	
-5	6	BOLT, CARRIAGE	8 X 3/8	ASME B18.5	
-4	2	HEADER	2 X 4 (NOM) X 38	ASTM D6199 CLASS 2	F
-3	1	FLOOR	48 X 38 X 3/4	A-A-55057 TYPE A	F
-2	3	SKID	2 X 4 (NOM) X 50 1/4	ASTM D6199 CLASS 2	F
-1	6	RUB	4 X 4 (NOM) X 12	ASTM D6199 CLASS 2	F
P/N	QTY REQD	NOMENCLATURE OR DESCRIPTION	SIZE: (INCHES UNLESS SPECIFIED) TOLERANCES ON FRAC. ± 1/8, DECIMAL ± .10, ANGLES ± 1°	MATERIAL SPECIFICATION	

SPECIAL PACKAGING INSTRUCTION	CODE ID 98747	SPI NO. (TPD) F01-241-0074
ITEM NOMENCLATURE ENGINE, GAS TURBINE, NONAIRCRAFT		SHEET 3 OF 10

CAUTION NOTICES

NOTICE 1: ASSETS PACKAGED IN ACCORDANCE WITH PREVIOUS EDITIONS OF THIS SPI DO NOT REQUIRE REPACKAGING IF THE INTEGRITY OF THE SPI IS MAINTAINED.

NOTICE 2: SEE SPIRES FOR A COMPLETE LISTING OF NSN's ASSIGNED TO THIS SPI.

NOTICE 3: PACKAGING MATERIAL MAY BE SUBSTITUTED IF IT MEETS THE REQUIREMENTS OF MIL-STD-2073, PROVIDES EQUAL OR BETTER PROTECTION AND THERE IS NO INCREASED COST TO THE GOVERNMENT.

NOTICE 4: LEVEL A PROTECTION REQUIRED TO MEET THE MOST SEVERE WORLDWIDE SHIPMENT, HANDLING, AND STORAGE CONDITIONS. EXAMPLES OF SITUATIONS ARE: WAR RESERVE MATERIAL, MOBILIZATION, STRATEGIC AND THEATER DEPLOYMENT, OPEN STORAGE AND DECK LOADING. SECURITY ASSISTANCE ITEMS, INCLUDING FMS, ARE ESPECIALLY SUSCEPTIBLE TO DAMAGE DUE TO UNKNOWN AND UNFAVORABLE TRANSPORTATION, CLIMATIC, AND STORAGE CONDITIONS. PROVIDE LEVEL B PACKING UNLESS OTHERWISE DIRECTED BY THE PROCURING COUNTRY.

INTERNATIONAL STANDARDS FOR PHYTOSANITARY MEASURES

REVISION OF ISPM NO. 15

REVISION OF WOOD PACKAGING MATERIAL FOR INTERNATIONAL TRADE

THE FOLLOWING STATEMENT IS IN COMPLIANCE WITH THE UNITED NATIONS-IMPLEMENTED RESTRICTIONS ON WOOD PACKAGING MATERIAL (WPM). THIS REQUIREMENT IS SPECIFICALLY CONCERNED WITH INVASIVE SPECIES SUCH AS THE PINEWOOD NEMATODE. WPM IS DEFINED AS WOOD PALLETS, SKIDS, LOAD BOARDS, PALLET COLLARS, WOODEN BOXES, REELS, DUNNAGE, CRATES, FRAMES, AND CLEATS. THE STATEMENT BELOW CITES THE REQUIREMENTS IN DETAIL AND COVERS LUMBER FOR BUILDING CONTAINERS AND PALLETS USED FOR DELIVERIES, RESULTING IN SHIPMENTS WORLDWIDE (DIRECT, OR THROUGH AIR LOGISTICS CENTERS (ALC), CONTAINER CONSOLIDATION POINTS (CCP), OR OTHER BASES).

WOODEN LUMBER, WOODEN PALLET AND PACKAGING/CONTAINER STATEMENT:

ALL WOODEN LUMBER, WOODEN PALLETS, AND WOODEN CONTAINERS PRODUCED ENTIRELY OR IN PART OF WOOD PACKAGING MATERIAL (WPM) SHALL BE CONSTRUCTED FROM DEBARKED WOOD IN ADDITION TO THE APPLICATION OF HEAT-TREATED (HT) MATERIAL (HT TO 56 DEGREES CENTIGRADE OR 133 DEGREES FAHRENHEIT FOR 30 MINUTES). CERTIFICATION/MARKING IS REQUIRED BY AN ACCREDITED AGENCY RECOGNIZED BY THE AMERICAN LUMBER STANDARDS COMMITTEE (ALSC). FOR REFERENCE DOCUMENTATION, SEE LATEST REVISION OF "INTERNATIONAL STANDARDS FOR PHYTOSANITARY MEASURES (ISPM NO. 15), "REGULATION OF WOOD PACKAGING MATERIAL IN INTERNATIONAL TRADE."

NOTES

1. I.D. TAGS MUST BE STAMPED BY RESPONSIBLE PARTY SIGNIFYING ITEM HAS BEEN PREPARED FOR SHIPMENT/STORAGE IAW APPLICABLE T.O.
2. ITEMS WHICH HAVE BEEN DRAINED AND PURGED MUST BE ACCOMPANIED WITH A COMPLETED AFTO FORM 20 OR LOCALLY PRODUCED DOCUMENTATION CERTIFYING THE ITEM HAS BEEN PROPERLY DRAINED AND PURGED. ITEMS CONTAINING RESIDUAL FUEL MUST BE PACKED IN A LEAK-PROOF LINER, WITH SPECIFIED SORBENT MATERIAL IN A STRONG OUTER CONTAINER. MARK, LABEL, AND DOCUMENT THE PACKAGE AS DANGEROUS GOODS IN APPARATUS, UN3363, CLASS 9.
3. IF APPLICABLE: MARK TYPE AND FLASH POINT OF PURGING FLUID IAW AFI 24-602v2, PARA 2.16.6.3.7 AND AFMAN24-604, A.3.3.9.5.4.
4. WRAP FUEL PUMP ENTIRELY WITH SORBENT MATERIAL, REF.-11. THIS IS **NOT** A REQUIREMENT FOR NEW ITEMS. SORBENT MATERIAL MUST BE INSPECTED PRIOR TO REUSE.
5. BAG, REF.-10, MAY BE POSITIONED AROUND ITEM IN LIEU OF AROUND FALSE BASE, REF.-14, AS LONG AS THE INTEGRITY OF THE SEALS AT MOUNTING POINTS ARE MAINTAINED.

SPECIAL PACKAGING INSTRUCTION

CODE ID
98747


SPI NO. (TPD)
F01-241-0074

ITEM NOMENCLATURE
ENGINE, GAS TURBINE, NONAIRCRAFT


SHEET 4 OF 10

NOTE:

ALL METAL HARDWARE USED FOR BLOCKING AND BRACING SHALL HAVE THE APPLICABLE SPI NO. STENCILED IN A VISIBLE AREA. USE OF METAL TAG OR ETCHING THE SPI NO. IN LIEU OF STENCILING IS ACCEPTABLE.

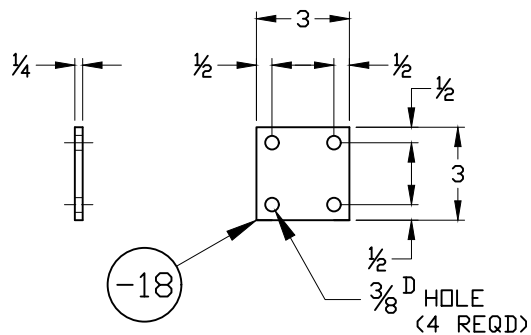

DETAIL A
(REAR BRACKET)

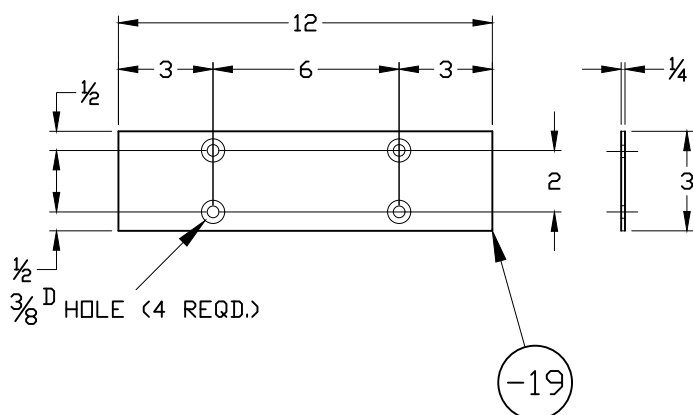



DETAIL B

SPECIAL PACKAGING INSTRUCTION

CODE ID
98747SPI NO. (TPD)
F01-241-0074ITEM NOMENCLATURE
ENGINE, GAS TURBINE, NONAIRCRAFT

SHEET 5 OF 10

NOTE:

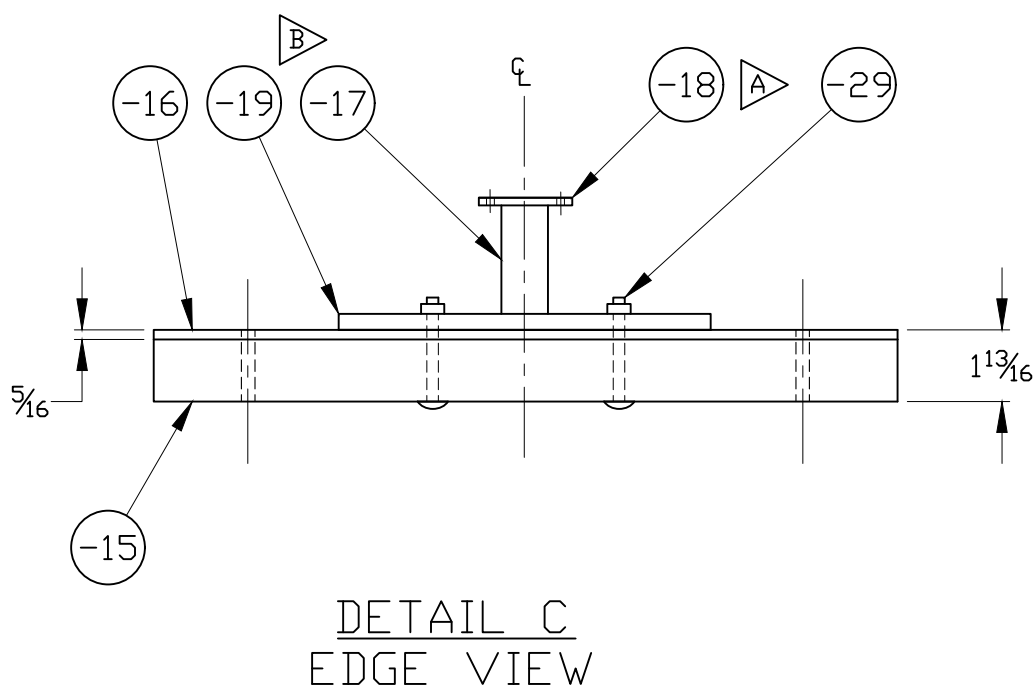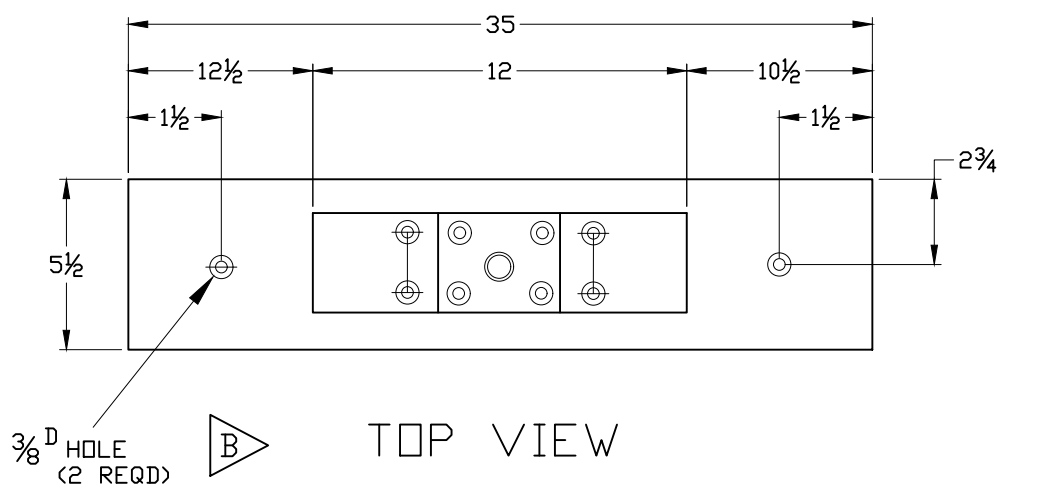WELD REF.-17, -18, AND -19
(REAR BACKET) TOGETHER
AS SHOWN.

SPECIAL PACKAGING INSTRUCTION

CODE ID
98747


SPI NO. (TPD)
F01-241-0074

ITEM NOMENCLATURE
ENGINE, GAS TURBINE, NONAIRCRAFT


SHEET 6 OF 10

NOTE:

ALL METAL HARDWARE USED FOR BLOCKING AND BRACING SHALL HAVE THE APPLICABLE SPI NO. STENCILED IN A VISIBLE AREA. USE OF METAL TAG OR ETCHING THE SPI NO. IN LIEU OF STENCILING IS ACCEPTABLE.

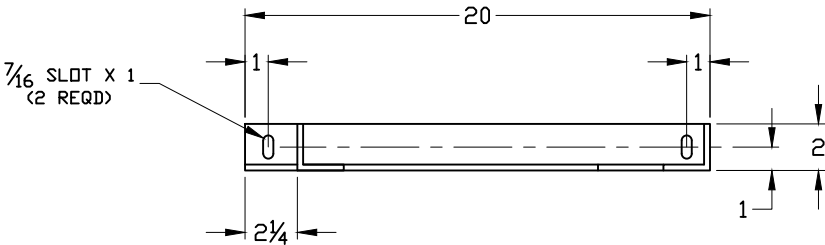

TOP VIEW

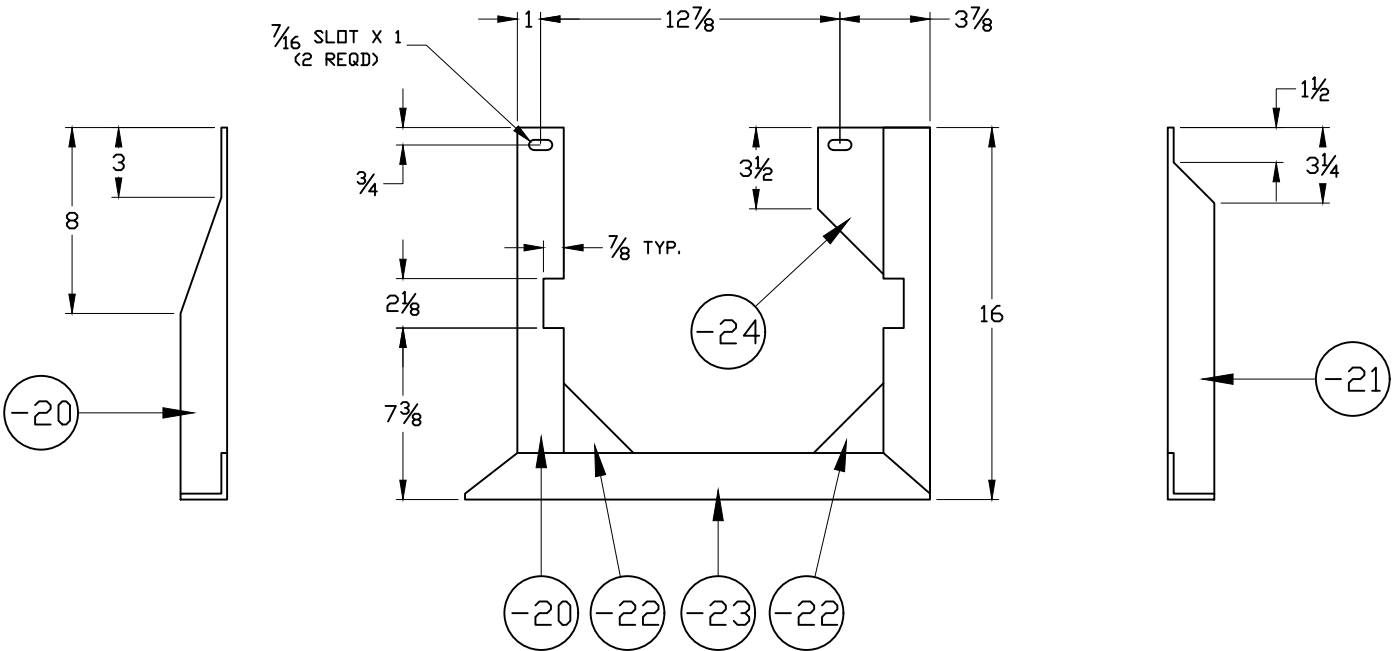

END
VIEW

FRONT BRACKET
TOWARD ENGINE

END
VIEW

DETAIL D

NOTE:

WELD REF -20, -21, -22, -23 & -24
(FRONT BRACKET) AS SHOWN.


SPECIAL PACKAGING INSTRUCTION

CODE ID
98747

SPI NO. (TPD)
F01-241-0074

ITEM NOMENCLATURE
ENGINE, GAS TURBINE, NONAIRCRAFT

SHEET 7 OF 10

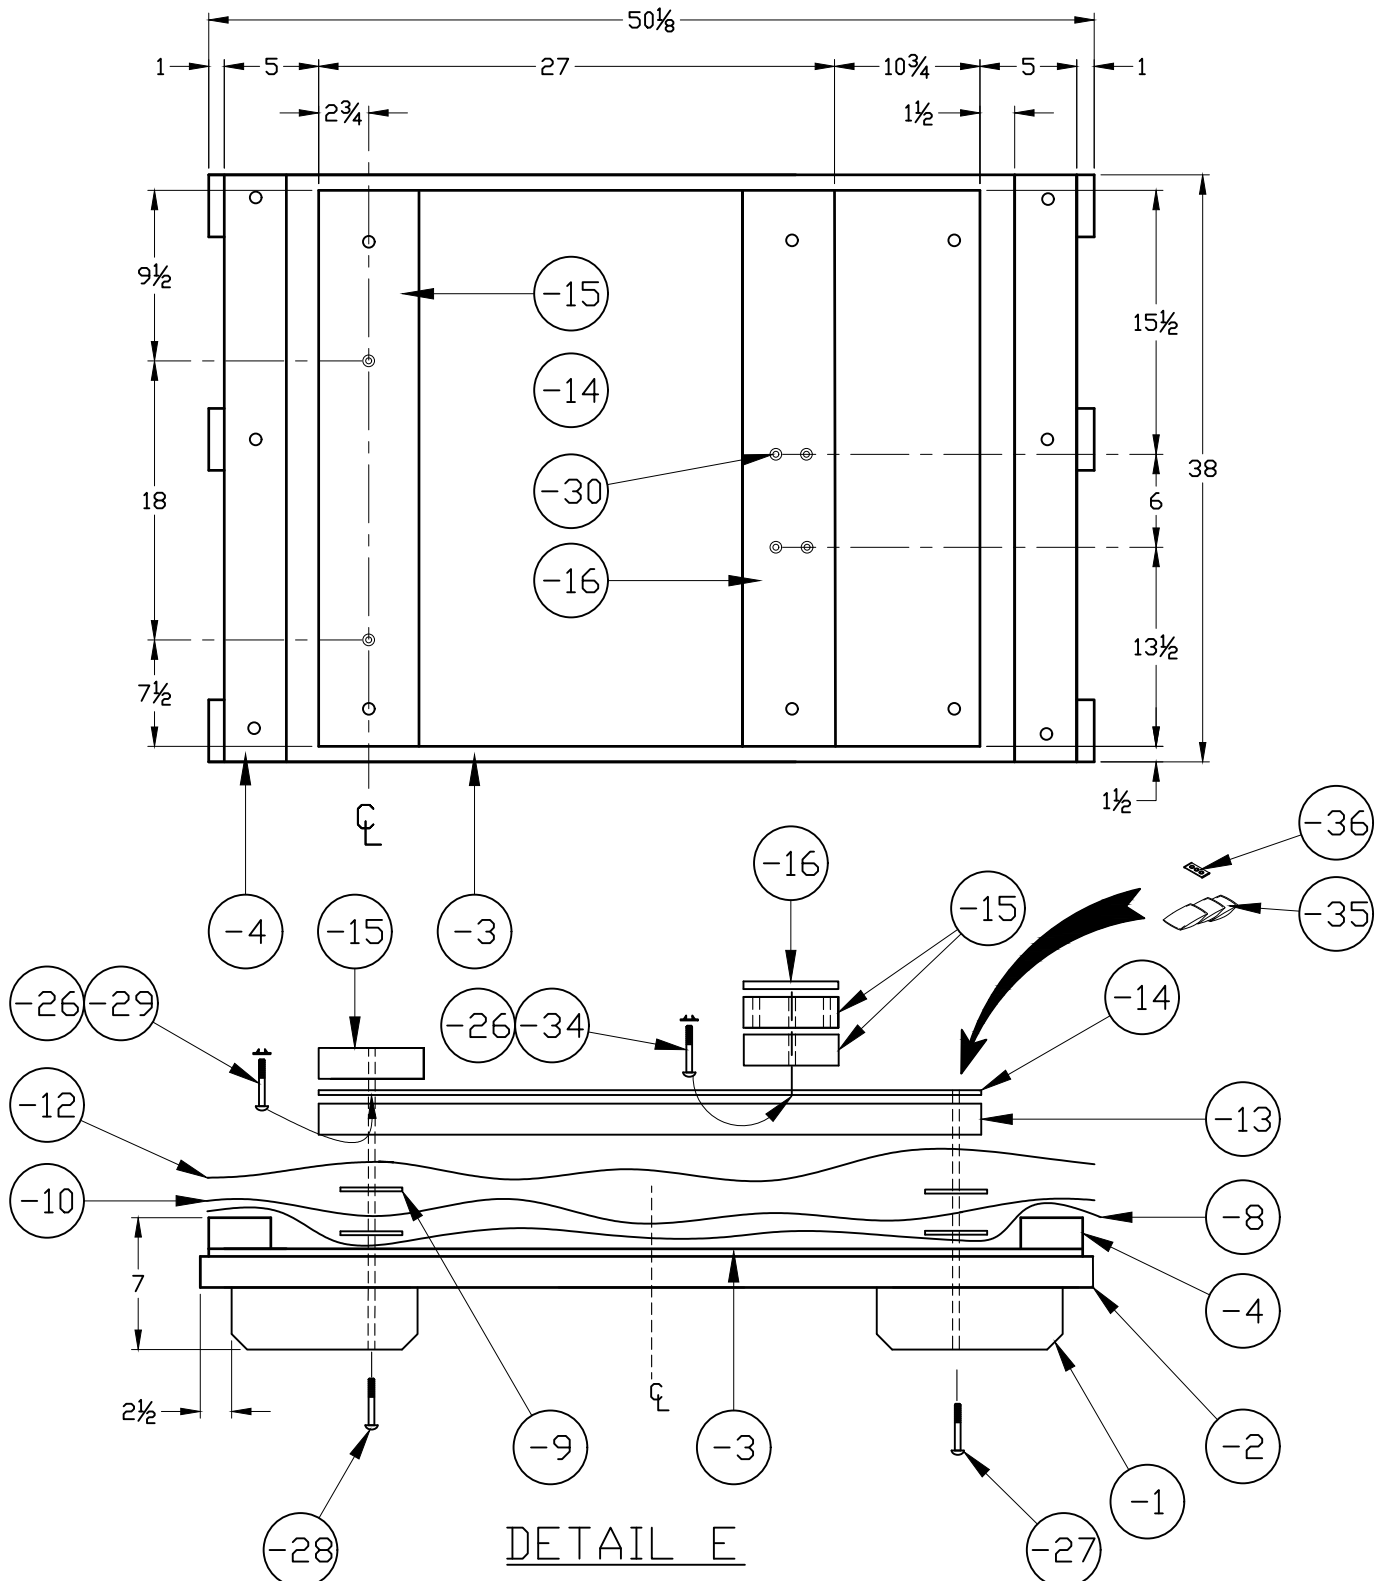



SPECIAL PACKAGING INSTRUCTION

CODE ID
98747

SPI NO. (TPO)
F01-241-0074

ITEM NOMENCLATURE
ENGINE, GAS TURBINE, NONAIRCRAFT

SHEET 8 OF 10

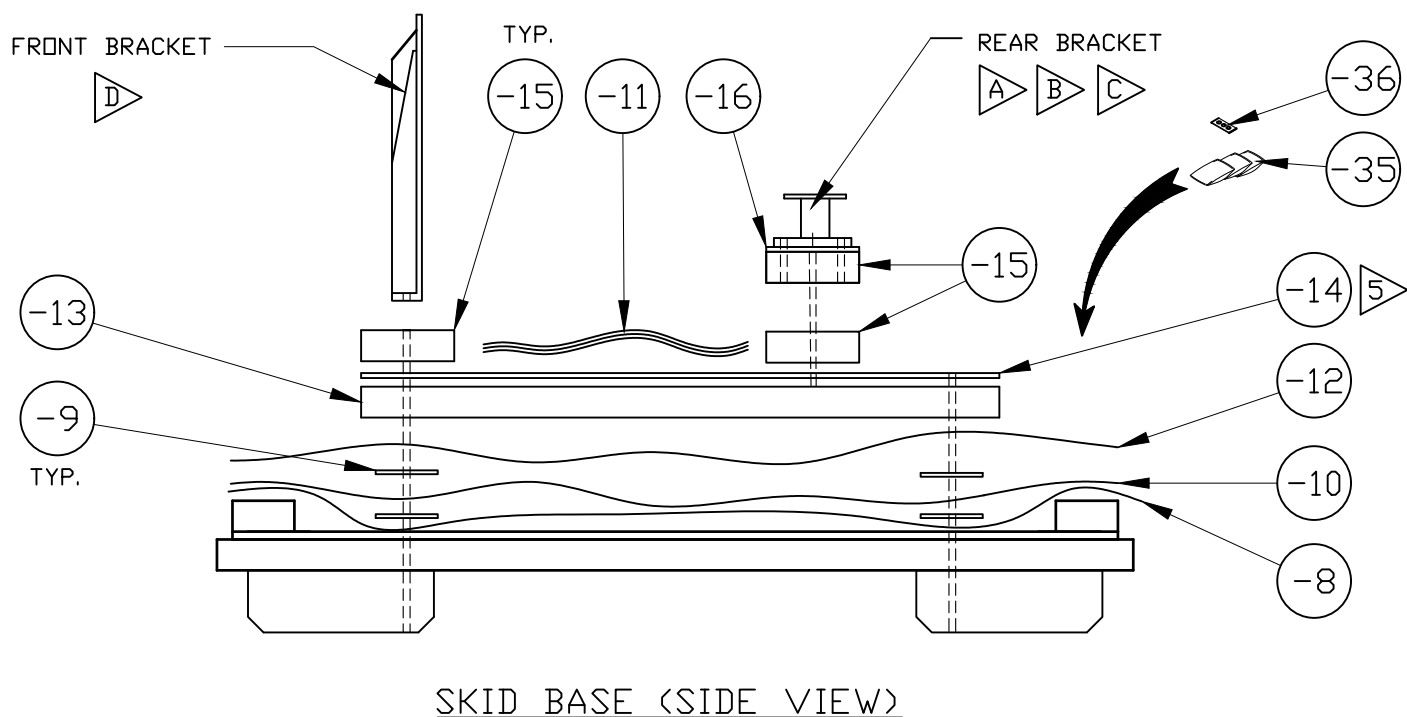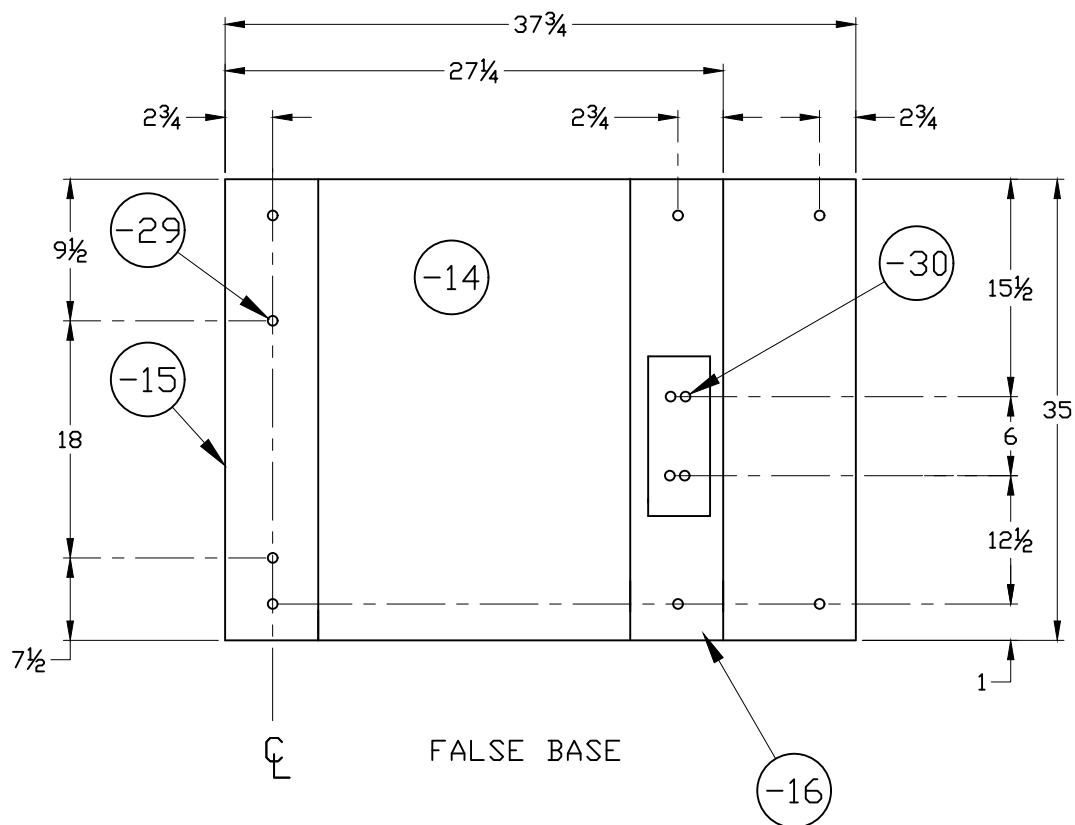

SPECIAL PACKAGING INSTRUCTION

CODE ID
98747

SPI NO. (TPD)
F01-241-0074


ITEM NOMENCLATURE
ENGINE, GAS TURBINE, NONAIRCRAFT

SHEET 9 OF 10

CUSHION ALL SHARP EDGES WITH
PPP-C-795 OR EQUIVALENT.

1

ITEM
REFERENCE

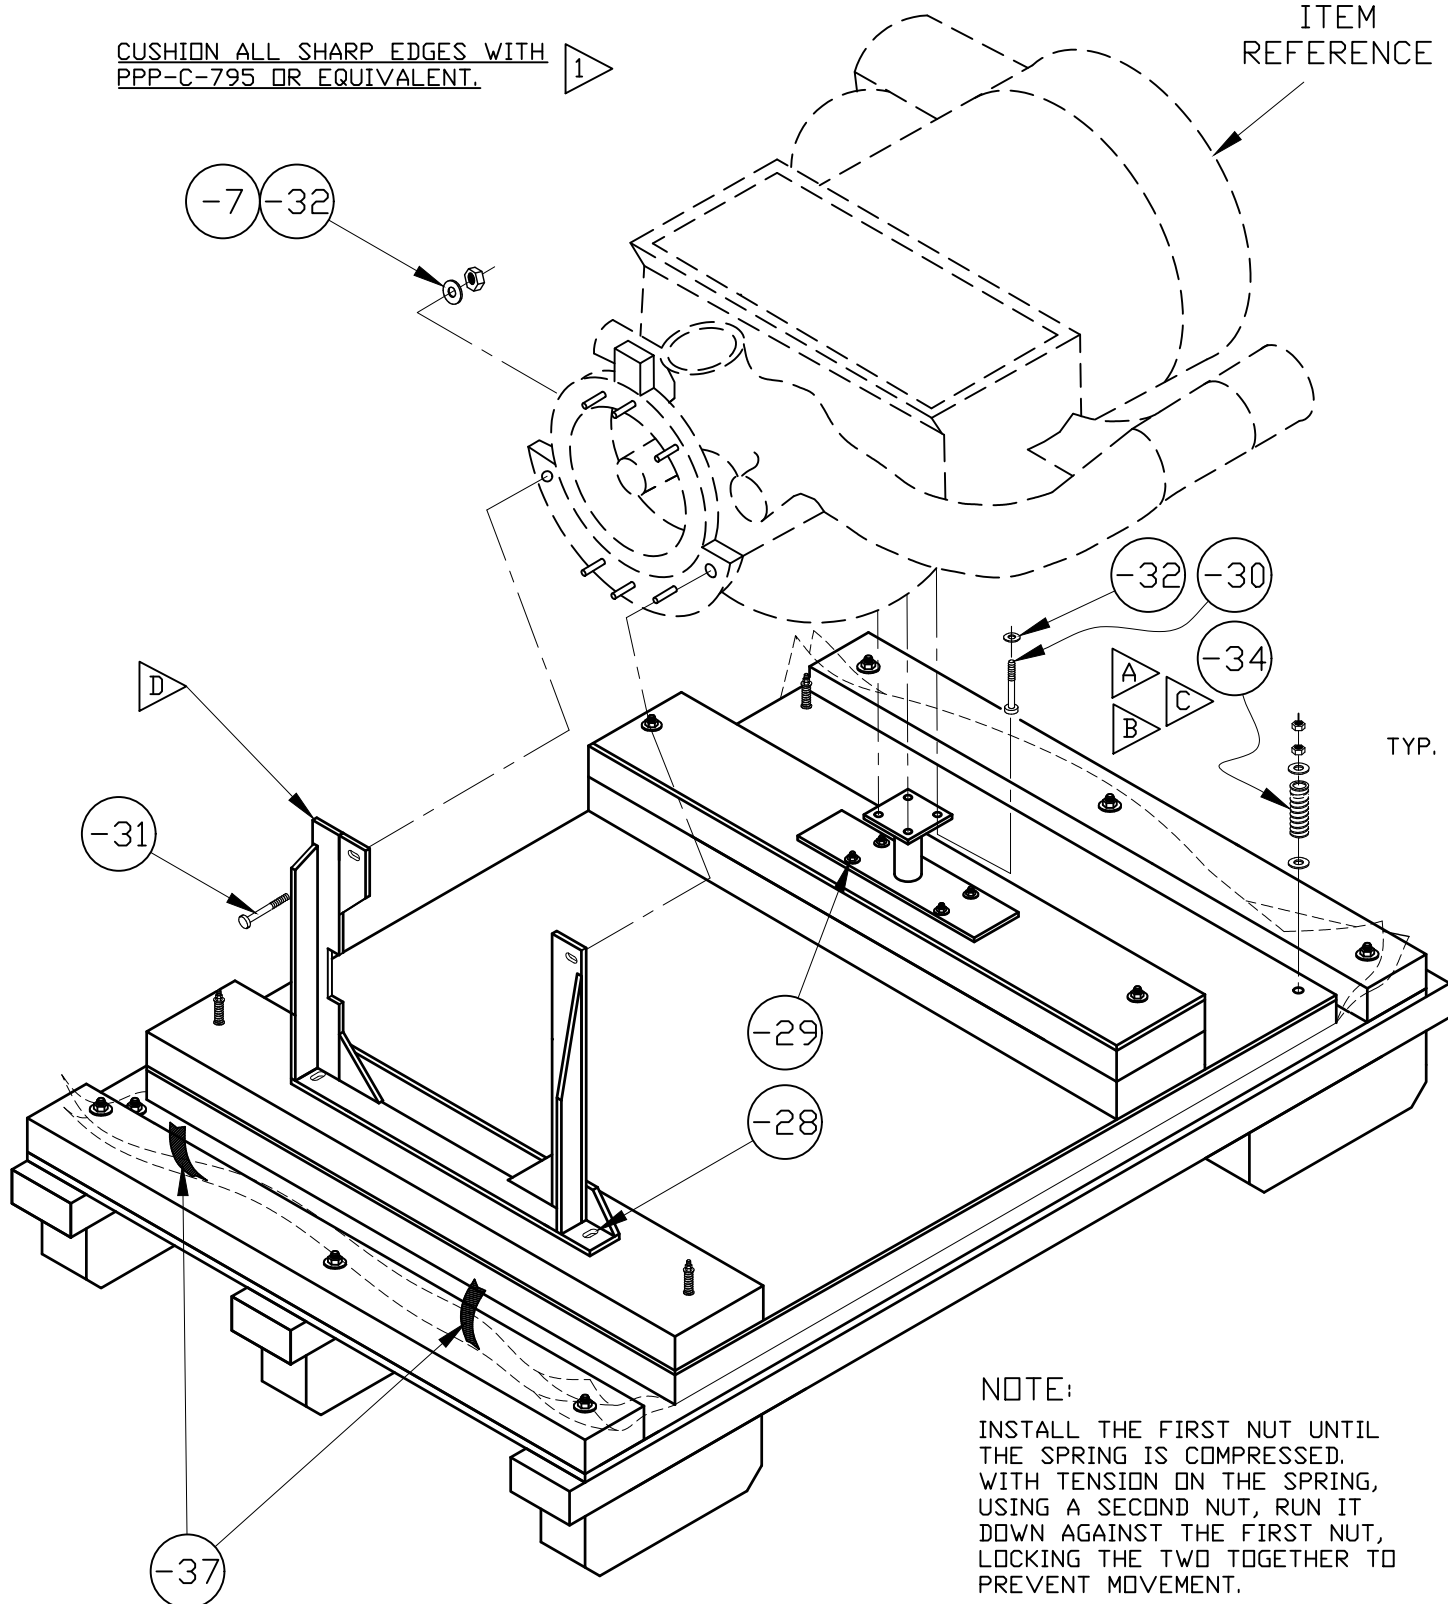

NOTE:

INSTALL THE FIRST NUT UNTIL
THE SPRING IS COMPRESSED.
WITH TENSION ON THE SPRING,
USING A SECOND NUT, RUN IT
DOWN AGAINST THE FIRST NUT,
LOCKING THE TWO TOGETHER TO
PREVENT MOVEMENT.

ASSEMBLY DETAIL

SPECIAL PACKAGING INSTRUCTION

CODE ID
98747

SPI NO. (TPO)
F01-241-0074

ITEM NOMENCLATURE
ENGINE, GAS TURBINE, NONAIRCRAFT

SHEET 10 OF 10

