Launching C. auris RNA-seq Analysis via BRC-Analytics

This guide describes how to launch a transcriptomics workflow for *Candidozyma auris* using BRC-Analytics and Galaxy.

Overview

BRC-Analytics (https://brc-analytics.org) provides a streamlined interface for selecting organism-specific sequencing data from NCBI SRA and launching analysis workflows directly in Galaxy.

Steps

1. Navigate to BRC-Analytics

Go to https://brc-analytics.org and click **Organisms**.

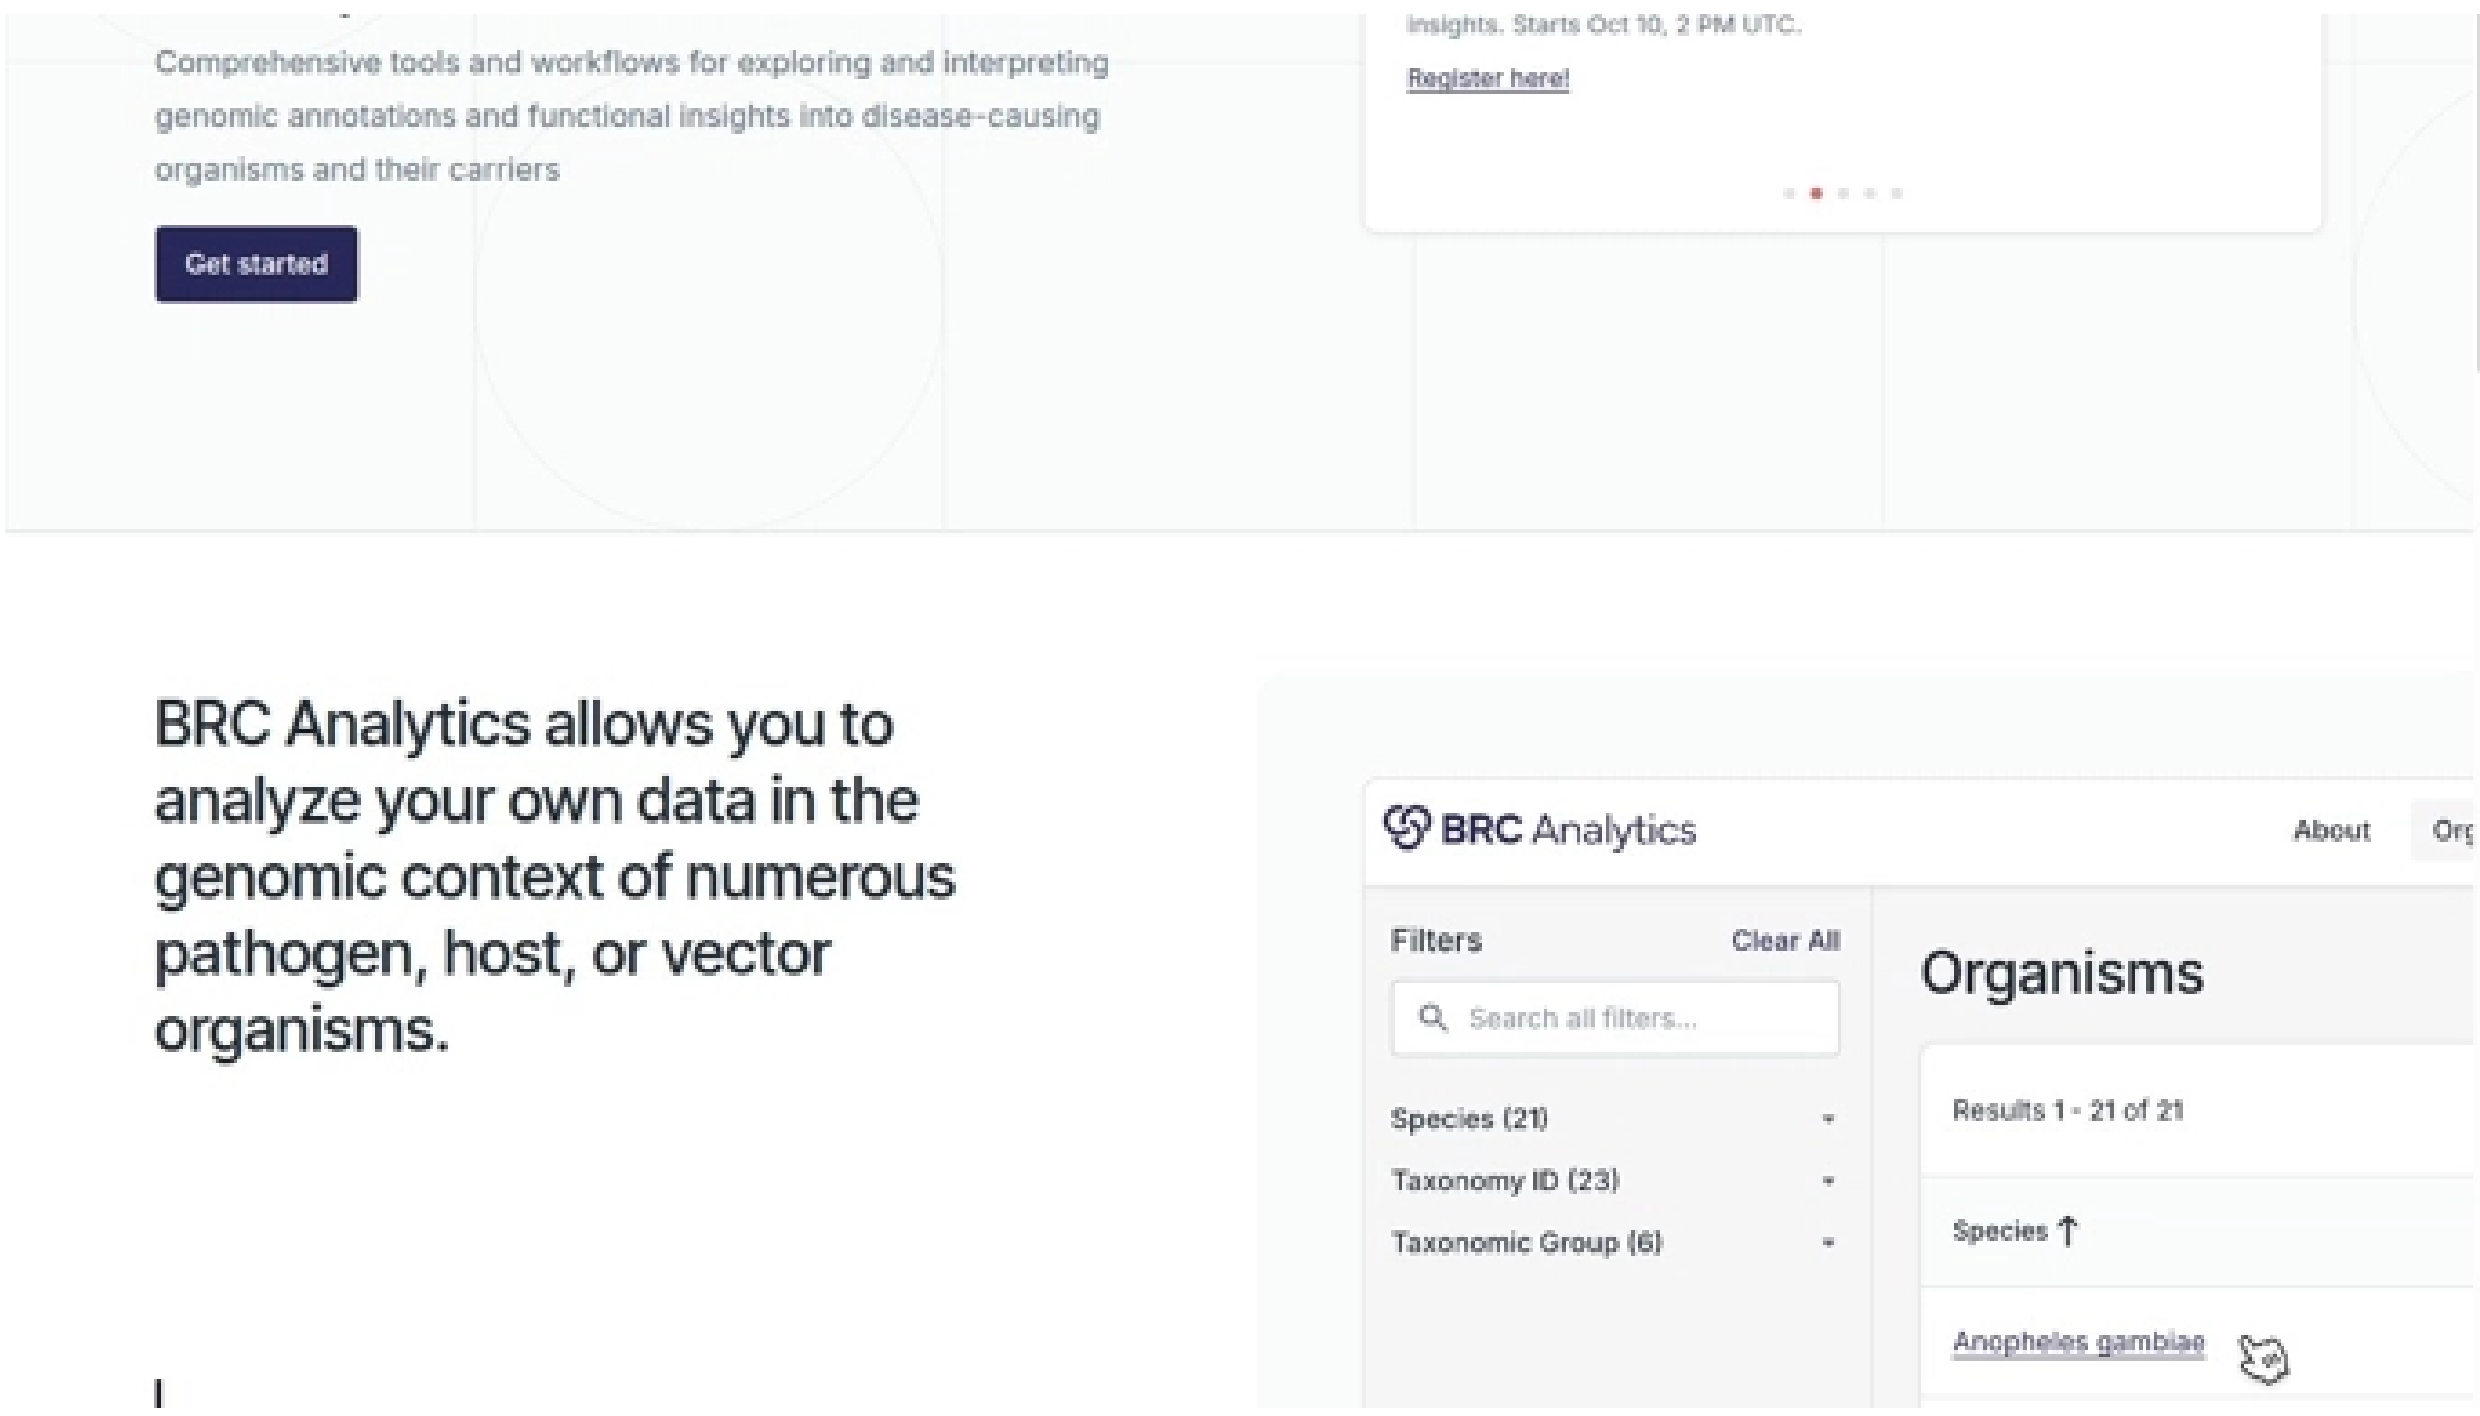

Figure 1: Step 1: Click Organisms

2. Select Organism

Search for "candida" in the filter field and select **Candidozyma (Candida) auris**.

3. Access Analysis Options

Click on **Candidozyma auris**, then click **Analyze**.

4. Choose Analysis Type

Select **Transcriptomics**.

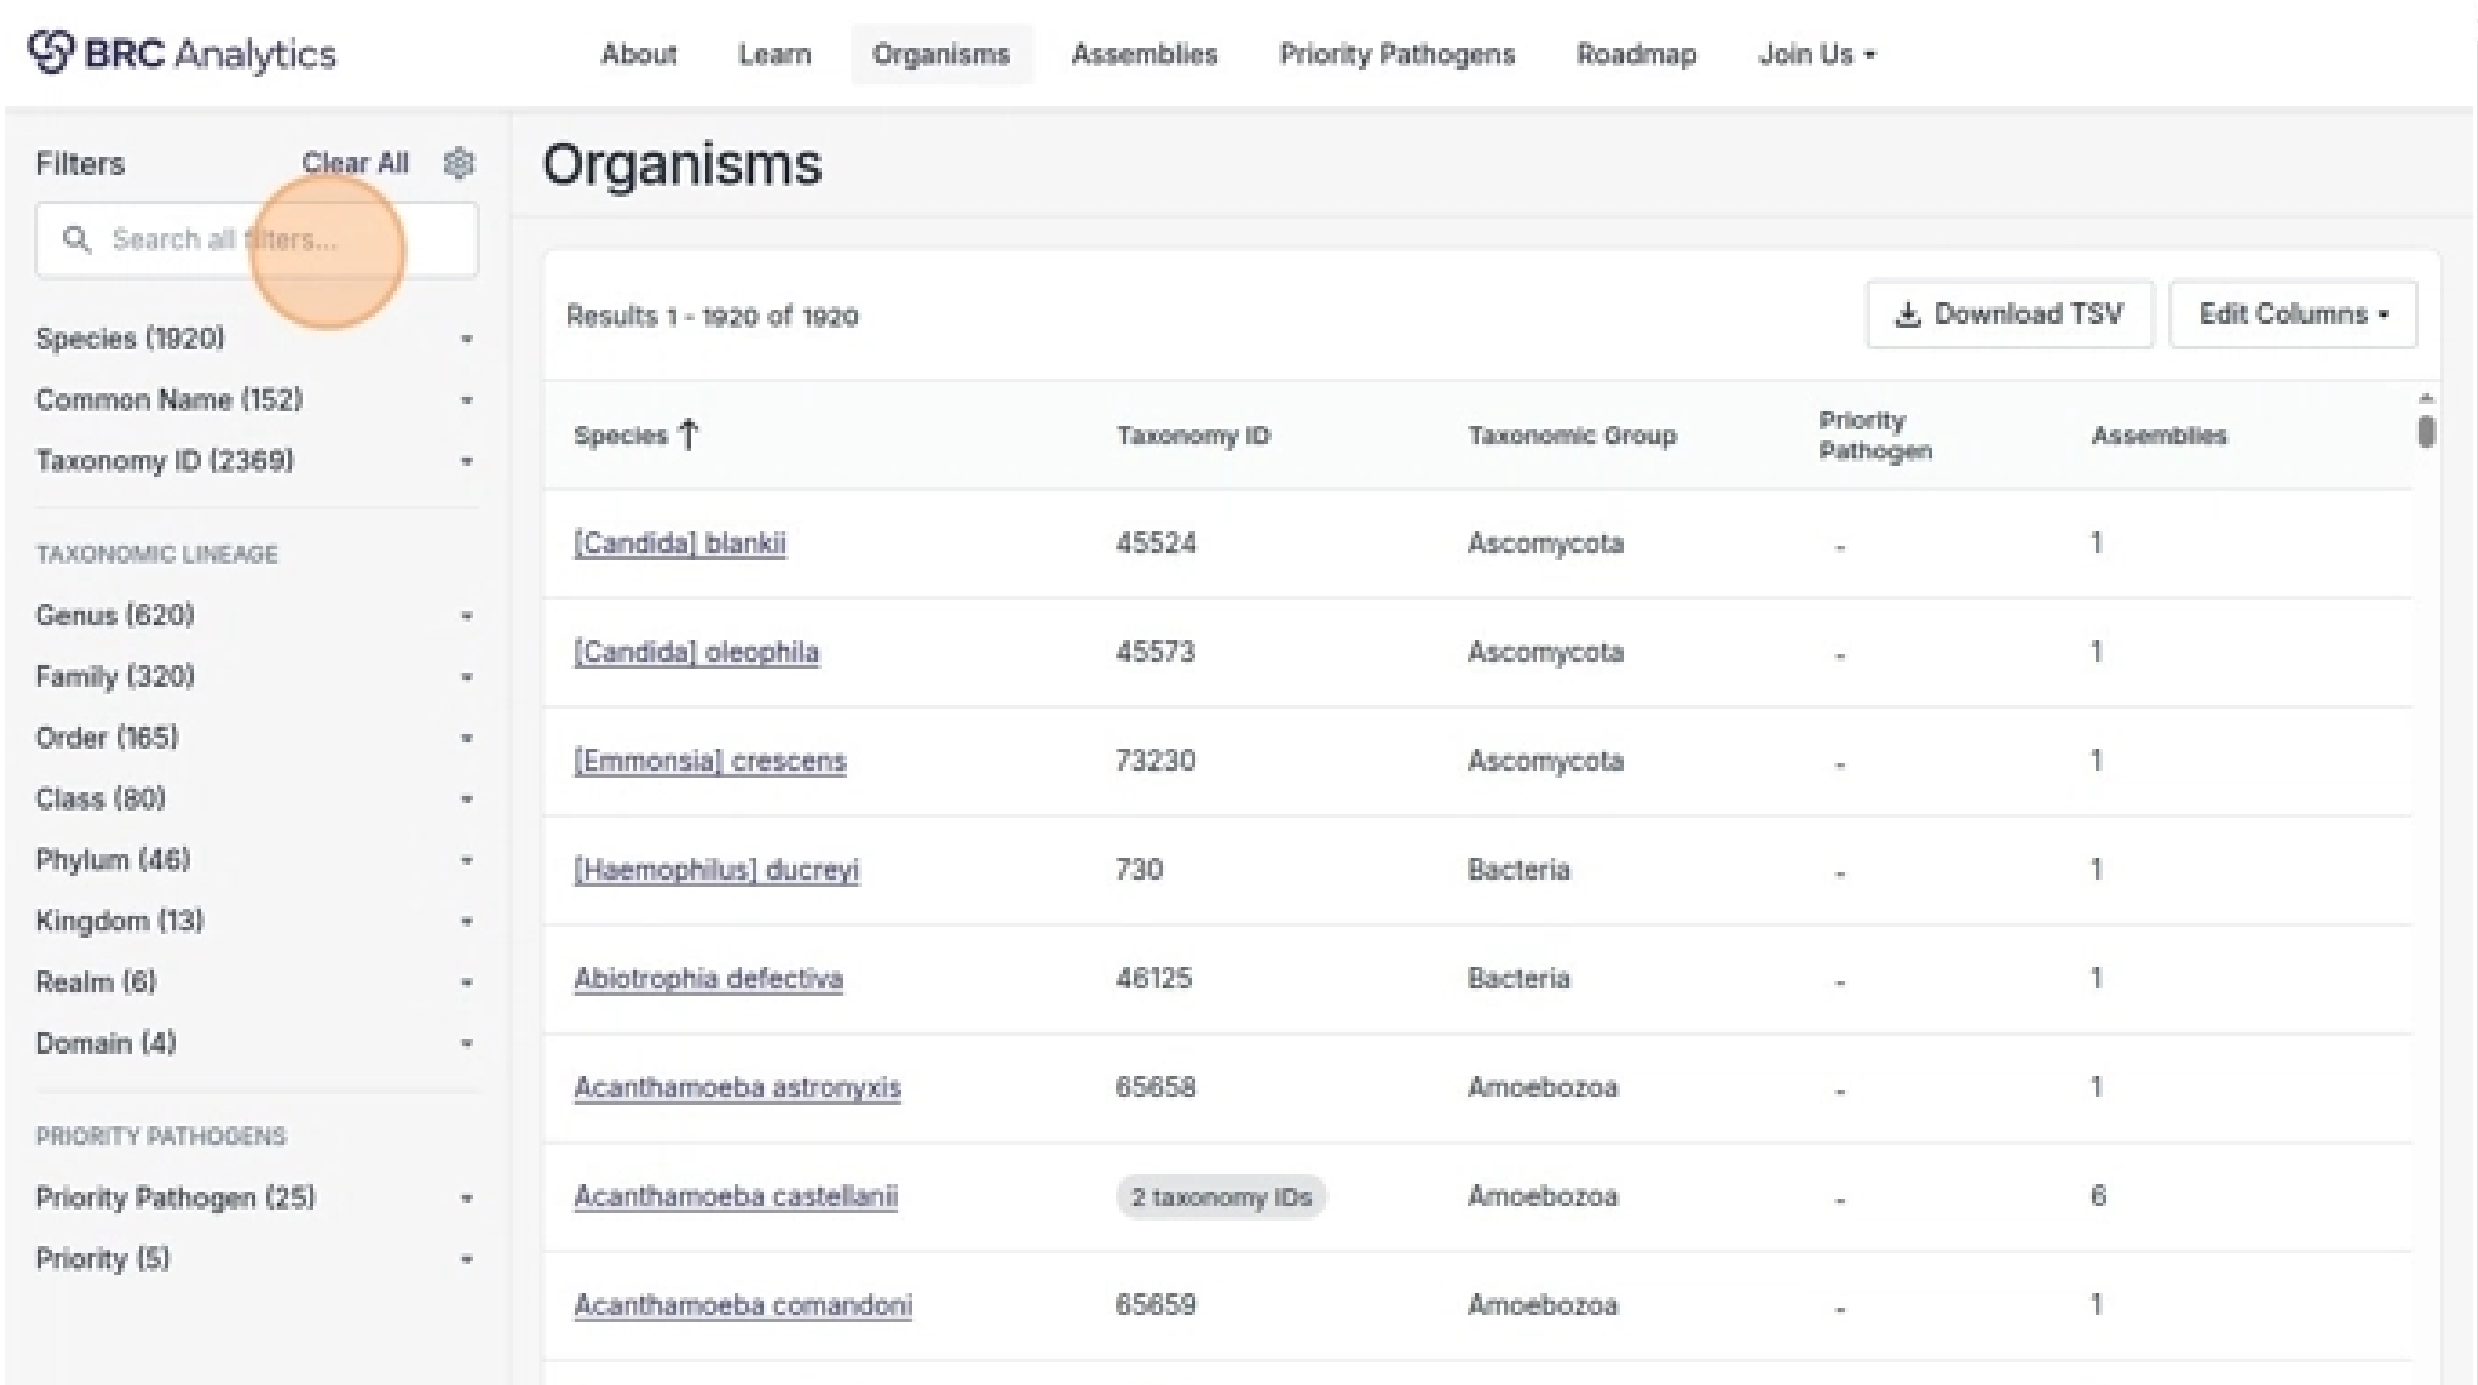

Figure 2: Step 2: Search and select organism

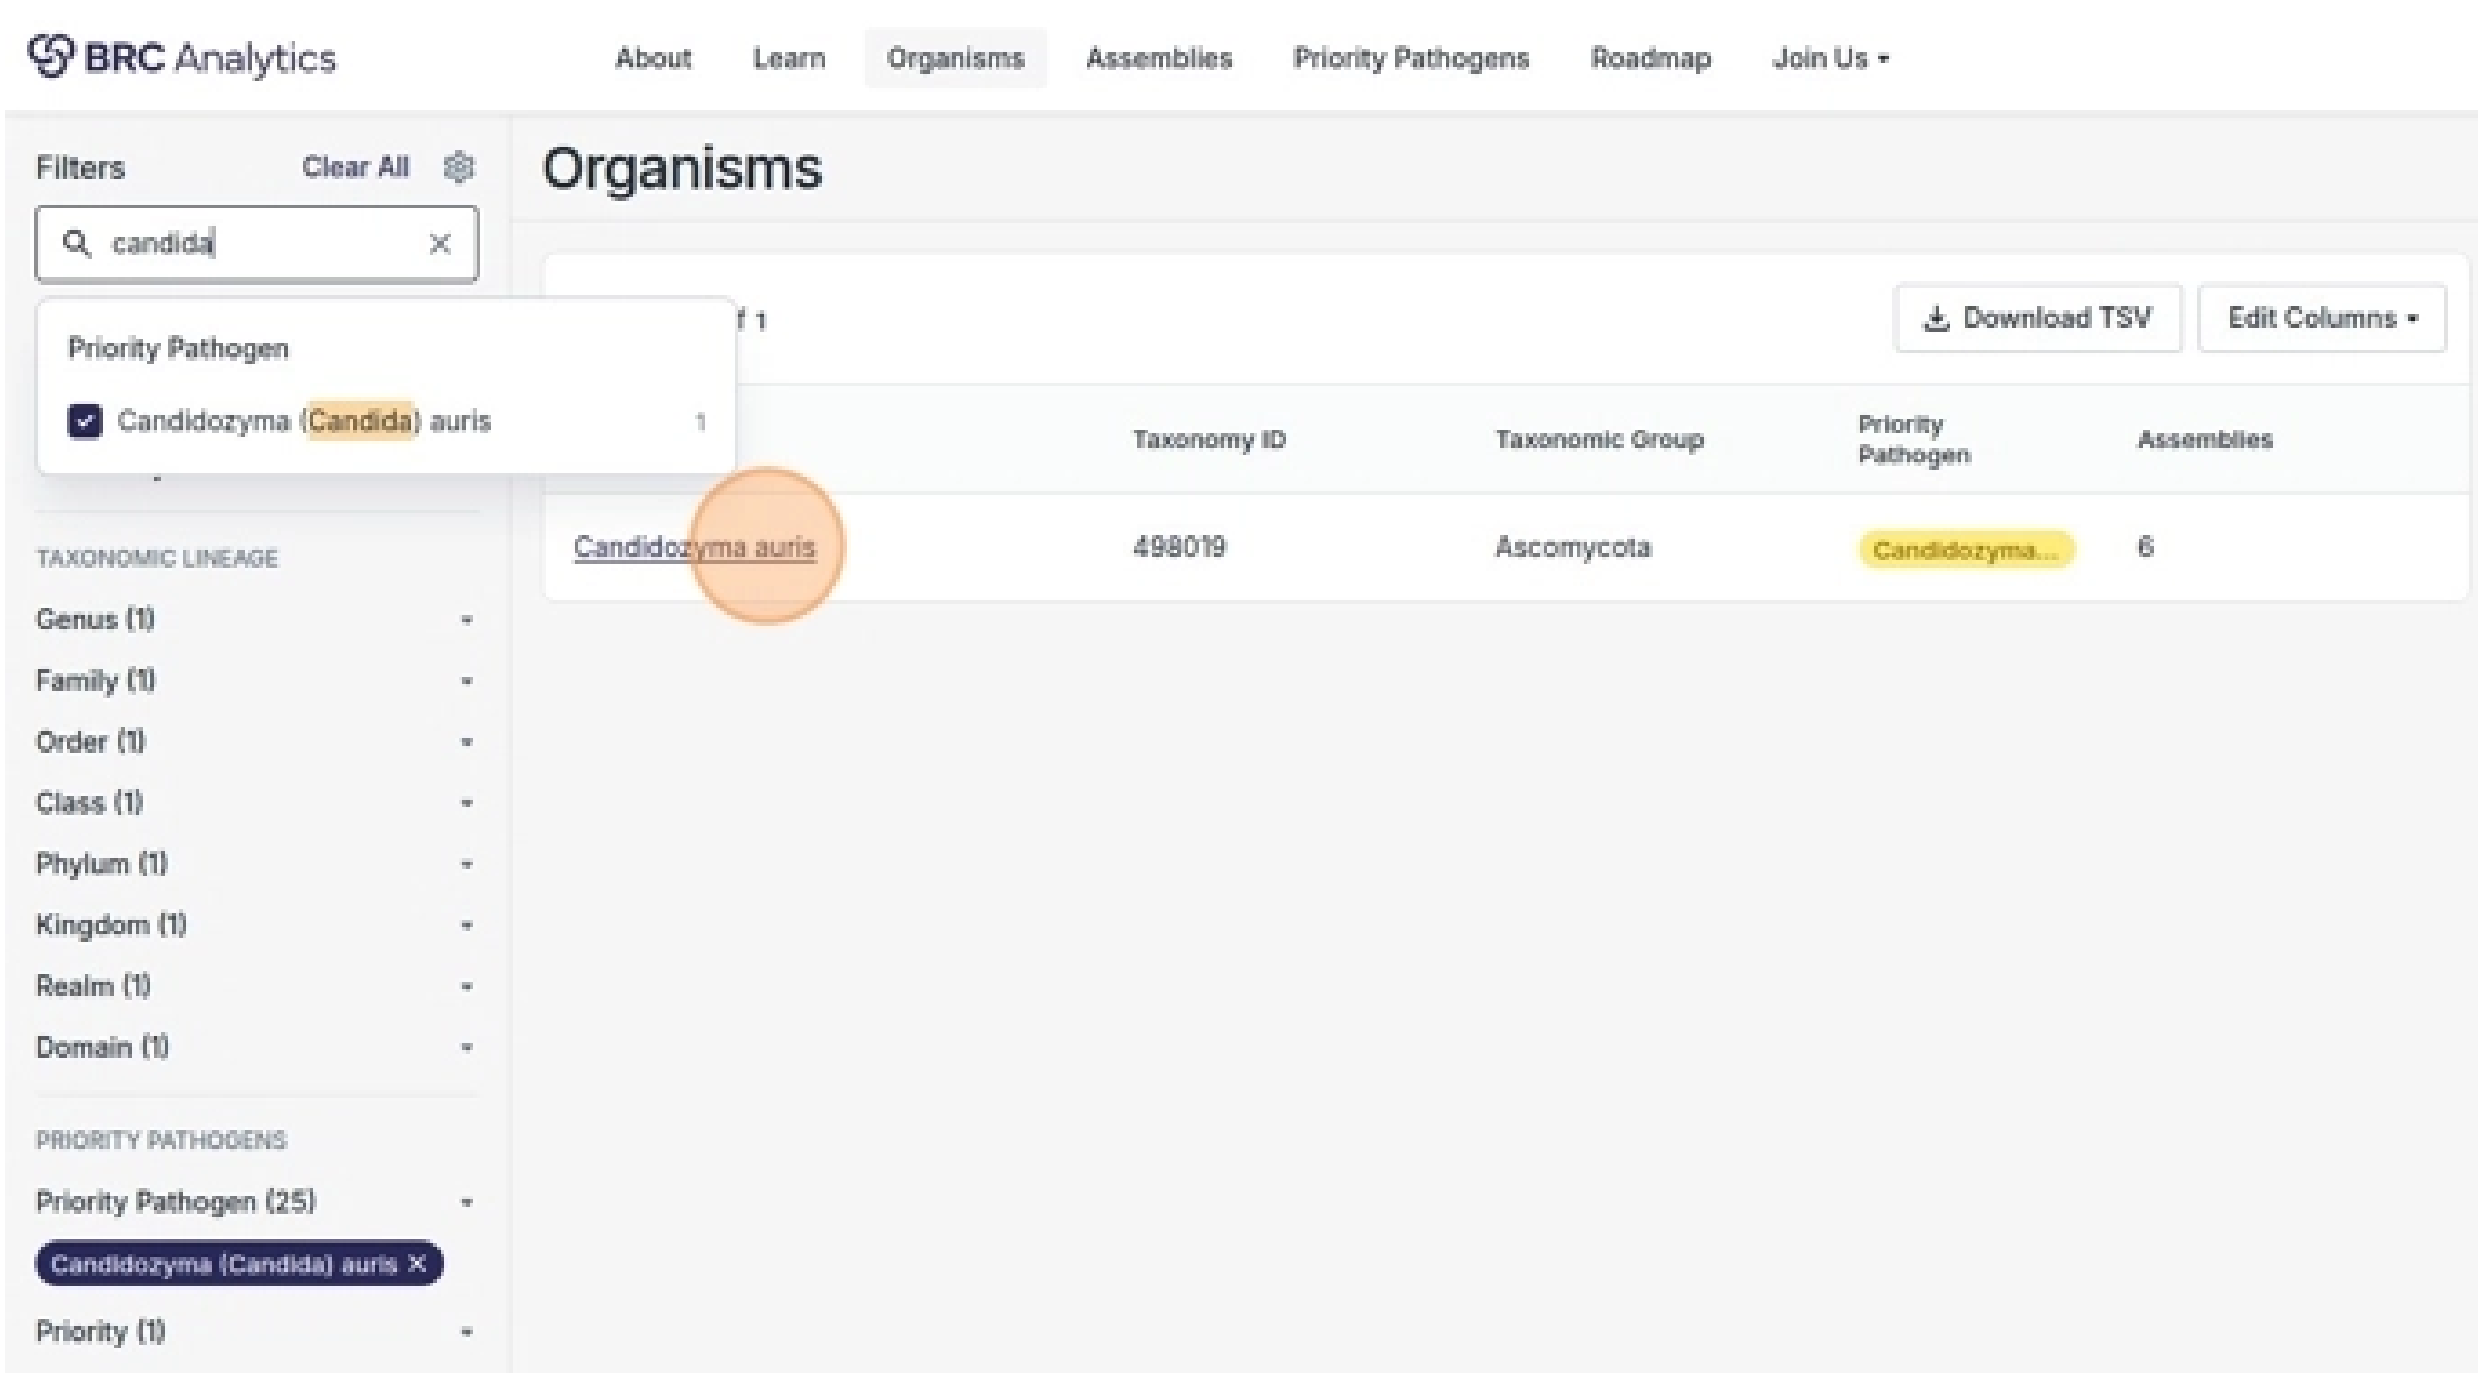

Figure 3: Step 3: Click Analyze

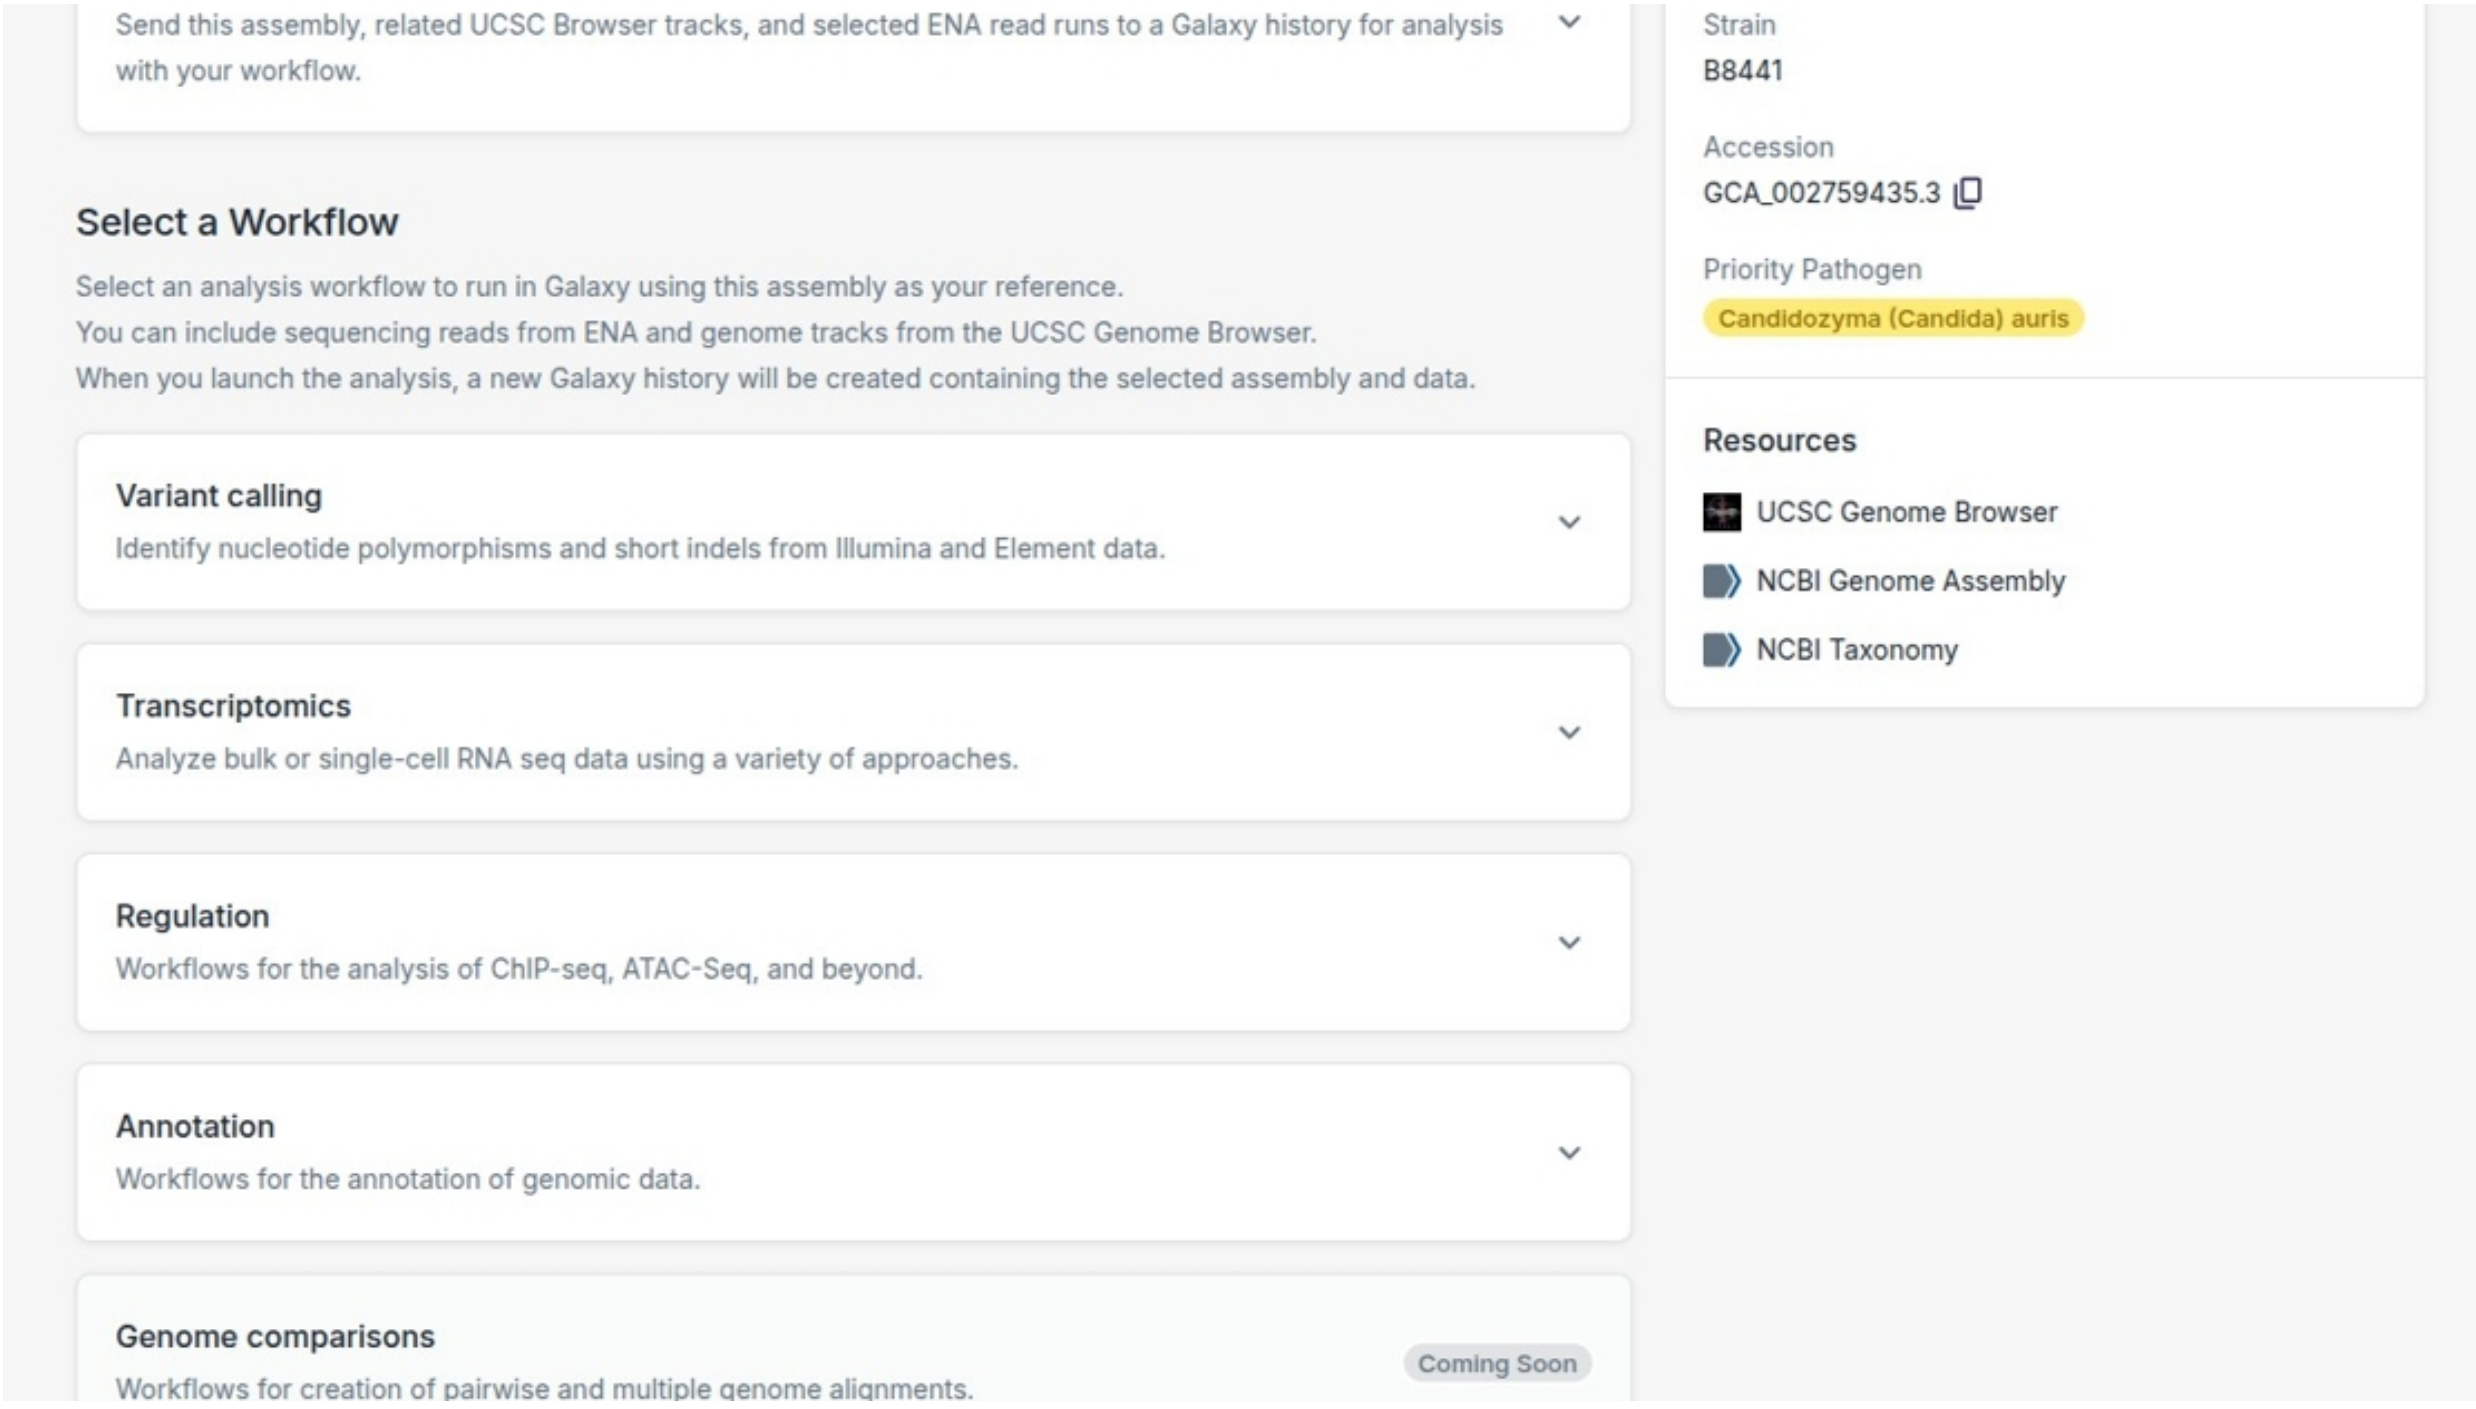

Figure 4: Step 4: Select Transcriptomics

5. Configure Workflow Inputs

Click **Configure Inputs**, then **Continue**.

6. Browse Available Sequences

Click **Browse Sequences** to access available SRA data.

7. Filter by Study Accession

Use **Study Accession** filter to find specific BioProjects. Select desired runs using checkboxes.

8. Add Sequencing Runs

Click **Add N Sequencing Runs** to add selected data.

9. Launch in Galaxy

Click **Launch In Galaxy** to open Galaxy with pre-configured workflow.

10. Access Workflow

Click the workflow icon to view workflow details.

11. Execute Workflow

Click **Run Workflow** to start the analysis.

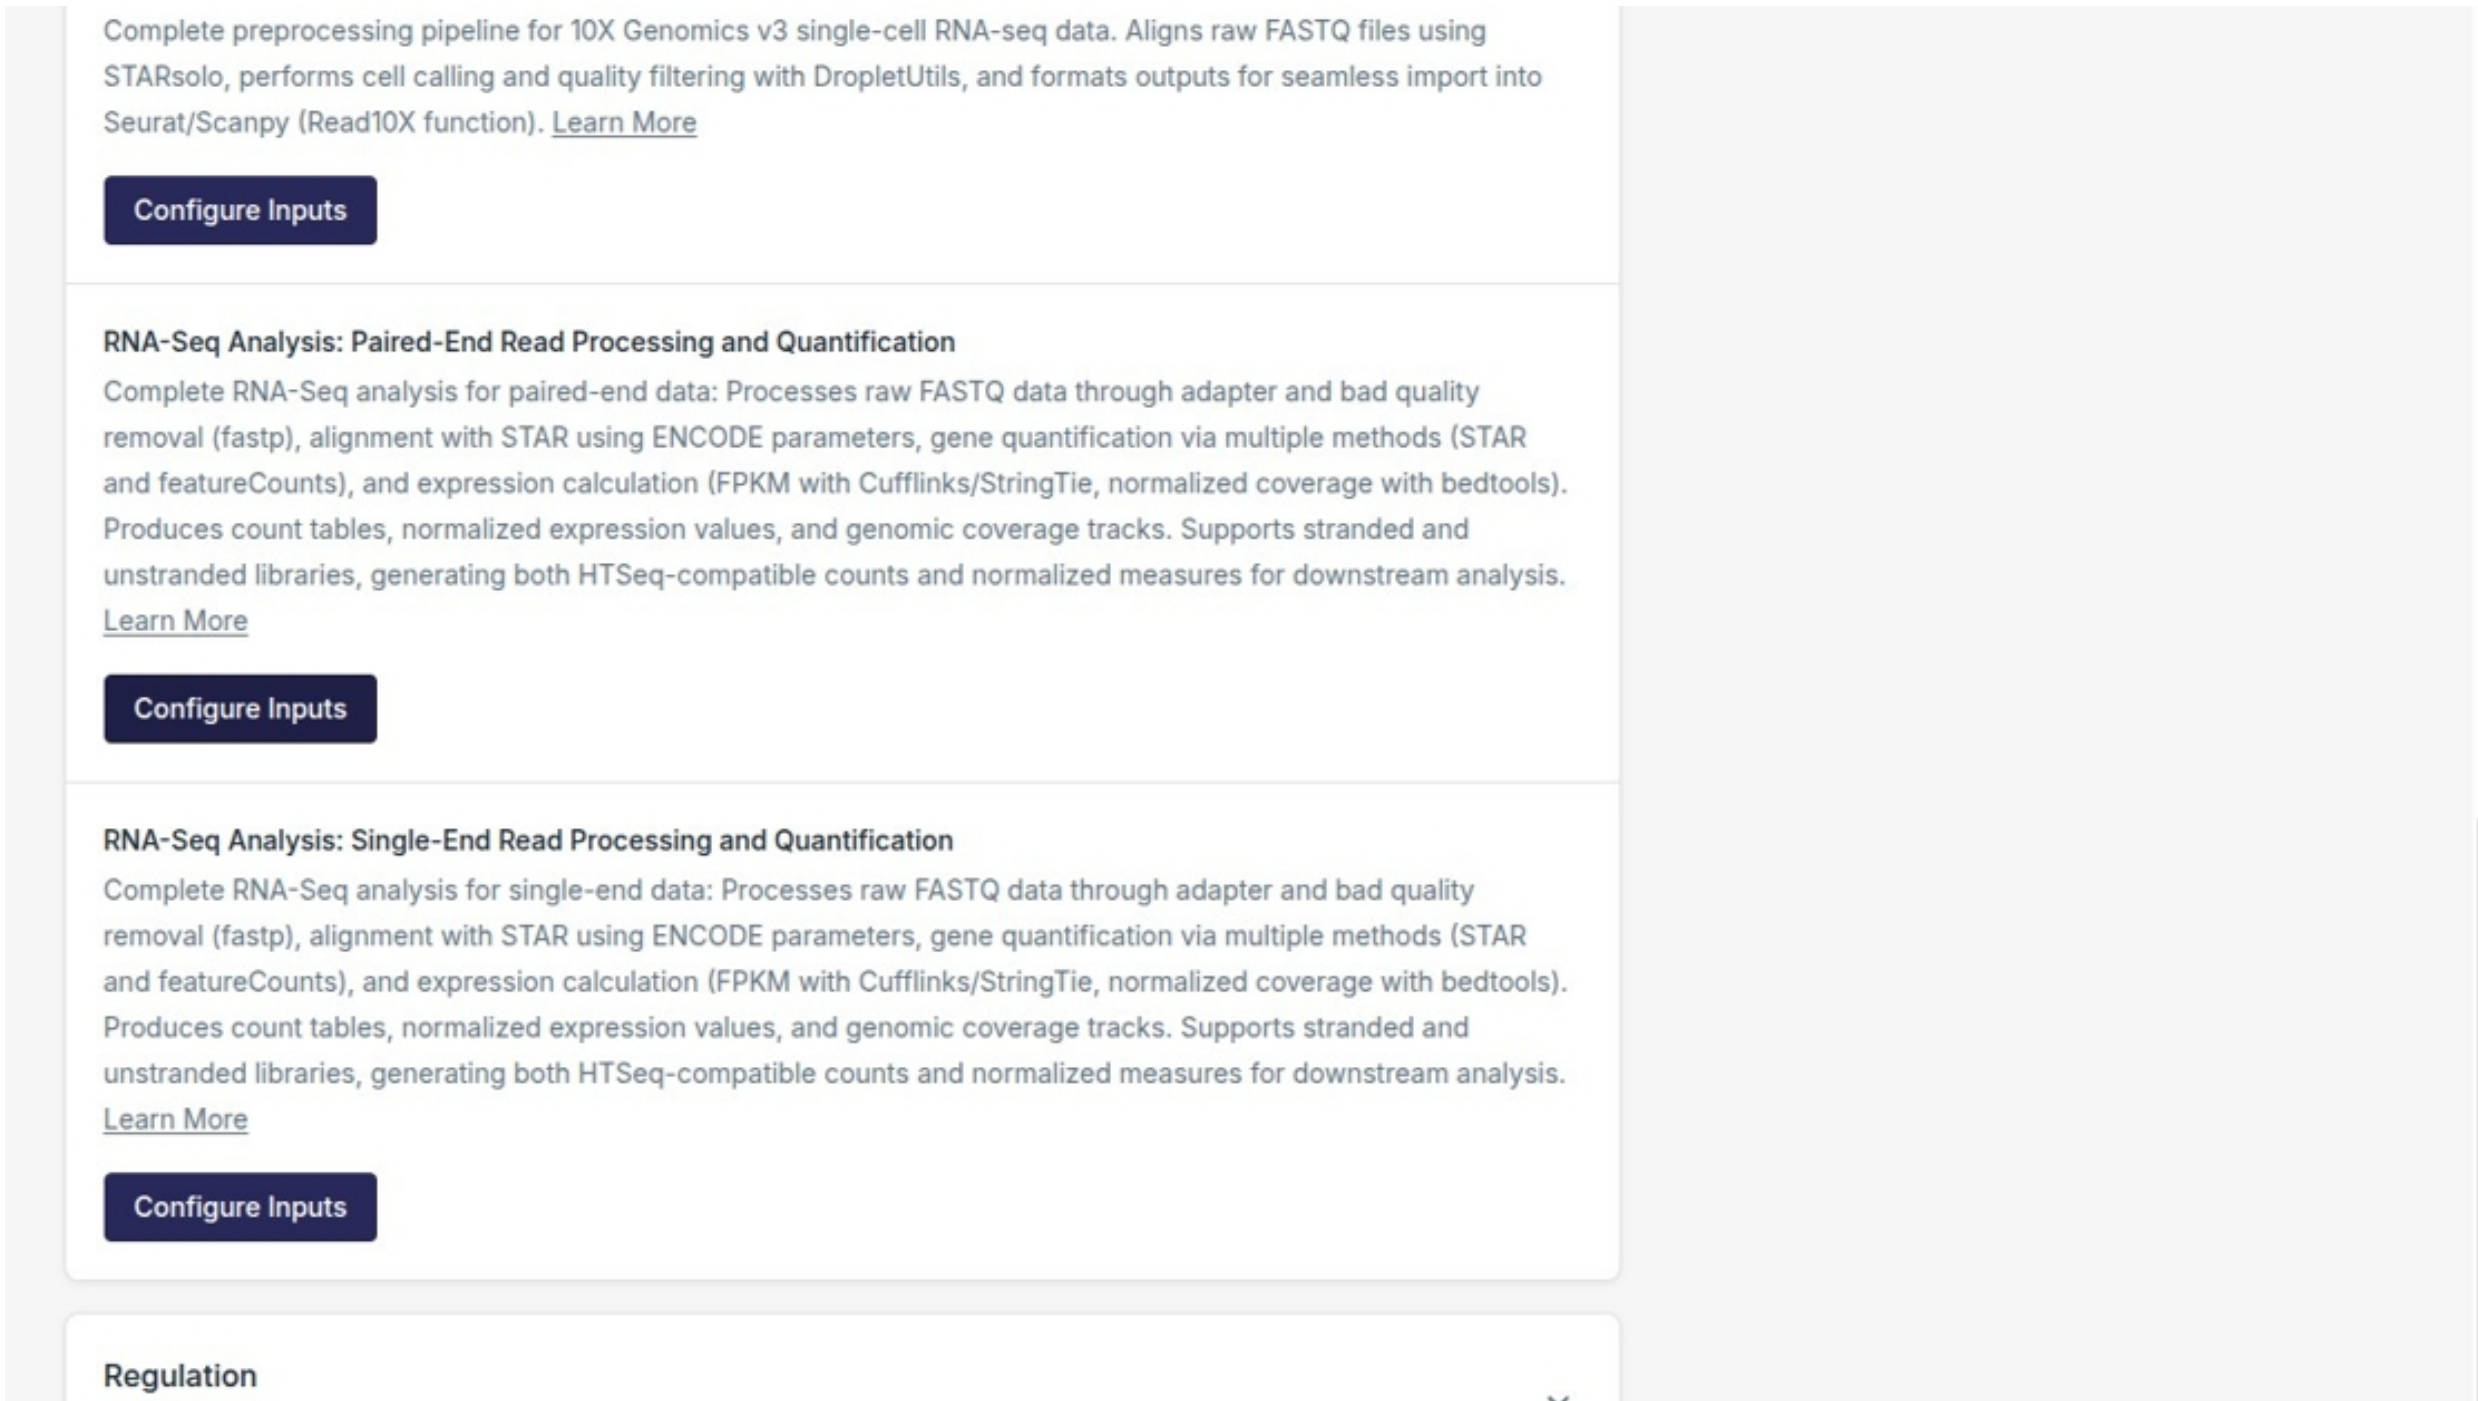

Figure 5: Step 5: Configure Inputs

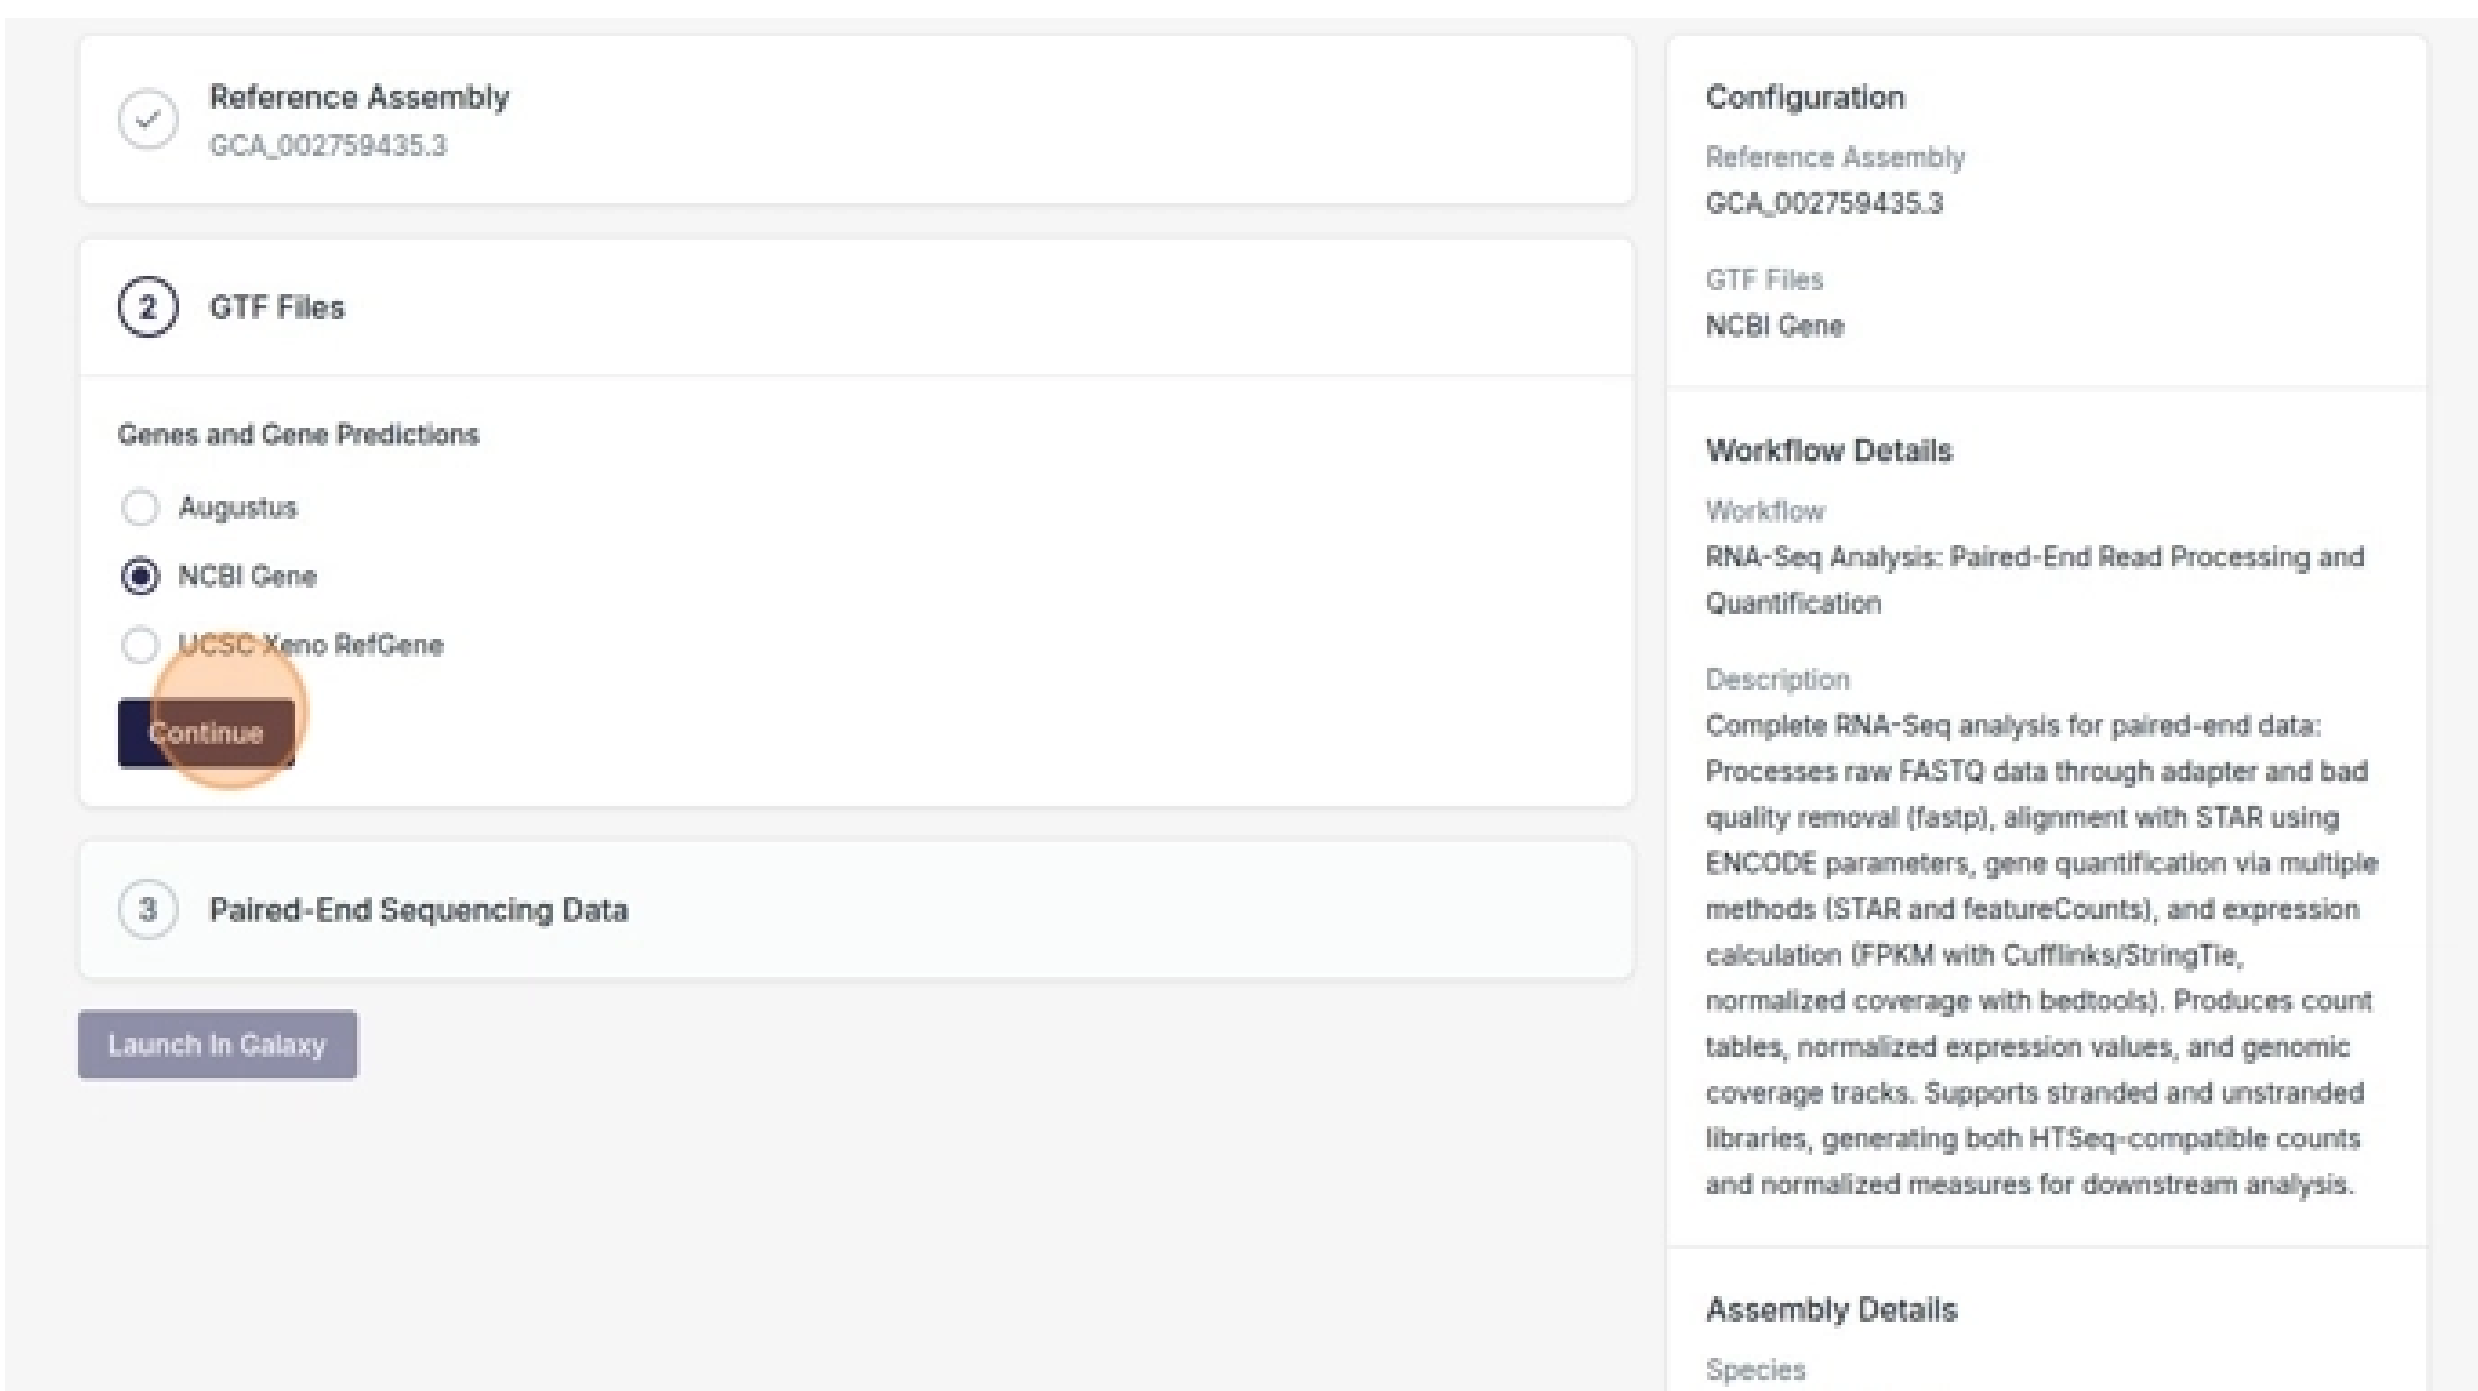

Figure 6: Step 6: Browse sequences

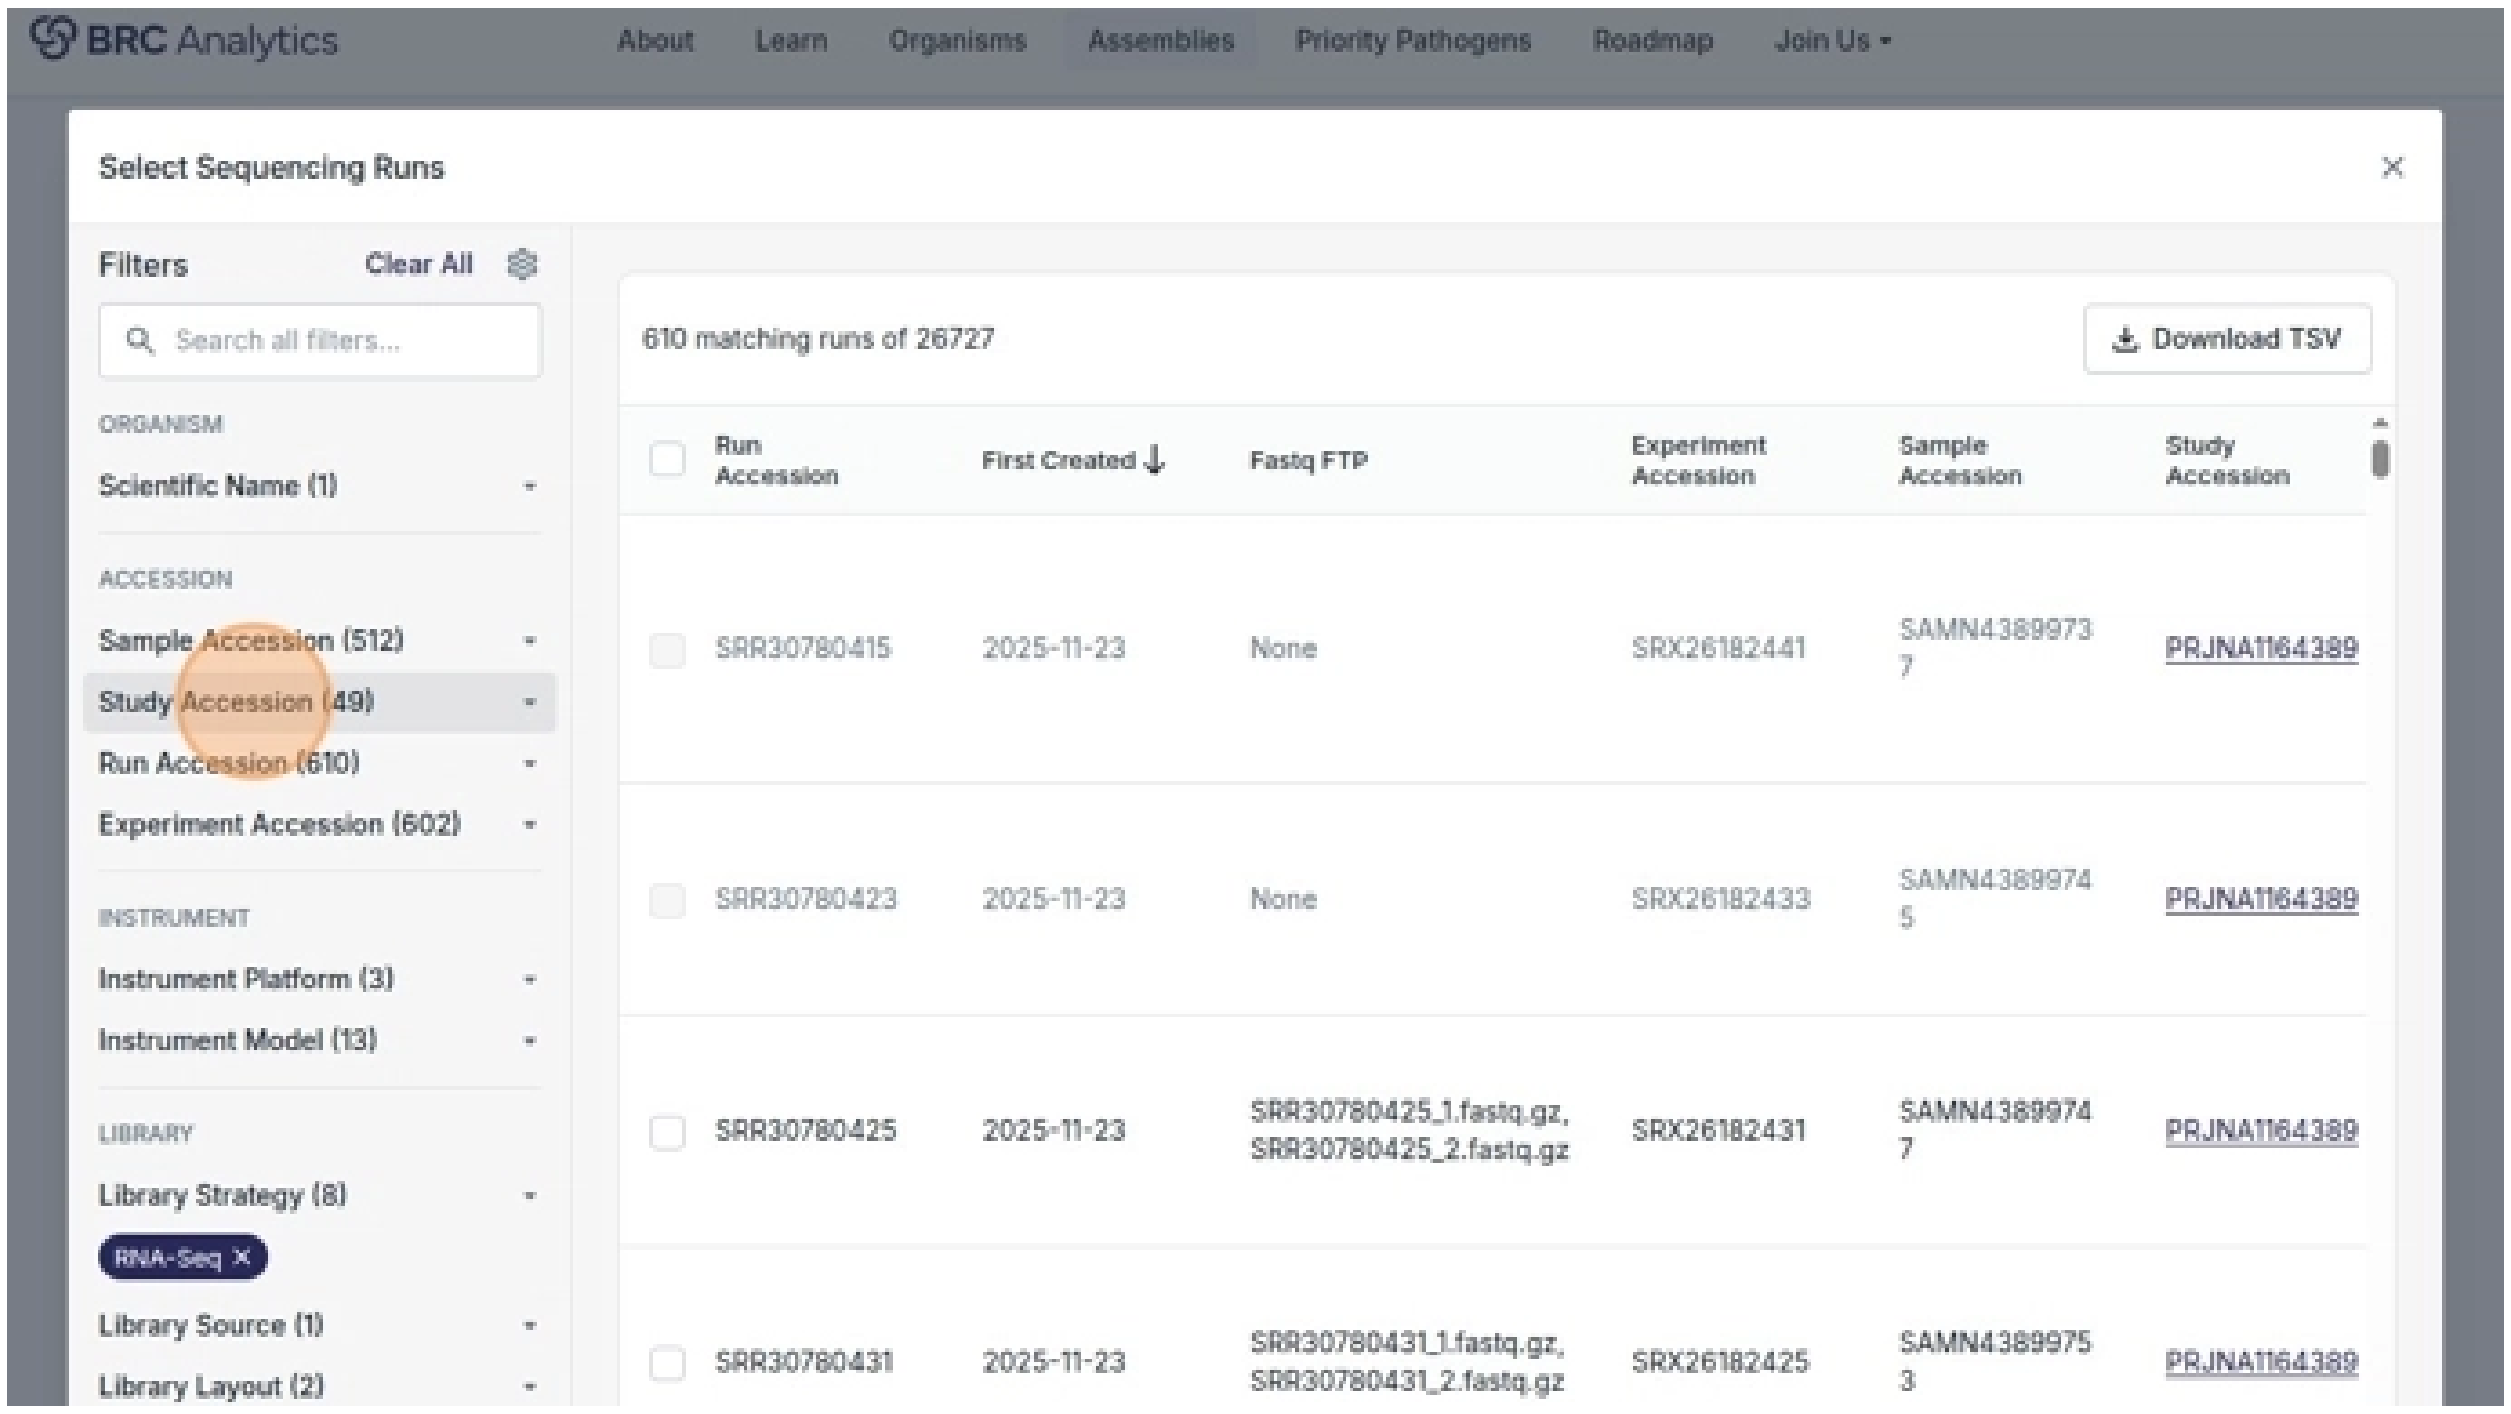

Figure 7: Step 7: Filter and select runs

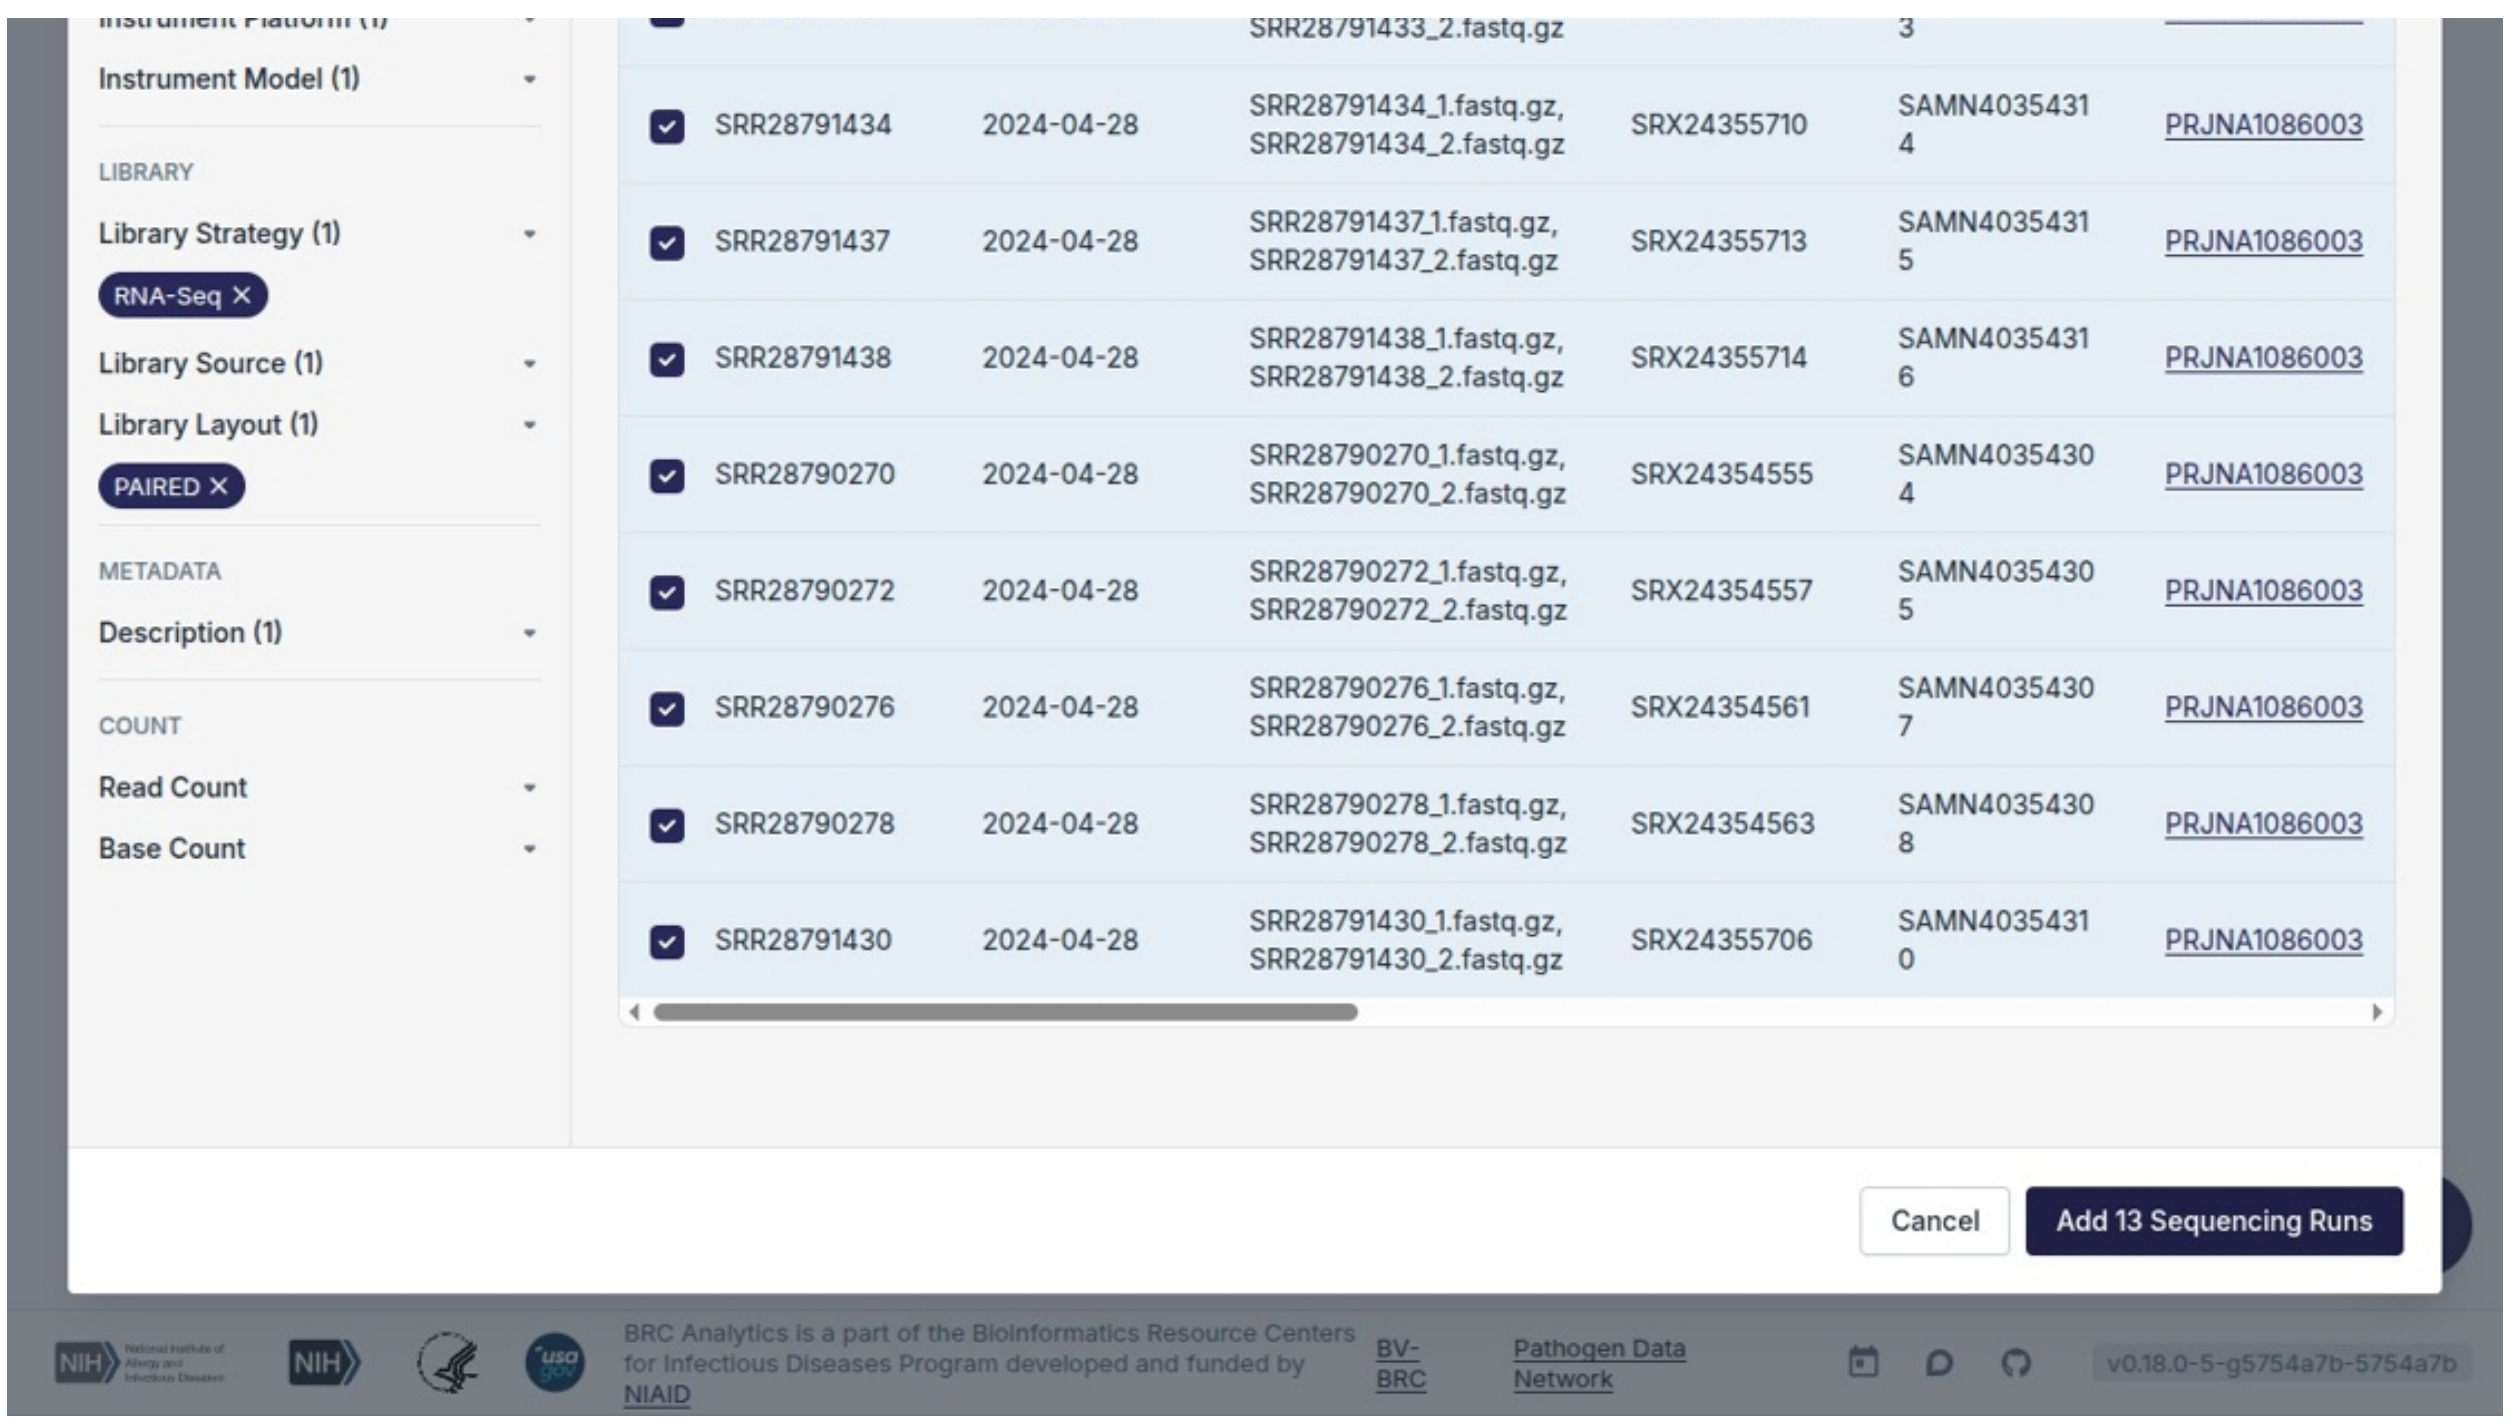

Figure 8: Step 8: Add sequencing runs

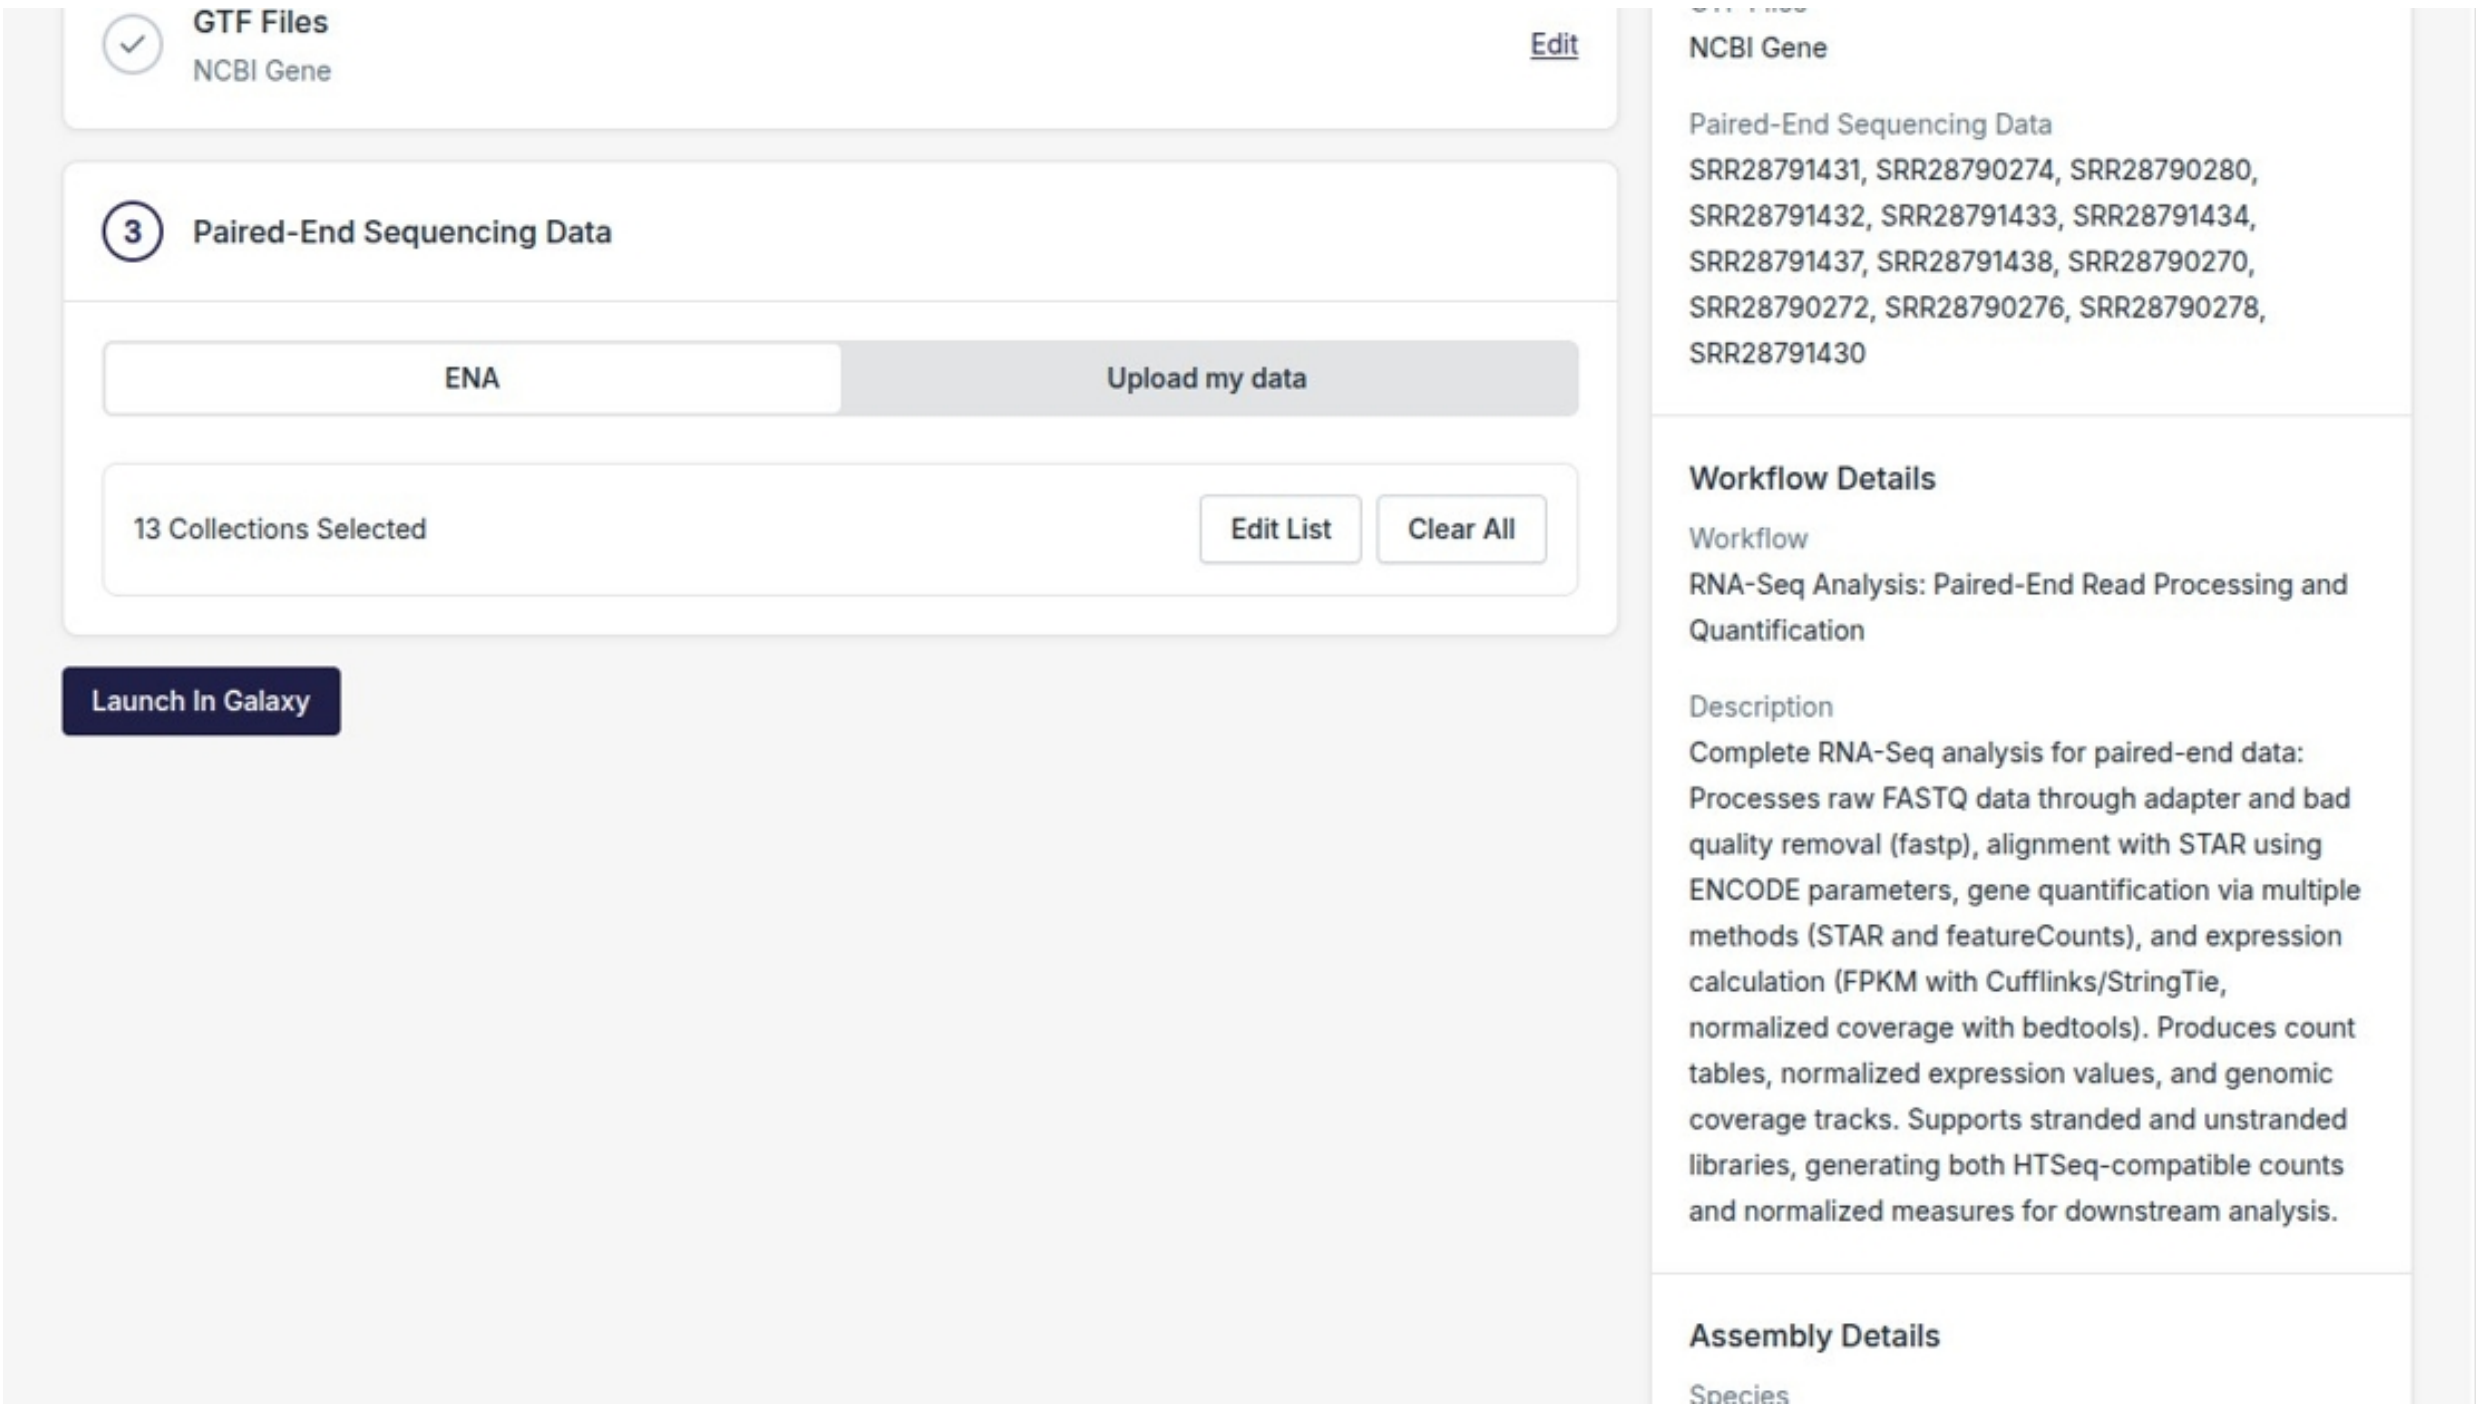

Figure 9: Step 9: Launch in Galaxy

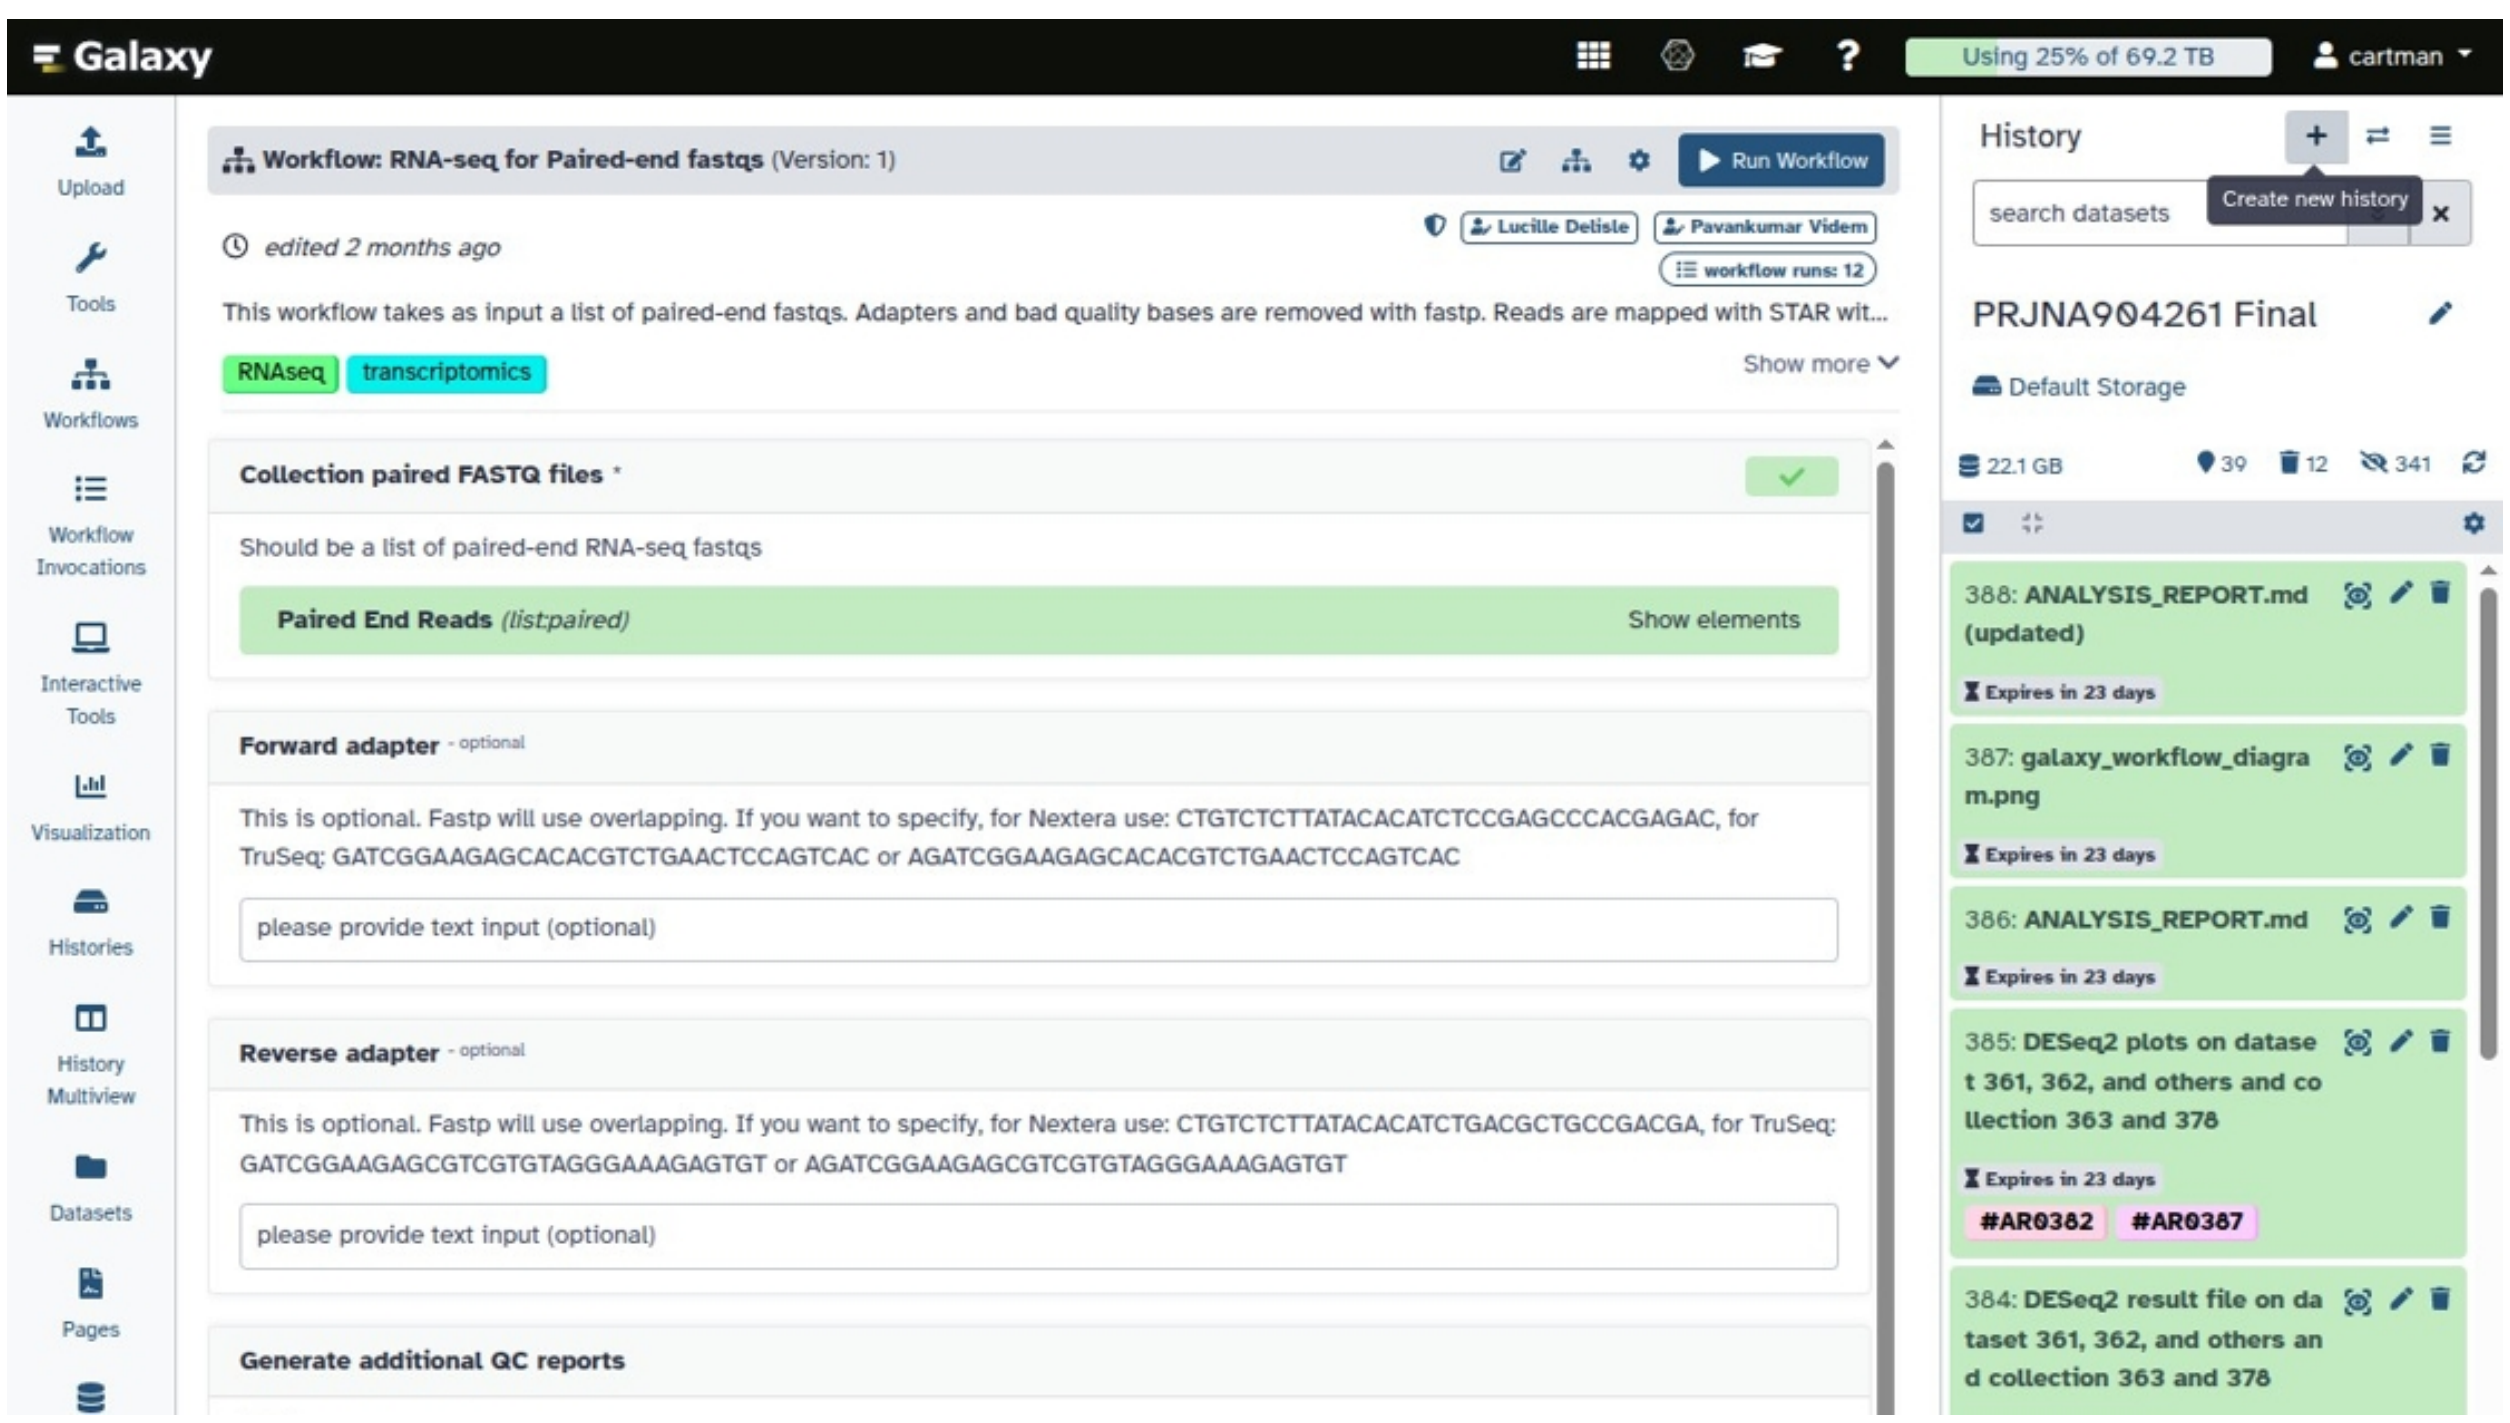

Figure 10: Step 10: Workflow icon

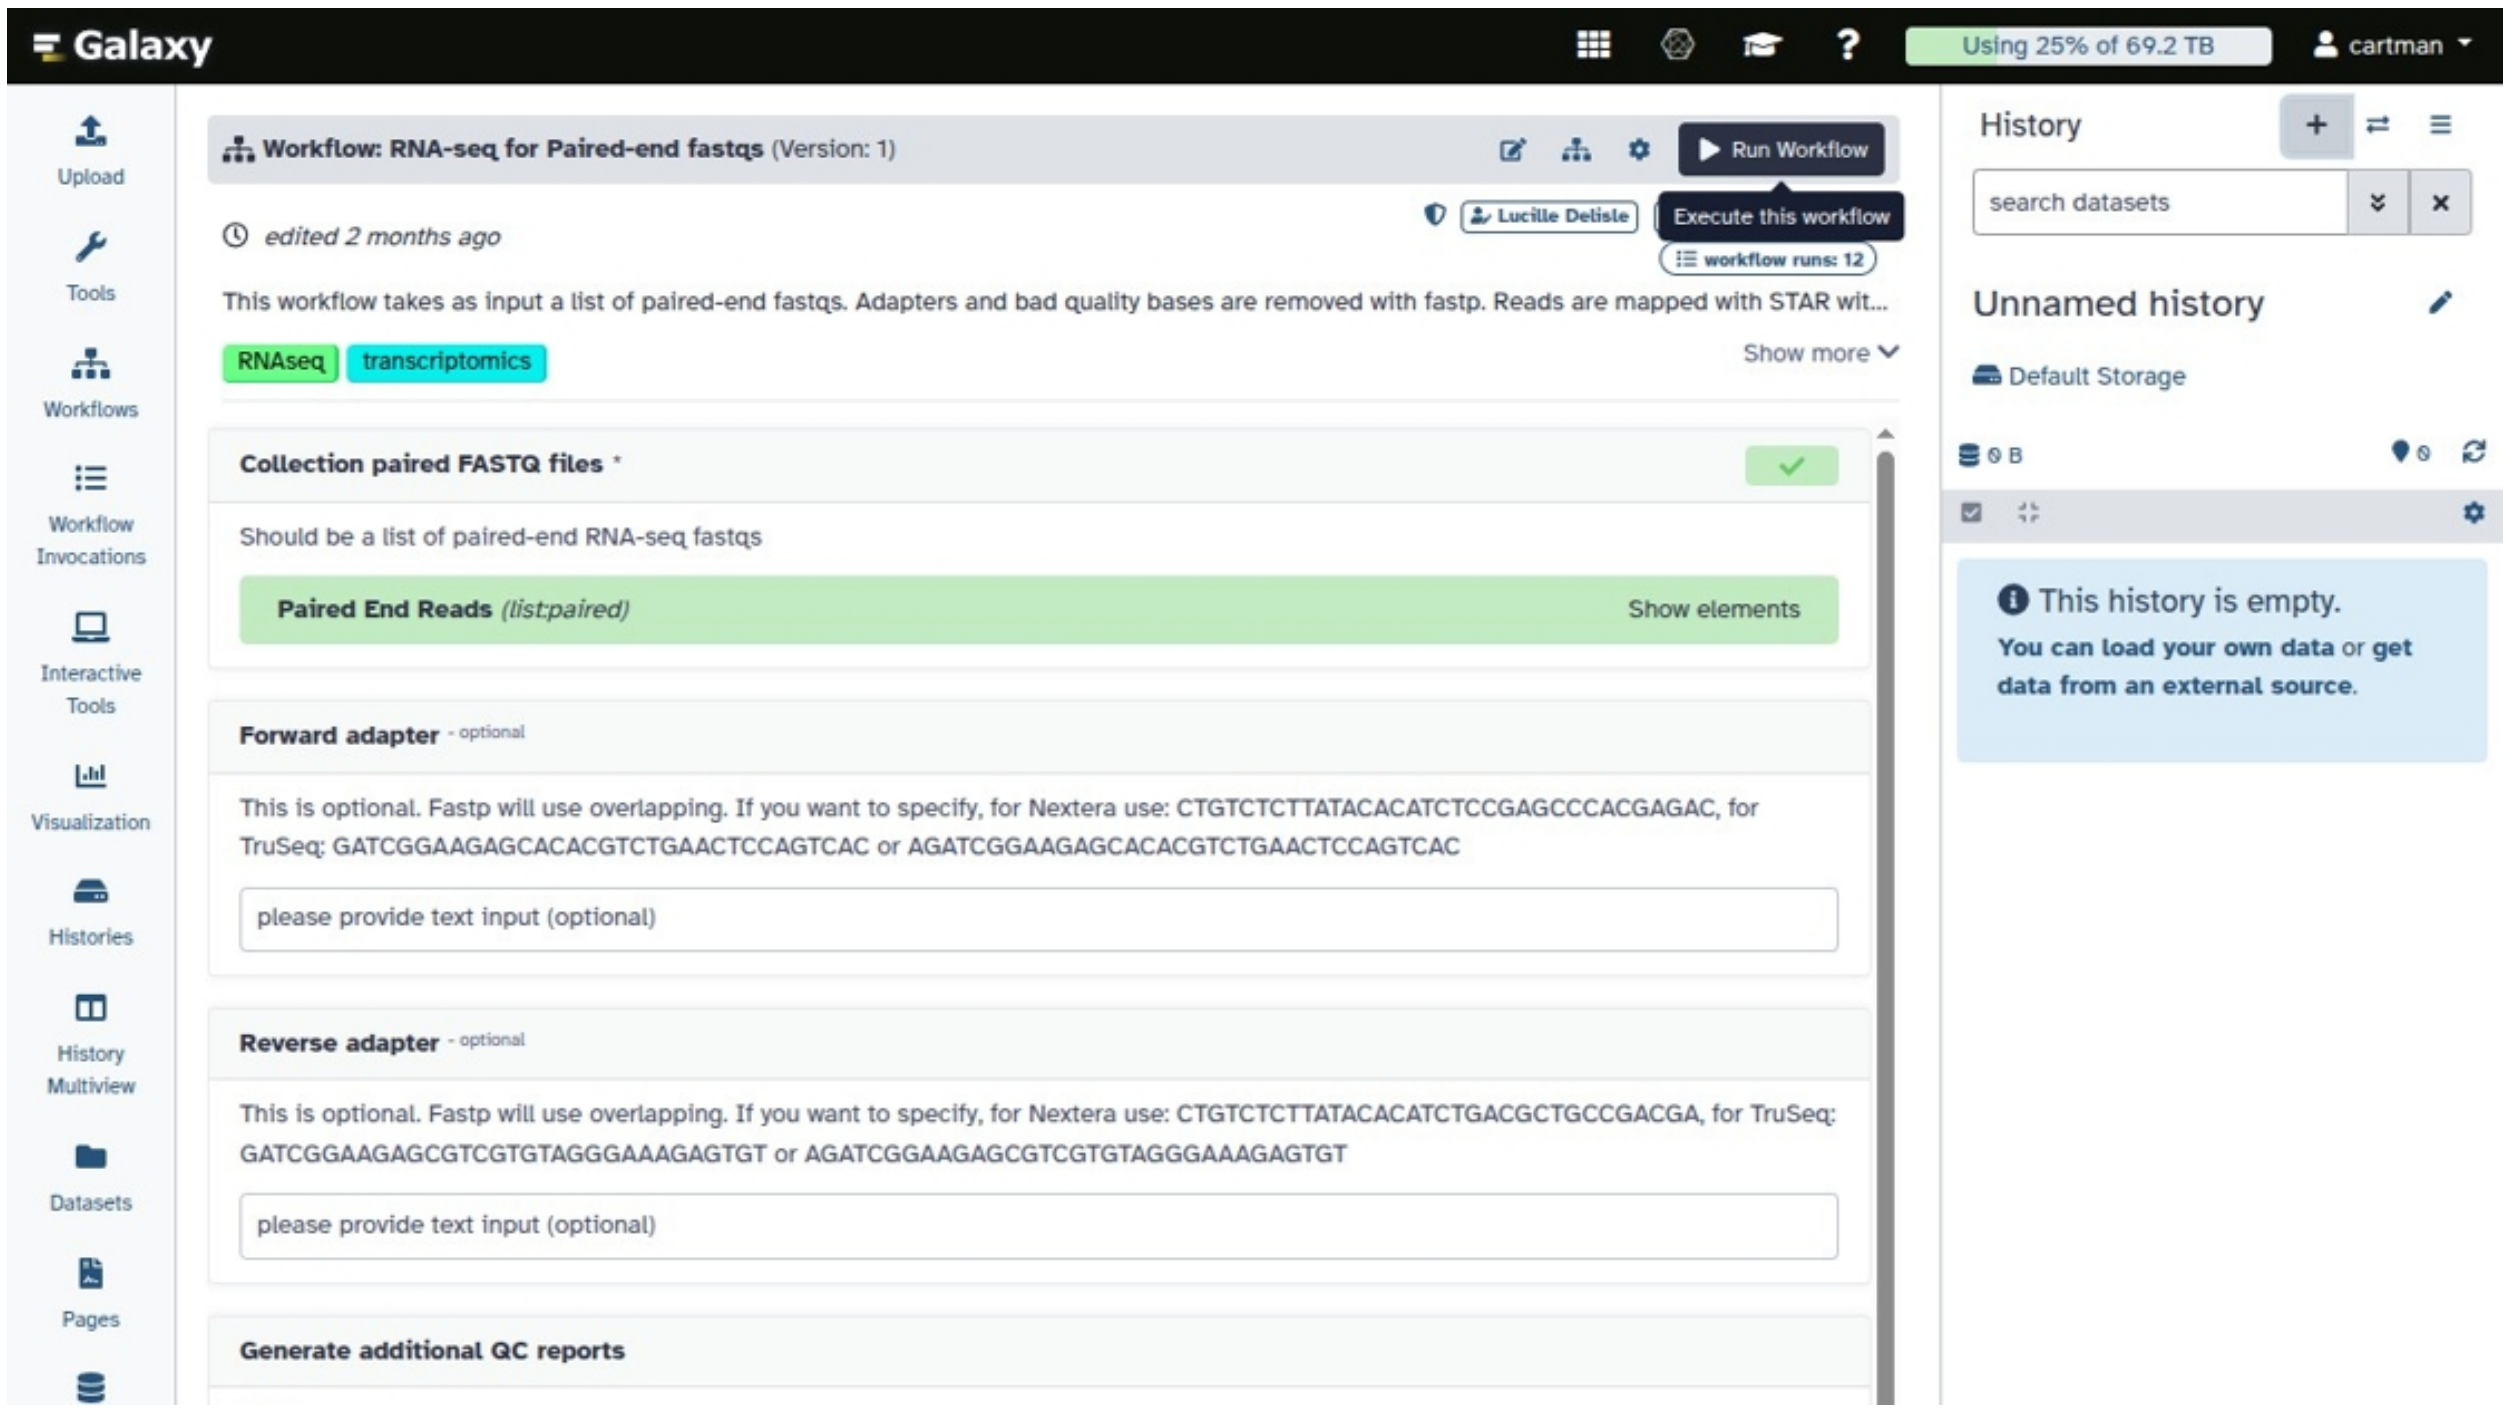

Figure 11: Step 11: Run Workflow

Result

After completion, Galaxy history contains:

- Quality-controlled reads (fastp)
- Aligned reads (STAR)
- Gene counts (featureCounts)
- Ready for differential expression analysis (DESeq2)

Source

Original Scribe tutorial by Anton Nekrutenko