

Problem 653: Two Sum IV - Input is a BST

Problem Information

Difficulty: [Easy](#)

Acceptance Rate: 0.00%

Paid Only: No

Problem Description

Given the

root

of a binary search tree and an integer

k

, return

true

if there exist two elements in the BST such that their sum is equal to

k

,


or

false

otherwise

.

Example 1:

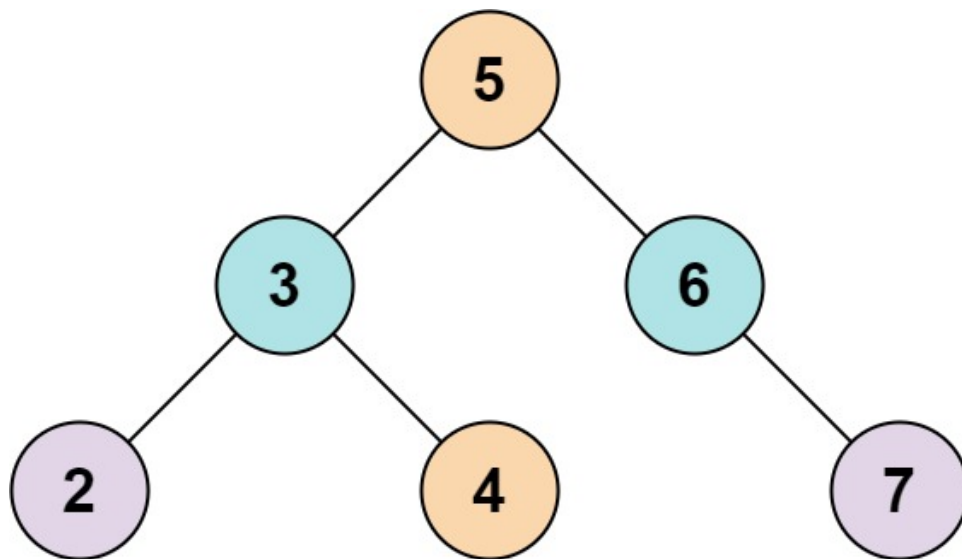


Input:

root = [5,3,6,2,4,null,7], k = 9

Output:

true

Example 2:

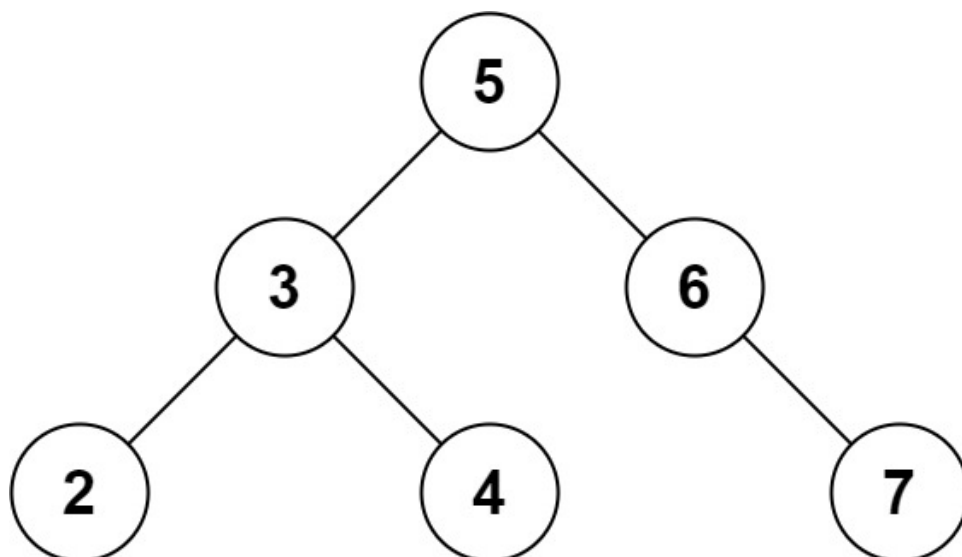

Input:

root = [5,3,6,2,4,null,7], k = 28

Output:

false

Constraints:

The number of nodes in the tree is in the range

[1, 10

4

]

.

-10

4

$\leq \text{Node.val} \leq 10$

4

root

is guaranteed to be a

valid

binary search tree.

-10

5

$\leq k \leq 10$

Code Snippets

C++:

```
/**
 * Definition for a binary tree node.
 * struct TreeNode {
 *   int val;
 *   TreeNode *left;
 *   TreeNode *right;
 *   TreeNode() : val(0), left(nullptr), right(nullptr) {}
 *   TreeNode(int x) : val(x), left(nullptr), right(nullptr) {}
 *   TreeNode(int x, TreeNode *left, TreeNode *right) : val(x), left(left),
 *   right(right) {}
 * };
 */
class Solution {
public:
    bool findTarget(TreeNode* root, int k) {

    }
};
```

Java:

```
/**
 * Definition for a binary tree node.
 * public class TreeNode {
 *   int val;
 *   TreeNode left;
 *   TreeNode right;
 *   TreeNode() {}
 *   TreeNode(int val) { this.val = val; }
 *   TreeNode(int val, TreeNode left, TreeNode right) {
 *     this.val = val;
 *     this.left = left;
 *     this.right = right;
 *   }
 * }
```

```

*/
class Solution {
public boolean findTarget(TreeNode root, int k) {

}

}

```

Python3:

```

# Definition for a binary tree node.
# class TreeNode:
# def __init__(self, val=0, left=None, right=None):
# self.val = val
# self.left = left
# self.right = right
class Solution:
def findTarget(self, root: Optional[TreeNode], k: int) -> bool:

```

Python:

```

# Definition for a binary tree node.
# class TreeNode(object):
# def __init__(self, val=0, left=None, right=None):
# self.val = val
# self.left = left
# self.right = right
class Solution(object):
def findTarget(self, root, k):
"""
:type root: Optional[TreeNode]
:type k: int
:rtype: bool
"""

```

JavaScript:

```

/**
 * Definition for a binary tree node.
 * function TreeNode(val, left, right) {
 * this.val = (val===undefined ? 0 : val)
 * this.left = (left===undefined ? null : left)
 * this.right = (right===undefined ? null : right)

```

```

* }
*/
/**
 * @param {TreeNode} root
 * @param {number} k
 * @return {boolean}
 */
var findTarget = function(root, k) {

};

```

TypeScript:

```

/**
 * Definition for a binary tree node.
 * class TreeNode {
 *   val: number
 *   left: TreeNode | null
 *   right: TreeNode | null
 *   constructor(val?: number, left?: TreeNode | null, right?: TreeNode | null)
 *   {
 *     this.val = (val===undefined ? 0 : val)
 *     this.left = (left===undefined ? null : left)
 *     this.right = (right===undefined ? null : right)
 *   }
 * }
 */

function findTarget(root: TreeNode | null, k: number): boolean {

};

```

C#:

```

/**
 * Definition for a binary tree node.
 * public class TreeNode {
 *   public int val;
 *   public TreeNode left;
 *   public TreeNode right;
 *   public TreeNode(int val=0, TreeNode left=null, TreeNode right=null) {
 *     this.val = val;

```

```

    * this.left = left;
    * this.right = right;
    * }
    * }
    */
public class Solution {
    public bool FindTarget(TreeNode root, int k) {

    }
}

```

C:

```

/**
 * Definition for a binary tree node.
 * struct TreeNode {
 *     int val;
 *     struct TreeNode *left;
 *     struct TreeNode *right;
 * };
 */
bool findTarget(struct TreeNode* root, int k) {

}

```

Go:

```

/**
 * Definition for a binary tree node.
 * type TreeNode struct {
 *     Val int
 *     Left *TreeNode
 *     Right *TreeNode
 * }
 */
func findTarget(root *TreeNode, k int) bool {

}

```

Kotlin:

```

/**
 * Example:
 * var ti = TreeNode(5)
 * var v = ti.`val`
 * Definition for a binary tree node.
 * class TreeNode(var `val`: Int) {
 *   var left: TreeNode? = null
 *   var right: TreeNode? = null
 * }
 */
class Solution {
fun findTarget(root: TreeNode?, k: Int): Boolean {

}
}

```

Swift:

```

/**
 * Definition for a binary tree node.
 * public class TreeNode {
 *   public var val: Int
 *   public var left: TreeNode?
 *   public var right: TreeNode?
 *   public init() { self.val = 0; self.left = nil; self.right = nil; }
 *   public init(_ val: Int) { self.val = val; self.left = nil; self.right =
nil; }
 *   public init(_ val: Int, _ left: TreeNode?, _ right: TreeNode?) {
 *     self.val = val
 *     self.left = left
 *     self.right = right
 *   }
 * }
 */
class Solution {
func findTarget(_ root: TreeNode?, _ k: Int) -> Bool {

}
}

```

Rust:

```

// Definition for a binary tree node.
// #[derive(Debug, PartialEq, Eq)]
// pub struct TreeNode {
//     pub val: i32,
//     pub left: Option<Rc<RefCell<TreeNode>>>,
//     pub right: Option<Rc<RefCell<TreeNode>>>,
// }
//
// impl TreeNode {
//     #[inline]
//     pub fn new(val: i32) -> Self {
//         TreeNode {
//             val,
//             left: None,
//             right: None
//         }
//     }
// }
// }

use std::rc::Rc;
use std::cell::RefCell;
impl Solution {
    pub fn find_target(root: Option<Rc<RefCell<TreeNode>>>, k: i32) -> bool {

    }
}

```

Ruby:

```

# Definition for a binary tree node.
# class TreeNode
#   attr_accessor :val, :left, :right
#   def initialize(val = 0, left = nil, right = nil)
#     @val = val
#     @left = left
#     @right = right
#   end
# end

# @param {TreeNode} root
# @param {Integer} k
# @return {Boolean}
def find_target(root, k)

end

```

PHP:

```
/**
 * Definition for a binary tree node.
 * class TreeNode {
 * public $val = null;
 * public $left = null;
 * public $right = null;
 * function __construct($val = 0, $left = null, $right = null) {
 * $this->val = $val;
 * $this->left = $left;
 * $this->right = $right;
 * }
 * }
 */
class Solution {

/**
 * @param TreeNode $root
 * @param Integer $k
 * @return Boolean
 */
function findTarget($root, $k) {

}

}
```

Dart:

```
/**
 * Definition for a binary tree node.
 * class TreeNode {
 * int val;
 * TreeNode? left;
 * TreeNode? right;
 * TreeNode([this.val = 0, this.left, this.right]);
 * }
 */
class Solution {
  bool findTarget(TreeNode? root, int k) {

  }
}
```

```
}
```

Scala:

```
/**
 * Definition for a binary tree node.
 * class TreeNode(_value: Int = 0, _left: TreeNode = null, _right: TreeNode =
null) {
 *   var value: Int = _value
 *   var left: TreeNode = _left
 *   var right: TreeNode = _right
 * }
 */
object Solution {
  def findTarget(root: TreeNode, k: Int): Boolean = {

  }
}
```

Elixir:

```
# Definition for a binary tree node.
#
# defmodule TreeNode do
#   @type t :: %__MODULE__{
#     val: integer,
#     left: TreeNode.t() | nil,
#     right: TreeNode.t() | nil
#   }
#   defstruct val: 0, left: nil, right: nil
# end

defmodule Solution do
  @spec find_target(root :: TreeNode.t() | nil, k :: integer) :: boolean
  def find_target(root, k) do

  end
end
```

Erlang:

```

%% Definition for a binary tree node.
%%
%% -record(tree_node, {val = 0 :: integer(),
%% left = null :: 'null' | #tree_node{},
%% right = null :: 'null' | #tree_node{}}).

-spec find_target(Root :: #tree_node{} | null, K :: integer()) -> boolean().
find_target(Root, K) ->
.

```

Racket:

```

; Definition for a binary tree node.
#|

; val : integer?
; left : (or/c tree-node? #f)
; right : (or/c tree-node? #f)
(struct tree-node
  (val left right) #:mutable #:transparent)

; constructor
(define (make-tree-node [val 0])
  (tree-node val #f #f))

|#

(define/contract (find-target root k)
  (-> (or/c tree-node? #f) exact-integer? boolean?)
)

```

Solutions

C++ Solution:

```

/*
 * Problem: Two Sum IV - Input is a BST
 * Difficulty: Easy
 * Tags: array, tree, hash, search
 *
 * Approach: Use two pointers or sliding window technique
 */

```

```

* Time Complexity: O(n) or O(n log n)
* Space Complexity: O(h) for recursion stack where h is height
*/

/**
* Definition for a binary tree node.
* struct TreeNode {
*   int val;
*   TreeNode *left;
*   TreeNode *right;
*   TreeNode() : val(0), left(nullptr), right(nullptr) {
// TODO: Implement optimized solution
return 0;
}
*   TreeNode(int x) : val(x), left(nullptr), right(nullptr) {
// TODO: Implement optimized solution
return 0;
}
*   TreeNode(int x, TreeNode *left, TreeNode *right) : val(x), left(left),
right(right) {
// TODO: Implement optimized solution
return 0;
}
* };
*/
class Solution {
public:
bool findTarget(TreeNode* root, int k) {

}
};

```

Java Solution:

```

/**
* Problem: Two Sum IV - Input is a BST
* Difficulty: Easy
* Tags: array, tree, hash, search
*
* Approach: Use two pointers or sliding window technique
* Time Complexity: O(n) or O(n log n)

```

```

* Space Complexity: O(h) for recursion stack where h is height
*/

/**
* Definition for a binary tree node.
* public class TreeNode {
*   int val;
*   TreeNode left;
*   TreeNode right;
*   TreeNode() {
// TODO: Implement optimized solution
return 0;
}
*   TreeNode(int val) { this.val = val; }
*   TreeNode(int val, TreeNode left, TreeNode right) {
*     this.val = val;
*     this.left = left;
*     this.right = right;
*   }
* }
*/

class Solution {
public boolean findTarget(TreeNode root, int k) {

}
}

```

Python3 Solution:

```

"""
Problem: Two Sum IV - Input is a BST
Difficulty: Easy
Tags: array, tree, hash, search

Approach: Use two pointers or sliding window technique
Time Complexity: O(n) or O(n log n)
Space Complexity: O(h) for recursion stack where h is height
"""

# Definition for a binary tree node.
# class TreeNode:

```

```

# def __init__(self, val=0, left=None, right=None):
# self.val = val
# self.left = left
# self.right = right
class Solution:
def findTarget(self, root: Optional[TreeNode], k: int) -> bool:
# TODO: Implement optimized solution
pass

```

Python Solution:

```

# Definition for a binary tree node.
# class TreeNode(object):
# def __init__(self, val=0, left=None, right=None):
# self.val = val
# self.left = left
# self.right = right
class Solution(object):
def findTarget(self, root, k):
"""
:type root: Optional[TreeNode]
:type k: int
:rtype: bool
"""

```

JavaScript Solution:

```

/**
 * Problem: Two Sum IV - Input is a BST
 * Difficulty: Easy
 * Tags: array, tree, hash, search
 *
 * Approach: Use two pointers or sliding window technique
 * Time Complexity: O(n) or O(n log n)
 * Space Complexity: O(h) for recursion stack where h is height
 */

/**
 * Definition for a binary tree node.
 * function TreeNode(val, left, right) {
 * this.val = (val===undefined ? 0 : val)

```

```

* this.left = (left===undefined ? null : left)
* this.right = (right===undefined ? null : right)
* }
*/
/**
* @param {TreeNode} root
* @param {number} k
* @return {boolean}
*/
var findTarget = function(root, k) {

};

```

TypeScript Solution:

```

/**
* Problem: Two Sum IV - Input is a BST
* Difficulty: Easy
* Tags: array, tree, hash, search
*
* Approach: Use two pointers or sliding window technique
* Time Complexity: O(n) or O(n log n)
* Space Complexity: O(h) for recursion stack where h is height
*/

/**
* Definition for a binary tree node.
* class TreeNode {
*   val: number
*   left: TreeNode | null
*   right: TreeNode | null
*   constructor(val?: number, left?: TreeNode | null, right?: TreeNode | null)
*   {
*     this.val = (val===undefined ? 0 : val)
*     this.left = (left===undefined ? null : left)
*     this.right = (right===undefined ? null : right)
*   }
* }
*/

function findTarget(root: TreeNode | null, k: number): boolean {

```

```
};
```

C# Solution:

```
/*
 * Problem: Two Sum IV - Input is a BST
 * Difficulty: Easy
 * Tags: array, tree, hash, search
 *
 * Approach: Use two pointers or sliding window technique
 * Time Complexity: O(n) or O(n log n)
 * Space Complexity: O(h) for recursion stack where h is height
 */

/**
 * Definition for a binary tree node.
 * public class TreeNode {
 * public int val;
 * public TreeNode left;
 * public TreeNode right;
 * public TreeNode(int val=0, TreeNode left=null, TreeNode right=null) {
 * this.val = val;
 * this.left = left;
 * this.right = right;
 * }
 * }
 */
public class Solution {
    public bool FindTarget(TreeNode root, int k) {

    }
}
```

C Solution:

```
/*
 * Problem: Two Sum IV - Input is a BST
 * Difficulty: Easy
 * Tags: array, tree, hash, search
 *
```

```

* Approach: Use two pointers or sliding window technique
* Time Complexity: O(n) or O(n log n)
* Space Complexity: O(h) for recursion stack where h is height
*/

/**
* Definition for a binary tree node.
* struct TreeNode {
*   int val;
*   struct TreeNode *left;
*   struct TreeNode *right;
* };
*/
bool findTarget(struct TreeNode* root, int k) {

}

```

Go Solution:

```

// Problem: Two Sum IV - Input is a BST
// Difficulty: Easy
// Tags: array, tree, hash, search
//
// Approach: Use two pointers or sliding window technique
// Time Complexity: O(n) or O(n log n)
// Space Complexity: O(h) for recursion stack where h is height

/**
* Definition for a binary tree node.
* type TreeNode struct {
*   Val int
*   Left *TreeNode
*   Right *TreeNode
* }
*/
func findTarget(root *TreeNode, k int) bool {

}

```

Kotlin Solution:

```

/**
 * Example:
 * var ti = TreeNode(5)
 * var v = ti.`val`
 * Definition for a binary tree node.
 * class TreeNode(var `val`: Int) {
 *   var left: TreeNode? = null
 *   var right: TreeNode? = null
 * }
 */
class Solution {
fun findTarget(root: TreeNode?, k: Int): Boolean {

}

}

```

Swift Solution:

```

/**
 * Definition for a binary tree node.
 * public class TreeNode {
 *   public var val: Int
 *   public var left: TreeNode?
 *   public var right: TreeNode?
 *   public init() { self.val = 0; self.left = nil; self.right = nil; }
 *   public init(_ val: Int) { self.val = val; self.left = nil; self.right =
nil; }
 *   public init(_ val: Int, _ left: TreeNode?, _ right: TreeNode?) {
 *     self.val = val
 *     self.left = left
 *     self.right = right
 *   }
 * }
 */
class Solution {
func findTarget(_ root: TreeNode?, _ k: Int) -> Bool {

}

}

```

Rust Solution:

```

// Problem: Two Sum IV - Input is a BST
// Difficulty: Easy
// Tags: array, tree, hash, search
//
// Approach: Use two pointers or sliding window technique
// Time Complexity: O(n) or O(n log n)
// Space Complexity: O(h) for recursion stack where h is height

// Definition for a binary tree node.
// #[derive(Debug, PartialEq, Eq)]
// pub struct TreeNode {
//     pub val: i32,
//     pub left: Option<Rc<RefCell<TreeNode>>>,
//     pub right: Option<Rc<RefCell<TreeNode>>>,
// }
//
// impl TreeNode {
//     #[inline]
//     pub fn new(val: i32) -> Self {
//         TreeNode {
//             val,
//             left: None,
//             right: None
//         }
//     }
// }

use std::rc::Rc;
use std::cell::RefCell;

impl Solution {
    pub fn find_target(root: Option<Rc<RefCell<TreeNode>>>, k: i32) -> bool {

    }
}

```

Ruby Solution:

```

# Definition for a binary tree node.
# class TreeNode
#   attr_accessor :val, :left, :right
#   def initialize(val = 0, left = nil, right = nil)
#     @val = val
#     @left = left

```

```

# @right = right
# end
# end
# @param {TreeNode} root
# @param {Integer} k
# @return {Boolean}
def find_target(root, k)

end

```

PHP Solution:

```

/**
 * Definition for a binary tree node.
 * class TreeNode {
 * public $val = null;
 * public $left = null;
 * public $right = null;
 * function __construct($val = 0, $left = null, $right = null) {
 * $this->val = $val;
 * $this->left = $left;
 * $this->right = $right;
 * }
 * }
 */
class Solution {

    /**
     * @param TreeNode $root
     * @param Integer $k
     * @return Boolean
     */
    function findTarget($root, $k) {

    }

}

```

Dart Solution:

```

/**
 * Definition for a binary tree node.

```

```

* class TreeNode {
*   int val;
*   TreeNode? left;
*   TreeNode? right;
*   TreeNode([this.val = 0, this.left, this.right]);
* }
*/
class Solution {
  bool findTarget(TreeNode? root, int k) {

  }
}

```

Scala Solution:

```

/**
 * Definition for a binary tree node.
 * class TreeNode(_value: Int = 0, _left: TreeNode = null, _right: TreeNode =
 * null) {
 *   var value: Int = _value
 *   var left: TreeNode = _left
 *   var right: TreeNode = _right
 * }
 */
object Solution {
  def findTarget(root: TreeNode, k: Int): Boolean = {

  }
}

```

Elixir Solution:

```

# Definition for a binary tree node.
#
# defmodule TreeNode do
#   @type t :: %__MODULE__{
#     val: integer,
#     left: TreeNode.t() | nil,
#     right: TreeNode.t() | nil
#   }
#   defstruct val: 0, left: nil, right: nil

```

```

# end

defmodule Solution do
  @spec find_target(root :: TreeNode.t | nil, k :: integer) :: boolean
  def find_target(root, k) do

  end
end

```

Erlang Solution:

```

%% Definition for a binary tree node.
%%
%% -record(tree_node, {val = 0 :: integer(),
%% left = null :: 'null' | #tree_node{},
%% right = null :: 'null' | #tree_node{}}).

-spec find_target(Root :: #tree_node{} | null, K :: integer()) -> boolean().
find_target(Root, K) ->
.

```

Racket Solution:

```

; Definition for a binary tree node.
#|

; val : integer?
; left : (or/c tree-node? #f)
; right : (or/c tree-node? #f)
(struct tree-node
  (val left right) #:mutable #:transparent)

; constructor
(define (make-tree-node [val 0])
  (tree-node val #f #f))

|#

(define/contract (find-target root k)
  (-> (or/c tree-node? #f) exact-integer? boolean?)
)

```

