

# Problem 2236: Root Equals Sum of Children

## Problem Information

**Difficulty:** Easy

**Acceptance Rate:** 0.00%

**Paid Only:** No

## Problem Description

You are given the

root

of a

binary tree

that consists of exactly

3

nodes: the root, its left child, and its right child.

Return

true

if the value of the root is equal to the

sum


of the values of its two children, or

false

otherwise

.

Example 1:

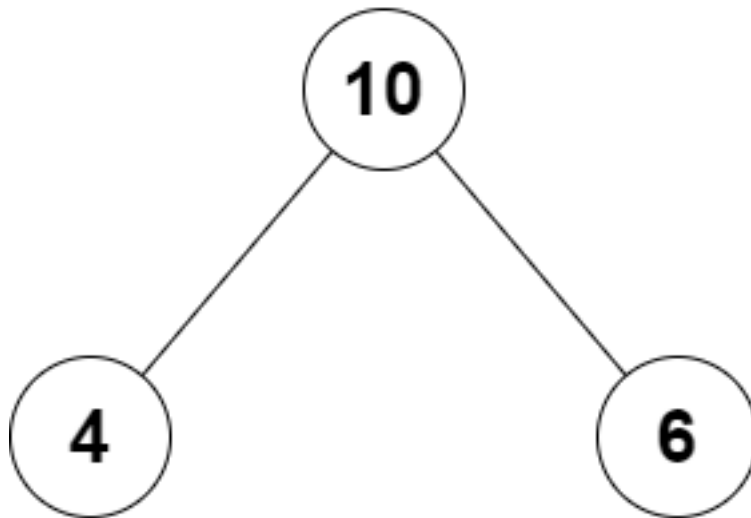

Input:

root = [10,4,6]


Output:

true

Explanation:

The values of the root, its left child, and its right child are 10, 4, and 6, respectively. 10 is equal to  $4 + 6$ , so we return true.

Example 2:

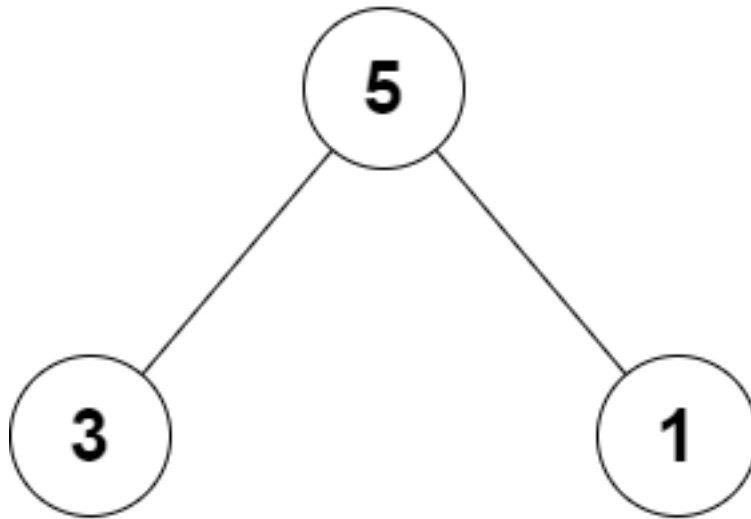

Input:

root = [5,3,1]

Output:

false

Explanation:

The values of the root, its left child, and its right child are 5, 3, and 1, respectively. 5 is not equal to  $3 + 1$ , so we return false.

Constraints:

The tree consists only of the root, its left child, and its right child.

$-100 \leq \text{Node.val} \leq 100$

## Code Snippets

**C++:**

```
/**
 * Definition for a binary tree node.
 * struct TreeNode {
```

```

* int val;
* TreeNode *left;
* TreeNode *right;
* TreeNode() : val(0), left(nullptr), right(nullptr) {}
* TreeNode(int x) : val(x), left(nullptr), right(nullptr) {}
* TreeNode(int x, TreeNode *left, TreeNode *right) : val(x), left(left),
right(right) {}
* };
*/
class Solution {
public:
bool checkTree(TreeNode* root) {

}
};

```

## Java:

```

/**
 * Definition for a binary tree node.
 * public class TreeNode {
 *     int val;
 *     TreeNode left;
 *     TreeNode right;
 *     TreeNode() {}
 *     TreeNode(int val) { this.val = val; }
 *     TreeNode(int val, TreeNode left, TreeNode right) {
 *         this.val = val;
 *         this.left = left;
 *         this.right = right;
 *     }
 * }
 */
class Solution {
public boolean checkTree(TreeNode root) {

}

}

```

## Python3:

```

# Definition for a binary tree node.
# class TreeNode:
# def __init__(self, val=0, left=None, right=None):
# self.val = val
# self.left = left
# self.right = right
class Solution:
def checkTree(self, root: Optional[TreeNode]) -> bool:

```

## Python:

```

# Definition for a binary tree node.
# class TreeNode(object):
# def __init__(self, val=0, left=None, right=None):
# self.val = val
# self.left = left
# self.right = right
class Solution(object):
def checkTree(self, root):
    """
    :type root: Optional[TreeNode]
    :rtype: bool
    """

```

## JavaScript:

```

/**
 * Definition for a binary tree node.
 * function TreeNode(val, left, right) {
 *   this.val = (val===undefined ? 0 : val)
 *   this.left = (left===undefined ? null : left)
 *   this.right = (right===undefined ? null : right)
 * }
 */
/**
 * @param {TreeNode} root
 * @return {boolean}
 */
var checkTree = function(root) {

};

```

## TypeScript:

```

/**
 * Definition for a binary tree node.
 * class TreeNode {
 *   val: number
 *   left: TreeNode | null
 *   right: TreeNode | null
 *   constructor(val?: number, left?: TreeNode | null, right?: TreeNode | null)
 *   {
 *     this.val = (val===undefined ? 0 : val)
 *     this.left = (left===undefined ? null : left)
 *     this.right = (right===undefined ? null : right)
 *   }
 * }
 */

function checkTree(root: TreeNode | null): boolean {

};

```

## C#:

```

/**
 * Definition for a binary tree node.
 * public class TreeNode {
 *   public int val;
 *   public TreeNode left;
 *   public TreeNode right;
 *   public TreeNode(int val=0, TreeNode left=null, TreeNode right=null) {
 *     this.val = val;
 *     this.left = left;
 *     this.right = right;
 *   }
 * }
 */

public class Solution {
    public bool CheckTree(TreeNode root) {

    }
}

```

## C:

```

/**
 * Definition for a binary tree node.
 * struct TreeNode {
 *   int val;
 *   struct TreeNode *left;
 *   struct TreeNode *right;
 * };
 */
bool checkTree(struct TreeNode* root) {

}

```

## Go:

```

/**
 * Definition for a binary tree node.
 * type TreeNode struct {
 *   Val int
 *   Left *TreeNode
 *   Right *TreeNode
 * }
 */
func checkTree(root *TreeNode) bool {

}

```

## Kotlin:

```

/**
 * Example:
 * var ti = TreeNode(5)
 * var v = ti.`val`
 * Definition for a binary tree node.
 * class TreeNode(var `val`: Int) {
 *   var left: TreeNode? = null
 *   var right: TreeNode? = null
 * }
 */
class Solution {
    fun checkTree(root: TreeNode?): Boolean {

    }

}

```

## Swift:

```
/**
 * Definition for a binary tree node.
 * public class TreeNode {
 * public var val: Int
 * public var left: TreeNode?
 * public var right: TreeNode?
 * public init() { self.val = 0; self.left = nil; self.right = nil; }
 * public init(_ val: Int) { self.val = val; self.left = nil; self.right =
nil; }
 * public init(_ val: Int, _ left: TreeNode?, _ right: TreeNode?) {
 * self.val = val
 * self.left = left
 * self.right = right
 * }
 * }
 */
class Solution {
func checkTree(_ root: TreeNode?) -> Bool {

}

}
```

## Rust:

```
// Definition for a binary tree node.
// #[derive(Debug, PartialEq, Eq)]
// pub struct TreeNode {
// pub val: i32,
// pub left: Option<Rc<RefCell<TreeNode>>>,
// pub right: Option<Rc<RefCell<TreeNode>>>,
// }
//
// impl TreeNode {
// #[inline]
// pub fn new(val: i32) -> Self {
// TreeNode {
// val,
// left: None,
// right: None
// }
// }
```



```

// }
// }
use std::rc::Rc;
use std::cell::RefCell;
impl Solution {
pub fn check_tree(root: Option<Rc<RefCell<TreeNode>>>) -> bool {

}
}

```

## Ruby:

```

# Definition for a binary tree node.
# class TreeNode
# attr_accessor :val, :left, :right
# def initialize(val = 0, left = nil, right = nil)
# @val = val
# @left = left
# @right = right
# end
# end
# @param {TreeNode} root
# @return {Boolean}
def check_tree(root)

end

```

## PHP:

```

/**
 * Definition for a binary tree node.
 * class TreeNode {
 * public $val = null;
 * public $left = null;
 * public $right = null;
 * function __construct($val = 0, $left = null, $right = null) {
 * $this->val = $val;
 * $this->left = $left;
 * $this->right = $right;
 * }
 * }
 */

```

```

class Solution {

  /**
   * @param TreeNode $root
   * @return Boolean
   */
  function checkTree($root) {

  }

}

```

### Dart:

```

/**
 * Definition for a binary tree node.
 * class TreeNode {
 *   int val;
 *   TreeNode? left;
 *   TreeNode? right;
 *   TreeNode([this.val = 0, this.left, this.right]);
 * }
 */
class Solution {
  bool checkTree(TreeNode? root) {

  }

}

```

### Scala:

```

/**
 * Definition for a binary tree node.
 * class TreeNode(_value: Int = 0, _left: TreeNode = null, _right: TreeNode =
 * null) {
 *   var value: Int = _value
 *   var left: TreeNode = _left
 *   var right: TreeNode = _right
 * }
 */
object Solution {
  def checkTree(root: TreeNode): Boolean = {

```

```
}  
}
```

## Elixir:

```
# Definition for a binary tree node.  
#  
# defmodule TreeNode do  
#   @type t :: %__MODULE__{  
#     val: integer,  
#     left: TreeNode.t() | nil,  
#     right: TreeNode.t() | nil  
#   }  
#   defstruct val: 0, left: nil, right: nil  
# end  
  
defmodule Solution do  
  @spec check_tree(root :: TreeNode.t | nil) :: boolean  
  def check_tree(root) do  
  
    end  
  end
```

## Erlang:

```
%% Definition for a binary tree node.  
%%  
%% -record(tree_node, {val = 0 :: integer(),  
%% left = null :: 'null' | #tree_node{} ,  
%% right = null :: 'null' | #tree_node{}}).  
  
-spec check_tree(Root :: #tree_node{} | null) -> boolean().  
check_tree(Root) ->  
.
```

## Racket:

```
; Definition for a binary tree node.  
#|  
  
; val : integer?  
; left : (or/c tree-node? #f)
```

```

; right : (or/c tree-node? #f)
(struct tree-node
  (val left right) #:mutable #:transparent)

; constructor
(define (make-tree-node [val 0])
  (tree-node val #f #f))

|#

(define/contract (check-tree root)
  (-> (or/c tree-node? #f) boolean?)
)

```

## Solutions

### C++ Solution:

```

/*
 * Problem: Root Equals Sum of Children
 * Difficulty: Easy
 * Tags: tree, graph
 *
 * Approach: DFS or BFS traversal
 * Time Complexity: O(n) where n is number of nodes
 * Space Complexity: O(h) for recursion stack where h is height
 */

/**
 * Definition for a binary tree node.
 * struct TreeNode {
 *   int val;
 *   TreeNode *left;
 *   TreeNode *right;
 *   TreeNode() : val(0), left(nullptr), right(nullptr) {}
 *   // TODO: Implement optimized solution
 *   return 0;
 * }
 *
 * TreeNode(int x) : val(x), left(nullptr), right(nullptr) {}
 * // TODO: Implement optimized solution
 */

```

```

return 0;
}
* TreeNode(int x, TreeNode *left, TreeNode *right) : val(x), left(left),
right(right) {
// TODO: Implement optimized solution
return 0;
}
* };
*/
class Solution {
public:
bool checkTree(TreeNode* root) {

}
};

```

## Java Solution:

```

/**
 * Problem: Root Equals Sum of Children
 * Difficulty: Easy
 * Tags: tree, graph
 *
 * Approach: DFS or BFS traversal
 * Time Complexity: O(n) where n is number of nodes
 * Space Complexity: O(h) for recursion stack where h is height
 */

/**
 * Definition for a binary tree node.
 * public class TreeNode {
 *     int val;
 *     TreeNode left;
 *     TreeNode right;
 *     TreeNode() {
 * // TODO: Implement optimized solution
 * return 0;
 * }
 *     TreeNode(int val) { this.val = val; }
 *     TreeNode(int val, TreeNode left, TreeNode right) {
 *         this.val = val;

```

```

* this.left = left;
* this.right = right;
* }
* }
*/
class Solution {
public boolean checkTree(TreeNode root) {

}

}

```

### Python3 Solution:

```

"""
Problem: Root Equals Sum of Children
Difficulty: Easy
Tags: tree, graph

Approach: DFS or BFS traversal
Time Complexity: O(n) where n is number of nodes
Space Complexity: O(h) for recursion stack where h is height
"""

# Definition for a binary tree node.
# class TreeNode:
# def __init__(self, val=0, left=None, right=None):
# self.val = val
# self.left = left
# self.right = right
class Solution:
def checkTree(self, root: Optional[TreeNode]) -> bool:
# TODO: Implement optimized solution
pass

```

### Python Solution:

```

# Definition for a binary tree node.
# class TreeNode(object):
# def __init__(self, val=0, left=None, right=None):
# self.val = val
# self.left = left

```

```

# self.right = right
class Solution(object):
def checkTree(self, root):
    """
    :type root: Optional[TreeNode]
    :rtype: bool
    """

```

## JavaScript Solution:

```

/**
 * Problem: Root Equals Sum of Children
 * Difficulty: Easy
 * Tags: tree, graph
 *
 * Approach: DFS or BFS traversal
 * Time Complexity: O(n) where n is number of nodes
 * Space Complexity: O(h) for recursion stack where h is height
 */

/**
 * Definition for a binary tree node.
 * function TreeNode(val, left, right) {
 *   this.val = (val===undefined ? 0 : val)
 *   this.left = (left===undefined ? null : left)
 *   this.right = (right===undefined ? null : right)
 * }
 */

/**
 * @param {TreeNode} root
 * @return {boolean}
 */
var checkTree = function(root) {

};

```

## TypeScript Solution:

```

/**
 * Problem: Root Equals Sum of Children
 * Difficulty: Easy

```

```

* Tags: tree, graph
*
* Approach: DFS or BFS traversal
* Time Complexity: O(n) where n is number of nodes
* Space Complexity: O(h) for recursion stack where h is height
*/

/**
* Definition for a binary tree node.
* class TreeNode {
*   val: number
*   left: TreeNode | null
*   right: TreeNode | null
*   constructor(val?: number, left?: TreeNode | null, right?: TreeNode | null)
*   {
*     this.val = (val===undefined ? 0 : val)
*     this.left = (left===undefined ? null : left)
*     this.right = (right===undefined ? null : right)
*   }
* }
*/

function checkTree(root: TreeNode | null): boolean {

};

```

## C# Solution:

```

/*
* Problem: Root Equals Sum of Children
* Difficulty: Easy
* Tags: tree, graph
*
* Approach: DFS or BFS traversal
* Time Complexity: O(n) where n is number of nodes
* Space Complexity: O(h) for recursion stack where h is height
*/

/**
* Definition for a binary tree node.
* public class TreeNode {

```



```

* public int val;
* public TreeNode left;
* public TreeNode right;
* public TreeNode(int val=0, TreeNode left=null, TreeNode right=null) {
* this.val = val;
* this.left = left;
* this.right = right;
* }
* }
*/

public class Solution {
public bool CheckTree(TreeNode root) {

}

}

```

### C Solution:

```

/*
* Problem: Root Equals Sum of Children
* Difficulty: Easy
* Tags: tree, graph
*
* Approach: DFS or BFS traversal
* Time Complexity: O(n) where n is number of nodes
* Space Complexity: O(h) for recursion stack where h is height
*/

/**
* Definition for a binary tree node.
* struct TreeNode {
* int val;
* struct TreeNode *left;
* struct TreeNode *right;
* };
*/

bool checkTree(struct TreeNode* root) {

}

```

### Go Solution:

```

// Problem: Root Equals Sum of Children
// Difficulty: Easy
// Tags: tree, graph
//
// Approach: DFS or BFS traversal
// Time Complexity: O(n) where n is number of nodes
// Space Complexity: O(h) for recursion stack where h is height

/**
 * Definition for a binary tree node.
 * type TreeNode struct {
 *     Val int
 *     Left *TreeNode
 *     Right *TreeNode
 * }
 */
func checkTree(root *TreeNode) bool {

}

```

### Kotlin Solution:

```

/**
 * Example:
 * var ti = TreeNode(5)
 * var v = ti.`val`
 * Definition for a binary tree node.
 * class TreeNode(var `val`: Int) {
 *     var left: TreeNode? = null
 *     var right: TreeNode? = null
 * }
 */
class Solution {
    fun checkTree(root: TreeNode?): Boolean {

    }
}

```

### Swift Solution:

```

/**
 * Definition for a binary tree node.

```

```

* public class TreeNode {
* public var val: Int
* public var left: TreeNode?
* public var right: TreeNode?
* public init() { self.val = 0; self.left = nil; self.right = nil; }
* public init(_ val: Int) { self.val = val; self.left = nil; self.right =
nil; }
* public init(_ val: Int, _ left: TreeNode?, _ right: TreeNode?) {
* self.val = val
* self.left = left
* self.right = right
* }
* }
*/
class Solution {
func checkTree(_ root: TreeNode?) -> Bool {

}

}

```

## Rust Solution:

```

// Problem: Root Equals Sum of Children
// Difficulty: Easy
// Tags: tree, graph
//
// Approach: DFS or BFS traversal
// Time Complexity: O(n) where n is number of nodes
// Space Complexity: O(h) for recursion stack where h is height

// Definition for a binary tree node.
// #[derive(Debug, PartialEq, Eq)]
// pub struct TreeNode {
//     pub val: i32,
//     pub left: Option<Rc<RefCell<TreeNode>>>,
//     pub right: Option<Rc<RefCell<TreeNode>>>,
// }
//
// impl TreeNode {
//     #[inline]
//     pub fn new(val: i32) -> Self {

```

```

// TreeNode {
// val,
// left: None,
// right: None
// }
// }
// }

use std::rc::Rc;
use std::cell::RefCell;

impl Solution {
    pub fn check_tree(root: Option<Rc<RefCell<TreeNode>>>) -> bool {

    }
}

```

### Ruby Solution:

```

# Definition for a binary tree node.
# class TreeNode
# attr_accessor :val, :left, :right
# def initialize(val = 0, left = nil, right = nil)
# @val = val
# @left = left
# @right = right
# end
# end

# @param {TreeNode} root
# @return {Boolean}
def check_tree(root)

end

```

### PHP Solution:

```

/**
 * Definition for a binary tree node.
 * class TreeNode {
 * public $val = null;
 * public $left = null;
 * public $right = null;
 * function __construct($val = 0, $left = null, $right = null) {

```

```

* $this->val = $val;
* $this->left = $left;
* $this->right = $right;
* }
* }
*/
class Solution {

/**
 * @param TreeNode $root
 * @return Boolean
 */
function checkTree($root) {

}

}

```

### Dart Solution:

```

/**
 * Definition for a binary tree node.
 * class TreeNode {
 *   int val;
 *   TreeNode? left;
 *   TreeNode? right;
 *   TreeNode([this.val = 0, this.left, this.right]);
 * }
 */
class Solution {
  bool checkTree(TreeNode? root) {

  }

}

```

### Scala Solution:

```

/**
 * Definition for a binary tree node.
 * class TreeNode(_value: Int = 0, _left: TreeNode = null, _right: TreeNode =
null) {
 *   var value: Int = _value

```

```

* var left: TreeNode = _left
* var right: TreeNode = _right
* }
*/
object Solution {
def checkTree(root: TreeNode): Boolean = {

}
}

```

### Elixir Solution:

```

# Definition for a binary tree node.
#
# defmodule TreeNode do
#   @type t :: %__MODULE__{
#     val: integer,
#     left: TreeNode.t() | nil,
#     right: TreeNode.t() | nil
#   }
#   defstruct val: 0, left: nil, right: nil
# end

defmodule Solution do
  @spec check_tree(root :: TreeNode.t | nil) :: boolean
  def check_tree(root) do

  end
end

```

### Erlang Solution:

```

%% Definition for a binary tree node.
%%
%% -record(tree_node, {val = 0 :: integer(),
%% left = null :: 'null' | #tree_node{},
%% right = null :: 'null' | #tree_node{}}).

-spec check_tree(Root :: #tree_node{} | null) -> boolean().
check_tree(Root) ->
.

```

## Racket Solution:

```
; Definition for a binary tree node.
#|

; val : integer?
; left : (or/c tree-node? #f)
; right : (or/c tree-node? #f)
(struct tree-node
  (val left right) #:mutable #:transparent)

; constructor
(define (make-tree-node [val 0])
  (tree-node val #f #f))

|#

(define/contract (check-tree root)
  (-> (or/c tree-node? #f) boolean?)
  )
```