

Problem 669: Trim a Binary Search Tree

Problem Information

Difficulty: Medium

Acceptance Rate: 0.00%

Paid Only: No

Problem Description

Given the

root

of a binary search tree and the lowest and highest boundaries as

low

and

high

, trim the tree so that all its elements lies in

[low, high]

. Trimming the tree should

not

change the relative structure of the elements that will remain in the tree (i.e., any node's descendant should remain a descendant). It can be proven that there is a

unique answer


.

Return

the root of the trimmed binary search tree

. Note that the root may change depending on the given bounds.

Example 1:

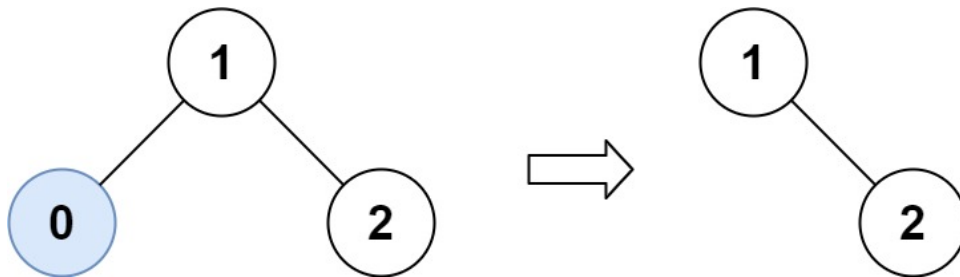


Input:

root = [1,0,2], low = 1, high = 2

Output:

[1,null,2]

Example 2:

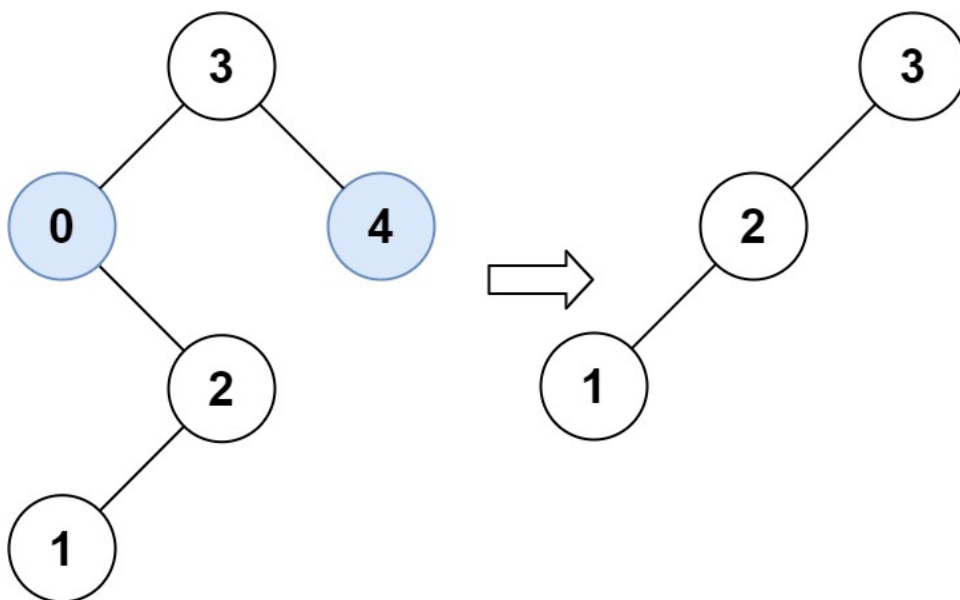

Input:

root = [3,0,4,null,2,null,null,1], low = 1, high = 3

Output:

[3,2,null,1]

Constraints:

The number of nodes in the tree is in the range

[1, 10

4

]

.

$0 \leq \text{Node.val} \leq 10$

4

The value of each node in the tree is

unique

.

root

is guaranteed to be a valid binary search tree.

$0 \leq \text{low} \leq \text{high} \leq 10$

4

Code Snippets

C++:

```
/**
 * Definition for a binary tree node.
 * struct TreeNode {
 *   int val;
 *   TreeNode *left;
 *   TreeNode *right;
 *   TreeNode() : val(0), left(nullptr), right(nullptr) {}
 *   TreeNode(int x) : val(x), left(nullptr), right(nullptr) {}
 *   TreeNode(int x, TreeNode *left, TreeNode *right) : val(x), left(left),
right(right) {}
 * };
 */
class Solution {
public:
    TreeNode* trimBST(TreeNode* root, int low, int high) {

    }
};
```

Java:

```
/**
 * Definition for a binary tree node.
 * public class TreeNode {
 *   int val;
 *   TreeNode left;
 *   TreeNode right;
 *   TreeNode() {}
 *   TreeNode(int val) { this.val = val; }
 *   TreeNode(int val, TreeNode left, TreeNode right) {
 *     this.val = val;
 *     this.left = left;
 *     this.right = right;
 *   }
 * }
 */
class Solution {
    public TreeNode trimBST(TreeNode root, int low, int high) {
```

```
}  
}
```

Python3:

```
# Definition for a binary tree node.  
# class TreeNode:  
# def __init__(self, val=0, left=None, right=None):  
# self.val = val  
# self.left = left  
# self.right = right  
class Solution:  
def trimBST(self, root: Optional[TreeNode], low: int, high: int) ->  
Optional[TreeNode]:
```

Python:

```
# Definition for a binary tree node.  
# class TreeNode(object):  
# def __init__(self, val=0, left=None, right=None):  
# self.val = val  
# self.left = left  
# self.right = right  
class Solution(object):  
def trimBST(self, root, low, high):  
    """  
    :type root: Optional[TreeNode]  
    :type low: int  
    :type high: int  
    :rtype: Optional[TreeNode]  
    """
```

JavaScript:

```
/**  
 * Definition for a binary tree node.  
 * function TreeNode(val, left, right) {  
 *   this.val = (val===undefined ? 0 : val)  
 *   this.left = (left===undefined ? null : left)  
 *   this.right = (right===undefined ? null : right)  
 * }  
 */
```

```

/**
 * @param {TreeNode} root
 * @param {number} low
 * @param {number} high
 * @return {TreeNode}
 */
var trimBST = function(root, low, high) {

};

```

TypeScript:

```

/**
 * Definition for a binary tree node.
 * class TreeNode {
 *   val: number
 *   left: TreeNode | null
 *   right: TreeNode | null
 *   constructor(val?: number, left?: TreeNode | null, right?: TreeNode | null)
 *   {
 *     this.val = (val===undefined ? 0 : val)
 *     this.left = (left===undefined ? null : left)
 *     this.right = (right===undefined ? null : right)
 *   }
 * }
 */

function trimBST(root: TreeNode | null, low: number, high: number): TreeNode
| null {

};

```

C#:

```

/**
 * Definition for a binary tree node.
 * public class TreeNode {
 *   public int val;
 *   public TreeNode left;
 *   public TreeNode right;
 *   public TreeNode(int val=0, TreeNode left=null, TreeNode right=null) {
 *     this.val = val;

```

```

    * this.left = left;
    * this.right = right;
    * }
    * }
    */
    public class Solution {
    public TreeNode TrimBST(TreeNode root, int low, int high) {

    }

    }

```

C:

```

/**
 * Definition for a binary tree node.
 * struct TreeNode {
 *     int val;
 *     struct TreeNode *left;
 *     struct TreeNode *right;
 * };
 */
struct TreeNode* trimBST(struct TreeNode* root, int low, int high) {

}

```

Go:

```

/**
 * Definition for a binary tree node.
 * type TreeNode struct {
 *     Val int
 *     Left *TreeNode
 *     Right *TreeNode
 * }
 */
func trimBST(root *TreeNode, low int, high int) *TreeNode {

}

```

Kotlin:

```

/**
 * Example:
 * var ti = TreeNode(5)
 * var v = ti.`val`
 * Definition for a binary tree node.
 * class TreeNode(var `val`: Int) {
 *   var left: TreeNode? = null
 *   var right: TreeNode? = null
 * }
 */
class Solution {
    fun trimBST(root: TreeNode?, low: Int, high: Int): TreeNode? {

    }
}

```

Swift:

```

/**
 * Definition for a binary tree node.
 * public class TreeNode {
 *   public var val: Int
 *   public var left: TreeNode?
 *   public var right: TreeNode?
 *   public init() { self.val = 0; self.left = nil; self.right = nil; }
 *   public init(_ val: Int) { self.val = val; self.left = nil; self.right = nil; }
 *   public init(_ val: Int, _ left: TreeNode?, _ right: TreeNode?) {
 *     self.val = val
 *     self.left = left
 *     self.right = right
 *   }
 * }
 */
class Solution {
    func trimBST(_ root: TreeNode?, _ low: Int, _ high: Int) -> TreeNode? {

    }
}

```

Rust:


```

// Definition for a binary tree node.
// #[derive(Debug, PartialEq, Eq)]
// pub struct TreeNode {
//     pub val: i32,
//     pub left: Option<Rc<RefCell<TreeNode>>>,
//     pub right: Option<Rc<RefCell<TreeNode>>>,
// }
//
// impl TreeNode {
//     #[inline]
//     pub fn new(val: i32) -> Self {
//         TreeNode {
//             val,
//             left: None,
//             right: None
//         }
//     }
// }

use std::rc::Rc;
use std::cell::RefCell;
impl Solution {
    pub fn trim_bst(root: Option<Rc<RefCell<TreeNode>>>, low: i32, high: i32) ->
    Option<Rc<RefCell<TreeNode>>> {

    }
}

```

Ruby:

```

# Definition for a binary tree node.
# class TreeNode
#   attr_accessor :val, :left, :right
#   def initialize(val = 0, left = nil, right = nil)
#     @val = val
#     @left = left
#     @right = right
#   end
# end

# @param {TreeNode} root
# @param {Integer} low
# @param {Integer} high
# @return {TreeNode}
def trim_bst(root, low, high)

```

```
end
```

PHP:

```
/**
 * Definition for a binary tree node.
 * class TreeNode {
 * public $val = null;
 * public $left = null;
 * public $right = null;
 * function __construct($val = 0, $left = null, $right = null) {
 * $this->val = $val;
 * $this->left = $left;
 * $this->right = $right;
 * }
 * }
 */
class Solution {

/**
 * @param TreeNode $root
 * @param Integer $low
 * @param Integer $high
 * @return TreeNode
 */
function trimBST($root, $low, $high) {

}

}
```

Dart:

```
/**
 * Definition for a binary tree node.
 * class TreeNode {
 * int val;
 * TreeNode? left;
 * TreeNode? right;
 * TreeNode([this.val = 0, this.left, this.right]);
 * }
 */
```

```

class Solution {
  TreeNode? trimBST(TreeNode? root, int low, int high) {

  }
}

```

Scala:

```

/**
 * Definition for a binary tree node.
 * class TreeNode(_value: Int = 0, _left: TreeNode = null, _right: TreeNode =
 * null) {
 *   var value: Int = _value
 *   var left: TreeNode = _left
 *   var right: TreeNode = _right
 * }
 */
object Solution {
  def trimBST(root: TreeNode, low: Int, high: Int): TreeNode = {

  }
}

```

Elixir:

```

# Definition for a binary tree node.
#
# defmodule TreeNode do
#   @type t :: %__MODULE__{
#     val: integer,
#     left: TreeNode.t() | nil,
#     right: TreeNode.t() | nil
#   }
#   defstruct val: 0, left: nil, right: nil
# end

defmodule Solution do
  @spec trim_bst(root :: TreeNode.t | nil, low :: integer, high :: integer) ::
    TreeNode.t | nil
  def trim_bst(root, low, high) do

  end
end

```

```
end
```

Erlang:

```
%% Definition for a binary tree node.
%%
%% -record(tree_node, {val = 0 :: integer(),
%% left = null :: 'null' | #tree_node{},
%% right = null :: 'null' | #tree_node{}}).

-spec trim_bst(Root :: #tree_node{} | null, Low :: integer(), High ::
integer()) -> #tree_node{} | null.
trim_bst(Root, Low, High) ->
.
```

Racket:

```
; Definition for a binary tree node.
#|

; val : integer?
; left : (or/c tree-node? #f)
; right : (or/c tree-node? #f)
(struct tree-node
  (val left right) #:mutable #:transparent)

; constructor
(define (make-tree-node [val 0])
  (tree-node val #f #f))

|#

(define/contract (trim-bst root low high)
  (-> (or/c tree-node? #f) exact-integer? exact-integer? (or/c tree-node? #f))
  )
```

Solutions

C++ Solution:

```

/*
 * Problem: Trim a Binary Search Tree
 * Difficulty: Medium
 * Tags: tree, search
 *
 * Approach: DFS or BFS traversal
 * Time Complexity: O(n) where n is number of nodes
 * Space Complexity: O(h) for recursion stack where h is height
 */

/**
 * Definition for a binary tree node.
 * struct TreeNode {
 *     int val;
 *     TreeNode *left;
 *     TreeNode *right;
 *     TreeNode() : val(0), left(nullptr), right(nullptr) {}
 *     TreeNode(int x) : val(x), left(nullptr), right(nullptr) {}
 *     TreeNode(int x, TreeNode *left, TreeNode *right) : val(x), left(left),
 *     right(right) {}
 * };
 */
class Solution {
public:
    TreeNode* trimBST(TreeNode* root, int low, int high) {

    }
};

```

Java Solution:

```

/**
 * Problem: Trim a Binary Search Tree
 * Difficulty: Medium
 * Tags: tree, search
 *
 * Approach: DFS or BFS traversal
 * Time Complexity: O(n) where n is number of nodes
 * Space Complexity: O(h) for recursion stack where h is height
 */

/**

```

```

* Definition for a binary tree node.
* public class TreeNode {
*   int val;
*   TreeNode left;
*   TreeNode right;
*   TreeNode() {
// TODO: Implement optimized solution
return 0;
}
*   TreeNode(int val) { this.val = val; }
*   TreeNode(int val, TreeNode left, TreeNode right) {
*     this.val = val;
*     this.left = left;
*     this.right = right;
*   }
* }
*/
class Solution {
public:
    TreeNode trimBST(TreeNode root, int low, int high) {

    }
}

```

Python3 Solution:

```

"""
Problem: Trim a Binary Search Tree
Difficulty: Medium
Tags: tree, search

Approach: DFS or BFS traversal
Time Complexity: O(n) where n is number of nodes
Space Complexity: O(h) for recursion stack where h is height
"""

# Definition for a binary tree node.
# class TreeNode:
#     def __init__(self, val=0, left=None, right=None):
#         self.val = val
#         self.left = left
#         self.right = right

```

```

class Solution:
def trimBST(self, root: Optional[TreeNode], low: int, high: int) ->
Optional[TreeNode]:
# TODO: Implement optimized solution
pass

```

Python Solution:

```

# Definition for a binary tree node.
# class TreeNode(object):
# def __init__(self, val=0, left=None, right=None):
# self.val = val
# self.left = left
# self.right = right
class Solution(object):
def trimBST(self, root, low, high):
"""
:type root: Optional[TreeNode]
:type low: int
:type high: int
:rtype: Optional[TreeNode]
"""

```

JavaScript Solution:

```

/**
 * Problem: Trim a Binary Search Tree
 * Difficulty: Medium
 * Tags: tree, search
 *
 * Approach: DFS or BFS traversal
 * Time Complexity: O(n) where n is number of nodes
 * Space Complexity: O(h) for recursion stack where h is height
 */

/**
 * Definition for a binary tree node.
 * function TreeNode(val, left, right) {
 * this.val = (val===undefined ? 0 : val)
 * this.left = (left===undefined ? null : left)
 * this.right = (right===undefined ? null : right)

```

```

* }
*/
/**
 * @param {TreeNode} root
 * @param {number} low
 * @param {number} high
 * @return {TreeNode}
 */
var trimBST = function(root, low, high) {

};

```

TypeScript Solution:

```

/**
 * Problem: Trim a Binary Search Tree
 * Difficulty: Medium
 * Tags: tree, search
 *
 * Approach: DFS or BFS traversal
 * Time Complexity: O(n) where n is number of nodes
 * Space Complexity: O(h) for recursion stack where h is height
 */

/**
 * Definition for a binary tree node.
 * class TreeNode {
 *   val: number
 *   left: TreeNode | null
 *   right: TreeNode | null
 *   constructor(val?: number, left?: TreeNode | null, right?: TreeNode | null)
 *   {
 *     this.val = (val===undefined ? 0 : val)
 *     this.left = (left===undefined ? null : left)
 *     this.right = (right===undefined ? null : right)
 *   }
 * }
 */

function trimBST(root: TreeNode | null, low: number, high: number): TreeNode
| null {

```



```
};
```

C# Solution:

```
/*
 * Problem: Trim a Binary Search Tree
 * Difficulty: Medium
 * Tags: tree, search
 *
 * Approach: DFS or BFS traversal
 * Time Complexity: O(n) where n is number of nodes
 * Space Complexity: O(h) for recursion stack where h is height
 */

/**
 * Definition for a binary tree node.
 * public class TreeNode {
 * public int val;
 * public TreeNode left;
 * public TreeNode right;
 * public TreeNode(int val=0, TreeNode left=null, TreeNode right=null) {
 * this.val = val;
 * this.left = left;
 * this.right = right;
 * }
 * }
 */
public class Solution {
    public TreeNode TrimBST(TreeNode root, int low, int high) {

    }
}
```

C Solution:

```
/*
 * Problem: Trim a Binary Search Tree
 * Difficulty: Medium
 * Tags: tree, search
 *
```

```

* Approach: DFS or BFS traversal
* Time Complexity: O(n) where n is number of nodes
* Space Complexity: O(h) for recursion stack where h is height
*/

/**
* Definition for a binary tree node.
* struct TreeNode {
*   int val;
*   struct TreeNode *left;
*   struct TreeNode *right;
* };
*/
struct TreeNode* trimBST(struct TreeNode* root, int low, int high) {

}

```

Go Solution:

```

// Problem: Trim a Binary Search Tree
// Difficulty: Medium
// Tags: tree, search
//
// Approach: DFS or BFS traversal
// Time Complexity: O(n) where n is number of nodes
// Space Complexity: O(h) for recursion stack where h is height

/**
* Definition for a binary tree node.
* type TreeNode struct {
*   Val int
*   Left *TreeNode
*   Right *TreeNode
* }
*/
func trimBST(root *TreeNode, low int, high int) *TreeNode {

}

```

Kotlin Solution:

```

/**
 * Example:
 * var ti = TreeNode(5)
 * var v = ti.`val`
 * Definition for a binary tree node.
 * class TreeNode(var `val`: Int) {
 *   var left: TreeNode? = null
 *   var right: TreeNode? = null
 * }
 */
class Solution {
fun trimBST(root: TreeNode?, low: Int, high: Int): TreeNode? {

}

}

```

Swift Solution:

```

/**
 * Definition for a binary tree node.
 * public class TreeNode {
 *   public var val: Int
 *   public var left: TreeNode?
 *   public var right: TreeNode?
 *   public init() { self.val = 0; self.left = nil; self.right = nil; }
 *   public init(_ val: Int) { self.val = val; self.left = nil; self.right =
nil; }
 *   public init(_ val: Int, _ left: TreeNode?, _ right: TreeNode?) {
 *     self.val = val
 *     self.left = left
 *     self.right = right
 *   }
 * }
 */
class Solution {
func trimBST(_ root: TreeNode?, _ low: Int, _ high: Int) -> TreeNode? {

}

}

```

Rust Solution:

```

// Problem: Trim a Binary Search Tree
// Difficulty: Medium
// Tags: tree, search
//
// Approach: DFS or BFS traversal
// Time Complexity: O(n) where n is number of nodes
// Space Complexity: O(h) for recursion stack where h is height

// Definition for a binary tree node.
// #[derive(Debug, PartialEq, Eq)]
// pub struct TreeNode {
//     pub val: i32,
//     pub left: Option<Rc<RefCell<TreeNode>>>,
//     pub right: Option<Rc<RefCell<TreeNode>>>,
// }
//
// impl TreeNode {
//     #[inline]
//     pub fn new(val: i32) -> Self {
//         TreeNode {
//             val,
//             left: None,
//             right: None
//         }
//     }
// }

use std::rc::Rc;
use std::cell::RefCell;

impl Solution {
    pub fn trim_bst(root: Option<Rc<RefCell<TreeNode>>>, low: i32, high: i32) ->
    Option<Rc<RefCell<TreeNode>>> {

    }
}

```

Ruby Solution:

```

# Definition for a binary tree node.
# class TreeNode
#   attr_accessor :val, :left, :right
#   def initialize(val = 0, left = nil, right = nil)
#     @val = val

```

```

# @left = left
# @right = right
# end
# end
# @param {TreeNode} root
# @param {Integer} low
# @param {Integer} high
# @return {TreeNode}
def trim_bst(root, low, high)

end

```

PHP Solution:

```

/**
 * Definition for a binary tree node.
 * class TreeNode {
 * public $val = null;
 * public $left = null;
 * public $right = null;
 * function __construct($val = 0, $left = null, $right = null) {
 * $this->val = $val;
 * $this->left = $left;
 * $this->right = $right;
 * }
 * }
 */
class Solution {

/**
 * @param TreeNode $root
 * @param Integer $low
 * @param Integer $high
 * @return TreeNode
 */
function trimBST($root, $low, $high) {

}

}

```

Dart Solution:

```

/**
 * Definition for a binary tree node.
 * class TreeNode {
 *   int val;
 *   TreeNode? left;
 *   TreeNode? right;
 *   TreeNode([this.val = 0, this.left, this.right]);
 * }
 */
class Solution {
  TreeNode? trimBST(TreeNode? root, int low, int high) {

  }
}

```

Scala Solution:

```

/**
 * Definition for a binary tree node.
 * class TreeNode(_value: Int = 0, _left: TreeNode = null, _right: TreeNode =
null) {
 *   var value: Int = _value
 *   var left: TreeNode = _left
 *   var right: TreeNode = _right
 * }
 */
object Solution {
  def trimBST(root: TreeNode, low: Int, high: Int): TreeNode = {

  }
}

```

Elixir Solution:

```

# Definition for a binary tree node.
#
# defmodule TreeNode do
#   @type t :: %__MODULE__{
#     val: integer,
#     left: TreeNode.t() | nil,
#     right: TreeNode.t() | nil
#   }

```

```

# defstruct val: 0, left: nil, right: nil
# end

defmodule Solution do
@spec trim_bst(root :: TreeNode.t | nil, low :: integer, high :: integer) ::
TreeNode.t | nil
def trim_bst(root, low, high) do

end

end

```

Erlang Solution:

```

%% Definition for a binary tree node.
%%
%% -record(tree_node, {val = 0 :: integer(),
%% left = null :: 'null' | #tree_node{},
%% right = null :: 'null' | #tree_node{}}).

-spec trim_bst(Root :: #tree_node{} | null, Low :: integer(), High ::
integer()) -> #tree_node{} | null.
trim_bst(Root, Low, High) ->
.

```

Racket Solution:

```

; Definition for a binary tree node.
#|

; val : integer?
; left : (or/c tree-node? #f)
; right : (or/c tree-node? #f)
(struct tree-node
(val left right) #:mutable #:transparent)

; constructor
(define (make-tree-node [val 0])
(tree-node val #f #f))

|#

```

```
(define/contract (trim-bst root low high)
  (-> (or/c tree-node? #f) exact-integer? exact-integer? (or/c tree-node? #f))
)
```