

Problem 894: All Possible Full Binary Trees

Problem Information

Difficulty: **Medium**

Acceptance Rate: 0.00%

Paid Only: No

Problem Description

Given an integer

`n`

, return

a list of all possible

full binary trees

with

`n`

nodes

. Each node of each tree in the answer must have

`Node.val == 0`

.

Each element of the answer is the root node of one possible tree. You may return the final list of trees in

any order

.

A

full binary tree

is a binary tree where each node has exactly


0

or

2

children.

Example 1:

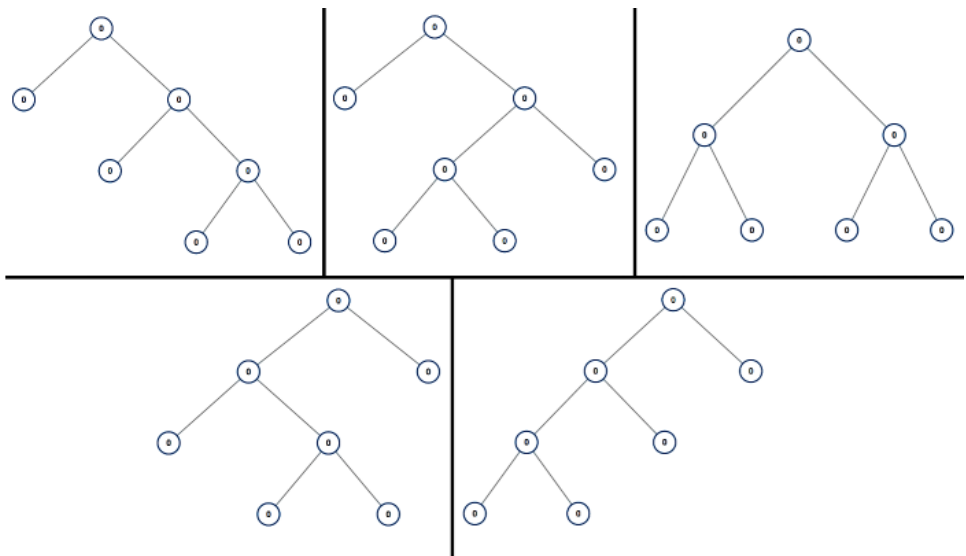

Input:

$n = 7$

Output:

[[0,0,0,null,null,0,0,null,null,0,0],[0,0,0,null,null,0,0,0,0,0],[0,0,0,0,0,0,0,0],[0,0,0,0,0,null,null,null,null,0,0],[0,0,0,0,0,null,null,0,0]]

Example 2:

Input:

n = 3

Output:

[[0,0,0]]

Constraints:

1 <= n <= 20

Code Snippets

C++:

```
/**
 * Definition for a binary tree node.
 * struct TreeNode {
 *   int val;
 *   TreeNode *left;
 *   TreeNode *right;
 *   TreeNode() : val(0), left(nullptr), right(nullptr) {}
 *   TreeNode(int x) : val(x), left(nullptr), right(nullptr) {}
 *   TreeNode(int x, TreeNode *left, TreeNode *right) : val(x), left(left),
 *   right(right) {}
 * };
 */
class Solution {
public:
    vector<TreeNode*> allPossibleFBT(int n) {

    }
};
```

Java:

```

/**
 * Definition for a binary tree node.
 * public class TreeNode {
 *     int val;
 *     TreeNode left;
 *     TreeNode right;
 *     TreeNode() {}
 *     TreeNode(int val) { this.val = val; }
 *     TreeNode(int val, TreeNode left, TreeNode right) {
 *         this.val = val;
 *         this.left = left;
 *         this.right = right;
 *     }
 * }
 */
class Solution {
    public List<TreeNode> allPossibleFBT(int n) {

    }
}

```

Python3:

```

# Definition for a binary tree node.
# class TreeNode:
#     def __init__(self, val=0, left=None, right=None):
#         self.val = val
#         self.left = left
#         self.right = right
class Solution:
    def allPossibleFBT(self, n: int) -> List[Optional[TreeNode]]:

```

Python:

```

# Definition for a binary tree node.
# class TreeNode(object):
#     def __init__(self, val=0, left=None, right=None):
#         self.val = val
#         self.left = left
#         self.right = right
class Solution(object):
    def allPossibleFBT(self, n):
        """

```

```

:type n: int
:rtype: List[Optional[TreeNode]]
"""

```

JavaScript:

```

/**
 * Definition for a binary tree node.
 * function TreeNode(val, left, right) {
 *   this.val = (val===undefined ? 0 : val)
 *   this.left = (left===undefined ? null : left)
 *   this.right = (right===undefined ? null : right)
 * }
 */
/**
 * @param {number} n
 * @return {TreeNode[]}
 */
var allPossibleFBT = function(n) {

};

```

TypeScript:

```

/**
 * Definition for a binary tree node.
 * class TreeNode {
 *   val: number
 *   left: TreeNode | null
 *   right: TreeNode | null
 *   constructor(val?: number, left?: TreeNode | null, right?: TreeNode | null) {
 *     this.val = (val===undefined ? 0 : val)
 *     this.left = (left===undefined ? null : left)
 *     this.right = (right===undefined ? null : right)
 *   }
 * }
 */

function allPossibleFBT(n: number): Array<TreeNode | null> {

};

```

C#:

```
/**
 * Definition for a binary tree node.
 * public class TreeNode {
 * public int val;
 * public TreeNode left;
 * public TreeNode right;
 * public TreeNode(int val=0, TreeNode left=null, TreeNode right=null) {
 * this.val = val;
 * this.left = left;
 * this.right = right;
 * }
 * }
 */
public class Solution {
public IList<TreeNode> AllPossibleFBT(int n) {

}

}
```

C:

```
/**
 * Definition for a binary tree node.
 * struct TreeNode {
 * int val;
 * struct TreeNode *left;
 * struct TreeNode *right;
 * };
 */
/**
 * Note: The returned array must be malloced, assume caller calls free().
 */
struct TreeNode** allPossibleFBT(int n, int* returnSize) {

}
```

Go:

```
/**
 * Definition for a binary tree node.
 * type TreeNode struct {
```

```

* Val int
* Left *TreeNode
* Right *TreeNode
* }
*/
func allPossibleFBT(n int) []*TreeNode {

}

```

Kotlin:

```

/**
 * Example:
 * var ti = TreeNode(5)
 * var v = ti.`val`
 * Definition for a binary tree node.
 * class TreeNode(var `val`: Int) {
 *     var left: TreeNode? = null
 *     var right: TreeNode? = null
 * }
 */
class Solution {
    fun allPossibleFBT(n: Int): List<TreeNode?> {

    }
}

```

Swift:

```

/**
 * Definition for a binary tree node.
 * public class TreeNode {
 *     public var val: Int
 *     public var left: TreeNode?
 *     public var right: TreeNode?
 *     public init() { self.val = 0; self.left = nil; self.right = nil; }
 *     public init(_ val: Int) { self.val = val; self.left = nil; self.right = nil; }
 *     public init(_ val: Int, _ left: TreeNode?, _ right: TreeNode?) {
 *         self.val = val
 *         self.left = left
 *         self.right = right
 *     }
 * }
 */

```

```

* }
* }
*/

class Solution {
func allPossibleFBT(_ n: Int) -> [TreeNode?] {

}

}

```

Rust:

```

// Definition for a binary tree node.
// #[derive(Debug, PartialEq, Eq)]
// pub struct TreeNode {
//     pub val: i32,
//     pub left: Option<Rc<RefCell<TreeNode>>>,
//     pub right: Option<Rc<RefCell<TreeNode>>>,
// }
//
// impl TreeNode {
//     #[inline]
//     pub fn new(val: i32) -> Self {
//         TreeNode {
//             val,
//             left: None,
//             right: None
//         }
//     }
// }

use std::rc::Rc;
use std::cell::RefCell;
impl Solution {
    pub fn all_possible_fbt(n: i32) -> Vec<Option<Rc<RefCell<TreeNode>>>> {

    }

}

```

Ruby:

```

# Definition for a binary tree node.
# class TreeNode
#   attr_accessor :val, :left, :right

```



```

# def initialize(val = 0, left = nil, right = nil)
# @val = val
# @left = left
# @right = right
# end
# end
# @param {Integer} n
# @return {TreeNode[]}
def all_possible_fbt(n)

end

```

PHP:

```

/**
 * Definition for a binary tree node.
 * class TreeNode {
 * public $val = null;
 * public $left = null;
 * public $right = null;
 * function __construct($val = 0, $left = null, $right = null) {
 * $this->val = $val;
 * $this->left = $left;
 * $this->right = $right;
 * }
 * }
 */
class Solution {

/**
 * @param Integer $n
 * @return TreeNode[]
 */
function allPossibleFBT($n) {

}

}

```

Dart:

```

/**
 * Definition for a binary tree node.

```

```

* class TreeNode {
*   int val;
*   TreeNode? left;
*   TreeNode? right;
*   TreeNode([this.val = 0, this.left, this.right]);
* }
*/
class Solution {
  List<TreeNode?> allPossibleFBT(int n) {

  }
}

```

Scala:

```

/**
 * Definition for a binary tree node.
 * class TreeNode(_value: Int = 0, _left: TreeNode = null, _right: TreeNode =
 * null) {
 *   var value: Int = _value
 *   var left: TreeNode = _left
 *   var right: TreeNode = _right
 * }
 */
object Solution {
  def allPossibleFBT(n: Int): List[TreeNode] = {

  }
}

```

Elixir:

```

# Definition for a binary tree node.
#
# defmodule TreeNode do
#   @type t :: %__MODULE__{
#     val: integer,
#     left: TreeNode.t() | nil,
#     right: TreeNode.t() | nil
#   }
#   defstruct val: 0, left: nil, right: nil
# end

```

```

defmodule Solution do
  @spec all_possible_fbt(n :: integer) :: [TreeNode.t | nil]
  def all_possible_fbt(n) do

  end
end

```

Erlang:

```

%% Definition for a binary tree node.
%%
%% -record(tree_node, {val = 0 :: integer(),
%% left = null :: 'null' | #tree_node{},
%% right = null :: 'null' | #tree_node{}}).

-spec all_possible_fbt(N :: integer()) -> [#tree_node{} | null].
all_possible_fbt(N) ->
.

```

Racket:

```

; Definition for a binary tree node.
#|

; val : integer?
; left : (or/c tree-node? #f)
; right : (or/c tree-node? #f)
(struct tree-node
  (val left right) #:mutable #:transparent)

; constructor
(define (make-tree-node [val 0])
  (tree-node val #f #f))

|#

(define/contract (all-possible-fbt n)
  (-> exact-integer? (listof (or/c tree-node? #f)))
)

```

Solutions

C++ Solution:

```
/*
 * Problem: All Possible Full Binary Trees
 * Difficulty: Medium
 * Tags: tree, dp
 *
 * Approach: DFS or BFS traversal
 * Time Complexity: O(n) where n is number of nodes
 * Space Complexity: O(n) or O(n * m) for DP table
 */

/**
 * Definition for a binary tree node.
 * struct TreeNode {
 *     int val;
 *     TreeNode *left;
 *     TreeNode *right;
 *     TreeNode() : val(0), left(nullptr), right(nullptr) {}
 *     TreeNode(int x) : val(x), left(nullptr), right(nullptr) {}
 *     TreeNode(int x, TreeNode *left, TreeNode *right) : val(x), left(left),
 *     right(right) {}
 * };
 */
class Solution {
public:
    vector<TreeNode*> allPossibleFBT(int n) {

    }
};
```

Java Solution:

```
/**
 * Problem: All Possible Full Binary Trees
 * Difficulty: Medium
 * Tags: tree, dp
 *
 * Approach: DFS or BFS traversal
 * Time Complexity: O(n) where n is number of nodes
 * Space Complexity: O(n) or O(n * m) for DP table
```

```

*/

/**
 * Definition for a binary tree node.
 * public class TreeNode {
 *     int val;
 *     TreeNode left;
 *     TreeNode right;
 *     TreeNode() {}
 *     TreeNode(int val) { this.val = val; }
 *     TreeNode(int val, TreeNode left, TreeNode right) {
 *         this.val = val;
 *         this.left = left;
 *         this.right = right;
 *     }
 * }
 */
class Solution {
    public List<TreeNode> allPossibleFBT(int n) {

    }
}

```

Python3 Solution:

```

"""
Problem: All Possible Full Binary Trees
Difficulty: Medium
Tags: tree, dp

Approach: DFS or BFS traversal
Time Complexity: O(n) where n is number of nodes
Space Complexity: O(n) or O(n * m) for DP table
"""

# Definition for a binary tree node.
# class TreeNode:
#     def __init__(self, val=0, left=None, right=None):
#         self.val = val
#         self.left = left
#         self.right = right

```

```

class Solution:
    def allPossibleFBT(self, n: int) -> List[Optional[TreeNode]]:
        # TODO: Implement optimized solution
        pass

```

Python Solution:

```

# Definition for a binary tree node.
# class TreeNode(object):
#     def __init__(self, val=0, left=None, right=None):
#         self.val = val
#         self.left = left
#         self.right = right
class Solution(object):
    def allPossibleFBT(self, n):
        """
        :type n: int
        :rtype: List[Optional[TreeNode]]
        """

```

JavaScript Solution:

```

/**
 * Problem: All Possible Full Binary Trees
 * Difficulty: Medium
 * Tags: tree, dp
 *
 * Approach: DFS or BFS traversal
 * Time Complexity: O(n) where n is number of nodes
 * Space Complexity: O(n) or O(n * m) for DP table
 */

/**
 * Definition for a binary tree node.
 * function TreeNode(val, left, right) {
 *     this.val = (val===undefined ? 0 : val)
 *     this.left = (left===undefined ? null : left)
 *     this.right = (right===undefined ? null : right)
 * }
 */

```

```

* @param {number} n
* @return {TreeNode[]}
*/
var allPossibleFBT = function(n) {

};

```

TypeScript Solution:

```

/**
 * Problem: All Possible Full Binary Trees
 * Difficulty: Medium
 * Tags: tree, dp
 *
 * Approach: DFS or BFS traversal
 * Time Complexity: O(n) where n is number of nodes
 * Space Complexity: O(n) or O(n * m) for DP table
 */

/**
 * Definition for a binary tree node.
 * class TreeNode {
 *   val: number
 *   left: TreeNode | null
 *   right: TreeNode | null
 *   constructor(val?: number, left?: TreeNode | null, right?: TreeNode | null)
 *   {
 *     this.val = (val===undefined ? 0 : val)
 *     this.left = (left===undefined ? null : left)
 *     this.right = (right===undefined ? null : right)
 *   }
 * }
 */

function allPossibleFBT(n: number): Array<TreeNode | null> {

};

```

C# Solution:

```

/*
 * Problem: All Possible Full Binary Trees
 * Difficulty: Medium
 * Tags: tree, dp
 *
 * Approach: DFS or BFS traversal
 * Time Complexity: O(n) where n is number of nodes
 * Space Complexity: O(n) or O(n * m) for DP table
 */

/**
 * Definition for a binary tree node.
 * public class TreeNode {
 * public int val;
 * public TreeNode left;
 * public TreeNode right;
 * public TreeNode(int val=0, TreeNode left=null, TreeNode right=null) {
 * this.val = val;
 * this.left = left;
 * this.right = right;
 * }
 * }
 */
public class Solution {
public IList<TreeNode> AllPossibleFBT(int n) {

}

}

```

C Solution:

```

/*
 * Problem: All Possible Full Binary Trees
 * Difficulty: Medium
 * Tags: tree, dp
 *
 * Approach: DFS or BFS traversal
 * Time Complexity: O(n) where n is number of nodes
 * Space Complexity: O(n) or O(n * m) for DP table
 */

/**

```



```

* Definition for a binary tree node.
* struct TreeNode {
*   int val;
*   struct TreeNode *left;
*   struct TreeNode *right;
* };
*/
/**
* Note: The returned array must be malloced, assume caller calls free().
*/
struct TreeNode** allPossibleFBT(int n, int* returnSize) {

}

```

Go Solution:

```

// Problem: All Possible Full Binary Trees
// Difficulty: Medium
// Tags: tree, dp
//
// Approach: DFS or BFS traversal
// Time Complexity: O(n) where n is number of nodes
// Space Complexity: O(n) or O(n * m) for DP table

/**
* Definition for a binary tree node.
* type TreeNode struct {
*   Val int
*   Left *TreeNode
*   Right *TreeNode
* }
*/
func allPossibleFBT(n int) []*TreeNode {

}

```

Kotlin Solution:

```

/**
* Example:
* var ti = TreeNode(5)

```

```

* var v = ti.`val`
* Definition for a binary tree node.
* class TreeNode(var `val`: Int) {
*   var left: TreeNode? = null
*   var right: TreeNode? = null
* }
*/
class Solution {
fun allPossibleFBT(n: Int): List<TreeNode?> {

}
}

```

Swift Solution:

```

/**
* Definition for a binary tree node.
* public class TreeNode {
*   public var val: Int
*   public var left: TreeNode?
*   public var right: TreeNode?
*   public init() { self.val = 0; self.left = nil; self.right = nil; }
*   public init(_ val: Int) { self.val = val; self.left = nil; self.right =
nil; }
*   public init(_ val: Int, _ left: TreeNode?, _ right: TreeNode?) {
*     self.val = val
*     self.left = left
*     self.right = right
*   }
* }
*/
class Solution {
func allPossibleFBT(_ n: Int) -> [TreeNode?] {

}
}

```

Rust Solution:

```

// Problem: All Possible Full Binary Trees
// Difficulty: Medium

```

```

// Tags: tree, dp
//
// Approach: DFS or BFS traversal
// Time Complexity: O(n) where n is number of nodes
// Space Complexity: O(n) or O(n * m) for DP table

// Definition for a binary tree node.
// #[derive(Debug, PartialEq, Eq)]
// pub struct TreeNode {
//     pub val: i32,
//     pub left: Option<Rc<RefCell<TreeNode>>>,
//     pub right: Option<Rc<RefCell<TreeNode>>>,
// }
//
// impl TreeNode {
//     #[inline]
//     pub fn new(val: i32) -> Self {
//         TreeNode {
//             val,
//             left: None,
//             right: None
//         }
//     }
// }

use std::rc::Rc;
use std::cell::RefCell;
impl Solution {
    pub fn all_possible_fbt(n: i32) -> Vec<Option<Rc<RefCell<TreeNode>>>> {

    }
}

```

Ruby Solution:

```

# Definition for a binary tree node.
# class TreeNode
#   attr_accessor :val, :left, :right
#   def initialize(val = 0, left = nil, right = nil)
#     @val = val
#     @left = left
#     @right = right
#   end
# end

```

```

# end
# end
# @param {Integer} n
# @return {TreeNode[]}
def all_possible_fbt(n)

end

```

PHP Solution:

```

/**
 * Definition for a binary tree node.
 * class TreeNode {
 * public $val = null;
 * public $left = null;
 * public $right = null;
 * function __construct($val = 0, $left = null, $right = null) {
 * $this->val = $val;
 * $this->left = $left;
 * $this->right = $right;
 * }
 * }
 */
class Solution {

/**
 * @param Integer $n
 * @return TreeNode[]
 */
function allPossibleFBT($n) {

}

}

```

Dart Solution:

```

/**
 * Definition for a binary tree node.
 * class TreeNode {
 * int val;
 * TreeNode? left;

```

```

* TreeNode? right;
* TreeNode([this.val = 0, this.left, this.right]);
* }
*/
class Solution {
List<TreeNode?> allPossibleFBT(int n) {

}

}

```

Scala Solution:

```

/**
 * Definition for a binary tree node.
 * class TreeNode(_value: Int = 0, _left: TreeNode = null, _right: TreeNode =
null) {
 *   var value: Int = _value
 *   var left: TreeNode = _left
 *   var right: TreeNode = _right
 * }
 */
object Solution {
def allPossibleFBT(n: Int): List[TreeNode] = {

}

}

```

Elixir Solution:

```

# Definition for a binary tree node.
#
# defmodule TreeNode do
#   @type t :: %__MODULE__{
#     val: integer,
#     left: TreeNode.t() | nil,
#     right: TreeNode.t() | nil
#   }
#   defstruct val: 0, left: nil, right: nil
# end

defmodule Solution do

```

```

@spec all_possible_fbt(n :: integer) :: [TreeNode.t | nil]
def all_possible_fbt(n) do

end

end

```

Erlang Solution:

```

%% Definition for a binary tree node.
%%
%% -record(tree_node, {val = 0 :: integer(),
%% left = null :: 'null' | #tree_node{},
%% right = null :: 'null' | #tree_node{}}).

-spec all_possible_fbt(N :: integer()) -> [#tree_node{} | null].
all_possible_fbt(N) ->
.

```

Racket Solution:

```

; Definition for a binary tree node.
#|

; val : integer?
; left : (or/c tree-node? #f)
; right : (or/c tree-node? #f)
(struct tree-node
  (val left right) #:mutable #:transparent)

; constructor
(define (make-tree-node [val 0])
  (tree-node val #f #f))

|#

(define/contract (all-possible-fbt n)
  (-> exact-integer? (listof (or/c tree-node? #f)))
  )

```