

Problem 1325: Delete Leaves With a Given Value

Problem Information

Difficulty: Medium

Acceptance Rate: 0.00%

Paid Only: No

Problem Description

Given a binary tree

root

and an integer

target

, delete all the

leaf nodes

with value

target

.

Note that once you delete a leaf node with value

target


,

if its parent node becomes a leaf node and has the value

target

, it should also be deleted (you need to continue doing that until you cannot).

Example 1:

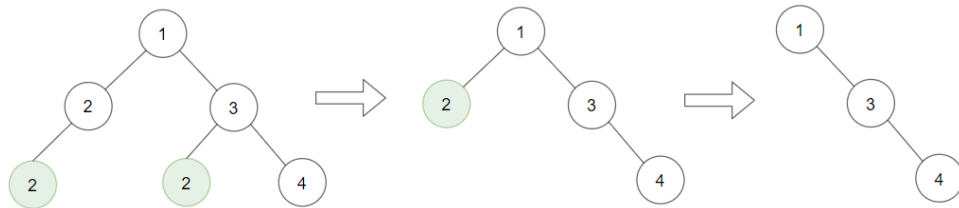

Input:

root = [1,2,3,2,null,2,4], target = 2


Output:

[1,null,3,null,4]

Explanation:

Leaf nodes in green with value (target = 2) are removed (Picture in left). After removing, new nodes become leaf nodes with value (target = 2) (Picture in center).

Example 2:

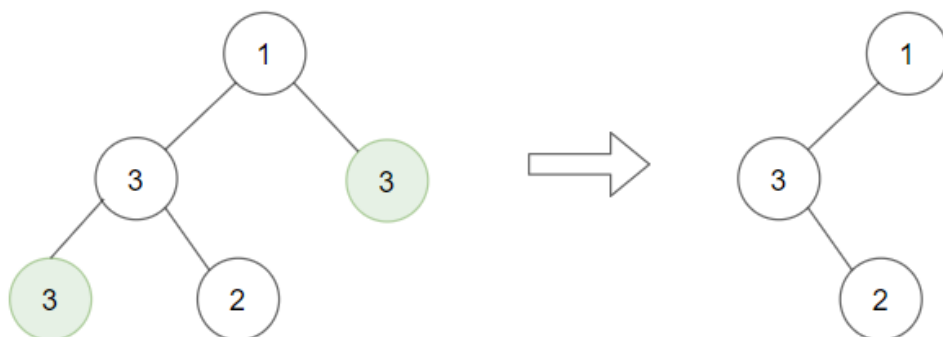


Input:

root = [1,3,3,3,2], target = 3

Output:

[1,3,null,null,2]

Example 3:

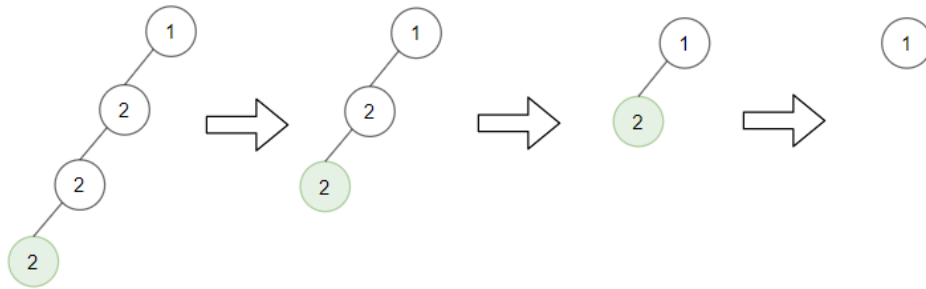

Input:

root = [1,2,null,2,null,2], target = 2

Output:

[1]

Explanation:

Leaf nodes in green with value (target = 2) are removed at each step.

Constraints:

The number of nodes in the tree is in the range

[1, 3000]

.

1 <= Node.val, target <= 1000

Code Snippets

C++:

```
/**
 * Definition for a binary tree node.
 * struct TreeNode {
 *   int val;
 *   TreeNode *left;
 *   TreeNode *right;
 *   TreeNode() : val(0), left(nullptr), right(nullptr) {}
 *   TreeNode(int x) : val(x), left(nullptr), right(nullptr) {}
 *   TreeNode(int x, TreeNode *left, TreeNode *right) : val(x), left(left),
 *   right(right) {}
 * };
 */
class Solution {
public:
    TreeNode* removeLeafNodes(TreeNode* root, int target) {

    }
};
```

Java:

```
/**
 * Definition for a binary tree node.
 * public class TreeNode {
 *   int val;
 *   TreeNode left;
 *   TreeNode right;
 *   TreeNode() {}
 *   TreeNode(int val) { this.val = val; }
 *   TreeNode(int val, TreeNode left, TreeNode right) {
 *     this.val = val;
 *     this.left = left;
 *     this.right = right;
 *   }
 * }
 */
class Solution {
    public TreeNode removeLeafNodes(TreeNode root, int target) {

    }
}
```

Python3:

```
# Definition for a binary tree node.
# class TreeNode:
#     def __init__(self, val=0, left=None, right=None):
#         self.val = val
#         self.left = left
#         self.right = right
class Solution:
    def removeLeafNodes(self, root: Optional[TreeNode], target: int) ->
        Optional[TreeNode]:
```

Python:

```
# Definition for a binary tree node.
# class TreeNode(object):
#     def __init__(self, val=0, left=None, right=None):
#         self.val = val
#         self.left = left
#         self.right = right
class Solution(object):
    def removeLeafNodes(self, root, target):
        """
        :type root: Optional[TreeNode]
        :type target: int
        :rtype: Optional[TreeNode]
        """
```

JavaScript:

```
/**
 * Definition for a binary tree node.
 * function TreeNode(val, left, right) {
 *     this.val = (val===undefined ? 0 : val)
 *     this.left = (left===undefined ? null : left)
 *     this.right = (right===undefined ? null : right)
 * }
 */
/**
 * @param {TreeNode} root
 * @param {number} target
 * @return {TreeNode}
 */
```

```
var removeLeafNodes = function(root, target) {

};
```

TypeScript:

```
/**
 * Definition for a binary tree node.
 * class TreeNode {
 *   val: number
 *   left: TreeNode | null
 *   right: TreeNode | null
 *   constructor(val?: number, left?: TreeNode | null, right?: TreeNode | null)
 *   {
 *     this.val = (val===undefined ? 0 : val)
 *     this.left = (left===undefined ? null : left)
 *     this.right = (right===undefined ? null : right)
 *   }
 * }
 */

function removeLeafNodes(root: TreeNode | null, target: number): TreeNode | null {

};
```

C#:

```
/**
 * Definition for a binary tree node.
 * public class TreeNode {
 *   public int val;
 *   public TreeNode left;
 *   public TreeNode right;
 *   public TreeNode(int val=0, TreeNode left=null, TreeNode right=null) {
 *     this.val = val;
 *     this.left = left;
 *     this.right = right;
 *   }
 * }
 */

public class Solution {
```

```

public TreeNode RemoveLeafNodes(TreeNode root, int target) {

}

}

```

C:

```

/**
 * Definition for a binary tree node.
 * struct TreeNode {
 *     int val;
 *     struct TreeNode *left;
 *     struct TreeNode *right;
 * };
 */
struct TreeNode* removeLeafNodes(struct TreeNode* root, int target) {

}

```

Go:

```

/**
 * Definition for a binary tree node.
 * type TreeNode struct {
 *     Val int
 *     Left *TreeNode
 *     Right *TreeNode
 * }
 */
func removeLeafNodes(root *TreeNode, target int) *TreeNode {

}

```

Kotlin:

```

/**
 * Example:
 * var ti = TreeNode(5)
 * var v = ti.`val`
 * Definition for a binary tree node.
 * class TreeNode(var `val`: Int) {
 *     var left: TreeNode? = null

```

```

* var right: TreeNode? = null
* }
*/
class Solution {
fun removeLeafNodes(root: TreeNode?, target: Int): TreeNode? {

}
}

```

Swift:

```

/**
 * Definition for a binary tree node.
 * public class TreeNode {
 * public var val: Int
 * public var left: TreeNode?
 * public var right: TreeNode?
 * public init() { self.val = 0; self.left = nil; self.right = nil; }
 * public init(_ val: Int) { self.val = val; self.left = nil; self.right =
 nil; }
 * public init(_ val: Int, _ left: TreeNode?, _ right: TreeNode?) {
 * self.val = val
 * self.left = left
 * self.right = right
 * }
 * }
 */
class Solution {
func removeLeafNodes(_ root: TreeNode?, _ target: Int) -> TreeNode? {

}
}

```

Rust:

```

// Definition for a binary tree node.
// #[derive(Debug, PartialEq, Eq)]
// pub struct TreeNode {
// pub val: i32,
// pub left: Option<Rc<RefCell<TreeNode>>>,
// pub right: Option<Rc<RefCell<TreeNode>>>,
// }

```



```

//
// impl TreeNode {
// #[inline]
// pub fn new(val: i32) -> Self {
//     TreeNode {
//         val,
//         left: None,
//         right: None
//     }
// }
// }
// }

use std::rc::Rc;
use std::cell::RefCell;

impl Solution {
    pub fn remove_leaf_nodes(root: Option<Rc<RefCell<TreeNode>>>, target: i32) ->
    Option<Rc<RefCell<TreeNode>>> {

    }
}

```

Ruby:

```

# Definition for a binary tree node.
# class TreeNode
#   attr_accessor :val, :left, :right
#   def initialize(val = 0, left = nil, right = nil)
#     @val = val
#     @left = left
#     @right = right
#   end
# end

# @param {TreeNode} root
# @param {Integer} target
# @return {TreeNode}
def remove_leaf_nodes(root, target)

end

```

PHP:

```

/**
 * Definition for a binary tree node.

```

```

* class TreeNode {
* public $val = null;
* public $left = null;
* public $right = null;
* function __construct($val = 0, $left = null, $right = null) {
* $this->val = $val;
* $this->left = $left;
* $this->right = $right;
* }
* }
*/
class Solution {

/**
 * @param TreeNode $root
 * @param Integer $target
 * @return TreeNode
 */
function removeLeafNodes($root, $target) {

}

}

```

Dart:

```

/**
 * Definition for a binary tree node.
 * class TreeNode {
 *   int val;
 *   TreeNode? left;
 *   TreeNode? right;
 *   TreeNode([this.val = 0, this.left, this.right]);
 * }
 */
class Solution {
  TreeNode? removeLeafNodes(TreeNode? root, int target) {

  }

}

```

Scala:

```

/**
 * Definition for a binary tree node.
 * class TreeNode(_value: Int = 0, _left: TreeNode = null, _right: TreeNode =
null) {
 *   var value: Int = _value
 *   var left: TreeNode = _left
 *   var right: TreeNode = _right
 * }
 */
object Solution {
  def removeLeafNodes(root: TreeNode, target: Int): TreeNode = {

  }
}

```

Elixir:

```

# Definition for a binary tree node.
#
# defmodule TreeNode do
#   @type t :: %__MODULE__{
#     val: integer,
#     left: TreeNode.t() | nil,
#     right: TreeNode.t() | nil
#   }
#   defstruct val: 0, left: nil, right: nil
# end

defmodule Solution do
  @spec remove_leaf_nodes(root :: TreeNode.t | nil, target :: integer) ::
    TreeNode.t | nil
  def remove_leaf_nodes(root, target) do

  end
end

```

Erlang:

```

%% Definition for a binary tree node.
%%
%% -record(tree_node, {val = 0 :: integer(),
%%   left = null :: 'null' | #tree_node{}},
%%   right = null :: 'null' | #tree_node{}}).

```

```

-spec remove_leaf_nodes(Root :: #tree_node{} | null, Target :: integer()) ->
#tree_node{} | null.
remove_leaf_nodes(Root, Target) ->
.

```

Racket:

```

; Definition for a binary tree node.
#|

; val : integer?
; left : (or/c tree-node? #f)
; right : (or/c tree-node? #f)
(struct tree-node
  (val left right) #:mutable #:transparent)

; constructor
(define (make-tree-node [val 0])
  (tree-node val #f #f))

|#

(define/contract (remove-leaf-nodes root target)
  (-> (or/c tree-node? #f) exact-integer? (or/c tree-node? #f))
  )

```

Solutions

C++ Solution:

```

/*
 * Problem: Delete Leaves With a Given Value
 * Difficulty: Medium
 * Tags: tree, search
 *
 * Approach: DFS or BFS traversal
 * Time Complexity: O(n) where n is number of nodes
 * Space Complexity: O(h) for recursion stack where h is height
 */

```

```

/**
 * Definition for a binary tree node.
 * struct TreeNode {
 *     int val;
 *     TreeNode *left;
 *     TreeNode *right;
 *     TreeNode() : val(0), left(nullptr), right(nullptr) {}
 *     TreeNode(int x) : val(x), left(nullptr), right(nullptr) {}
 *     TreeNode(int x, TreeNode *left, TreeNode *right) : val(x), left(left),
 *     right(right) {}
 * };
 */
class Solution {
public:
    TreeNode* removeLeafNodes(TreeNode* root, int target) {

    }
};

```

Java Solution:

```

/**
 * Problem: Delete Leaves With a Given Value
 * Difficulty: Medium
 * Tags: tree, search
 *
 * Approach: DFS or BFS traversal
 * Time Complexity: O(n) where n is number of nodes
 * Space Complexity: O(h) for recursion stack where h is height
 */

/**
 * Definition for a binary tree node.
 * public class TreeNode {
 *     int val;
 *     TreeNode left;
 *     TreeNode right;
 *     TreeNode() {
 *
 *     }
 * }
 */
// TODO: Implement optimized solution
return 0;

```

```

    }
    * TreeNode(int val) { this.val = val; }
    * TreeNode(int val, TreeNode left, TreeNode right) {
    * this.val = val;
    * this.left = left;
    * this.right = right;
    * }
    * }
    */
    class Solution {
    public TreeNode removeLeafNodes(TreeNode root, int target) {

    }

    }

```

Python3 Solution:

```

"""
Problem: Delete Leaves With a Given Value
Difficulty: Medium
Tags: tree, search

Approach: DFS or BFS traversal
Time Complexity: O(n) where n is number of nodes
Space Complexity: O(h) for recursion stack where h is height
"""

# Definition for a binary tree node.
# class TreeNode:
# def __init__(self, val=0, left=None, right=None):
# self.val = val
# self.left = left
# self.right = right
class Solution:
def removeLeafNodes(self, root: Optional[TreeNode], target: int) ->
Optional[TreeNode]:
# TODO: Implement optimized solution
pass

```

Python Solution:

```

# Definition for a binary tree node.
# class TreeNode(object):
#     def __init__(self, val=0, left=None, right=None):
#         self.val = val
#         self.left = left
#         self.right = right
class Solution(object):
    def removeLeafNodes(self, root, target):
        """
        :type root: Optional[TreeNode]
        :type target: int
        :rtype: Optional[TreeNode]
        """

```

JavaScript Solution:

```

/**
 * Problem: Delete Leaves With a Given Value
 * Difficulty: Medium
 * Tags: tree, search
 *
 * Approach: DFS or BFS traversal
 * Time Complexity: O(n) where n is number of nodes
 * Space Complexity: O(h) for recursion stack where h is height
 */

/**
 * Definition for a binary tree node.
 * function TreeNode(val, left, right) {
 *     this.val = (val===undefined ? 0 : val)
 *     this.left = (left===undefined ? null : left)
 *     this.right = (right===undefined ? null : right)
 * }
 */

/**
 * @param {TreeNode} root
 * @param {number} target
 * @return {TreeNode}
 */
var removeLeafNodes = function(root, target) {

};

```

TypeScript Solution:

```
/**
 * Problem: Delete Leaves With a Given Value
 * Difficulty: Medium
 * Tags: tree, search
 *
 * Approach: DFS or BFS traversal
 * Time Complexity: O(n) where n is number of nodes
 * Space Complexity: O(h) for recursion stack where h is height
 */

/**
 * Definition for a binary tree node.
 * class TreeNode {
 *   val: number
 *   left: TreeNode | null
 *   right: TreeNode | null
 *   constructor(val?: number, left?: TreeNode | null, right?: TreeNode | null)
 *   {
 *     this.val = (val===undefined ? 0 : val)
 *     this.left = (left===undefined ? null : left)
 *     this.right = (right===undefined ? null : right)
 *   }
 * }
 */

function removeLeafNodes(root: TreeNode | null, target: number): TreeNode | null {
  null {

  };
}
```

C# Solution:

```
/*
 * Problem: Delete Leaves With a Given Value
 * Difficulty: Medium
 * Tags: tree, search
 *
 * Approach: DFS or BFS traversal
 * Time Complexity: O(n) where n is number of nodes
 * Space Complexity: O(h) for recursion stack where h is height
 */
```



```

*/

/**
 * Definition for a binary tree node.
 * public class TreeNode {
 * public int val;
 * public TreeNode left;
 * public TreeNode right;
 * public TreeNode(int val=0, TreeNode left=null, TreeNode right=null) {
 * this.val = val;
 * this.left = left;
 * this.right = right;
 * }
 * }
 */
public class Solution {
public TreeNode RemoveLeafNodes(TreeNode root, int target) {

}

}

```

C Solution:

```

/*
 * Problem: Delete Leaves With a Given Value
 * Difficulty: Medium
 * Tags: tree, search
 *
 * Approach: DFS or BFS traversal
 * Time Complexity: O(n) where n is number of nodes
 * Space Complexity: O(h) for recursion stack where h is height
 */

/**
 * Definition for a binary tree node.
 * struct TreeNode {
 * int val;
 * struct TreeNode *left;
 * struct TreeNode *right;
 * };
 */

```

```

struct TreeNode* removeLeafNodes(struct TreeNode* root, int target) {

}

```

Go Solution:

```

// Problem: Delete Leaves With a Given Value
// Difficulty: Medium
// Tags: tree, search
//
// Approach: DFS or BFS traversal
// Time Complexity: O(n) where n is number of nodes
// Space Complexity: O(h) for recursion stack where h is height

/**
 * Definition for a binary tree node.
 * type TreeNode struct {
 *     Val int
 *     Left *TreeNode
 *     Right *TreeNode
 * }
 */
func removeLeafNodes(root *TreeNode, target int) *TreeNode {

}

```

Kotlin Solution:

```

/**
 * Example:
 * var ti = TreeNode(5)
 * var v = ti.`val`
 * Definition for a binary tree node.
 * class TreeNode(var `val`: Int) {
 *     var left: TreeNode? = null
 *     var right: TreeNode? = null
 * }
 */
class Solution {
    fun removeLeafNodes(root: TreeNode?, target: Int): TreeNode? {

```

```
}  
}
```

Swift Solution:

```
/**  
 * Definition for a binary tree node.  
 * public class TreeNode {  
 * public var val: Int  
 * public var left: TreeNode?  
 * public var right: TreeNode?  
 * public init() { self.val = 0; self.left = nil; self.right = nil; }  
 * public init(_ val: Int) { self.val = val; self.left = nil; self.right =  
 nil; }  
 * public init(_ val: Int, _ left: TreeNode?, _ right: TreeNode?) {  
 * self.val = val  
 * self.left = left  
 * self.right = right  
 * }  
 * }  
 */  
class Solution {  
 func removeLeafNodes(_ root: TreeNode?, _ target: Int) -> TreeNode? {  
  
 }  
}
```

Rust Solution:

```
// Problem: Delete Leaves With a Given Value  
// Difficulty: Medium  
// Tags: tree, search  
//  
// Approach: DFS or BFS traversal  
// Time Complexity: O(n) where n is number of nodes  
// Space Complexity: O(h) for recursion stack where h is height  
  
// Definition for a binary tree node.  
// #[derive(Debug, PartialEq, Eq)]  
// pub struct TreeNode {  
// pub val: i32,  

```

```

// pub left: Option<Rc<RefCell<TreeNode>>>,
// pub right: Option<Rc<RefCell<TreeNode>>>,
// }
//
// impl TreeNode {
// #[inline]
// pub fn new(val: i32) -> Self {
//   TreeNode {
//     val,
//     left: None,
//     right: None
//   }
// }
// }
// }

use std::rc::Rc;
use std::cell::RefCell;
impl Solution {
pub fn remove_leaf_nodes(root: Option<Rc<RefCell<TreeNode>>>, target: i32) ->
Option<Rc<RefCell<TreeNode>>> {

}

}

```

Ruby Solution:

```

# Definition for a binary tree node.
# class TreeNode
#   attr_accessor :val, :left, :right
#   def initialize(val = 0, left = nil, right = nil)
#     @val = val
#     @left = left
#     @right = right
#   end
# end

# @param {TreeNode} root
# @param {Integer} target
# @return {TreeNode}
def remove_leaf_nodes(root, target)

end

```

PHP Solution:

```
/**
 * Definition for a binary tree node.
 * class TreeNode {
 * public $val = null;
 * public $left = null;
 * public $right = null;
 * function __construct($val = 0, $left = null, $right = null) {
 * $this->val = $val;
 * $this->left = $left;
 * $this->right = $right;
 * }
 * }
 */
class Solution {

/**
 * @param TreeNode $root
 * @param Integer $target
 * @return TreeNode
 */
function removeLeafNodes($root, $target) {

}

}
```

Dart Solution:

```
/**
 * Definition for a binary tree node.
 * class TreeNode {
 * int val;
 * TreeNode? left;
 * TreeNode? right;
 * TreeNode([this.val = 0, this.left, this.right]);
 * }
 */
class Solution {
  TreeNode? removeLeafNodes(TreeNode? root, int target) {

}

}
```

Scala Solution:

```
/**
 * Definition for a binary tree node.
 * class TreeNode(_value: Int = 0, _left: TreeNode = null, _right: TreeNode =
 * null) {
 *   var value: Int = _value
 *   var left: TreeNode = _left
 *   var right: TreeNode = _right
 * }
 */
object Solution {
  def removeLeafNodes(root: TreeNode, target: Int): TreeNode = {

  }
}
```

Elixir Solution:

```
# Definition for a binary tree node.
#
# defmodule TreeNode do
#   @type t :: %__MODULE__{
#     val: integer,
#     left: TreeNode.t() | nil,
#     right: TreeNode.t() | nil
#   }
#   defstruct val: 0, left: nil, right: nil
# end

defmodule Solution do
  @spec remove_leaf_nodes(root :: TreeNode.t | nil, target :: integer) ::
    TreeNode.t | nil
  def remove_leaf_nodes(root, target) do

  end
end
```

Erlang Solution:

```
%% Definition for a binary tree node.
%%
```

```

%% -record(tree_node, {val = 0 :: integer(),
%% left = null :: 'null' | #tree_node{},
%% right = null :: 'null' | #tree_node{}}).

-spec remove_leaf_nodes(Root :: #tree_node{} | null, Target :: integer()) ->
#tree_node{} | null.
remove_leaf_nodes(Root, Target) ->
.

```

Racket Solution:

```

; Definition for a binary tree node.
#|

; val : integer?
; left : (or/c tree-node? #f)
; right : (or/c tree-node? #f)
(struct tree-node
  (val left right) #:mutable #:transparent)

; constructor
(define (make-tree-node [val 0])
  (tree-node val #f #f))

|#

(define/contract (remove-leaf-nodes root target)
  (-> (or/c tree-node? #f) exact-integer? (or/c tree-node? #f))
  )

```