

Web programiranje PHP2-sajt 1

DOKUMENTACIJA

<http://nekretninephp2.byethost17.com>

Autor: Nemanja Pravdić 305/16

1.0 Uvod	3
1.1 Korisceni jezici	3
1.2 Funkcionalnost sajta	3
1.3 Template	3
2.0 Organizacija	7
2.1 Organizaciona sema	7
2.2 Mapa sajta	7
2.3 Slike stranica i opis funkcija	8
3.0 Kodovi	19
add.php	20
addgrad.php	25
addNaselje.php	26
addPhoto.php	27
autor.php	28
deletegrad.php	31
deletenaselje.php	31
deletenekrenine.php	32
editgrad.php	32
editnaselje.php	34
editnekretnine.php	35
editovanje.php	42
editovanje1.php	43
header.php	48
index.php	50
konekcija.inc	55
kontakt.php	55
login.php	58
logout.php	62
pocetna.php	62
poll_vote.php	64
prikaz.php	68
prikazNaselja.php	74
prikaznekrenine.php	75
profil.php	79
style.css	82

1.0 Uvod


1.1 Korisceni jezici

Za izradu ovog sajta korisceni su sledeci jezici: HTML, CSS, JavaScript, XML, AJAX, mySQL i PHP. Kod ovog sajta je kucan u phpStorm-u.

1.2 Funkcionalnost sajta

- Admin panel: Omogucava administratoru da dodaje, brise i edituje gradove, naselja I nekretnine -Logovanje
- Registracija (proveru regularnim izrazima)
- Obicni korisnici kao i administrator imaju pravo da menjaju svoje podate
- Provera korisnika kroz sesije
- Dinamicki meni
- Dinamicko pozivanje stranica(Single page)
- Slajder koji prikazuje slike iz baze(Galerija)
- Aneka : ocenjivanje mog sajta i prikazivanje rezultata odma nakon ocenjivanja (AJAX)
- Straničenje

1.3 Template

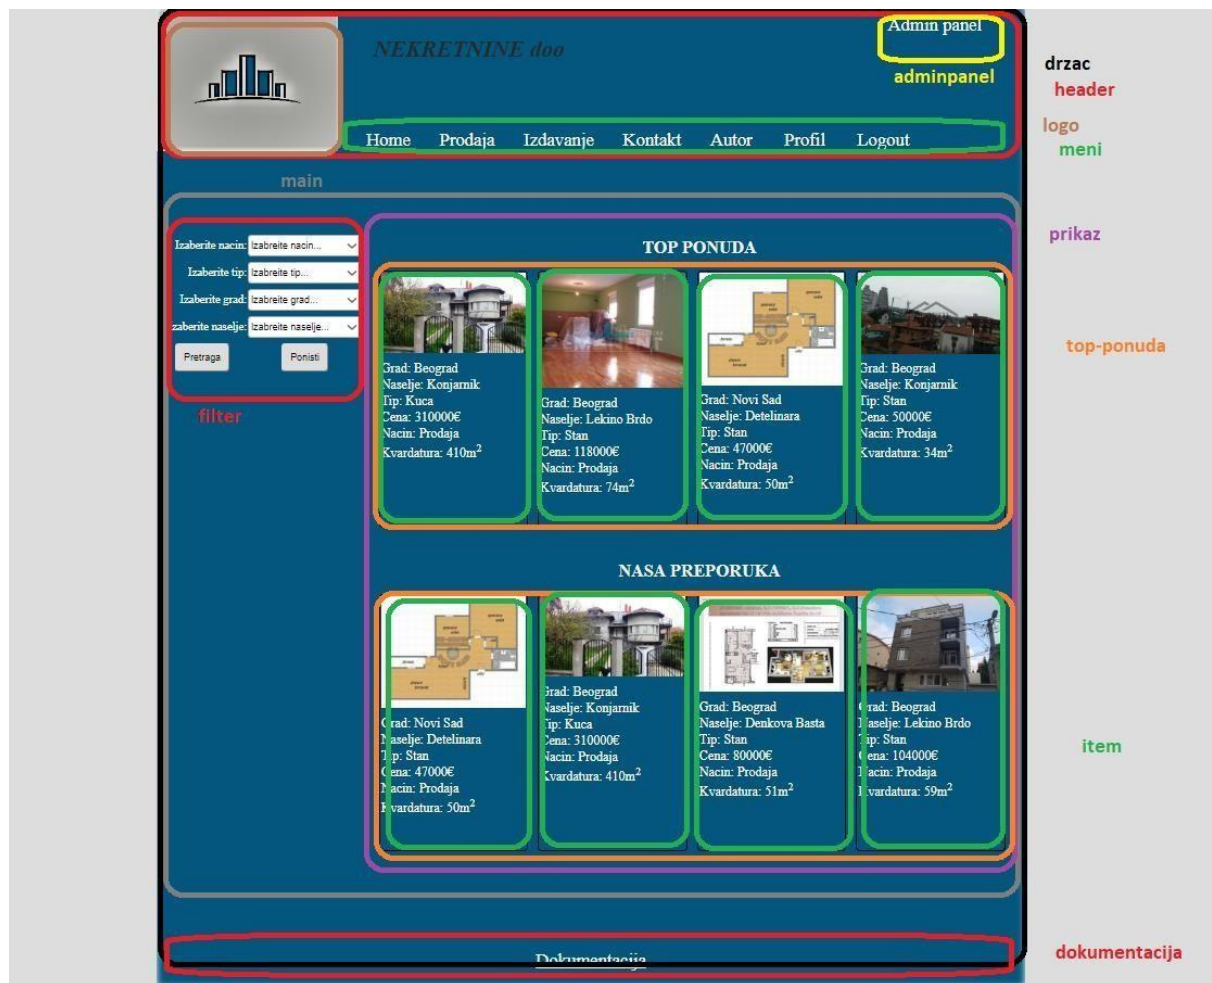

```
<?php
```

```
    @session_start();
```

```
@ob_start();    require
```

```
("konekcija.inc");
```

```
?>
```

```
<html>
```

```
<head>
```

```
<meta name="description" content="Prodaja, izdavanje nekrenina" />
```

```
<meta name="keywords" content="nekretnine, stanovi, kuce, prodaja, izdavanje"/>
```

```
<meta http-equiv="Content-Type" content="text/html; charset=utf-8"/>

<meta name="author" content="Nemanja Pravdić">

<title>Nekretnine doo</title>
<link rel="icon" href="images/logo.ico">
<script src="java.js"></script>

<link rel="stylesheet" type="text/css" href="slick/slick.css"/>
<link rel="stylesheet" type="text/css" href="slick/slick-theme.css"/>

<script type="text/javascript" src="//code.jquery.com/jquery-1.11.0.min.js"></script>
<script type="text/javascript" src="//code.jquery.com/jquery-migrate-1.2.1.min.js"></script>
<script type="text/javascript" src="slick/slick.min.js"></script>

<link rel="stylesheet" href="style.css">
</head>
<body>
  <div id="drzac">    <?php
require ("header.php");
    ?>
    <div class="cisti"></div>
    <div class="main">

        <?php
if(!isset($_GET['strana']))
    $strana="";
    else
        $strana=$_GET['strana'];
switch($strana)
    {
```

```


        case('prikaz'):include ("prikaz.php");break;        case('kontakt'):include
('kontakt.php');break;        case('autor'):include ("autor.php");break;
case('login'):include ('login.php');break;        case('profil'):include ('profil.php');break;
case('logout'):include ('logout.php');break;        case('add'):include ('add.php');break;
case('edit'):include
('editnekretnine.php');break;        case('delete'):include
('deletenekretnine.php');break;        case('nekretnina'):include
('prikaznekretnine.php');break;        case('addPhoto'):include
('addPhoto.php');break;        case('addGrad'):include
('addgrad.php');break;        case('editgrad'):include
('editgrad.php');break;        case('deletegrad'):include
('deletegrad.php');break;        case('addNaselje'):include
('addNaselje.php');break;        case('editnaselje'):include
('editnaselje.php');break;        case('deletenaselje'):include
('deletenaselje.php');break;
default: include("pocetna.php");break;
    }
    ?>
</div>
<div class="cisti"></div>
<div class="dokumentacija">
    <?php        if(isset($_SESSION['id']) &&
$_SESSION['id']==1)
echo "<a href=''>Dokumentacija</a>";
    ?>
</div>
</div>
</body>
</html>

```

1.4 Nema tudjeg CSS-a

2.0 Organizacija

2.1 Organizaciona sema

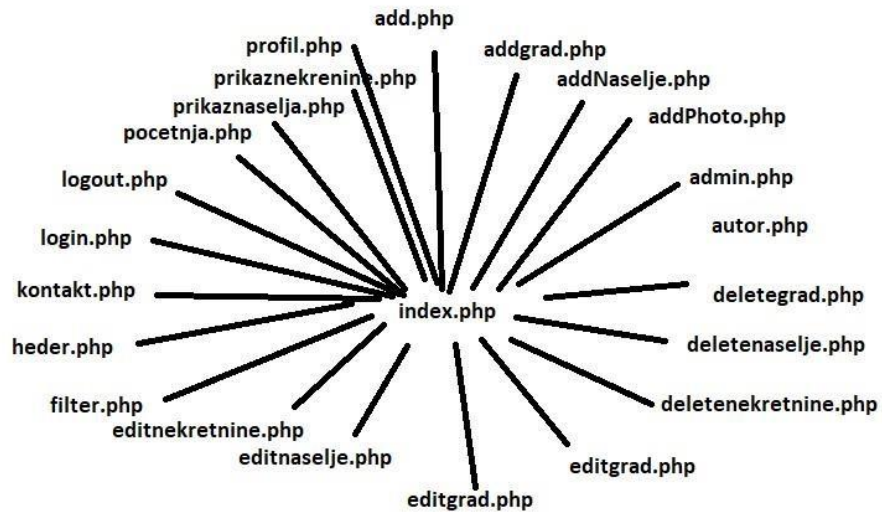

2.2 Mapa sajta

```


<?xml version="1.0" encoding="UTF-8"?>
<urlset
  xmlns="http://www.sitemaps.org/schemas/sitemap/0.9"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://www.sitemaps.org/schemas/sitemap/0.9
    http://www.sitemaps.org/schemas/sitemap/0.9/sitemap.xsd">
  <!-- created with Free Online Sitemap Generator www.xml-sitemaps.com
  -->

```

```
<url>  
  <loc>http://nekretninephp2.byethost17.com/</loc>  
  <lastmod>2018-02-16T15:51:55+00:00</lastmod>  
</url>  
  
</urlset>
```

2.3 Slike stranica i opis funkcija

pocetna.php(index.php)



Admin panel

[Home](#)
[Prodaja](#)
[Izdavanje](#)
[Kontakt](#)
[Autor](#)
[Profil](#)
[Logout](#)


Izaberite nacin:
Izaberite tip:
Izaberite grad:
Izaberite naselje:

Pretraga
Ponisti


TOP PONUDA




Grad: Beograd
Naselje: Konjarnik
Tip: Kuca
Cena: 310000€
Nacin: Prodaja
Kvadratura: 410m²



Grad: Beograd
Naselje: Lekino Brdo
Tip: Stan
Cena: 118000€
Nacin: Prodaja
Kvadratura: 74m²




Grad: Novi Sad
Naselje: Detelinara
Tip: Stan
Cena: 47000€
Nacin: Prodaja
Kvadratura: 50m²




Grad: Beograd
Naselje: Konjarnik
Tip: Stan
Cena: 50000€
Nacin: Prodaja
Kvadratura: 34m²


NASA PREPORUKA




Grad: Novi Sad
Naselje: Detelinara
Tip: Stan
Cena: 47000€
Nacin: Prodaja
Kvadratura: 50m²



Grad: Beograd
Naselje: Konjarnik
Tip: Kuca
Cena: 310000€
Nacin: Prodaja
Kvadratura: 410m²



Grad: Beograd
Naselje: Denikova Basta
Tip: Stan
Cena: 80000€
Nacin: Prodaja
Kvadratura: 51m²



Grad: Beograd
Naselje: Lekino Brdo
Tip: Stan
Cena: 104000€
Nacin: Prodaja
Kvadratura: 59m²

[Dokumentacija](#)

Funcionalnosti: filtriranje i pretraga nekretnina, random prikaz top ponuda i preporuka, dinamicki meni. Upotreba AJAX-a prilikom odabira grada

Admin panel

Home Prodaja Izdavanje Kontakt Autor Profil Logout

NEKRETNOSTI.doc


Izaberite naselje:
 Izaberite tip:
 Izaberite grad:
 Izaberite naselje:
 Pretraži:
 Ponovi:

DODAJ NEKRETNOSTI...


Editovanje, dodavanje, brisanje
 Naselje:
 Grad:

Naselje	Tip	Grad
Izmeni	Izbrisi	Dodaj novo
Izmeni	Izbrisi	Dodaj novo
Izmeni	Izbrisi	Dodaj novo
Izmeni	Izbrisi	Dodaj novo
Izmeni	Izbrisi	Dodaj novo
Izmeni	Izbrisi	Dodaj novo


Dodaj novo




Grad: Novi Sad
 Naselje: Donja Bura
 Tip: Stan
 Način prodaje: Prodaja
 Kvadratura: 50m²
 Cena: 470000€
[Prikaži detalje...](#)




Grad: Kragujevac
 Naselje: Kragujevac
 Tip: Stan
 Način prodaje: Prodaja
 Kvadratura: 34m²
 Cena: 500000€
[Prikaži detalje...](#)




Grad: Kragujevac
 Naselje: Kragujevac
 Tip: Kuća
 Način prodaje: Prodaja
 Kvadratura: 410m²
 Cena: 5100000€
[Prikaži detalje...](#)




Grad: Kragujevac
 Naselje: Kragujevac
 Tip: Stan
 Način prodaje: Izdavanje
 Kvadratura: 40m²
 Cena: 2500€
[Prikaži detalje...](#)




Grad: Kragujevac
 Naselje: Kragujevac
 Tip: Stan
 Način prodaje: Prodaja
 Kvadratura: 30m²
 Cena: 445000€
[Prikaži detalje...](#)



Grad: Kragujevac
 Naselje: Lakina Buda
 Tip: Stan
 Način prodaje: Izdavanje
 Kvadratura: 50m²
 Cena: 5000€
[Prikaži detalje...](#)



Grad: Kragujevac
 Naselje: Lakina Buda
 Tip: Stan
 Način prodaje: Prodaja
 Kvadratura: 50m²
 Cena: 1040000€
[Prikaži detalje...](#)



Grad: Kragujevac
 Naselje: Lakina Buda
 Tip: Stan
 Način prodaje: Prodaja
 Kvadratura: 74m²
 Cena: 150000€
[Prikaži detalje...](#)

1 2


[Dokumentacija](#)

Funkcionalnosti: ova stranica je ujedno i admin panel. Mogućnost dodavanja, brisanja, editovanja gradova naselja i nekretnina. Prilikom editovanja gradova i naselja koriscen AJAX. Mogućnost

dodavanja vise slika za jednu nekreninu, paginacija, filtriranje. Samo admin moze da vidi dokumentaciju!

prikaznekrentine.php

74 m2, Stan, Lekino brdo, agencijski ID: 10055



Adresa: Lekino brdo, 11000 Beograd, Srbija
Grad: Beograd
Naselje: Lekino Brdo
Tip: Stan
Nacin: Prodaja
Broj soba: 3
Sprat: 0
Godina izgradnje: 2017
Kvadratura: 74m²
Cena: 118000€
Opis: Lux, nov, neuseljavan stan, odlična novogradnja iz 2016. god, kvalitetan, veoma komforan, tri spavaće sobe, terasa 30m², uknjižen, za svaku preporuku. Ag. prov 2%

Funkcionalnost: dinamički prikaz slajdera, informacije prikupljene iz baze

kontakt.php



The screenshot shows the homepage of 'NEKRETNINE doo'. The header includes a logo on the left, the site name 'NEKRETNINE doo' in the center, and an 'Admin panel' link on the right. A navigation menu contains links for Home, Prodaja, Izdavanje, Kontakt, Autor, Profil, and Logout. The main content area features a contact form with the heading 'Ukoliko imate nekih pitanja slobodno pitajte'. The form fields are labeled 'Ime i prezime:', 'Mail:', and 'Vase pitanje...'. A 'SEND' button is located below the text area. At the bottom of the page, there is a link for 'Dokumentacija'.


Funkcionalnosti: slanje pitanja preko maila, provera regularnim izrazima

autor.php



This screenshot displays the 'Autor' (Author) profile page. The layout is consistent with the previous page, featuring the same header and navigation menu. The main content area contains a profile picture of a man on the left. To the right of the photo is a text block with the following content: 'Moje ime je Nemanja Pravdić. Rođen sam 25. Septembra 1996 godine. Završio sam srednju elektrotehničku školu Nikola Tesla. Trenutno sam student Visoke ICT škole na smeru Internet Tehnologije, na završnoj godini. Tri godine se bavim Web-om. Do sada sam napravio četiri sajta, a ovo je peti. Jezici sa kojima se trenutno bavim su HTML(5), CSS(3), XML, JavaScript, mySQL i PHP.' Below the text is a rating section titled 'Ocenite moj sajt' with three radio buttons labeled 'Super', 'Ok', and 'Loše'. At the bottom of the page, the 'Dokumentacija' link is visible.

Funkcionalnosti: AJAX ocenjivanje sajta profil.php



Admin panel

NEKRETNINE doo

[Home](#) [Prodaja](#) [Izdavanje](#) [Kontakt](#) [Autor](#) [Profil](#) [Logout](#)

Podaci korisnika **Nemanja**:
Uloga: Administrator

Ime:

Prezime:


Email:

Password:

Ponovite password:

[Dokumentacija](#)

Funkcionalnosti: editovanje naloga, provera regularnim izrazima



NEKRETNINE doo

Home Prodaja Izdavanje Kontakt Autor Login/Register

LOGIN

Email:

Password:

REGISTER

Ime:


Prezime:

Email:

Password:

Ponovite password:

Funkcionalnosti: logovanje, dodavanje usera u sesiju, registracija, provera regularnim izrazima
add.php



Admin panel

[Home](#) [Prodaja](#) [Izdavanje](#) [Kontakt](#) [Autor](#) [Profil](#) [Logout](#)

Dodavanje nekretnine...

Naziv:

Adresa:

Grad:

Izaberite naselje:

Nacin prodaje:

Tip nekretnine:

Broj soba:

Sprat:

Godina izgradnje:

Cena:

Kvadratura:

Top pomda:

☐

Preporuka:

☐

Opis:

Submit

[Dokumentacija](#)

Funkcionalnosti: dodavanje nekretnine u bazu

editnekretnine.php


Dodavanje nekretnine...

Naziv:	<input type="text" value="NOV, SAVRŠEN STAN!!!"/>
Adresa:	<input type="text" value="Detelinara, 21000 Novi Sad, Srl"/>
Grad:	<input type="text" value="Novi Sad"/>
Izaberite naselje:	<input type="text" value="Detelinara"/>
Nacin prodaje:	<input type="text" value="Prodaja"/>
Tip nekretnine:	<input type="text" value="Stan"/>
Broj soba:	<input type="text" value="3"/>
Sprat:	<input type="text" value="2"/>
Godina izgradnje:	<input type="text" value="2010"/>
Cena:	<input type="text" value="47000"/>
Kvadratura:	<input type="text" value="50"/>
Top ponuda:	<input checked="" type="checkbox"/>
Preporuka:	<input checked="" type="checkbox"/>
Opis:	<div>Stan je odličnog rasporeda, izuzetno funkcionalan, na odličnoj lokaciji, blizina škole, vrtića.</div>
<input type="button" value="Submit"/>	


[Dokumentacija](#)

Funkcionalnosti: editovanje nekretnine i update baze

addPhoto.php

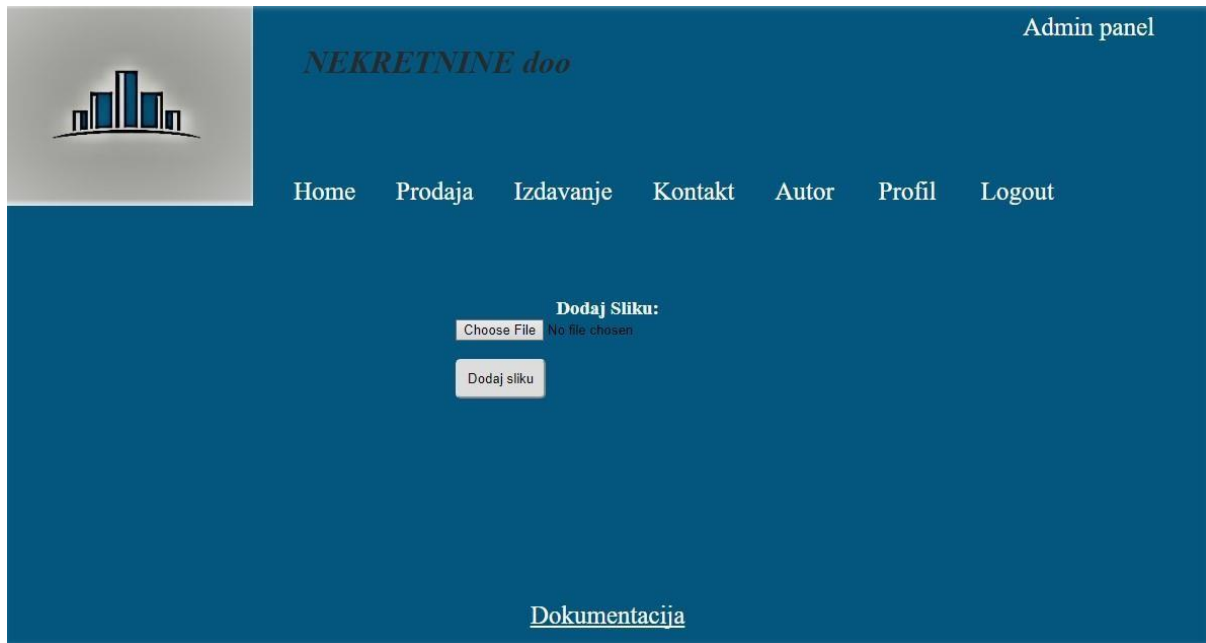

Funkcionalnosti: Dodavanje slika za nekretninu i upisivanje u bazu



The screenshot shows the Admin panel of the NEKRETNINE doo website. The header includes the company logo, name, and navigation links. The main content area features a form to add a city, with a text input field and a Submit button. A link to the documentation is also present.


Admin panel

NEKRETNINE doo

[Home](#) [Prodaja](#) [Izdavanje](#) [Kontakt](#) [Autor](#) [Profil](#) [Logout](#)

Dodaj Grad:

[Dokumentacija](#)



The screenshot shows the Admin panel of the NEKRETNINE doo website. The header includes the company logo, name, and navigation links. The main content area features a form to add a settlement in Belgrade, with a text input field and a Submit button. A link to the documentation is also present.

Admin panel

NEKRETNINE doo


[Home](#) [Prodaja](#) [Izdavanje](#) [Kontakt](#) [Autor](#) [Profil](#) [Logout](#)

Dodaj Naselje u Beograd-u:

[Dokumentacija](#)

Funkcionalnosti: dodavanje gradova i naselja

editgrad.php, editnaselje.php



The screenshot shows the Admin panel of the NEKRETNINE doo website. The header includes the company logo, name, and navigation links. The main content area features the 'Edit Naselja' form with a text input field containing 'Detelinara' and a 'Submit' button. A link to 'Dokumentacija' is located at the bottom of the panel.

Admin panel


NEKRETNINE doo

Home Prodaja Izdavanje Kontakt Autor Profil Logout

Edit Naselja:

Detelinara Submit

[Dokumentacija](#)



The screenshot shows the Admin panel of the NEKRETNINE doo website. The header includes the company logo, name, and navigation links. The main content area features the 'Edit Grad' form with a text input field containing 'Novi Sad' and a 'Submit' button. A link to 'Dokumentacija' is located at the bottom of the panel.

Admin panel

NEKRETNINE doo

Home Prodaja Izdavanje Kontakt Autor Profil Logout

Edit Grad:

Novi Sad Submit

[Dokumentacija](#)

Funkcionalnosti: editovanje naselja i gradova, update baze

3.0 Kodovi

add.php

```

<?php
    if(!isset($_SESSION['uloga']))
    {
        header("Location:index.php");
    }
    else if($_SESSION['uloga']!=1)
    {
        header("Location:index.php");
    }
    if(isset($_REQUEST['btnSubmit']))
    {
        $naziv=$_REQUEST['tbNaziv'];
        $adresa=$_REQUEST['tbAdresa'];
        $grad=$_REQUEST['grad'];
        $naselje=$_REQUEST['naselje'];
        $nacin=$_REQUEST['nacin'];
        $tip=$_REQUEST['tip'];
        $brojSoba=$_REQUEST['tbBrojSoba'];
        $sprat=$_REQUEST['tbSprat'];
        $godinalzgradnje=$_REQUEST['tbGodinalzgradnje'];
        $cena=$_REQUEST['tbCena'];
        $kvadratura=$_REQUEST['tbKvadratura'];    if(isset($_REQUEST['chbTop']))
            $top=1;    else    $top=0;
        if(isset($_REQUEST['chbPreporuka']))
            $preporuka=1;
        else
            $preporuka=0;
        $opis=$_REQUEST['taOpis'];

        $unos=mysqli_query($konekcija,"insert into nekretnina
values('','$naziv','$grad','$naselje','$tip','$nacin','{$adresa}','{$brojSoba}','{$sprat}','{$godinalzgradnje}','

```

```

{$scena}', '{$kvadratura}', '{$opis}', {$stop}, {$preporuka}"));

    if($unos)

        echo "Uspesno uneto u bazu!";

    else

        echo "Doslo je do greske!";

}

?> <script>    function prikazNaselja(str)
{
    if (str == "") {

        document.getElementById("ajax").innerHTML = "";

        return;

    } else {

        if (window.XMLHttpRequest) {

            // code for IE7+, Firefox, Chrome, Opera, Safari
xmlhttp = new XMLHttpRequest();

        } else {

            // code for IE6, IE5

            xmlhttp = new ActiveXObject("Microsoft.XMLHTTP");

        }

        xmlhttp.onreadystatechange = function() {            if (this.readyState
== 4 && this.status == 200) {
document.getElementById("ajax").innerHTML=this.responseText;

        }

        };

        xmlhttp.open("GET", "prikazNaselja.php?q="+str,true);
xmlhttp.send();

    }

}

</script>

<h3>

```

Dodavanje nekretnine...

</h3>

<div class="login">

<form name="dodavanje" action="index.php?strana=add" method="post">

<table>

<tr>

<td><p>Naziv:</p></td>

<td><input type="text" name="tbNaziv" id="tbNaziv"/></td>

</tr>

<tr>

<td><p>Adresa:</p></td>

<td><input type="text" name="tbAdresa" id="tbAdresa"/></td>

</tr>

<tr>

<td><p>Grad:</p></td>

<td>

<select name="grad" onchange="prikazNaselja(this.value)">

<option value="0">Izabreite grad...</option>

<?php

\$rez=mysqli_query(\$konekcija,"select * from grad");

while(\$r=mysqli_fetch_array(\$rez))

{

echo "<option value='". \$r['idGrad']. "'>". \$r['NazivGrada']. "</option>";

}

?>

</select>

</td>

</tr>

<tr id="ajax">

<td>

<p>Izaberite naselje: </p>

```

</td>
<td>
    <select name="naselje">
        <option value="0">Izabreite naselje...</option>
    </td>
</tr>
<tr>
<td>
    <p>Nacin prodaje:</p>
</td>
<td>
    <select name="nacin">
        <option value="0">Izabreite nacin...</option>
    <?php
        $rez=mysqli_query($konekcija,"select * from nacinprodaje");
while($r=mysqli_fetch_array($rez))
    {
        echo "<option value='".$r['idNacinProdaje']."'>".$r['NazivNacina']."</option>";
    }
    ?>
    </select>
</td>
</tr>
<tr>
<td>
    <p>Tip nekretnine:</p>
</td>
<td>
    <select name="tip">
        <option value="0">Izabreite tip...</option>
    <?php

```

```

    $rez=mysqli_query($konekcija,"select * from tipnekretnine");
while($r=mysqli_fetch_array($rez))

    {
        echo "<option value='".$$r['idTipNekretnine']."'>".$$r['NazivTipa']."</option>";
    }
    ?>
</select>
</td>
</tr>
<tr>
    <td><p>Broj soba:</p></td>
    <td><input type="number" name="tbBrojSoba" id="tbBrojSoba"/></td>
</tr>
<tr>
    <td><p>Sprat:</p></td>
    <td><input type="number" name="tbSprat" id="tbSprat"/></td>
</tr>
<tr>
    <td><p>Godina izgradnje:</p></td>
    <td><input type="number" name="tbGodinalzgradnje" id="tbGodinalzgradnje"/></td>
</tr>
<tr>
    <td><p>Cena:</p></td>
    <td><input type="number" name="tbCena" id="tbCena"/></td>
</tr>
<tr>
    <td><p>Kvadratura:</p></td>
    <td><input type="number" name="tbKvadratura" id="tbKvadratura"/></td>
</tr>
<tr>
    <td><p>Top ponuda:</p></td>

```



```

        <td><input type="checkbox" name="chbTop" id="chbTop"/> </td>
    </tr>
    <tr>
        <td><p>Preporuka:</p></td>
        <td><input type="checkbox" name="chbPreporuka" id="chbPreporuka"/> </td>
    </tr>
    <tr>
        <td><p>Opis:</p></td>
        <td><textarea name="taOpis" id="taOpis"></textarea></td>
    </tr>
    <tr>
        <td colspan="2" align="center">
            <input type="submit" name="btnSubmit" id="btnSubmit"/>
        </td>
    </tr>
</table>
</form>
</div>

```

addgrad.php

```

<?php
if(!isset($_SESSION['uloga']))
{
    header("Location:index.php");
}
else if($_SESSION['uloga']!=1)
{
    header("Location:index.php");
}
if(isset($_REQUEST['btnSubmit'])){
    $grad=$_REQUEST['tbGrad'];
    $unos=mysqli_query($konekcija,"insert into grad values('','$grad')");
}

```

```

if($unos)
{
    echo "Uspesno uneto u bazu";
}
else
    echo
"Greska";

}

?>
<div class="add">
<form action="<?php $_SERVER['REQUEST_URI'] ?>" method="post">
    <h3>Dodaj Grad:</h3><br/>
    <input type="text" name="tbGrad" />
    <input type="submit" name="btnSubmit" />
</form>
</div>

```

addNaselje.php

```

<?php if(!isset($_SESSION['uloga']))
{
    header("Location:index.php");
}
else if($_SESSION['uloga']!=1)
{
    header("Location:index.php");
}

if(isset($_REQUEST['btnSubmit'])) {
    $naslje = $_REQUEST['tbNaselje'];
    $unos = mysqli_query($konekcija, "insert into naselje
values('',{ $naslje },{ $_REQUEST['id']})"); if ($unos) { echo "Uspesno uneto u bazu";

```

```

    } else
        echo "Greska";
    }
    if(isset($_REQUEST['id']))
    {
        $id=$_REQUEST['id'];
        $upit=mysqli_query($konekcija,"select * from grad where idGrad={$id}");
        $red=mysqli_fetch_array($upit);
    }
    ?>
<div class="add">
    <form action="<?php $_SERVER['REQUEST_URI'] ?>" method="post">
        <h3>Dodaj Naselje u <?php echo $red['NazivGrada'] ?>-u:</h3><br/>
        <input type="text" name="tbNaselje" />
        <input type="submit" name="btnSubmit" />
    </form>
</div>

```

addPhoto.php

```

<?php if(!isset($_SESSION['uloga']))
{
    header("Location:index.php");
}
else if($_SESSION['uloga']!=1)
{
    header("Location:index.php");
}
if(isset($_REQUEST['btnDodaj']))
{

```

```

$alt = $_FILES['fSlika']['name'];
$tmpSlike=$_FILES['fSlika']['tmp_name'];
$putanja="nekretnine/".$alt;

$provera=mysqli_query($konekcija,"select * from slikenekretnine where
idNekretnina={$_REQUEST['id']}"); if(move_uploaded_file($tmpSlike,$putanja)) {    if
(mysqli_num_rows($provera) == 0)
    $glavna = 1;
else
    $glavna = 0;

    $unos = mysqli_query($konekcija, "insert into slikenekretnine
values('','$alt','$putanja',$_REQUEST['id'],$glavna)");
}
if($unos)    echo
"Uspesan unos";
}

if(isset($_REQUEST['id'])) {
    ?>
    <div class="add">

        <form action="<?php $_SERVER['REQUEST_URI'] ?>" method="post"
enctype="multipart/formdata">

            <h3>Dodaj Sliku:</h3>

            <input type='file' name='fSlika' id='fSlika' /><br/><br/>

            <button type="submit" name="btnDodaj">Dodaj sliku</button>

        </form>

    </div>

<?php
}
?>

```

autor.php

```
<script>

function getVote(int) {

    if (window.XMLHttpRequest) {
        // code for IE7+, Firefox, Chrome, Opera, Safari

        xmlhttp=new XMLHttpRequest();

    } else { // code for IE6, IE5

        xmlhttp=new ActiveXObject("Microsoft.XMLHTTP");

    }

    xmlhttp.onreadystatechange=function() {

        if (this.readyState==4 && this.status==200) {

            document.getElementById("poll").innerHTML=this.responseText;

        }

    }

    xmlhttp.open("GET","poll_vote.php?vote="+int,true);

    xmlhttp.send();

}

</script>
```

```
<div class="autor">
```

```
<div class="omeni">
```

Moje ime je Nemanja Pravdić. Rođen sam 25. Septembra 1996 godine. Završio sam srednju elektrotehničku skolu Nikola Tesla.

Trenutno sam student Visoke ICT škole na smeru Internet Tehnologije, na završnoj godini.

Tri godine se bavim Web-om. Do sada sam napravio cetri sajta, a ovo je peti.

Jezici sa kojima se trenutno bavim su HTML(5), CSS(3), XML, JavaScript, mySQL i PHP.

```
<div id="poll">
```

```
<label>Ocenite moj sajt</label>
```

```
<form>
```

Super:

```
<input type="radio" name="vote" value="0" onclick="getVote(this.value)">
```

```
<br>Ok:
```

```
<input type="radio" name="vote" value="1" onclick="getVote(this.value)">
```

```
<br>Lose:
```

```
<input type="radio" name="vote" value="2" onclick="getVote(this.value)">
```

```
</form>
```

```
</div>
```

```
</div>
```

```
</div>
```

deletegrad.php

```
<?php
```

```
if(!isset($_SESSION['uloga']))
```

```
{
```

```
    header("Location:index.php");
```

```
}
```

```
else if($_SESSION['uloga']!=1)
```

```
{
```

```
    header("Location:index.php");
```

```
}
```

```
if(isset($_REQUEST['id'])){\
```

```
    $upit=mysqli_query($konekcija,"delete from grad where idGrad={$_REQUEST['id']}");
```

```
    if($upit)
```

```
{
```

```
        header("Location:index.php?strana=prikaz");
```

```
}
```

```
}
```

deletenaselje.php

```
<?php if(!isset($_SESSION['uloga']))
```

```
{    header("Location:index.php");
```

```
}
```

```
else if($_SESSION['uloga']!=1)
```

```
{
```

```
    header("Location:index.php");
```

```
}
```

```
if(isset($_REQUEST['id'])){\
```

```

$upit=mysqli_query($konekcija,"delete from naselje where idNaselje={$_REQUEST['id']}");
if($upit)
{
    header("Location:index.php?strana=prikaz");
}
}

deletenekrenine.php
<?php if(!isset($_SESSION['uloga']))
{
    header("Location:index.php");
}
else if($_SESSION['uloga']!=1)
{
    header("Location:index.php");
}
if(isset($_REQUEST['id'])){
    $upit=mysqli_query($konekcija,"delete from nekretnina where idNekretnina={$_REQUEST['id']}");
    $upit2=mysqli_query($konekcija, "delete from slikenekretnine where
idNekretnina={$_REQUEST['id']}");

    header("Location:index.php?strana=prikaz");

}

```

editgrad.php

```

<?php
if(!isset($_SESSION['uloga']))
{
    header("Location:index.php");
}
else if($_SESSION['uloga']!=1)

```



```

{
    header("Location:index.php");
}

if(isset($_REQUEST['btnSubmit'])){
    $grad=$_REQUEST['tbGrad'];
    $unos=mysqli_query($konekcija,"update grad set
    nazivGrada='{ $grad}' where idGrad={$_REQUEST['id']}");

    if($unos)
    {
        echo "Uspesno uneto u bazu";
    }
    else
        echo
"Greska";
}

if(isset($_REQUEST['id'])) {
    $id = $_REQUEST['id'];
    $upit = mysqli_query($konekcija, "select * from grad where idGrad={$id}");
    $red = mysqli_fetch_array($upit);
}
else{
    header("Location:index.php");
}

?>

<div class="add">

    <form action="<?php $_SERVER['REQUEST_URI'] ?>" method="post">

        <h3>Edit Grad:</h3><br/>

        <input type="text" name="tbGrad" value="<?php echo $red['NazivGrada']; ?>" />

        <input type="submit" name="btnSubmit" />

    </form>

</div>

```

editnaselje.php

```

<?php
if(!isset($_SESSION['uloga']))
{
    header("Location:index.php");
}
else if($_SESSION['uloga']!=1)
{
    header("Location:index.php");
}
if(isset($_REQUEST['btnSubmit'])){
    $naselje=$_REQUEST['tbNaselje'];
    $unos=mysqli_query($konekcija,"update naselje set nazivNaselja='{ $naselje}' where
idNaselje={$_REQUEST['id']}");    if($unos)
    {
        echo "Uspesno uneto u bazu";
    }
    else
        echo "Greska";
}
if(isset($_REQUEST['id'])) {    $id
= $_REQUEST['id']; $upit =
mysqli_query($konekcija,
"select * from naselje where
idNaselje={$id}");    $red =
mysqli_fetch_array($upit);
}
else{
header("Location:index.php");
}

```

```
?>
```

```
<div class="add">

<form action="<?php $_SERVER['REQUEST_URI'] ?>" method="post">

    <h3>Edit Naselja:</h3><br/>

    <input type="text" name="tbNaselje" value="<?php echo $red['NazivNaselja']; ?>" />    <input
type="submit" name="btnSubmit" />

</form>

</div>
```

editnekretnine.php

```
<?php
if(!isset($_SESSION['uloga']))
{
    header("Location:index.php");
}
else if($_SESSION['uloga']!=1)
{
    header("Location:index.php");
}
if(isset($_REQUEST['btnSubmit']))
{
    $naziv=$_REQUEST['tbNaziv'];
    $adresa=$_REQUEST['tbAdresa'];
    $grad=$_REQUEST['grad'];
    $naselje=$_REQUEST['naselje'];
    $nacin=$_REQUEST['nacin'];
    $tip=$_REQUEST['tip'];
    $brojSoba=$_REQUEST['tbBrojSoba'];
    $sprat=$_REQUEST['tbSprat'];
    $godinalzgradnje=$_REQUEST['tbGodinalzgradnje'];
```

```

    $cena=$_REQUEST['tbCena'];
    $kvadratura=$_REQUEST['tbKvadratura'];
    if(isset($_REQUEST['chbTop']))
        $top=1;    else
    $top=0;
    if(isset($_REQUEST['chbPreporuka']))
    $preporuka=1;

    else
        $preporuka=0;
    $opis=$_REQUEST['taOpis'];

    $unos=mysqli_query($konekcija,"update nekretnina set Naziv='{ $naziv}', idGrad={ $grad},
idNaselje={ $naselje}, idTipNekretnine={ $tip}, idNacin={ $nacin}, Adresa='{ $adresa}',
BrojSoba={ $brojSoba}, Sprat={ $sprat}, Godinalzgradnje={ $godinalzgradnje}, Cena={ $cena},
Kvadratura={ $kvadratura}, Opis='{ $opis}', Preporuka={ $preporuka}, Top={ $top} where
idNekretnina={ $_REQUEST['id']}");

    if($unos)        echo "Uspesno uneto
u bazu!";

    else
        echo "Doslo je do greske!";
}
if(isset($_REQUEST['id'])){
    $upit=mysqli_query($konekcija,"select * from nekretnina where idNekretnina={ $_REQUEST['id']}");
    $red=mysqli_fetch_array($upit);
}
?>

<script>
function prikazNaselja(str) {
    if (str == "") {
        document.getElementById("ajax").innerHTML = "";
        return;
    } else {
        if (window.XMLHttpRequest) {
            // code for IE7+, Firefox, Chrome, Opera, Safari

```

```

xmlhttp = new XMLHttpRequest();

    } else {

        // code for IE6, IE5        xmlhttp = new
ActiveXObject("Microsoft.XMLHTTP");

    }

    xmlhttp.onreadystatechange = function() {        if (this.readyState
== 4 && this.status == 200) {
document.getElementById("ajax").innerHTML=this.responseText;

    }

    };

    xmlhttp.open("GET","prikazNaselja.php?q="+str,true);
    xmlhttp.send();

    }

}
</script>

<h3>

    Dodavanje nekretnine...<br/><br/><br/>

</h3>

<div class="login">

    <form name="dodavanje" action="<?php $_SERVER['REQUEST_URI'] ?>" method="post">

        <table>

            <tr>

                <td><p>Naziv:</p></td>

                <td><input type="text" name="tbNaziv" id="tbNaziv" value="<?php echo $red['Naziv']
?>"/></td>

            </tr>

            <tr>

                <td><p>Adresa:</p></td>

                <td><input type="text" name="tbAdresa" id="tbAdresa" value="<?php echo $red['Adresa']
?>"/></td>

            </tr>

            <tr>

```

```

<td><p>Grad:</p></td>

<td>

    <select name="grad" onchange="prikazNaselja(this.value)">
        <option value="0">Izabreite grad...</option>

        <?php
            $rez=mysqli_query($konekcija,"select * from grad");
while($r=mysqli_fetch_array($rez))
            {
                if($r['idGrad']==$red['idGrad'])                echo "<option
value='".$r['idGrad']."' selected>".$r['NazivGrada']."</option>";
                else
                    echo "<option value='".$r['idGrad']."'>".$r['NazivGrada']."</option>";
            }
        ?>
    </select>

</td>

</tr>

<tr id="ajax">

    <td>

        <p>Izaberite naselje: </p>

    </td>

    <td>

        <select name="naselje">
            <option value="0">Izabreite naselje...</option>

            <?php
                $rez=mysqli_query($konekcija,"select * from naselje where idGrad={$red['idGrad']}");
while($r=mysqli_fetch_array($rez))
                {
                    if($r['idNaselje']==$red['idNaselje'])                echo "<option
value='".$r['idNaselje']."' selected>".$r['NazivNaselja']."</option>";
                    else

```

```

        echo "<option value='".$.$r['idNaselje']."'>".$.$r['NazivNaselja']."</option>";
    }
    ?>
</td>
</tr>
<tr>
    <td>
        <p>Nacin prodaje:</p>
    </td>
    <td>
        <select name="nacin">
            <option value="0">Izabreite nacin...</option>
            <?php
                $rez=mysqli_query($konekcija,"select * from nacinprodaje");
while($r=mysqli_fetch_array($rez))
            {
                if($r['idNacinProdaje']==$red['idNacin'])
                    echo "<option value='".$.$r['idNacinProdaje']."'
selected>".$.$r['NazivNacina']."</option>";
                else
                    echo "<option value='".$.$r['idNacinProdaje']."'>".$.$r['NazivNacina']."</option>";
            }
            ?>
        </select>
    </td>
</tr>
<tr>
    <td>
        <p>Tip nekretnine:</p>
    </td>
    <td>
        <select name="tip">

```

```

        <option value="0">Izabreite tip...</option>

        <?php
            $rez=mysqli_query($konekcija,"select * from tipnekretnine");
while($r=mysqli_fetch_array($rez))
        {
            if($r['idTipNekretnine']==$red['idTipNekretnine'])
                echo "<option value='".$r['idTipNekretnine']."' selected>".$r['NazivTipa']."</option>";
            else
                echo "<option value='".$r['idTipNekretnine']."'>".$r['NazivTipa']."</option>";
        }
        ?>
    </select>
</td>
</tr>
<tr>
    <td><p>Broj soba:</p></td>
    <td><input type="number" name="tbBrojSoba" id="tbBrojSoba" value="<?php echo
$red['BrojSoba'] ?>"/></td>
</tr>
<tr>
    <td><p>Sprat:</p></td>
    <td><input type="number" name="tbSprat" id="tbSprat" value="<?php echo $red['Sprat']
?>"/></td>
</tr>
<tr>
    <td><p>Godina izgradnje:</p></td>
    <td><input type="number" name="tbGodinalzgradnje" id="tbGodinalzgradnje"
value="<?php echo $red['Godinalzgradnje'] ?>"/></td>
</tr>
<tr>
    <td><p>Cena:</p></td>
    <td><input type="number" name="tbCena" id="tbCena" value="<?php echo $red['Cena']
?>"/></td>

```



```

</tr>

<tr>

    <td><p>Kvadratura:</p></td>

    <td><input type="number" name="tbKvadratura" id="tbKvadratura" value="<?php echo
$red['Kvadratura'] ?>"/></td>

</tr>

<tr>

    <td><p>Top ponuda:</p></td>

    <td><?php          if($red['Top']==1)          echo "<input
type='checkbox' name='chbTop' id='chbTop' checked/>";

        else

            echo "<input type='checkbox' name='chbTop' id='chbTop' />";

        ?>

    </td>

</tr>

<tr>

    <td><p>Preporuka:</p></td>

    <td><?php          if($red['Preporuka']==1)          echo "<input
type='checkbox' name='chbPreporuka' id='chbPreporuka' checked/>";

        else

            echo "<input type='checkbox' name='chbPreporuka' id='chbPreporuka' />";

        ?></td>

</tr>

<tr>

    <td><p>Opis:</p></td>

    <td><textarea name="taOpis" id="taOpis"><?php echo $red['Opis'] ?></textarea></td>

</tr>

<tr>

    <td colspan="2" align="center">

        <input type="submit" name="btnSubmit" id="btnSubmit"/>

    </td>

</tr>

```

```

        </table>
    </form>
</div>

```

editovanje.php

```

<script>

</script> <?php
include('konekcija.inc'); $q
= intval($_GET['q']);
if($q==1)
{?>
    <table border="1">
        <tr>
            <td>Naziv</td>
            <td>Izmeni</td>
            <td>Brisanje</td>
        </tr>
        <?php
            $grad=mysqli_query($konekcija,"select * from grad");
while($g=mysqli_fetch_array($grad)){
    echo "<tr>

        <td>{$g['NazivGrada']}</td>

        <td><a href='index.php?strana=editgrad&id={$g['idGrad']}'>Izmeni...</a></td>

        <td><a href='index.php?strana=deletegrad&id={$g['idGrad']}'>Izbrisi...</a></td>

    </tr>";
}
?>

```

```

<tr>
  <th colspan="3">
    <a href="index.php?strana=addGrad">Dodaj novo</a>
  </th>
</tr>
</table>
<?php
}
if($q==2)
{?>
  <select name="grad" onchange="edit1(this.value)">
    <option value="0">Izabrite grad...</option>
    <?php
      $rez=mysqli_query($konekcija,"select * from grad");   while($r=mysqli_fetch_array($rez))
      {
        echo "<option value='".$r['idGrad']."'>".$r['NazivGrada']."</option>";
      }
    ?>
  </select>
  <div id="tabela1">

  </div>
<?php
}
?>

```

editovanje1.php

```

<?php
include('konekcija.inc');
$d = intval($_GET['d']);
?>

```

```

<table border="1">
  <tr>
    <td>Naziv</td>
    <td>Izmeni</td>
    <td>Brisanje</td>
  </tr>
  <?php
    $grad=mysqli_query($konekcija,"select * from naselje where idGrad={$d}");
    while($g=mysqli_fetch_array($grad)){
      echo "<tr>

        <td>{$g['NazivNaselja']}</td>

        <td><a href='index.php?strana=editnaselje&id={$g['idNaselje']}'>Izmeni...</a></td>

        <td><a href='index.php?strana=deletenaselje&id={$g['idNaselje']}'>Izbrisi...</a></td>

      </tr>";
    }
  ?>
  <tr>
    <th colspan="3">
      <a href="index.php?strana=addNaselje&id=<?php echo $d; ?>">Dodaj novo</a>
    </th>
  </tr> </table>

```

filter.php

```

<script> function prikazNaselja(str)
{
  if (str == "") {
    document.getElementById("ajax").innerHTML = "";
  }
}

```

```

        return;
    } else {
        if (window.XMLHttpRequest) {
            // code for IE7+, Firefox, Chrome, Opera, Safari
            xmlhttp = new XMLHttpRequest();
        } else {
            // code for IE6, IE5
            xmlhttp = new
            ActiveXObject("Microsoft.XMLHTTP");
        }
        xmlhttp.onreadystatechange = function() {
            if (this.readyState
            == 4 && this.status == 200) {
                document.getElementById("ajax").innerHTML=this.responseText;
            }
        };
        xmlhttp.open("GET","prikazNaselja.php?q="+str,true);
        xmlhttp.send();
    }
}
</script>
<div class="filter">
    <form action='index.php?strana=prikaz' method='GET'>
        <input type="hidden" name="strana" value="prikaz"/>

    <table>
        <tr>
            <td>
                <p>Izaberite nacin: </p>
            </td>
            <td>
                <select name="nacin">
                    <option value="0">Izabreite nacin...</option>
                </select>
            </td>
        </tr>
    </table>
    <?php

```

```

        $rez=mysqli_query($konekcija,"select * from nacinprodaje");
while($r=mysqli_fetch_array($rez))
    {
        echo "<option value='". $r['idNacinProdaje']. "'>". $r['NazivNacina']. "</option>";
    }
    ?>
</select>
</td>
</tr>
<tr>
    <td>
        <p>Izaberite tip: </p>
    </td>
    <td>
        <select name="tip">
            <option value="0">Izaberite tip...</option>
            <?php
                $rez=mysqli_query($konekcija,"select * from tipnekretnine");
while($r=mysqli_fetch_array($rez))
    {
        echo "<option value='". $r['idTipNekretnine']. "'>". $r['NazivTipa']. "</option>";
    }
    ?>
        </select>
    </td>
</tr>
<tr>
    <td>
        <p>Izaberite grad: </p>
    </td>
    <td>

```

```

<select name="grad" onchange="prikazNaselja(this.value)">
  <option value="0">Izabreite grad...</option>

  <?php
    $rez=mysqli_query($konekcija,"select * from grad");
while($r=mysqli_fetch_array($rez))
    {
        echo "<option value='".$r['idGrad']."'>".$r['NazivGrada']."</option>";
    }
  ?>
</select>
</td>
</tr>

<tr id="ajax">
  <td>
    <p>Izaberite naselje: </p>
  </td>
  <td>
    <select name="naselje">
      <option value="0">Izabreite naselje...</option>
    </td>
  </tr>

  <tr>
    <td align="center">
      <button type="submit" id="btnPretraga" name="btnPretraga">Pretraga</button></td>
    <td align="center">
      <button type="reset" id="btnPonisti" name="btnPonisti">Ponisti</button>

    </td>
  </tr>

```

```

</table>
</form>
</div>

```

header.php

```

<div class="header">
  <div class="logo">
    <a href="index.php"></a>  </div>

  <div class="meni">
    <h1 align="center">NEKRETNINE doo</h1>
    <ul class="dropdown">
      <?php

        $upit="select * from meni where Parent is null";

        $rez=mysqli_query($konekcija,$upit);

        echo "<ul>";

        while($r=mysqli_fetch_array($rez))

        {

          echo "<li><a href='".$r['Link']."'>".$r['Naziv']."'</a>";

          $upit2="select * from meni where Parent='".$r['idMeni']."'";

          $rez2=mysqli_query($konekcija,$upit2);

```



```

if(mysqli_num_rows($rez2)>1)

{

    echo "<ul>";

    while($r2=mysqli_fetch_array($rez2))

    {

        echo "<li><a href='".$r2['Link']."'>".$r2['Naziv']."</a></li>";

    }

    echo "</ul>";

}

echo "</li>";

}

if(!isset($_SESSION['uloga']))){?>

    <li>

        <a href="index.php?strana=login">Login/Register</a>

    </li>

</ul>

</div>

```

```

<?php }
else if($_SESSION['uloga']==1 || $_SESSION['uloga']==2){
    $uloga=$_SESSION['uloga'];
    ?>

    <li>
        <a href="index.php?strana=profil">Profil</a>
    </li>
    <li>
        <a href="index.php?strana=logout">Logout</a>        </li></ul></div>
<?php
if($uloga==1){ ?>
    <div class="adminpanel">
        <a href="index.php?strana=prikaz">Admin panel</a>

    <?php echo "</div>"; } } ?>

</div>

```

index.php

```

<?php
    @session_start();
    @ob_start();    require
    ("konekcija.inc"); ?>

<html>
<head>

    <meta name="description" content="Prodaja, izdavanje nekrenina" />

    <meta name="keywords" content="nekretnine, stanovi, kuce, prodaja, izdavanje"/>

    <meta http-equiv="Content-Type" content="text/html; charset=utf-8"/>

```

```

<meta name="author" content="Nemanja Pravdić">

<title>Nekretnine doo</title>
<link rel="icon" href="images/logo.ico">
<script src="java.js"></script>

<link rel="stylesheet" type="text/css" href="slick/slick.css"/>
<link rel="stylesheet" type="text/css" href="slick/slick-theme.css"/>

<script type="text/javascript" src="//code.jquery.com/jquery-1.11.0.min.js"></script>
<script type="text/javascript" src="//code.jquery.com/jquery-migrate-1.2.1.min.js"></script>
<script type="text/javascript" src="slick/slick.min.js"></script>

<link rel="stylesheet" href="style.css">
</head>
<body>
    <div id="drzac">        <?php
require ("header.php");
    ?>
    <div class="cisti"></div>
    <div class="main">

        <?php
if(!isset($_GET['strana']))
    $strana="";
else
    $strana=$_GET['strana'];
switch($strana)
    {

```

```

        case('prikaz'):include ("prikaz.php");break;
case('kontakt'):include ("kontakt.php");break;
case('autor'):include ("autor.php");break;
case('login'):include ('login.php');break;          case('profil'):include
('profil.php');break;          case('logout'):include
('logout.php');break;          case('add'):include ('add.php');break;
case('edit'):include
('editnekretnine.php');break;          case('delete'):include
('deletenekretnine.php');break;          case('nekretnina'):include
('prikaznekretnine.php');break;          case('addPhoto'):include
('addPhoto.php');break;          case('addGrad'):include
('addgrad.php');break;          case('editgrad'):include
('editgrad.php');break;          case('deletegrad'):include
('deletegrad.php');break;          case('addNaselje'):include
('addNaselje.php');break;          case('editnaselje'):include
('editnaselje.php');break;          case('deletenaselje'):include
('deletenaselje.php');break;          default:
include("pocetna.php");break;
    }
    ?>
</div>
<div class="cisti"></div>
<div class="dokumentacija">
    <?php      if(isset($_SESSION['id'])) &&
$_SESSION['id']==1)      echo "<a
href='>Dokumentacija</a>";
    ?>
</div>
</div>

```

```
</body> </html>
```

```
java.js function
```

```
register(){
```

```
var x=document.sign;
```

```
var ime=x.tbIme.value;
```

```
var prezime=x.tbPrezime.value;
```

```
var email=x.tbEmail.value;
```

```
var pass=x.tbPass.value;
```

```
var pass2=x.tbPass2.value;
```

```
var relmePrezime=/^[A-Z]{1}[a-z]{2,15}$/;
```

```
var reEmail=/^\w+([\.-]?\w+)*@\w+([\.-]?\w+)*(\.\w{2,3})+$/;
```

```
var rePass=/^\w{4,20}$/;
```

```
if(!ime.match(relmePrezime)) {
```

```
    alert("Pogresan unos imena!");
```

```
    return false;
```

```
}
```

```
if(!prezime.match(relmePrezime))
```

```
{  
  
    alert("Pogresan unos prezimena!");  
  
    return false;  
  
}  
  
if(!email.match(reEmail))  
  
{  
  
    alert("Pogresan unos email-a");  
  
    return false;  
  
}  
  
if(!pass.match(rePass))  
  
{  
  
    alert("Pogresan unos u polju password");  
  
    return false;  
}  
  
if(pass!=pass2)  
  
{  
  
    alert("Polja za password se ne podudaraju!");
```

```
return false;
```

```
}
```

```
}
```

konekcija.inc

```
<?php
```

```
$konekcija=mysqli_connect("sql307.byethost.com","b17_21617483","pravda96","b17_21617483_php2_sajt1");
```

kontakt.php

```
<script> function pitanje()
```

```
{
```

```
var x = document.pitanja;
```

```
var ime = x.tbName.value;
```

```
var email = x.tbMail.value;
```

```
var pitanje = x.taPitanje.value;    var relme = /^[A-Z]{1}[a-z]{2,15}\s[A-Z]{1}[a-z]{2,15}$/;
```

```
var reEmail = /^\\w+([\\.-]?\\w+)*@\\w+([\\.-]?\\w+)*\\.\\w{2,3}+$/;
```

```
if (!ime.match(relme)) {
```

```
document.getElementById("tbName").style.border = "3px solid red";

return false;

}

else {

    document.getElementById("tbName").style.border = "";

}

if (!email.match(reEmail)) {        document.getElementById("tbMail").style.border = "3px solid
red";

    return false;

}

else

{

    document.getElementById("tbMail").style.border = "";

}

if (pitanje.length < 1) {

    document.getElementById("taPitanje").style.border = "3px solid red";

    return false;

}

else {
```



```

document.getElementById("taPitanje").style.border = "";

alert("Odgovoriceemo na vise pitanje u sto kracem roku");

window.open('mailto:nepravdic@hotmail.rs?subject=sneakers,pitanje&body=' + pitanje + ' '
+ email);

    }
}
</script>
<div class="kontakt">
<form action="<?php echo $_SERVER['REQUEST_URI'];?>" method="post" name="pitanja"
onsubmit="return pitanje();" >

<table>

    <tr><th colspan="2"><p class="pitanje">Ukoliko imate nekih pitanja slobodno
pitajte</p></th></tr>

    <tr>

        <th><p>Ime i prezime:</p></th></tr><tr>

        <th><input type="text" name="tbName" id="tbName"/></th>

    </tr>

    <tr>

        <th><p>Mail:</p></th></tr>

        <th><input type="text" name="tbMail" id="tbMail"/></th>

```

```

</tr>

<tr>

    <th><textarea id="taPitanje" name="taPitanje" placeholder="Vase
pitanje..."></textarea></th>

</tr>

<tr>

    <th><input type="submit" id="btnPitanje" name="btnPitanje" value="SEND" /></th>
</tr>

</table>

</form>

</div>

```

login.php

```

<div class="login">

    <h3>LOGIN</h3>

    <?php
if(isset($_POST['btnLogin'])){
    $email=addslashes($_POST['tbEmail']);
    $password=addslashes($_POST['tbPassword']);
    $rez=mysqli_query($konekcija,"select * from korisnik where Mail='{ $email}' and
Lozinka=md5('{ $password}')");
    if(mysqli_num_rows($rez)==1){
    $r=mysqli_fetch_array($rez);
        $_SESSION['uloga']=$r['idUloga'];
    $_SESSION['id']=$r['idKorisnik'];        header("Location:index.php");
    }
}

```

```

else{          echo "<p class='obavestenje'>Pogresan
unos!</p>";
    }

}

?>

```

```

<form action="index.php?strana=login" method="post" enctype="multipart/form-data">
    <table>
        <tr>
            <td align="right"><p>Email:</p></td>
            <td><input type="text" id="tbEmail" name="tbEmail" /></td>
        </tr>
        <tr>
            <td align="right"><p>Password:</p></td>
            <td><input type="password" id="tbPassword" name="tbPassword" /></td>
        </tr>
        <tr>
            <td colspan="2" align="center"><input type="submit" id="btnLogin" name="btnLogin"
value="Login"/></td>
        </tr>
    </table>
</form>
<h3>REGISTER</h3>
<?php
if(isset($_POST['btnRegister']))
{
    $ime=$_POST['tbIme'];
    $prezime=$_POST['tbPrezime'];
    $email=$_POST['tbEmail'];
    $password=$_POST['tbPass'];
    $test=mysqli_query($konekcija,"select * from korisnik where Mail='{$_email}'");

```

```

if(mysqli_num_rows($test)==1)
{
    echo "<p>Korisnik sa unetom email adresom vec postoji!</p>";
}
else{
    $unos=mysqli_query($konekcija,"insert into korisnik
values('','2','$ime','$prezime','$email','".md5($password)."')");
    if($unos){
        $unosSesije=mysqli_query($konekcija,"select * from korisnik where Mail='{$email}' and
Lozinka=md5('{$password}')");
        $r=mysqli_fetch_array($unosSesije);
        $_SESSION['uloga']=$r['idUloga'];
$_SESSION['id']=$r['idKorisnik'];        header("Location:index.php");
    }
}
}
?>

<form action='index.php?strana=login' method='post' name="sign" onsubmit="return register()">
<table>

<tr>

<td align="right"><p>Ime:</p></td>

<td><input type='text' name='tblme' id='tblme'/></td>

</tr>

<tr>

<td><p align="right">Prezime:</p></td>

```

```

<td><input type='text' name='tbPrezime' id='tbPrezime' /></td>

</tr>

<tr>

<td><p align="right">Email:</p></td>

<td><input type='text' name='tbEmail' id='tbEmail' /></td>

</tr>

<tr>

<td><p align="right">Password:</p></td>

<td><input type='password' name='tbPass' id='tbPass' /></td>

</tr>

<tr>

<td><p align="right">Ponovite password:</p></td>

<td><input type='password' name='tbPass2' id='tbPass2' /></td>

</tr>

<tr>

<th colspan="2"><input type="submit" name="btnRegister" value="Registruj se" /></th>

```

```
</tr>
```

```
</table>
```

```
</form>
```

```
</div>
```

[logout.php](#)

```
<?php
```

```
session_destroy();
```

```
header("Location:index.php");
```

```
?>
```

[pocetna.php](#)

```
<?php
```

```
require ("filter.php");
```

```
?>
```

```
<div class="prikaz">
```

```
<h2 align="center">TOP PONUDA</h2>
```

```
<div class="top-ponuda">
```

```
<?php
```

```

    $upit=mysqli_query($konekcija,"select *, n.idNekretnina as id from nekretnina n left join
    slikenekretnine s on n.idNekretnina=s.idNekretnina inner join tipnekretnine t on
    t.idTipNekretnine=n.idTipNekretnine inner join nacinprodaje nacin on
    nacin.idNacinProdaje=n.idNacin inner JOIN grad g on g.idGrad=n.idGrad inner join naselje na on
    n.idNaselje=na.idNaselje where Top=1 and (Glavna=1 or Glavna is null) order by rand() limit 4");
    while ($r=mysqli_fetch_array($upit)) {
```

```

?>

<a href="index.php?strana=nekretnina&id=<?php echo $r['id']; ?>">

    <div class="item">

        <p>Grad: <?php echo $r['NazivGrada'] ?></p>

        <p>Naselje: <?php echo $r['NazivNaselja'] ?></p>

        <p>Tip: <?php echo $r['NazivTipa'] ?></p>

        <p>Cena: <?php echo $r['Cena'] ?>&euro;</p>

        <p>Nacin: <?php echo $r['NazivNacina'] ?></p>

        <p>Kvadratura: <?php echo $r['Kvadratura'] ?>m<sup>2</sup></p>

    </div>

</a>

<?php
}
?>

</div>

<h2 align="center">NASA PREPORUKA</h2>

<div class="top-ponuda">

    <?php

        $upit=mysqli_query($konekcija,"select *, n.idNekretnina as id from nekretnina n left join
slikenekretnine s on n.idNekretnina=s.idNekretnina inner join tipnekretnine t on
t.idTipNekretnine=n.idTipNekretnine inner join nacinprodaje nacin on
nacin.idNacinProdaje=n.idNacin inner JOIN grad g on g.idGrad=n.idGrad inner join naselje na on
n.idNaselje=na.idNaselje where Preporuka=1 and (Glavna=1 or Glavna is null) order by rand() limit
4");

        while ($r=mysqli_fetch_array($upit)) {

            ?>

            <a href="index.php?strana=nekretnina&id=<?php echo $r['id']; ?>">

                <div class="item">

                    <p>Grad: <?php echo $r['NazivGrada'] ?></p>

                    <p>Naselje: <?php echo $r['NazivNaselja'] ?></p>

                    <p>Tip: <?php echo $r['NazivTipa'] ?></p>

```

```

<p>Cena: <?php echo $r['Cena'] ?>&euro;</p>
<p>Nacin: <?php echo $r['NazivNacina'] ?></p>
<p>Kvadratura: <?php echo $r['Kvadratura'] ?>m<sup>2</sup></p>
</div>
</a>
<?php
}
?>
</div>
</div>

```

[poll_result.txt](#)

```
32||11||5
```

[poll_vote.php](#)

```

<?php

$vote = $_REQUEST['vote'];

//get content of textfile

$filename = "poll_result.txt";
$content = file($filename);

//put content in array

$array = explode("||", $content[0]);

```



```
$super = $array[0];
```

```
$ok= $array[1];
```

```
$lose=$array[2];
```

```
if ($vote == 0) {
```

```
    $super = $super + 1;
```

```
}
```

```
if ($vote == 1) {
```

```
    $ok = $ok + 1;
```

```
}
```

```
if ($vote == 2) {
```

```
    $lose = $lose + 1;
```

```
}
```

```
$insertvote = $super."||".$ok."||".$lose;
```

```
$fp = fopen($filename,"w");
```

```
fputs($fp,$insertvote);
```

```
fclose($fp);
```

```
?>
```

```
<label>Rezultat:</label>
```

```
<table>
```

```
<tr>
```

```
<td>Super:</td>
```

```
<td>
```

```
'
```

```
height='20px'>
```

```
<?php echo(100*round($super/($ok+$super+$lose),2)); ?>%
```

```
</td>
```

```
</tr>
```

```
<tr>
```

```
<td>Ok:</td>
```

```
<td>
```

```
'
```

```
height='20'>
```

```
<?php echo(100*round($ok/($ok+$super+$lose),2)); ?>%
```

```
</td>
```

```
</tr>
```

```
<tr>
```

```
<td>Lose:</td>
```

```
<td>
```

```
'
```

```
height='20'>
```

```
<?php echo(100*round($lose/($ok+$super+$lose),2)); ?>%
```

```
</td>
```

```
</tr>
```

</table>

[prikaz.php](#)

```
<script>  function edit(str)
{
    if (str == "") {
        document.getElementById("tabela").innerHTML = "";
        return;
    } else {
        if (window.XMLHttpRequest) {
            // code for IE7+, Firefox, Chrome, Opera, Safari
xmlhttp = new XMLHttpRequest();
        } else {
            // code for IE6, IE5
            xmlhttp = new ActiveXObject("Microsoft.XMLHTTP");
        }
        xmlhttp.onreadystatechange = function() {            if (this.readyState
== 4 && this.status == 200) {
document.getElementById("tabela").innerHTML=this.responseText;
        }
        };
        xmlhttp.open("GET","editovanje.php?q="+str,true);
        xmlhttp.send();
    }
}

function edit1(str) {
    if (str == "") {
        document.getElementById("tabela1").innerHTML = "";
        return;
    } else {
        if (window.XMLHttpRequest) {
            // code for IE7+, Firefox, Chrome, Opera, Safari
```

```

xmlhttp = new XMLHttpRequest();

    } else {

        // code for IE6, IE5

        xmlhttp = new ActiveXObject("Microsoft.XMLHTTP");

    }

    xmlhttp.onreadystatechange = function() {          if (this.readyState ==
4 && this.status == 200) {
document.getElementById("tabela1").innerHTML=this.responseText;

    }

    };

    xmlhttp.open("GET","editovanje1.php?d="+str,true);
    xmlhttp.send();

    }

}

</script> <?php require
("filter.php");
?>

<div class="prikaz">

<?php
if(isset($_SESSION['uloga']) && $_SESSION['uloga']==1) {
?>

<div class="nekretnina">

    <h2 align="center"><a href="index.php?strana=add">DODAJ NEKRETINU...</a></h2>

    <h3>Editovanje, dodavanje, brisanje</h3>

    <select name="admin" onchange="edit(this.value)">

        <option value="0">Izaberite...</option>

        <option value="1">Grad</option>

        <option value="2">Naselje</option>

    </select>

    <div id="tabela">

```

```

</div>
</div>
<?php
}
?>
<?php  if(!isset($_GET['pagin']))

{$page=1;}

else{

    $page=$_GET['pagin'];}

if($page==1 || $page=="")

{

    $limit=0;

}

else

{

    $limit=($page*8)-8;

}

    $ prikaz = "select *, n.idNekretnina as id from nekretnina n left join slikenekretnine s on
n.idNekretnina=s.idNekretnina inner join tipnekretnine t on t.idTipNekretnine=n.idTipNekretnine
inner join nacinprodaje nacin on nacin.idNacinProdaje=n.idNacin inner JOIN grad g on
g.idGrad=n.idGrad inner join naselje na on n.idNaselje=na.idNaselje";  $pomoc=0;
if(isset($_REQUEST['nacin']) && $_REQUEST['nacin']!=0){    if($pomoc==0){

```

```

    $prikaz.=" where n.idNacin={$_REQUEST['nacin']}";
    $pomoc=1;
}
else
    $prikaz.=" and n.idNacin={$_REQUEST['nacin']}";
}
if(isset($_REQUEST['tip']) && $_REQUEST['tip']!=0){    if($pomoc==0){
    $prikaz.=" where n.idTipNekretnine={$_REQUEST['tip']}";
    $pomoc=1;
}
else
    $prikaz.=" and n.idTipNekretnine={$_REQUEST['tip']}";
}
if(isset($_REQUEST['grad']) && $_REQUEST['grad']!=0){    if($pomoc==0){
    $prikaz.=" where n.idGrad={$_REQUEST['grad']}";
    $pomoc=1;
}
else
    $prikaz.=" and n.idGrad={$_REQUEST['grad']}";
}
if(isset($_REQUEST['naselje']) && $_REQUEST['naselje']!=0){    if($pomoc==0){
    $prikaz.=" where n.idNaselje={$_REQUEST['naselje']}";
    $pomoc=1;
}
else
    $prikaz.=" and n.idNaselje={$_REQUEST['naselje']}";
}
if($pomoc==0){
    $prikaz.=" where (Glavna=1 or Glavna is null)";
    $pomoc=1;
}

```

```

else
    $prikaz.=" and (Glavna=1 or Glavna is null)";
    $prikaz.=" order by id desc";
    $brojN=$prikaz." limit {$limit},8";
    $ispis1=mysqli_query($konekcija,$prikaz);
    $ispis=mysqli_query($konekcija,$brojN);
    $broj=mysqli_num_rows($ispis1); while
    ($r=mysqli_fetch_array($ispis)) {
        ?>
        <div class="nekretnina">
            <div class="nekretninaSlika">
                " />
            </div>
            <div class="opis">
                <ul>
                    <li><p>Grad:<?php echo $r['NazivGrada']; ?></p></li>
                    <li><p>Naselje:<?php echo $r['NazivNaselja']; ?></p></li>          <li><p>Tip:<?php
echo $r['NazivTipa']; ?></p></li>
                    <li><p>Nacin prodaje:<?php echo $r['NazivNacina']; ?></p></li>
                    <li><p>Kvadratura:<?php echo $r['Kvadratura'] ?>m<sup>2</sup></p></li>
                    <li><p>Cena:<b><?php echo $r['Cena']; ?>&euro;</b></p></li>
                </ul>
            </div>
            <div class="opisAdmin">
                <?php          if (isset($_SESSION['uloga']) &&
$_SESSION['uloga'] == 1) {
                    ?>
                    <ul>
                        <li>
                            <a href="index.php?strana=edit&id=<?php echo $r['id']; ?>">Edituj nekretninu...</a>
                        </li>
                        <li>

```



```

        <a href="index.php?strana=addPhoto&id=<?php echo $r['id']; ?>">Dodaj sliku za
nekretninu...</a>
    </li>
    <li>
        <a href="index.php?strana=delete&id=<?php echo $r['id']; ?>">Izbrisi
nekretninu...</a>
    </li>
</ul>
<?php
}
?>
<button><a href="index.php?strana=nekretnina&id=<?php echo $r['id']; ?>">Prikazi
detalje...</a></button>
</div>
<div class="cisti"></div>

</div>
<?php
}
?>
<div id="pagination">

<?php

$p=ceil($broj/8);

for($i=1;$i<=$p;$i++) {        if
(!isset($_REQUEST['pagin'])) {        if
($page == $i) {

    echo "<a href='{$_SERVER['REQUEST_URI']}'&pagin=$i' class='active pagin'>$i</a>";

} else {

```

```

        echo "<a href='{$_SERVER['REQUEST_URI']}'&pagin=$i' class='pagin'>$i</a>";

    }

}

else{
    $url=$_SERVER['REQUEST_URI'];
    $url1=explode('&',$url);
    $url2=array_pop($url1);
    $url3=implode("&",$url1);
    if ($page == $i) {

        echo "<a href='{ $url3}&pagin=$i' class='active pagin'>$i</a>";

    } else {

        echo "<a href='{ $url3}&pagin=$i' class='pagin'>$i</a>";

    }

}

?>

</div>
</div>

prikazNaselja.php
<?php
include('konekcija.inc');

```

```
$q = intval($_GET['q']);
```



```
<td>
```

```
    <p>Izaberite naselje: </p>
```

```
</td>
```

```
<td>
```

```
    <select name="naselje">
```

```
        <option value="0">Izabrite naselje...</option>
```

```
        <?php
```

```
            $rez=mysqli_query($konekcija,"select * from naselje where idGrad={$q} order by
NazivNaselja");    while($r=mysqli_fetch_array($rez))
```

```
        {
```

```
            echo "<option value='". $r['idNaselje']. "'>". $r['NazivNaselja']. "</option>";
```

```
        }
```

```
        ?>
```

```
    </select>
```

```
</td>
```

prikaznekrenine.php

```
<script>
```

```
    $(document).ready(function(){
```

```
        $(' .slider').slick({
```

```
        });
```

```
        });
```

```
</script>
```

```
<div class="prikazNekretine">
```

```
    <?php
```

```
$upit=mysqli_query($konekcija,"select *, n.idNekretnina as id from nekretnina n left join
slikenekretnine s on n.idNekretnina=s.idNekretnina inner join tipnekretnine t on
t.idTipNekretnine=n.idTipNekretnine inner join nacinprodaje nacin on
nacin.idNacinProdaje=n.idNacin inner JOIN grad g on g.idGrad=n.idGrad inner join naselje na on
n.idNaselje=na.idNaselje where n.idNekretnina={$_REQUEST['id']}");
```

```
$rez=mysqli_fetch_array($upit);
```

```
?>
```

```
<h2 align="center"><?php echo $rez['Naziv'] ?></h2>
```

```
<div class="slider">
```

```
<?php
```

```
$upit=mysqli_query($konekcija,"select * from slikenekretnine where
idNekretnina={$_REQUEST['id']}");
```

```
while($r=mysqli_fetch_array($upit))
```

```
{
```

```
echo "<div class='slika'><img src='{$r['url']}' alt='{$r['alt']}' /> </div>";
```

```
}
```

```
?>
```

```
</div>
```

```
<table>
```

```
<tr>
```

```
<th><p>Adresa:</p></th>
```

```
<td><p> <?php
```

```
echo $rez['Adresa'];
```

```
?>
```

```
</p></td>
```

```
</tr>
```

```
<tr>
```

```
<th><p>Grad:</p></th>
```

```
<td><p>
```

```
<?php
```

```
echo $rez['NazivGrada'];
```

```
?>
```

```

        </p></td>
    </tr>
    <tr>
        <th><p>Naselje:</p></th>
        <td><p>
            <?php          echo
$rez['NazivNaselja'];
            ?>
        </p></td>
    </tr>
    <tr>
        <th><p>Tip:</p></th>
        <td><p>
            <?php          echo
$rez['NazivTipa'];
            ?>
        </p></td>
    </tr>
    <tr><th><p>Nacin:</p></th> <td><p>
        <?php
            echo $rez['NazivNacina'];
            ?>
        </p></td>
    </tr>
    <tr>
        <th><p>Broj soba:</p></th>
        <td><p>
            <?php
echo $rez['BrojSoba'];
            ?>
        </p></td>
    </tr>

```

```

</tr>
<tr>
  <th><p>Sprat:</p></th>
  <td><p>
    <?php
echo $rez['Sprat'];
    ?>
  </p></td>
</tr>
<tr>
  <th><p>Godina izgradnje:</p></th>
  <td><p>
    <?php
    echo $rez['Godinalzgradnje'];
    ?>
  </p></td>
</tr>
<tr>
  <th><p>Kvadratura:</p></th> <td><p>
    <?php
    echo $rez['Kvadratura'];
    ?>m<sup>2</sup>
  </p></td>
</tr>
<tr>
  <th><p>Cena:</p></th>
  <td><p>
    <?php
echo $rez['Cena'];
    ?>&euro;
  </p></td>

```

```

</tr>
<tr>
  <th><p>Opis</p></th>
  <td><p>
    <?php
echo $rez['Opis'];
    ?>
  </p></td>
</tr>
</table>

</div>

```

profil.php

```

<div class="login">
<?php
    if(isset($_POST['btnRegister']))
    {
        $ime=$_POST['tbIme'];
        $prezime=$_POST['tbPrezime'];
        $email=$_POST['tbEmail'];
        $password=$_POST['tbPass'];
        $test=mysqli_query($konekcija,"select * from korisnik where Mail='{$_email}'");
        if(mysqli_num_rows($test)==1)
        {
            echo "<p>Korisnik sa unetom email adresom vec postoji!</p>";
        }
        else{
            $izmena=mysqli_query($konekcija,"update korisnik set Ime='{$_ime}', Prezime='{$_prezime}',
Mail='{$_email}', Lozinka=md5('{$_password}') where idKorisnik='{$_SESSION['id']}'");
            if($izmena)

```

```

    {
        echo "<p class='obavestenje'>Uspesno ste promenili podatke</p>";
    }
}

if(isset($_SESSION['id']))
{
    $upit=mysqli_query($konekcija,"select * from korisnik where idKorisnik={$_SESSION['id']}");
    $rez=mysqli_fetch_array($upit);?>

    <form action="index.php?strana=profil" method="post" name="sign" onsubmit="return
register()">

        <table>

            <tr>

                <td colspan="2" align="center"><p>Podaci korisnika <b><?php echo
$rez['Ime'];?></b>:</p>

                    <p>Uloga:<?php                if($_SESSION['uloga']==1)
echo "Adminitrator";

                        else
                            echo "Gost";

                    ?>

                </p><br/>

            </td>

        </tr>

        <tr>

            <td align="right"><p>Ime:</p></td>

            <td><input type='text' name='tbIme' id='tbIme' value="<?php echo $rez['Ime']; ?>"/></td>

        </tr>

        <tr>

```



```
<td><p align="right">Prezime:</p></td>

<td><input type='text' name='tbPrezime' id='tbPrezime' value="<?php echo
$rez['Prezime']; ?>" /></td>

</tr>

<tr>

<td><p align="right">Email:</p></td>

<td><input type='text' name='tbEmail' id='tbEmail' value="<?php echo $rez['Mail'];
?>" /></td>

</tr>

<tr>

<td><p align="right">Password:</p></td>

<td><input type='password' name='tbPass' id='tbPass' /></td>

</tr>

<tr>

<td><p align="right">Ponovite password:</p></td>

<td><input type='password' name='tbPass2' id='tbPass2' /></td>

</tr>
```

```
<tr>
```

```
<th colspan="2"><input type="submit" name="btnRegister" value="Promeni"/></th>
```

```
</tr>
```

```
</table>
```

```
</form>
```

```
<?php }?>
```

```
</div>
```

style.css

```
*{margin:0;padding:0;} body{ background-color:
```

```
#dddddd;
```

```
} a{ font-size: 25px; color:
```

```
white;
```

```
}
```

```
p{
```

```
color:white;
```

```
}
```

```
button{ padding:10px;
```

```
border-radius: 5px;
```

```
}
```

```
select{
```

```
height:30px; border-radius:
```

```
5px;
```

```
}  
#drzac{    margin: 0 auto;  
width:1200px;  
boxshadow:inset 0 0 15px  
#FFF;    background-color:  
#04567e;  
}  
.header{ height:200px;  
position: relative;  
  
}  
.main{  
paddingtop:60px;  
paddingbottom:  
100px;  
}  
h1{      position:  
absolute; top:20%;  
left:25%;  
font-style: italic; color:#2a2a2a;  
}  
h2{  
color:whitesmoke; margin:10px;  
}  
.logo{  
    float:left;  
width:240px;  
}  
.meni{  
    float:right;
```

```
width:960px; height:
100%;

}
.cisti{
clear:both;
} .filter{
width:300px;
float:left;
}
.prikaz{
width:900px;
float: right;
margin:0 auto; paddingtop:50px;
padding-bottom: 100px;
}
.dropdown{ margin-
left: 30px; position: absolute;
bottom: 0; }

.meni ul li{display:inline-block;
}
.meni a{text-decoration:none; padding-left:20px;
padding-right:20px;
}
.meni ul li ul {
position:absolute;
}
.meni ul li ul li{
display:none; padding:5px; background-color:
#04567e;
}
```

```
.meni a:hover{ text-decoration:underline;
color:white;
}
```

```
.meni li:hover li { display:block;
}
```

```
.item{
width:200px; height:350px;
float:left;
padding:2px;
margin:7px;
font-size:18px;
border:1px solid
black;
border-radius: 5px;
}
```

```
.item img{ margin-bottom:10px;
}
```

```
.filter{
margin-top:50px;} .filter
```

```
table{
width:95%; height:
200px;
}
```

```
.filter select{
width: 100%;
} .filter p{
float:right;
}
```

```
.adminpanel{
position: absolute;
right:5%; top:5%;
}
.adminpanel a{ text-decoration:
none;
}
.adminpanel a:hover{ text-decoration: underline;
}
.top-ponuda{ height:400px;

}
.item a:hover p{ background-color:
#FFF;
}
.login {

width:1200px;
}
.login td{
padding:10px;
}
input[type='text'], input[type='password'], input[type='number']
{
width:200px; height:30px;
borderradius: 5px;
padding:5px;
}
textarea{
width:200px;
height:80px;
borderradius: 5px;
```

```

}

input[type='submit']{
margin:0 auto; height:30px;
border-radius:
5px; padding:10px;

}

#greska{ width:100%;
height:50px;
}

.login table{
margin:0px auto;
}

h3{
margintop:30px;
textalign: center;
color:whitesmoke;
}

.obavestenje{
text-align: center;
}

.nekretninaSlika{
float:left;
}

.nekretnina{
width:750px;
margin:10px auto;
border:1px solid;
border-radius: 5px;
padding:20px; position:
relative; } .opis{
marginleft: 30px;

```

```

float: left;
} .opis
li{
margin-bottom: 5px;
}
.opisAdmin li{ marginbottom:
10px;
}
.opisAdmin a{
color:black; font-size:
18px; text-decoration:
none;
}
.opisAdmin{
float:right;
}
.opisAdmin button{
position: absolute; right:10px;
bottom:
10px;
}
.opisAdmin a:hover{ textdecoration:
underline;
}
.add form{ width:300px;
margin:0px auto;
}
.add{ margin-top:30px; padding-bottom:
100px;
}

```



```
.nekretnina select{ width:200px; margin:10px auto;
display: block;
}
```

```
.nekretnina table{ margin:20px
auto;
}
```

```
.nekretninaSlika img{ width:
200px;
}
```

```
.prikazNekretine{ width:
1200px; margin:0 auto;
} .slider{
width:500px; margin:0px
auto; height:60%;
}
```

```
.slider img{
width:500px;
}
```

```
.prikazNekretine table{
width:500px; margin:0
auto;
}
```

```
.dokumentacija{ text-align:
center; paddingbottom:
20px;
}
```

```
#pagination{ text-align:
center; margintop:50px;
}
```

```

.pagin{  color: white;
padding:  8px  16px;
text-decoration: none;
border-radius:5px;  }
.active          {
backgroundcolor:
black; color:
white;
}
.pagin:hover:not(.active) { backgroundcolor:
#ddd;
}
.autor{  margin:0
auto;
width:600px;
}
.autor          img{
height:400px;
borderradius:   10px;
float:left; margin-
right:20px; margin-bottom:
100px;
}
.omeni{  width:300px;
float:left;
}
#poll {
margin:20px;
}

```

```
#poll      img{  
height:20px;  
verticalalign: middle;  
}  
#poll td{  
height:20px;  
}  
.kontakt{  
width:600px; margin:0  
auto;  
}  
.kontakt table{  
width:100%;  
}
```