

Streamlined Constraint Reasoning via CNN Pattern Recognition on Enumerated Solutions

Patrick Spracklen 

May 20, 2026

Abstract

Constraint programming practitioners accelerate hard problems through a layered set of techniques applied in order of risk. Standard hardening (symmetry-breaking constraints and implied constraints) preserves satisfiability and is applied first. *Streamliner constraints*, which restrict search to a structural sub-family of solutions, do not preserve satisfiability and are reserved as a final lever for instances where hardening alone is insufficient. Existing automated streamliner-synthesis approaches either search a structured constraint grammar with combinatorial budgets or prompt a Large Language Model directly on the problem model. We propose a different approach: enumerate feasible solutions to a training instance, train a Convolutional Neural Network contrastively against perturbed non-solutions to detect structural patterns the feasibility predicate exploits, and translate the CNN’s discriminative signal, via both filter-property correlations and direct filter-contrast between high-activation and low-activation solutions, into candidate MiniZinc streamliners through LLM-driven constraint synthesis. The CNN serves as a pattern recognizer over enumerated solutions, surfacing structural regularities that ground the LLM’s constraint-generation reasoning. We evaluate on hardened variants of standard benchmark models (symmetry-breaking and implied constraints already in place), where streamliner discovery is the residual performance lever. Our pipeline achieves 98.8% portfolio time reduction on hardened Vessel Loading, 98.6% on hardened Social Golfers, and 89.4% on Black Hole, with best-single streamliners reaching geometric-mean speedups of $932\times$, $356\times$, and $1103\times$ respectively. Discovered streamliners include class-based packing constraints on Vessel Loading, beyond-hardening canonicalisations on Social Golfers, and layout-coordinate bounds on Black Hole: structural restrictions that the standard hardening does not provide.

1 Introduction

Constraint programming (CP) [18] solves decision and optimisation problems by propagating declarative constraints over finite-domain variables. Practitioners accelerate hard problem instances through a layered set of techniques applied in order of risk to the underlying problem specification. *Symmetry-breaking constraints* [7], which fix a canonical representative in each orbit of the problem’s symmetry group, and *implied constraints* [5], which state consequences of the formulation that aid propagation, both preserve satisfiability of the original instance: implied constraints leave the solution set unchanged, while symmetry-breaking constraints retain at least one representative from every orbit so a model is satisfiable iff the original is. These sound techniques are applied first, and form the standard hardening of any well-engineered CP model.

Streamliner constraints [13] sit outside this set. A streamliner restricts search to solutions sharing a particular structural property, pruning large portions of the search tree at the cost of completeness: a streamlined instance may be rendered unsatisfiable even when the original has solutions, and proving unsatisfiability on a tightly-constrained streamlined instance can itself be

expensive. Because the satisfiability tradeoff is real, a streamliner is properly viewed as a tool of *last resort*: the CP practitioner should harden the model with sound techniques first, and only invoke a streamliner when those options have been exhausted on instances that remain intractable. This ordering matters for evaluating automated streamliner-synthesis methods: a method evaluated on an unhardened model may be measuring the recovery of constraints a practitioner would have added by hand before contemplating a streamliner.

Prior automated approaches. Two families of automated streamliner-synthesis methods have been published. The first conducts directed search over a structured constraint grammar [27, 22, 23, 24]: candidate streamliners are drawn from a constraint lattice with Monte-Carlo or portfolio-based selection. The approach is sound and reproducible but the candidate space is bounded by the grammar the authors anticipated; constraint shapes outside the grammar cannot be discovered. The most recent approach, StreamLLM [25], prompts a Large Language Model with the MiniZinc model and asks it to emit candidate streamliners with closed-loop runtime feedback. This removes the grammar bound and reports large speedups across a benchmark suite. The cost is that the LLM is working from parametric knowledge alone: it knows what constraints look like for this problem class, but has no grounding in what structural patterns actually hold in the feasible solutions of the specific instance at hand.

The hardening question. Both prior approaches are evaluated against benchmark models in their as-shipped form, which for several CP problems omits literature-standard hardening. Our own measurements (Section 3) make the consequences concrete: adding literature-standard symmetry-breaking and implied constraints to the StreamLLM-distributed Hypergraph Coloring and Vessel Loading models reduces the median Chuffed baseline solve time from ≥ 1800 s to under 20 s, with Hypergraph Coloring collapsing to 0.2 s. Streamliner-discovery results obtained against these unhardened baselines therefore conflate two different signals: the recovery of missing model constraints, and the discovery of genuine streamliners. The harder and more practical question is what remains *after* the standard hardening is applied, and whether useful streamliners can still be found in that regime.

Our approach: pattern recognition on enumerated solutions. Rather than searching a constraint space, we extract structure directly from observed solutions and translate that structure into candidate streamliners. For each training instance we enumerate at least 500 feasible solutions with a complete solver and train a 3-layer Convolutional Neural Network contrastively against perturbed non-solutions. The CNN’s filters learn to detect structural patterns the feasibility predicate exploits. We surface the CNN’s signal in two complementary ways: (i) by correlating each filter’s activations with a problem-shape-specific library of ≈ 30 structural properties (row and column aggregates, adjacent-pair statistics, positional centroids, and so on), producing a relevance ranking we present to the LLM alongside per-property summary statistics; and (ii) by directly comparing high-activation against low-activation solutions under top-variance filters, asking the LLM to hypothesise the structural shape each filter is detecting. Both paths emit candidate MiniZinc streamliners that are pooled, semantically clustered, and validated against cached baselines.

The structuring choice is that the CNN serves as a *pattern recognizer over enumerated solutions*: it extracts structure from the data without needing a hand-written constraint grammar, and that structure grounds the LLM’s constraint synthesis in observable evidence rather than text-level inference from the problem model.

Evaluation regime and headline results. We evaluate on hardened benchmark models, where the standard sound techniques have been applied and only genuine streamliner discovery remains as a performance lever. All headline portfolio numbers below use the family-budget allocation (Section 4.5) at $k = 3$ families with $m = 3$ members per family; we additionally report simple top-3 numbers as a comparison baseline. Our pipeline delivers 98.8% portfolio time reduction on hardened Vessel Loading, 98.6% on hardened Social Golfers, and 89.4% on Black Hole (the one benchmark in our suite without canonical hardening, making the head-to-head comparison with prior work methodologically clean), matching StreamLLM’s realtime result on Black Hole with simple-top-3 and exceeding it with the family-budget allocation; the discovered constraints are qualitatively distinct from those found by model-text-only synthesis (Section 5.3). Best-single streamliners reach geometric-mean speedups in the hundreds-to- thousands range on the instances they retain; per-problem numbers and retention denominators are reported in Section 5. The discovered constraints are structurally distinct from what the hardening provides: class-based packing constraints on Vessel Loading, beyond-hardening canonicalisations on Social Golfers, and layout-coordinate bounds on Black Hole. This gives direct evidence that the pipeline finds residual structure that the standard sound techniques do not capture.

Contributions.

1. A streamliner-synthesis pipeline driven by CNN pattern recognition on enumerated solutions, with two LLM-prompting paths (filter-property correlation and direct filter-contrast on solution pairs) that together turn observed solution structure into candidate MiniZinc constraints (Section 4).
2. Empirical demonstration that this pipeline finds useful streamliners both on hardened benchmarks (Sections 5.4 and 5.5) and on Black Hole, the one benchmark in our suite without canonical hardening (Section 5.3). On Black Hole, where direct comparison with StreamLLM [25] is methodologically clean, the pipeline matches their realtime result with simple-top-3 and improves on it with family-budget allocation; crucially, the discovered constraints are qualitatively distinct from those the model-text-only approach finds, illustrating the complementary nature of the two pipelines (Section 5.3).
3. Empirical evidence that adding literature-standard hardening to three StreamLLM benchmark models collapses median solver time from ≥ 1800 s to under 20s (Section 3), motivating evaluation of streamliner-synthesis methods only on hardened baselines where streamliner discovery is the residual lever rather than recovery of missing model constraints.
4. A *family-budget portfolio allocation* mechanism that uses LLM-generated constraint descriptors as semantic family tags to enforce both inter-family and intra-family diversity in the deployed portfolio (Section 4.5). At $k = 3$ families with $m = 3$ members per family, the mechanism improves over simple top-3 selection on every problem in our suite without any increase in compute envelope; the largest gain is on Black Hole, where the simple-top-3 portfolio is dominated by redundant pile-top variants (Section 6.2).

2 Related Work

Streamlining and its automation. Gomes and Sellmann introduced streamlining as a principled incomplete-search technique for constraint satisfaction problems [13]: the search is restricted to a structurally typical sub-family of solutions in exchange for substantially reduced search effort.

The technique has been extended to constructive procedures [14] and applied with manual designs to spatially-balanced Latin squares [21], with striking results on individual problem families but expensive replication across new problems. This motivated work on automated streamliner synthesis. Wetter, Akgün, and Miguel [27] introduced a constraint-lattice search over the Essence modelling language [10] via the Conjure constraint modeller [1], and Spracklen *et al.* [22, 23, 24] extended this with Monte-Carlo Tree Search, optimisation-problem support, and portfolio-based instance selection. The approach is sound and the portfolio framework gives strong empirical results, but the candidate space is fundamentally bounded by the grammar: constraint shapes that fall outside the authors’ atomic vocabulary cannot be discovered. Our work extends the candidate space by extracting structural patterns directly from observed solutions and translating them into candidate constraints via a Large Language Model, removing the grammar bound while retaining the validation-driven filtering of the portfolio approach.

The most recent work in this area is StreamLLM [25]: a Large Language Model is prompted with the MiniZinc problem model and asked to emit candidate streamliners with closed-loop runtime feedback, removing the grammar bound that the bottom-up methods carry. The authors are methodologically transparent about constraint types: their Table 1 classifies each winning constraint as implied (i), symmetry-breaking (s), satisfaction-non-preserving (-), or uncertain (u); and they observe that the one benchmark model retaining its standard symmetry breaking (BIBD) yields more modest improvements than the others. Our work differs from theirs in two respects. First, the LLM in our pipeline reasons about *observed solution structure* via a CNN pattern recognizer rather than the model text alone. Second, we evaluate the synthesis pipeline on benchmark models with literature-standard hardening already applied, isolating the streamliner-discovery contribution from the recovery of missing model constraints.

Constraint acquisition. A separate research area learns explicit constraint models from example solutions. ModelSeeker [3] performs algebraic matching against a global-constraint catalogue to extract per-relation constraints from positive examples; subsequent constraint-acquisition systems use similar template-driven matching against fixed catalogues [4]. These systems target the construction of *satisfiability-preserving* models from data and are template-bounded by their target constraint catalogue. Our pipeline targets a different artefact (streamliners, which are explicitly satisfiability-non-preserving) and does not require a target catalogue: candidate constraints are generated by the LLM conditioned on observed solution structure, not matched against a known set of patterns.

Deep learning and language models for combinatorial reasoning. A separate line of work applies deep learning directly to combinatorial reasoning. SATNet [26] and NeuroSAT [20] learn end-to-end neural solvers for SAT. Neither extracts human-readable constraints or plugs back into a CP solver, so the systems are complementary to ours rather than competing. More recent LLM-driven approaches share our pattern of using a language model to propose candidate formal artefacts validated by a sound downstream procedure: FunSearch [17] generates candidate program fragments evaluated against an automated scorer for combinatorial discovery; Lemur [28] integrates LLMs into automated program verification; and Pei *et al.* [16] ask whether LLMs can hypothesise loop invariants, with the hypotheses checked by a verifier. Our pipeline shares this generate-and-validate structure but applies it to streamliner synthesis for CP, with the additional ingredient of CNN-based pattern recognition over enumerated solutions providing the LLM’s evidential grounding.

Feature interpretation in CNNs. Our use of CNN filter–property correlation has a direct antecedent in the Network Dissection framework [2], which associates individual filters with semantic

Table 1: Baseline solve-time distribution on StreamLLM test instances. Chuffed 0.13.1, 1800s timeout.

Problem	N	SAT / UNKN		Median (s)	
		Unhardened	Hardened	Unhardened	Hardened
Hypergraph Coloring	94	36 / 58	94 / 0	1800	0.2
Vessel Loading	51	21 / 30	48 / 3	1800	15
Social Golfers	61	27 / 34	38 / 23	1670	1045

concepts by matching activation maps against a hand-labelled concept dataset. Our setting is simpler in that the “concepts” are algorithmically computable structural properties (row sums, adjacent-pair statistics, and so on) rather than human-annotated semantic categories. The goal is also different: we use the correlations to rank which properties the LLM should reason about during constraint synthesis, rather than to interpret a vision-trained network.

3 Benchmark Context: Hardening and Streamliner Evaluation

Before presenting our method we take a page to situate the evaluation. Because streamliners do not preserve satisfiability, a CP practitioner will typically exhaust sound options (standard symmetry breaking, implied constraints, redundant constraints) before reaching for streamlining. This makes the choice of baseline model important for evaluating any automated streamliner synthesiser. We report a small empirical observation on the benchmark suite used by StreamLLM [25]: on several of their problems the as-shipped baseline model omits literature-standard hardening, and adding those constraints substantially changes the instance distribution.

For three of StreamLLM’s benchmark problems we compared the solve-time distribution of the as-shipped MiniZinc model against a hardened variant that adds standard constraints from the literature (for Social Golfers, the week-1 canonical partition combined with a golfer-1 group anchor and an inter-week lex ordering [9]; for Vessel Loading, a lex-leader symmetry break over identical containers and an orientation canonicalisation for square containers; for Hypergraph Coloring, value-precedence on colour labels and the implied vertex-count sum). Per-problem MiniZinc for these additions appears in Section A. Figure 1 and Table 1 report the result.

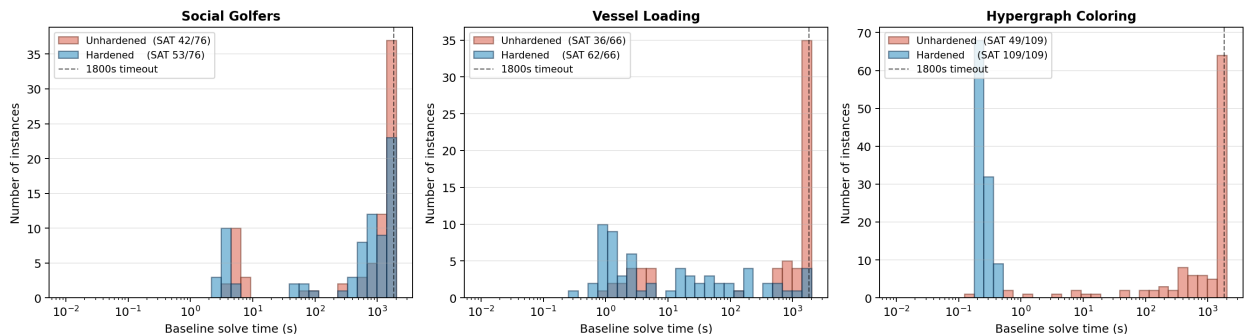


Figure 1: Chuffed baseline solve-time distributions for three StreamLLM benchmark problems before and after literature-standard hardening (all instances). Red: unhardened; blue: hardened. Dashed vertical at 1800s timeout.

The most striking effect is on Hypergraph Coloring, where adding the value-precedence chain and the colour-count identity reduces the median test baseline to 0.2s and collapses the timeout count to zero. Vessel Loading sees a similar tail compression: the median drops from 1800s to 15s and the unknown count from 30 of 51 to 3. Social Golfers is meaningfully improved by hardening but remains non-trivial.

The practical implication is that for these problems sound hardening is not just methodologically prior to streamlining; it is also where the largest performance gains come from. Implied and symmetry-breaking constraints are guaranteed to preserve satisfiability, deliver the order-of-magnitude baseline compressions reported in Table 1, and are the natural first move when a CP practitioner faces a slow benchmark model. Streamliners, which are not solution-preserving, are a last-resort lever, justified only after standard sound techniques have been applied. An automated streamliner synthesiser evaluated against an unhardened baseline risks rediscovering constraints a practitioner would have added by hand before attempting any streamlining at all. The reported speedups therefore conflate two distinct effects: the recovery of missing sound constraints (gains that would disappear once the model is properly hardened) and genuine beyond-hardening streamliner discovery. Only the latter is the intended contribution of the streamlining literature, and reporting the two together conflates what streamlining actually achieves with the recovery of missing model constraints.

This observation is not a criticism of StreamLLM’s contribution; they have been transparent about constraint types throughout. Rather, it informs our evaluation choice. For the remainder of this paper we evaluate our method on hardened variants of **Social Golfers** (Section 5.4) and **Vessel Loading** (Section 5.5), where literature-standard symmetry breaking and implied constraints are already in place and genuine streamliner discovery is the remaining lever. We additionally include **Black Hole** (Section 5.3) as a third evaluation problem. Black Hole has no canonical hardening: its sequence is semantically ordered and the decision variables admit no natural relabelling group, so neither symmetry-breaking nor implied-constraint additions are available. This makes it the one problem in our suite where a direct head-to-head with StreamLLM is methodologically clean, as both pipelines must discover genuine streamliners and neither can recover a missing model constraint.

3.1 Composite test set construction

A practical consequence of evaluating on hardened models is that many of StreamLLM’s distributed test instances become trivial under hardening, leaving little baseline solve time for any streamliner to reduce. We address this by drawing test instances from two peer-reviewed sources: the StreamLLM [25] test sets and the automated-streamliner-portfolios artefact accompanying Spracklen *et al.* [24]. Both sets were generated by the same informative-instance-generation framework, AutoIG, of Dang *et al.* [8]. We retain only test instances on which the hardened baseline returns SAT within a 3600s timeout: the regime where the per-instance speedup metric is well-defined. For Social Golfers this yields 61 test instances (52 from [25], 9 from [24]); for Vessel Loading, 22 test instances (4 from [25], 18 from [24]); for Black Hole, 49 of the 53 StreamLLM-distributed instances pass the SAT-within-3600s criterion (the remaining 4 have unknown baselines within the timeout and are excluded). Black Hole has no canonical hardening, so the BH test set is drawn entirely from the StreamLLM distribution without augmentation.

4 Pipeline

Grammar-based approaches [22, 23, 24] search a pre-specified constraint lattice: every candidate is drawn from constraint shapes the designer anticipated, so anything outside the grammar is unreachable by construction. StreamLLM [25] removes this ceiling by prompting an LLM directly

with the MiniZinc model text, freeing it to propose arbitrary constraint shapes. The cost is that the LLM is then working from parametric knowledge alone: it knows what constraints *look like* for this problem class, but has no evidence of what patterns actually hold in the feasible solutions of the specific instance at hand. The obvious alternative (presenting the LLM with the enumerated solutions directly and asking it to find patterns) is impractical: even a modest corpus of 500 solutions for a 52×52 Black Hole instance amounts to tens of thousands of numbers, and LLMs are poorly suited to reasoning over raw numerical arrays at that scale, both in terms of context budget and in terms of the kind of systematic pattern-finding the task demands, a limitation we encountered directly when testing uncompressed solution payloads during development.

Our pipeline keeps the LLM’s generative freedom while replacing parametric guessing with grounded evidence. The key observation is that a CNN trained to distinguish genuine solutions from perturbed non-solutions *must* be detecting real structural regularities: if its filters can reliably separate the two classes, they are responding to patterns that exist in the solution set rather than artefacts of the model text. We extract those filters as explicit references to solution-level structure and pass them to the LLM, giving it a concrete signal to reason about rather than asking it to hypothesise in the dark. The result is constraint synthesis that is both unconstrained in shape (the LLM can propose any MiniZinc expression) and anchored in observed evidence (the proposed constraint must explain a pattern the CNN demonstrably found).

Figure 2 sketches the end-to-end flow. The pipeline factors into four stages: solution enumeration, contrastive CNN training, LLM-driven constraint synthesis along two prompting paths, and multi-instance pooling with validation.

4.1 Solution enumeration and encoding

Given a MiniZinc model and a training instance, we enumerate at least $N = 500$ feasible solutions using Chuffed [6] with the `all_solutions` flag (more when the per-instance enumeration budget allows; some training instances supply several thousand solutions). Each solution is encoded as a 2D or 3D tensor whose shape matches the decision variable’s structure: scalar grayscale for matrix problems, permutation matrix for 1-D permutations, one-hot encoding for assignment-style problems, and a custom *container rasterisation* for multi-variable packing problems such as Vessel Loading (where the decision variables encode container coordinates rather than a single matrix). This tensor representation is what the CNN operates on; the original MiniZinc decision variable is also retained so the LLM can be shown raw solution samples in their original shape.

We additionally compute a problem-shape-specific library of ≈ 30 structural properties per solution: row sums, column sums, diagonal sums, value ranges, monotonicity indicators, adjacent position differences, positional centroids, extremum locations, and similar invariants. The exact set is conditional on the variable shape, but each property is a real-valued summary of one solution. A property whose value is constant across all enumerated solutions is an *implied* consequence of the original constraints (never useful as a streamliner). A property whose value lies in a narrow band across solutions, but is not strictly constant, is a first-class streamliner candidate: tight bounds near the observed range often retain satisfiability while pruning aggressively.

Problem applicability. The pipeline applies to any CSP whose decision variables can be encoded as a fixed-shape 2D or 3D tensor. Matrix problems (Latin squares, BIBD, magic squares) map naturally to grayscale images; permutation problems (N-Queens, Black Hole) to binary permutation matrices; assignment problems to one-hot encodings; and packing problems with coordinate variables (Vessel Loading) to rasterised spatial maps. The key requirement is that the solution structure is spatially regular enough for a convolutional filter to detect recurring patterns: problems whose

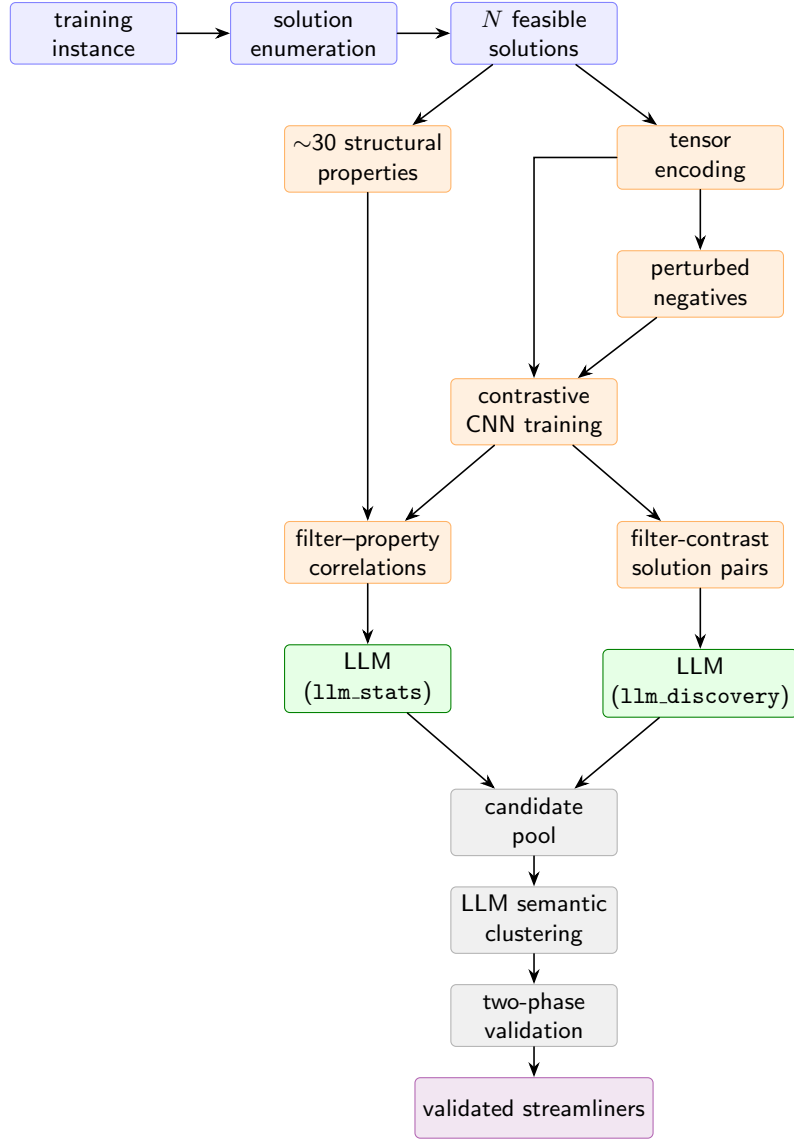


Figure 2: End-to-end pipeline from a MiniZinc model and training instance to a pool of validated streamliners. Stages are colour-coded: *blue* = solution preparation, *orange* = CNN pattern recognition, *green* = LLM constraint synthesis, *grey* = validation. Solutions are enumerated and encoded into tensors; a CNN is trained contrastively against perturbed negatives and emits two complementary signals: per-filter property correlations and high/low filter-activation solution pairs. Two LLM-prompting paths consume these signals: `llm_stats` reasons over property statistics with the correlation prior, and `llm_discovery` hypothesises constraints from the contrast pairs. Candidates from both paths are pooled across training instances and ensemble seeds, semantically clustered, and validated in two phases against cached baselines.

solutions have highly variable structure across instances, or whose decision variables do not admit a natural 2D layout, are less suitable candidates. A concrete negative example is Steiner Triple Systems, where every feasible solution has identical row sums, column sums, and pair counts by construction; the property library finds nothing with non-zero variance and the `llm_stats` path produces no useful candidates (Section 7). Conversely, graph colouring, scheduling, and routing problems with a fixed underlying topology are natural future targets, provided the encoding maps the problem’s structure to a spatially interpretable representation (e.g. adjacency matrix or timeline grid) before the CNN stage.

4.2 Contrastive CNN training and pattern recognition

Per-instance, we train a 3-layer Convolutional Neural Network ($32 \rightarrow 64 \rightarrow 128$ channels, 3×3 kernels, batch normalisation, ReLU) contrastively on enumerated solutions versus *negative samples*: tensors generated by perturbing a feasible solution into a structurally close but typically infeasible configuration. We use three negative generators per solution shape (row-permuted, position-swapped, and fully uniform-random) and balance positives and negatives one-to-one. The classification objective forces the CNN to learn filters that detect structural patterns the feasibility predicate exploits: filters that activate on real solutions and not on random arrangements of the same domain values.

The CNN’s signal is surfaced in two complementary ways for downstream constraint synthesis. Filter selection operates across all three conv layers: for each layer we rank filters by per-solution mean-activation variance and retain the top six per layer (eighteen filters in total; figures in this paper show the top three for visual clarity). This keeps both shallow filters that detect local primitives (e.g. adjacency patterns) and deeper filters that compose those primitives into longer-range structure; both are useful inputs for the LLM’s constraint synthesis, and pre-committing to one depth would discard signal. In practice, however, the most spatially interpretable constraint-discovery signal in our evaluation was concentrated in the first convolutional layer: the deeper layers showed broadly similar spatial patterns without clear evidence of qualitatively distinct hierarchical features. Whether multi-layer extraction adds meaningful constraint-discovery value over a shallower architecture remains an open question (Section 7).

First, we compute Pearson correlations between each retained filter’s per-solution activation vector and each structural property’s per-solution value vector. Properties with high $|r|$ correlations are properties the CNN’s discriminative behaviour explains, and hence first-class targets for streamlining. Second, we identify high-activation and low-activation solution pairs under each retained filter; these contrast pairs feed the filter-contrast LLM path described below.

We use an ensemble of $K = 3$ random initialisation seeds per training instance to reduce filter-selection variance: different CNN initialisations learn slightly different filter bases, and pooling candidates across the ensemble yields a more robust relevance ranking than any single seed.

Figure 3 renders this learned structure on a Black Hole training instance: every top-variance filter at layer 0 encodes the rank-adjacency rule that defines the problem.

4.3 LLM-driven constraint synthesis

The CNN’s pattern-recognition output and the per-property statistics are translated into candidate MiniZinc streamliners by a Large Language Model along two prompting paths.

Statistics path (`llm_stats`). We assemble a JSON payload containing (i) per-property summary statistics (mean, standard deviation, range, near-constant flag, median); (ii) the top three CNN filters by absolute correlation for each property, ranked; (iii) up to five raw sample solutions in their

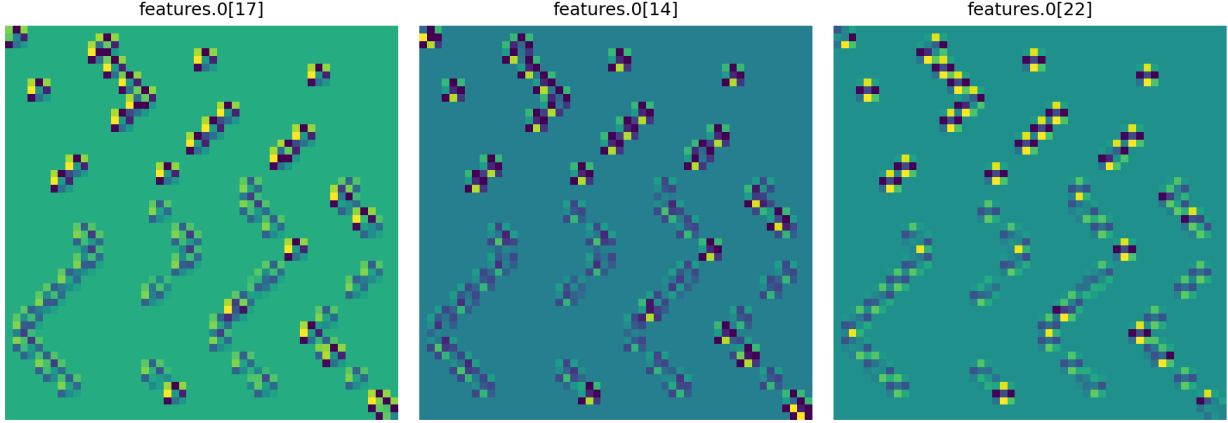


Figure 3: Mean activation maps for the three top-variance `features.0` filters of a CNN trained contrastively on Black Hole solutions versus near-miss negatives (training instance 1191; mean over the enumerated-solutions corpus). Each filter exhibits a zigzag/staircase signature: the rank-adjacency constraint forces consecutive sequence positions to play cards of adjacent rank, so the 1s in neighbouring rows of the permutation matrix shift by a small column offset as the rank walk ascends or descends, tracing a diagonal staircase across the canvas. The CNN learns this dominant rank-adjacency structure without being told what to look for; this signal is what grounds the LLM constraint synthesis in Section 4.3. Deeper layers (`features.3`, `features.6`) track the same primitive at longer composition lengths.

original variable shape; and (iv) when training on multiple instances of varying size, a per-property progression table that allows the LLM to extrapolate bounds parametrically in n rather than pinning to a single observation. The prompt instructs the LLM to emit a JSON array of candidate MiniZinc constraints, each tagged with the originating property, an *aggressiveness* level (*conservative* = bound has a safety margin past the observed extreme; *tight-fit* = bound matches the observed extreme; *aggressive* = bound is the LLM’s parametric extrapolation, possibly tighter than any observation), and a syntactic form (existential, universal, aggregate, pairwise). We sample multiple (form, aggregation, aggressiveness) combinations per call to avoid the LLM collapsing into a single shape.

Filter-contrast path (llm_discovery). For each top-variance CNN filter we partition the solution corpus into a high-activation group and a low-activation group, pass both as labelled numerical data to the LLM, and ask it to hypothesise what structural pattern distinguishes the two groups. The prompt asks for a textual hypothesis followed by a candidate MiniZinc constraint that encodes the hypothesised pattern. Unlike the statistics path, this path does not anchor the LLM to a predefined property library: the LLM is free to propose constraint shapes outside the property catalogue, including multi-variable structural relationships and non-trivial canonicalisations that the property statistics alone do not suggest.

Mechanical templates (briefly). For comparison we also implemented a deterministic template path: near-constant properties at observed value k instantiate `constraint p = k` directly, with similar mechanical substitutions for monotonicity flags and extremum-shaped properties. Templates are reproducible and cost-free, but in our hardened-model evaluation they consistently underperform both LLM paths, which generalise to constraint shapes the templates do not encode. We retain

templates as a baseline-stage in the pipeline but report them only when relevant.

All three sources (statistics path, filter-contrast path, and templates) emit method-tagged candidates that are text-deduplicated on exact constraint string. Templates are preserved as a baseline column in the validation pool but on the hardened-evaluation regime contribute no headline picks (Figure 7).

4.4 Multi-instance pooling and validation

The previous stages run independently on each of M training instances. We pool all method-tagged candidates across instances and seeds, and a second LLM call performs semantic clustering: candidates whose constraint shapes match modulo parameter substitution are grouped, and from each cluster we expand up to four representatives (tightest, loosest, parametric median, and an extrapolated variant) into the validation candidate set. Semantic clustering is necessary because text deduplication misses parametrically-equivalent constraints that arise across different instance sizes.

Each candidate is evaluated on the training instances to filter to those that improve over baseline somewhere and to produce the training-set savings score used for portfolio selection (Section 4.5). Each solve is capped at the baseline time on the same instance (a streamliner slower than baseline is not useful) and per-pair results are incrementally checkpointed so that the pipeline is resumable. The final reported metrics (Section 5) are computed on the held-out test instances described in Section 3.1; no separate validation set is used between training and test.

4.5 Portfolio deployment via family-budget allocation

The validated candidate pool is the input to a portfolio selection step that produces the deployed streamliner set. The natural baseline rule (*simple top- k* : rank candidates by training-set savings and pick the top- k) is blind to a structural property of the LLM-driven pool: constraint variants of the same shape (different aggressiveness levels, different parameter regimes) typically all rank highly because they all save substantial training time, but contribute redundantly to the deployed portfolio. On Black Hole, the simple top-3 picks are all variants of the pile-top y -coordinate bound; the deployed compute budget is dominated by one constraint family even though the pool contains other useful shapes. We diagnose this in Section 6.2.

We deploy a *family-budget portfolio allocation* that explicitly enforces both inter-family and intra-family diversity. The mechanism repurposes the LLM’s own constraint descriptors (short snake-case labels emitted alongside each synthesised constraint: `pile_top_early_25`, `max_adj_diff_aggressive`, `rank_walk_endpoints`, etc.) as semantic family tags; candidates are bucketed by descriptor prefix. For a deployment of k families with m members per family:

1. Select the top k families ranked by the highest individual training-set savings of any member of that family.
2. Within each selected family, retain the top m members by individual training-set savings.
3. Race all $k \cdot m$ retained streamliners against the baseline. Each family receives a wall-clock budget equal to the baseline time; within a family, the m retained members share that budget equally (slot = t_{base}/m). A streamliner “succeeds” for its family if it returns SAT within its slot. The family’s contribution is the wall-clock time at which its first member returns SAT (not the individual streamliner’s solve time), or the baseline time if no member succeeds. Portfolio time per instance is the minimum of the k family contributions and the baseline.

Total compute is identical to a simple top- k ($k + 1$)-way race: k family-races plus the baseline solve, with each family-race using t_{base} of compute distributed across m slots. Critically, each individual streamliner receives *less* wall-clock time than in a simple top- k race (slot = t_{base}/m rather than t_{base}); the family-budget allocation trades per-streamliner time for coverage across aggressiveness levels, not additional compute. Two complementary diversity properties motivate this allocation. *Inter-family* diversity (controlled by k) ensures the portfolio covers structurally distinct constraint shapes. *Intra-family* diversity (controlled by m) covers different aggressiveness levels and parameter regimes within each shape. We expect diminishing returns in m because variants within a family target the same property and share retention behaviour at the margin; we observe this empirically (Section 6.3, with the sweet spot at $m = 3$).

Throughout the evaluation we deploy family-budget allocation at $k = 3$, $m = 3$, yielding a portfolio of 9 streamliners across 3 families per problem. We additionally report simple top-3 numbers as a comparison baseline; for direct comparison with prior work [25] on Black Hole we keep the simple top-3 reading as well.

The mechanism is independent of the LLM that generated the constraints: any constraint-synthesis pipeline whose pool members carry semantic labels (or that admits a downstream clustering pass) can adopt the same allocation. In our case the labels are free (the LLM emits them as part of each constraint’s description during synthesis, Section 4.3), so family-budget allocation adds no incremental cost to the pipeline.

5 Evaluation

5.1 Experimental setup

Solver and protocol. We use the Chuffed 0.13.1 solver [6] under MiniZinc 2.9.5 [15], with a 3600s wall-clock timeout and a fixed random seed (42) for every solve. Baselines are computed once per test instance and cached; each streamlined solve is individually capped at the cached baseline time on the same instance (a streamliner that runs longer than the baseline is by construction unhelpful). Our CNN is trained for 100 epochs per training instance with an ensemble of $K = 3$ random seeds. Constraint synthesis uses Anthropic’s Claude Opus models. We additionally tested locally hosted open-weight models via Ollama (`qwen2.5-coder:14b`, the largest model our hardware could run), but the generated MiniZinc was not reliable enough to sustain the synthesis pass; the open-weight limitation is discussed further in Section 7.

Hardware. All experiments ran on a single workstation: an Intel Core i7-13700K CPU (16 cores, 24 threads, up to 5.4 GHz), 32 GB of system memory, an NVIDIA GeForce RTX 4090 GPU (24 GB VRAM), and a 1 TB SSD. The host OS is Ubuntu 22.04 on WSL2 (Linux kernel 5.15) and the full pipeline executes inside Docker (Python 3.11, PyTorch, MiniZinc 2.9.5 with the Chuffed solver). CNN training uses the GPU; baseline and streamlined solves use Chuffed on a single CPU thread per solver process, with parallel portfolio races scheduled across separate processes. Each solver process runs under `runsolver` [19], which enforces per-solve wall-clock and memory limits and returns a clean timeout signal rather than relying on solver-internal termination.

Test sets. For Black Hole we use the StreamLLM-distributed test instances [25] unmodified (Section 3 explains why no canonical hardening applies to BH). For hardened Social Golfers and Vessel Loading we use the composite test set described in Section 3: the union of the StreamLLM-distributed instances and the automated-streamliner-portfolios artefact [24], restricted to instances

on which the hardened baseline returns SAT within the 3600s timeout. This yields 61 instances for hardened Social Golfers (52 from [25], 9 from [24]), 22 for hardened Vessel Loading (4 and 18 respectively), and 49 of 53 StreamLLM Black Hole instances (the remaining 4 have unknown baselines within 3600s and are excluded by the same SAT-within- timeout criterion applied to the SG and VL test sets).

Metrics. For each test instance i let $t_b(i)$ be the cached baseline solve time and $t_c(i)$ the streamlined solve time of candidate c . The per-instance speedup is $t_b(i)/t_c(i)$ when both return SAT. Aggregated metrics reported below:

- *Portfolio time savings.* We race the deployed portfolio (either simple top-3 or family-budget) against the baseline in parallel and report $(\sum t_b(i) - \sum t_{\text{winner}}(i)) / \sum t_b(i)$, where $t_{\text{winner}}(i)$ is the wall-clock time of the first process (streamliner or baseline) to return SAT on instance i . For simple top-3 this is a 4-way race; for family-budget at $k = 3$, $m = 3$ it is a 10-way race within the same total compute envelope. This mirrors the metric reported in Figure 3 of [25], converted from their reduction form $1 - t_{\text{new}}/t_{\text{old}}$.
- *Pool ceiling.* At each instance we pick the single fastest SAT-returning streamliner across the *entire* validated pool (all candidates, not just the deployed subset), then aggregate. This is an oracle upper bound: no runtime selection scheme drawing from the same pool can exceed it. The gap between a deployed portfolio (simple top-3 or family-budget, both of which select a small subset of the pool) and the ceiling quantifies how much selection inefficiency leaves on the table.
- *Best-single geometric-mean speedup.* For the single top-performing streamliner per problem, the geometric mean of per-instance speedups over instances where both the streamliner and the baseline returned SAT. This complements the portfolio metric: a streamliner with high per-instance speedup but narrow SAT-retention is rewarded here even if it does not survive portfolio aggregation.
- *CPU-adjusted time savings.* The $(k + 1)$ -way race consumes up to $(k + 1)$ times the CPU of a lone baseline solve, since all parallel processes run until the winner finishes. We therefore also report *CPU-adjusted savings* $(\sum t_b(i) - (k + 1) \sum t_{\text{winner}}(i)) / \sum t_b(i)$ as an honest accounting of total compute cost. We regard the wall-clock figure as the primary practical metric: modern hardware routinely provides the spare cores needed to run a small parallel portfolio at no wall-clock penalty, and this is the deployment model assumed by StreamLLM [25]; Spracklen *et al.* [24] account for CPU cost explicitly in their portfolio evaluation. The CPU-adjusted figure is reported for completeness and for practitioners operating under strict compute budgets.

Selection rule. Throughout the evaluation we deploy the family-budget allocation introduced in Section 4.5 at $k = 3$ families and $m = 3$ members per family, racing 9 streamliners against the baseline within the same compute envelope as a 4-way race. As a comparison baseline we also report the simple top-3 rule (rank pool members by training-set savings; deploy the top 3): this is the natural single-streamliner-per-slot reading and the closest analogue to prior portfolio work. Family-budget is our default deployment; simple top-3 is reported alongside for direct comparison with prior published portfolios.

Table 2: Portfolio time savings across all three problems. *Pool ceiling* is an oracle upper bound: at each instance, the single fastest SAT-returning streamliner from the full validated pool. *FB→ceiling gap* is the residual between family-budget and the pool ceiling. StreamLLM comparison is only reported for Black Hole, the one problem where both pipelines face the same (unhardened) baseline.

	Black Hole (49 instances)	Hardened SG (61 instances)	Hardened VL (22 instances)
Simple top-3	79.7%	94.4%	97.4%
Family-budget ($k = 3, m = 3$)	89.4%	98.6%	98.8%
Pool ceiling	94.9%	98.7%	99.6%
FB→ceiling gap	5.5 pp	0.1 pp	0.8 pp
StreamLLM (realtime, Fig. 3)	$\approx 80\%$	—	—

5.2 Overview: speedup heatmap

Figure 4 gives a bird’s-eye view of the full validated pool across all three problems before the per-problem analysis. Each row is one validated streamliner, ordered by SAT-retention count; each column is one test instance, ordered by baseline solve time. Colour encodes $\log_{10}$ speedup where the streamliner returns SAT; purple marks instances rendered unsatisfiable; dark grey marks timeout or no result.

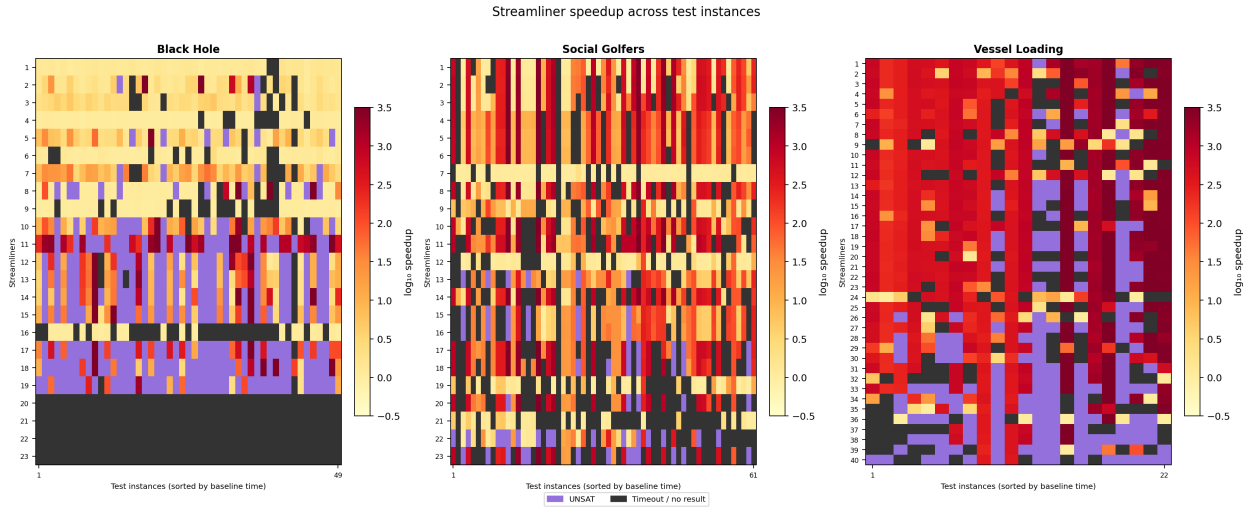


Figure 4: Speedup heatmap across all validated streamliners and test instances for Black Hole (23 streamliners, 49 instances), Social Golfers (23 streamliners, 61 instances), and Vessel Loading (40 streamliners, 22 instances). Rows are ordered by SAT-retention count (highest coverage first); columns by baseline solve time (easiest left). Colour encodes $\log_{10}$ speedup on SAT-retained instances (yellow $\approx 1\times$, dark red $\geq 1000\times$); purple = UNSAT; dark grey = timeout or no result. The BH block rows 20–23 (all dark grey) are the template candidates, which contribute nothing on this evaluation regime.

Table 2 summarises the headline portfolio metrics across all three problems.

5.3 Black Hole

Black Hole [11, 12] is a single-player card game encoded as a CSP: arrange 51 of 52 playing cards into a sequence and a layout of 17 piles of 3 cards, such that each consecutive pair of cards in the sequence differs by ± 1 modulo 13 (rank adjacency) and a small set of layout constraints relating piles to the sequence are satisfied. The key decision variables are $x[p]$, the card at position p in the play sequence, and $y[c]$, its inverse (the position of card c in the sequence). The parameter $\text{layout}[i, j]$ gives the card in pile i at depth j , so $\text{layout}[i, 1]$ is the initial top card of pile i , the only card in that pile that is accessible at the start of the game.

Pipeline output. Training on the 16 StreamLLM training instances, our pipeline generates a pool of 23 candidate streamliners (6 from the LLM-statistics path, 4 from the template path, 13 from the LLM-discovery path). The simple-top-3 ranking (training-savings only) selects three pool members all from the LLM-discovery *pile-top* family (we use *king-pin* as shorthand for the terminal-card constraint $(x[52]-1) \bmod 13 = 12$, which requires the last card played to be a King):

1. forall(i in 1..17)($y[\text{layout}[i, 1]] \leq 25$)
2. forall(i in 1..17)($y[\text{layout}[i, 1]] \leq 35$)
3. forall(i in 1..17)($y[\text{layout}[i, 1]] \leq 30$) + king-pin

Here $\text{layout}[i, 1]$ is the *initial* top card of pile i (before the game begins) and $y[c]$ is the position of card c in the play sequence. The model already enforces that a buried card cannot be played before the card on top of it; the pile-top constraint says something stronger and non-obvious: the 17 initially-accessible cards do not merely precede their pile-mates, they cluster in the first K positions of the *global* 52-card sequence. A valid solution could in principle place a pile-top card at move 48 and still satisfy rank-adjacency; the CNN observed across 2000 enumerated solutions that this almost never happens. The filter-contrast path surfaced this pattern; the statistics path missed it as the property library contains no y -coordinate aggregates over the layout indexing array. This constraint is unreachable by any approach anchored to a fixed property library, and the raw-solutions alternative is impractical at this data scale: exhaustively computing variance over all variable-index combinations in a 52×52 encoding yields an unranked flood of near-constants with no signal about which are discriminative. The CNN finds the pile-top pattern without being told to look for layout coordinates: the contrastive objective attends to pile-top positions because they are the most discriminative signal separating real solutions from perturbed near-misses.

The discovery mechanism in action. The `llm_discovery` path operates in two complementary modes depending on how the CNN signal manifests. In the *variance-driven* mode, a filter tracks a per-solution scalar property with non-trivial variance across the corpus: for example, filter `features.6[75]` on training instance 1191 correlates strongly with the *ascending-pairs count* ($r = +0.57$ across 2000 solutions), which counts the number of positions p where $x[p+1] > x[p]$ (i.e. the card value increases from one sequence position to the next). The 3 highest-activation solutions under this filter have ascending-pairs counts of $\{29, 30, 29\}$ out of 51 adjacent positions; the 3 lowest have $\{24, 26, 24\}$. The LLM receives these contrasting solution groups as numerical data and converts the observed separation into a bound constraint ($\text{sum}(p \text{ in } 1..51)(\text{bool2int}(x[p+1] > x[p])) \leq 27$). This filter is a non-deployed pool member. On the test set the constraint retains SAT on 41 of 49 instances and improves on all of them, but the geomean speedup is only $1.1\times$: bounding the ascending-pairs count to ≤ 27 prunes very

little of the search space because most valid solutions naturally sit near that value (population mean ≈ 27.2 , std ≈ 1.5). The pile-top family dominates the deployment ranking by a wide margin.

In the *invariant-driven* mode, the CNN exposes a per-element pattern that holds almost universally across the corpus. Per-pile y -coordinates are nearly invariant across the 2000 enumerated solutions of instance 1191: 15 of 17 pile-top positions take a single value, and the remaining two vary by ± 1 . Figure 5 makes this directly visible: in three arbitrary solutions sampled from the corpus, the same 17 pile-top cards land at the same (p, v) co-ordinates while the non-pile-top cards visibly migrate. The LLM could read the maximum pile-top position (41 on this instance) from the solution data and emit $y[\text{layout}[i,1]] \leq K$ at three aggressiveness levels; it is this family that dominates the deployed portfolio. Both modes feed the same prompt; on Black Hole only the invariant-driven branch produces deployed picks.

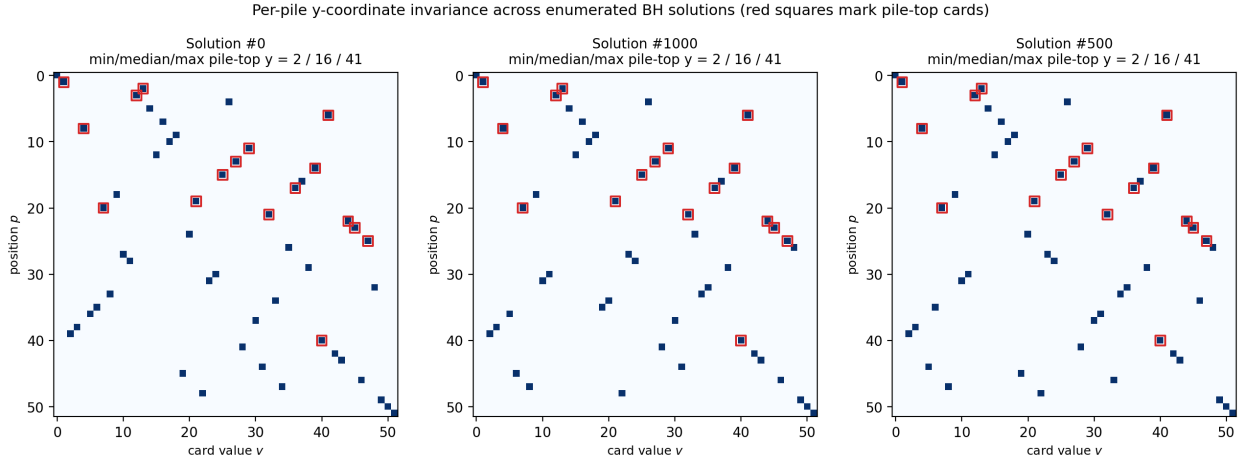


Figure 5: Per-pile y -coordinate invariance on Black Hole training instance 1191. Three arbitrary solutions (positions 0, 500, 1000 in the enumerated corpus) rendered as 52×52 permutation matrices. Red squares mark the 17 pile-top cards ($\text{layout}[i,1]$ for $i \in 1..17$). The red-marked cells appear at identical (p, v) co-ordinates in all three panels, while the unmarked cells (non-pile-top cards) visibly migrate; the invariance is structural, not accidental. This figure shows one example of the pattern the CNN exposes: for this deal, pile-top positions are fixed across solutions, suggesting a bound on how early they appear in the sequence. Pinning pile-tops to exact positions would not generalise across instances, since the deal changes per instance and different cards sit on top of the piles; a parametric bound $y[\text{layout}[i,1]] \leq K$ captures the structural regularity without depending on instance-specific card identities.

Family-budget portfolio. The simple top-3 ranking concentrates the deployed compute budget on a single constraint family. The family-budget allocation (Section 4.5) at $k = 3$ instead selects three different families (*pile-top*, *max-adj-diff*, *rank-walk-endpoints*) and retains the top $m = 3$ members of each (9 streamliners total), racing them within the same compute envelope. *Pile-top* contributes its three aggressiveness-level variants; *max-adj-diff* contributes a tight-fit and an aggressive variant; *rank-walk* has only one member at this pool size.

Results. Table 2 reports the headline portfolio metric. The deployed family-budget portfolio achieves 89.4% time savings, comfortably above StreamLLM’s realtime configuration ($\approx 80\%$ from their Figure 3) and recovering most of the way to the 94.9% pool ceiling. The simple-top-3 reading

Table 3: Pile-top family: aggressiveness–coverage tradeoff on the 49 Black Hole test instances. SAT = instances on which the streamliner returns SAT within the baseline cap; UNSAT = instances rendered unsatisfiable. Geomean and max speedup computed over SAT instances only.

Variant	SAT	UNSAT	Geomean speedup	Max speedup
$K = 25$ (most aggressive)	26	23	$1103\times$	$4547\times$
$K = 30$ + king-pin	18	31	$225\times$	$10\,470\times$
$K = 35$ (least aggressive)	39	10	$10\times$	$51\times$

reaches 79.7%, closely matching StreamLLM’s published number for like-for-like comparison, but is structurally limited by the within-pile-top redundancy of its three picks (diagnosed in Section 6.2). The 9.7-percentage-point gap between simple-top-3 and family-budget is the structural improvement the family-aware allocation buys.

The qualitative difference between the two pipelines’ discoveries is striking. StreamLLM’s realtime BH triple ($x[26]=26$, a rank-descent-forbidding forall, and $x[52]=52$) pins individual cards to individual positions, constraints plausible from reading the model text alone. Our deployed family operates on $y[\text{layout}[i,1]]$, a compound expression that composes the layout parameter with the positional variable to constrain all 17 pile-top cards to appear within the first K positions of the play sequence. This cross-variable relationship is not visible in the model text; it emerges from observing that pile-top positions are nearly invariant across the enumerated solution corpus. The contrast illustrates the complementary roles of the two approaches: model-text-grounded synthesis recovers plausible structural guesses, while solution-grounded synthesis discovers structural regularities that only become visible in the solution distribution.

The best single streamliner, $\text{forall}(i \text{ in } 1..17)(y[\text{layout}[i,1]] \leq 25)$, at the most aggressive end of the pile-top family — achieves a geometric-mean speedup of $1103\times$ over the 26 of 49 instances on which it retains satisfiability, with a maximum per-instance speedup of $4547\times$. Table 3 reports all three deployed pile-top variants and makes the aggressiveness–coverage tradeoff concrete. Tightening the bound from $K = 35$ to $K = 25$ reduces SAT retention from 39 to 26 instances but lifts the geometric-mean speedup from $10\times$ to $1103\times$: the constraint prunes so aggressively that where it applies the solver barely searches. Soundness is instance-specific: whether $y[\text{layout}[i,1]] \leq K$ holds depends on the particular Black Hole card layout, not on how hard the instance is to solve, so baseline difficulty is not a predictor of SAT retention. The family-budget portfolio races all three variants within the pile-top slot, covering the instances that the most aggressive member fails.

5.4 Hardened Social Golfers

Social Golfers [12] asks for a weekly schedule of $g = n_{\text{pg}} \cdot n_{\text{gr}}$ golfers (n_{pg} per group, n_{gr} groups) into n_{rounds} weeks, such that no two golfers share a group more than once. We harden the StreamLLM-distributed model with three literature-standard additions: a week-1 canonical partition, a golfer-1 group anchor, and an inter-week lex ordering (full constraint listings in Section A). Together these collapse the standard SG symmetry group on the deployed baseline. Even with this hardening in place, 61 of the test instances drawn from [25] and [24] remain solvable but non-trivially hard for the baseline (median solve time on the order of minutes; total baseline wall-clock across the 61-instance set is 19.0 h).

Results. Our pipeline produces a pool of 23 candidate streamliners on hardened SG (11 from the LLM-statistics path, 12 from the LLM-discovery path). The deployed family-budget portfolio

achieves 98.6% portfolio time savings on the 61-instance test set, essentially matching the 98.7% pool ceiling (within 0.1 pp). The simple-top-3 reading (comparison baseline) reaches 94.4%; the 4.2-percentage-point improvement of family-budget over simple top-3 comes from including a second variant of the `sg_lex` family in the deployed portfolio. The best single streamliner achieves a geometric-mean speedup of $356\times$ over the 18 of 61 instances on which it retains satisfiability, with a per-instance maximum of $2784\times$.

Statistics-path picks. The two statistics-path picks are both beyond-hardening canonicalisations:

1. (*LLM-statistics*) a closed-form algebraic assignment for week 2:

```
forall(g in Golfer)(assign[g, 2] =
  (((g-1) div n_per_group)
    + ((g-1) mod n_per_group)) mod n_groups) + 1)
```

Filter `features.3[4]` correlates at $|r| = 0.97$ with `subsquare_2x2_sum_variance`, the variance of 2×2 block sums in the scalar encoding, which is near-constant across all 2000 solutions (std = 0.14). This gives `subsquare_2x2_sum_variance` the highest CNN endorsement among all 30 properties, directing the LLM’s attention to 2×2 block structure as the load-bearing signal. With this framing, the LLM inspects the raw sample solutions, observes that week-2 assignments follow a specific cyclic round-robin pattern relative to week 1, and derives the algebraic formula. The CNN’s role here is to act as an attention mechanism, elevating the right structural feature above the remaining properties so the LLM focuses on the correct part of the solution structure.

2. (*LLM-statistics*) a per-golfer week-to-week change constraint excluding golfer 1:

```
forall(g in Golfer where g > 1, w in 1..n_rounds-1)
  (assign[g, w] != assign[g, w+1])
```

This forbids any non-canonicalised golfer from being assigned to the same group on two consecutive weeks. The stats path surfaced it via filter `features.3[32]`, which correlates at $|r| = 0.85$ with the `horizontal_adjacency_diff` property (a measure of how much consecutive-week group assignments differ across the solution). That property is near-constant with mean 1.32 and std 0.009, indicating golfers almost never repeat a group in consecutive weeks in valid solutions; the LLM reads this near-constant signal and emits the constraint. Validation confirms this is a genuine streamliner: it retains satisfiability on 55 of 61 test instances (with 6 rendered unsatisfiable), confirming that valid solutions exist in which a golfer does occupy the same group in consecutive weeks.

Both constraints are beyond-hardening canonicalisations that impose additional structure on top of the standard hardening without being among the canonical lex-leader, value-precedence, or week-permutation symmetry breaks; they are constraints the standard hardening does not capture.

What the CNN sees. Unlike Black Hole and Vessel Loading, Social Golfers produces nearly uniform activation maps with no diagonal striping or geometric silhouette. The structural patterns the CNN detects (consistent 2×2 block sums and horizontal edge regularity between consecutive weeks) hold uniformly across the entire canvas, so filters fire at similar strength everywhere rather than at identifiable positions. The CNN found real patterns, but they are diffuse rather than localised, making spatial hotspot data less informative here than for BH or VL.

For the discovery path, diffuse activations give the LLM less positional evidence to anchor on, and it falls back on prior-driven canonicalisation drawn from its knowledge of SG group-permutation structure rather than reading a spatially-concentrated CNN signal. Where activations are spatially concentrated (BH, VL), the discovery path extracts CNN-grounded geometric constraints (Section 5.5); where they are flat, as here, the CNN’s contribution is through the stats-path correlation ranking rather than spatial signal.

5.5 Hardened Vessel Loading

Vessel Loading [12] is a 2D rectangular-packing problem: place `n_containers` rectangles on a `deck_width` by `deck_length` deck such that containers of incompatible classes respect minimum separation distances. We harden the StreamLLM-distributed model with two additions: a lex-leader symmetry break over identical containers, and a square-container orientation canonicalisation (full constraint listings in Section A). Because the baseline VL model permits container rotation, this hardening is more substantial than the symmetry break on Social Golfers and substantially compresses the baseline solve-time distribution. Even after hardening, however, the 22-instance composite test set retains a meaningful distribution of harder cases drawn from [24] (total baseline wall-clock 6.1 h).

What the CNN sees. Figure 6 renders the learned filter activations on a representative VL training instance. VL solutions are rasterised to a `deck_length` $\times$ `deck_width` grid where each cell holds the class ID of the container occupying that position (zero for empty); the CNN therefore sees a spatial map of the deck. In each activation panel, columns correspond to the x -axis (**Left** coordinate, left deck wall at column 0), rows to the y -axis (**Bottom** coordinate), and colour encodes filter response strength (dark purple = no activation, teal/green = moderate activation over the main deck region, bright yellow = peak activation). Across the top-variance `features.0` filters the same silhouette recurs: thin vertical bands at the deck walls, a dominant interior region, and a consistent bright bottom-left hot-spot. The discovery-path picks are precisely the constraints this geometry would suggest: a global rotation suppression keying on the canonical orientation visible in the silhouette, and a same-class horizontal-clustering bound keying on the bottom-left hot-spot’s locality. The LLM is reading the activation maps in this case rather than relying on problem-description priors alone: what the CNN exposes spatially, the LLM converts into a packing heuristic.

Results. Our pipeline produces a pool of 40 candidate streamliners on hardened VL (23 from the LLM-statistics path, 17 from the LLM-discovery path). The deployed family-budget portfolio achieves 98.8% portfolio time savings on the 22-instance test set, recovering most of the way to the 99.6% pool ceiling. The simple-top-3 reading reaches 97.4%, already close to the pool ceiling on this problem; the family-budget improvement is modest (1.4 pp) because VL’s pool is already near-saturated under simple-top-3. The best single streamliner achieves a geometric-mean speedup of $932\times$ over the 17 of 22 instances on which it retains satisfiability, with a maximum per-instance speedup of $8389\times$.

Illustrative pool picks. Three constraints from different families illustrate the range of structure the pipeline discovers, mixing both LLM paths:

1. (*LLM-statistics*) an orientation-aware left-edge bound on containers smaller than the deck:

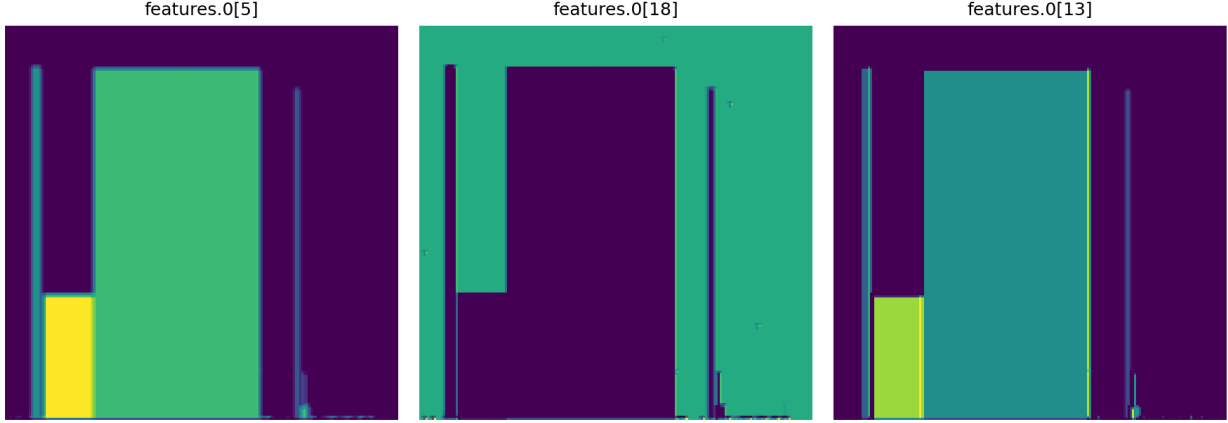


Figure 6: Mean activation maps for the three highest-variance `features.0` filters trained contrastively on Vessel Loading solutions versus packing near-miss negatives (training instance 0051e4a17e...; mean over the enumerated-solutions corpus). Columns = **Left** coordinate (x -axis of deck); rows = **Bottom** coordinate (y -axis); colour encodes activation strength (dark purple = none, teal/green = moderate activation over the main deck region, yellow = peak). Across most filters the same silhouette recurs: vertical bands at the deck walls, a dominant interior region, and a consistent bright bottom-left hot-spot. The bottom-left hot-spot is the spatial signal the LLM-discovery path converts into the packing-heuristic streamliners (`Bottom[c] mod 2 = 0`, same-class **Left** clustering) representative of the discovery-path pool.

```
forall(c in Containers
  where max(width[c], length[c]) <= deck_width)
  (Left[c] <= deck_width - max(width[c], length[c]))
```

This enforces that any container that fits within the deck width in either orientation must be placed so that its left edge plus its larger dimension does not exceed the deck width, a packing-tightness constraint that handles both rotations. The CNN signal came from the *mean_Left_all* and *std_Left_all* properties ($|r| > 0.94$ across all three ensemble seeds), indicating that **Left** coordinates are tightly constrained in valid solutions. The LLM uses this signal as a cue and derives the orientation-aware formula from the model structure: neither alone produces the constraint. It retains satisfiability on 18 of 22 test instances with a geometric-mean speedup of $439\times$.

2. (*LLM-statistics*) a bottom-edge grid-alignment constraint:

```
forall(c in Containers)(Bottom[c] mod 2 = 0)
```

This requires every container’s bottom edge to land on an even y -coordinate. The constraint is not in the model and cannot be derived from reading it; it is an emergent property of the specific container dimensions in these instances. When containers with even-valued heights are packed starting from $y = 0$, each successive bottom edge naturally lands on an even coordinate, and the CNN detects this regularity via the *n_boundaries* property ($-r = 0.97$), which is near-constant across all solutions. The LLM translates “container edges consistently align to even grid positions” into the mod-2 constraint. By halving the candidate y -coordinates for every container simultaneously, it prunes the search space dramatically: 16 of 22 test instances retain satisfiability with a geometric-mean speedup of $646\times$.

3. (*LLM-discovery*) a same-class horizontal clustering constraint:

```
forall(c, k in Containers
  where c < k /\ class[c] = class[k])
  (abs(Left[c] - Left[k]) <= deck_width div 3)
```

The CNN’s activation maps expose a spatial regularity: in high-activation solutions, containers sharing the same cargo class are consistently co-located in the same region of the deck rather than spread across it. The LLM reads this clustering signal and translates it into a proximity bound: any two same-class containers must have their left edges within one-third of the deck width of each other. This complements the symmetry break on *identical* containers (which requires matching width and length as well as class) by restricting the horizontal spread of same-class containers regardless of their dimensions. It retains satisfiability on 18 of 22 test instances with a geometric-mean speedup of $654\times$. Notably, the LLM generates this bound without referencing the `separation` matrix already in the model, which specifies the minimum required distance between containers of each class pair. A more precise version could derive a bound consistent with those separation values; this illustrates the prompt-improvement direction discussed in Section 8.

The hardened VL winners are *structural packing heuristics* rather than further canonicalisations: they restrict where containers are placed and how their classes relate, rather than canonicalising the symmetry orbit of the hardened baseline. This is a different kind of structure from the Social Golfers winners and reflects VL’s geometric, rather than symmetric, residual structure.

6 Analysis

6.1 Which LLM path carries the headline?

A natural question given the two-path design is whether one path dominates the other. Figure 7 addresses this by plotting every validated streamliner as a point on the SAT-retention vs geomean-speedup plane.

Two observations stand out. First, SAT retention and speedup are in fundamental tension: tighter constraints prune the search space more aggressively and deliver higher per-instance speedup where they apply, but render more instances unsatisfiable. This tradeoff is visible in all three panels as a downward-sloping Pareto frontier from top-left (high speedup, low retention) to bottom-right (lower speedup, broad coverage). A useful streamliner portfolio needs both: a high-speedup/low-retention member to win on the instances it retains, and a conservative member to cover the rest.

Second, the two LLM paths occupy different regions of the tradeoff space. On Black Hole the discovery path dominates the high-speedup end (the pile-top family), while on hardened SG the stats path owns the top-left. On VL both paths are competitive throughout. The two paths address different aspects of the solution-set signal: the `llm_stats` path is strongest when structural regularity is captured by the per-property library, while `llm_discovery` is strongest when the regularity involves variables outside that library (the BH pile-top coordinates, the VL grid-alignment pattern). Templates appear in the BH pool but contribute nothing above $1\times$ on the hardened regime and are omitted from the figure.

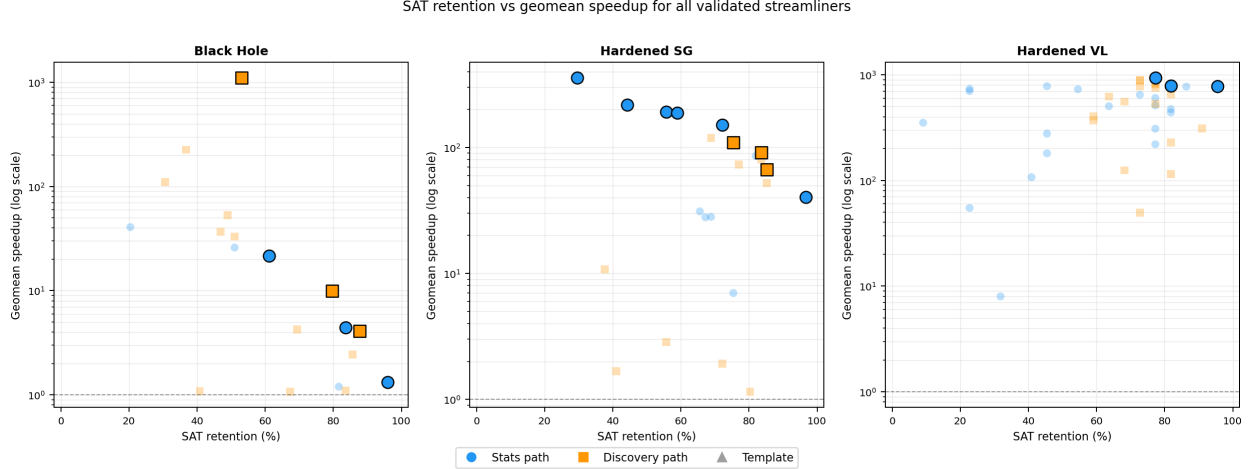


Figure 7: SAT retention (% of test instances solved) vs geomean speedup on retained instances (log scale) for all validated streamliners across the three problems. Blue circles = `llm_stats` path; orange squares = `llm_discovery` path. No template candidates appear above $1\times$ speedup on the hardened evaluation regime. The dashed line marks $1\times$ (no improvement).

6.2 Selection inefficiency and the role of the pool

As Table 2 shows, hardened SG/VL exhibit small selection gaps (≤ 5 pp) while Black Hole exhibits a 15.2-percentage-point gap. We can decompose the gap further by examining the candidate constraint *families* present in each pool.

On hardened SG and VL, the deployed picks span complementary constraint families, each targeting a distinct structural regularity. The 4-way race in the portfolio rarely sees two streamliners competing on the same instance, and the static rule recovers most of the pool ceiling.

On Black Hole, by contrast, the simple top-3 picks are all from the same *family*: pile-top y -coordinate bounds at three aggressiveness levels. When this family is the per-instance optimum the portfolio captures it, but for instances where the optimum lies in a different family the portfolio falls back to baseline. This is the structural origin of BH’s 15.2 pp selection gap, which the family-budget allocation (Section 4.5) is designed to address. As Table 2 reports, family-budget recovers 9.7 of the 15.2 pp gap, leaving a 5.5 pp residual. This instance-level variability is directly visible in Figure 4: the BH panel shows a highly fragmented pattern where no single streamliner dominates across the full instance set, in contrast to the more consistent coverage visible in the SG and VL panels.

6.3 Sensitivity of family-budget to k and m , and wall-clock vs. CPU cost

The family-budget mechanism (Section 4.5) has two parameters: the number of families k deployed and the number of members m retained per family. Throughout the evaluation we fix $k = 3$ for direct comparability with prior portfolio work, but here we sweep both dimensions and additionally report CPU-adjusted savings alongside wall-clock savings to characterise the compute cost of the parallel race.

Intra-family count m . Table 4 reports wall-clock portfolio savings at $k = 3$ for $m \in \{1, 2, 3\}$ and for “all members” (no intra-family cap). Three observations. First, the diminishing-returns prediction is borne out empirically: $m = 3$ captures essentially all of the recoverable gain on each

Table 4: Sensitivity to intra-family member count m at $k = 3$ families (wall-clock savings). Best m per problem in bold; “all members” = no cap on intra-family size. All values simulated from the shared validation-pool data used for the Section 5 headlines.

	$m = 1$	$m = 2$	$m = 3$	all members
Hardened SG	95.3%	95.2%	98.6%	98.7%
Hardened VL	97.6%	98.8%	98.8%	95.3%
Black Hole	79.2%	89.4%	89.4%	83.9%

problem, and the marginal gain from $m = 2$ to $m = 3$ is already smaller than from $m = 1$ to $m = 2$ on Black Hole. Second, growing m beyond three members per family *degrades* performance on Vessel Loading: VL’s `vl_no_rotation` family has eight variants whose later members are weak, and including them all causes slot dilution that prevents the strong members from completing within their shrunken slot. This corroborates the mechanism’s design hypothesis: the value of intra-family diversity saturates early, and exceeding the saturation point hurts. Third, $m = 1$ reduces the family-budget portfolio to one member-per-family (effectively a family-balanced top- k ranking with full per-streamliner time) and recovers only a small fraction of the family-budget gain on SG and VL (0.9 pp and 0.2 pp over simple top-3 respectively), and is slightly *worse* than simple top-3 on Black Hole (−0.5 pp) because the single best pile-top member per family cannot replicate the slot-sharing benefit. The family-aware *allocation* (slot-shared compute across multiple members) does the bulk of the work; family-aware *selection* alone is insufficient.

Wall-clock vs. CPU-adjusted savings. For Hardened SG and Hardened VL the CPU-adjusted figures track wall-clock savings closely across all (k, m) settings (within 4 pp), because the winning streamliners solve their instances so quickly that $(k + 1) \times t_{\text{winner}}$ remains a small fraction of t_b . At the paper’s default ($k = 3, m = 3$): SG 94.5% CPU-adjusted (vs. 98.6% wall-clock); VL 95.1% (vs. 98.8%).

Black Hole shows a larger gap (89.4% wall-clock, 57.7% CPU-adjusted at $k = 3, m = 3$) because BH streamliner SAT coverage is lower: a non-trivial fraction of instances are solved only by the baseline, so the parallel processes that fail on those instances consume their full slot budget without contributing. The wasted compute accumulates in the CPU accounting but is invisible in the wall-clock figure, which records only the winner’s time.

Table 5 shows the full (k, m) sweep for Black Hole, reporting both wall-clock savings (WC) and CPU-adjusted savings (CPU). Increasing k improves wall-clock monotonically (more diverse families cover more instances) but *degrades* CPU-adjusted savings at fixed $m = 1$, because each additional family adds another parallel process that frequently exhausts its slot without finding SAT. The most CPU-efficient settings are low- k , moderate- m : ($k = 2, m = 2$) delivers 88.8% wall-clock at 66.4% CPU-adjusted, the best CPU figure in the table. The paper’s default ($k = 3, m = 3$) trades 8.7 pp of CPU efficiency for 0.6 pp of additional wall-clock savings over ($k = 2, m = 2$), a reasonable exchange when spare cores are available. Practitioners under strict compute budgets may prefer the ($k = 2, m = 2$) configuration.

7 Limitations and Threats to Validity

Breadth of direct comparison. We report a direct head-to-head against StreamLLM [25] only on Black Hole, the one problem where standard hardening is not applicable and the two pipelines

Table 5: Black Hole portfolio savings across family count k and per-family member count m . Each cell shows wall-clock savings (WC) / CPU-adjusted savings (CPU). Paper default ($k = 3, m = 3$) marked †; oracle pool ceiling is 94.9% wall-clock.

	$m = 1$	$m = 2$	$m = 3$
$k = 1$	54.7% / 9.4%	77.8% / 55.6%	78.0% / 56.0%
$k = 2$	75.2% / 25.6%	88.8% / 66.4%	88.8% / 66.5%
$k = 3$	79.2% / 16.9%	89.4% / 57.7%	89.4% / 57.7%†
$k = 4$	81.6% / 8.2%	90.0% / 49.8%	90.0% / 49.9%
$k = 5$	85.0% / 10.2%	90.0% / 40.1%	90.0% / 40.2%

therefore face the same task. For Social Golfers and Vessel Loading we evaluate on *hardened* variants of the StreamLLM-distributed models, which is a different evaluation regime; a reader cannot directly compare our hardened SG and VL numbers against StreamLLM’s reported figures because the underlying baselines differ. We have not re-run the StreamLLM pipeline against our hardened models. A hardened-baseline rerun of StreamLLM, while methodologically clean, is computationally expensive and beyond the scope of this paper; we leave it to future work.

LLM dependence. Constraint synthesis uses Claude Opus as the prompted LLM throughout. We did experiment with self-hosted open-weight models via Ollama (specifically the `qwen2.5-coder:14b` class of models, the largest size our available hardware could run), but the generated MiniZinc was not syntactically reliable enough to sustain the constraint-synthesis pass, and we were unable to host larger models that might have done better. An open-weight reproduction with sufficiently capable hardware is therefore left to future work; it is desirable both for cost reasons (the headline pools are independent of solver runs) and for reproducibility under proprietary-model discontinuation. We report the LLM client and version in each experiment’s `experiment_config.json`.

Run-to-run variance and reproducibility. Single-seed pipeline runs have non-trivial variance because both the CNN training and the LLM constraint synthesis are non-deterministic. We mitigate the CNN side with an ensemble of $K = 3$ random seeds per training instance; the LLM side is mitigated by the semantic-clustering pass that absorbs parametrically-equivalent variants into representative clusters. Headline numbers in this paper come from a single end-to-end pipeline run per problem; we have not run multiple end-to-end seeds and report variance bands. This is a real limitation: a reviewer cannot infer from our numbers how sensitive the deployed top-3 picks are to the seed used for constraint synthesis.

CNN ablation and architecture. The meaningful published alternative to CNN-grounded synthesis is LLM-only generation from the model text (StreamLLM), which we compare against directly on Black Hole (Section 5.3). The mechanical template path is the other natural reference and is already in the pipeline; it contributes no headline picks (Figure 7). The BH pile-top constraint is unreachable by any fixed-property-library approach (Section 5.3), establishing the CNN’s contribution by construction on that problem. The one open question is whether the CNN correlation ranking on the `llm_stats` path adds value over simply presenting all properties unranked; we leave this to future work. A related question is network depth: in practice the most interpretable signal was consistently in the first layer, and whether the 3-layer architecture is necessary over a single convolutional layer has not been tested.

Variance check. The pipeline implicitly assumes that the property library contains at least one property with non-zero per-solution variance and bounded range; without such a property no streamliner candidate can be generated by the `llm_stats` path. Problems whose feasible solutions share all aggregate properties (e.g., Steiner Triple Systems, where every feasible solution has identical row sums, column sums, and pair counts) will yield no useful candidates from the statistics path, though the discovery path may still identify structure from the filter-contrast pairs. We have not evaluated such problems in this paper.

8 Conclusion

We have presented a pipeline for streamliner synthesis driven by CNN pattern recognition on enumerated solutions. The central idea is to use the CNN as a grounding mechanism: rather than asking the LLM to reason from model text alone (as in StreamLLM) or from raw solution arrays (impractical at scale), the CNN first identifies which structural properties of the solution distribution are most discriminative, and then directs the LLM’s attention to that observed evidence. The result is constraint synthesis that is both unconstrained in shape (the LLM can propose any MiniZinc expression) and anchored in structure that actually holds in the feasible solution set rather than inferred from problem description alone. Per training instance, a Convolutional Neural Network is trained contrastively to detect structural patterns the feasibility predicate exploits, and its discriminative signal is surfaced to a Large Language Model along two paths: filter–property correlation rankings alongside per-property statistics, and direct filter-contrast on high-activation and low-activation solution pairs. The LLM translates the resulting structural evidence into candidate MiniZinc streamliners, which are pooled, clustered, and validated against cached baselines.

We evaluated the pipeline in the regime where automated streamliner discovery is genuinely needed: hardened benchmark models with literature-standard symmetry-breaking and implied constraints already in place, plus Black Hole, the one benchmark in our suite without a canonical hardening. Deployed at $k = 3$ families with $m = 3$ members per family, the family-budget portfolio delivers 98.8% time reduction on hardened Vessel Loading with a best-single-streamliner geometric-mean speedup of $932\times$; 98.6% on hardened Social Golfers with a $356\times$ best-single geomean; and 89.4% on Black Hole with a $1103\times$ best-single geomean. On Black Hole, where direct head-to-head comparison with prior work is methodologically clean, the 89.4% family-budget result exceeds StreamLLM’s realtime configuration ($\approx 80\%$); the simple-top-3 reading (79.7%) matches that prior work for like-for-like comparison, and family-budget closes 9.7 of the 15.2-percentage-point pool ceiling gap with no additional compute envelope.

Across all three problems, both LLM paths contribute headline picks; the CNN’s filter-contrast path is load-bearing on Black Hole specifically, where it surfaces constraints over layout coordinates that the per-property statistics path does not reach. The discovered streamliners are structurally distinct from what the standard hardening provides: class-based packing constraints on Vessel Loading, beyond-hardening canonicalisations on Social Golfers, and layout-coordinate bounds on Black Hole.

A secondary observation is that the CNN’s activation maps carry diagnostic information about which kind of constraint the discovery path produces. On Vessel Loading and Black Hole the activations expose interpretable spatial structure (deck silhouette and per-pile invariants respectively) and the discovery picks key directly on that structure; the Black Hole pile-top constraint is structurally unreachable by any fixed-property-library approach, providing direct evidence of the CNN’s contribution on that problem. On Social Golfers the activations are flat and the discovery path falls back on prior-driven canonicalisations.

The most natural direction for future work is richer CNN training: the current binary contrastive objective converges on the single most discriminative pattern per instance, and harder negatives or multi-property auxiliary tasks would encourage filter specialisation across independent structural signals. A second direction is prompt refinement: although the LLM already receives the full MiniZinc model alongside the CNN evidence, it does not always reason carefully about consistency with existing model constraints when proposing bounds. Explicitly instructing the LLM to verify that a proposed constraint does not conflict with or duplicate constraints already in the model would improve the precision of generated candidates and reduce candidates that are trivially implied or structurally inconsistent. A third direction is finer family tagging for the portfolio (constraint-AST clustering or behavioural similarity rather than descriptor prefix) to recover the residual gap to the full-pool oracle. A broader open-weight LLM reproduction would also strengthen reproducibility.

A Hardening constraints

Social Golfers

We add three literature-standard constraints [7] to the StreamLLM-distributed Social Golfers model:

- *Week-1 canonical partition.* Fix the entire first-week column to a canonical assignment, breaking golfer-permutation symmetry within week 1:
`forall(g in Golfer)(assign[g, 1] = ((g-1) div n_per_group) + 1)`
- *Golfer-1 group anchor.* Fix golfer 1 to group 1 in every week beyond the first, naming “group 1” as the group containing golfer 1:
`forall(w in Week where w > 1)(assign[1, w] = 1)`
- *Inter-week lex ordering.* Impose lex order on weeks $2 \dots n_{\text{rounds}}$ [9], breaking week-permutation symmetry (week 1 is excluded as its column is already canonicalised).

Vessel Loading

We add two constraints [7] to the StreamLLM-distributed Vessel Loading model:

- *Lex-leader symmetry break over identical containers.* Containers sharing width, length, and class are interchangeable; their (Left, Bottom) pairs are forced into lex order:
`forall(c1, c2 in Containers
 where c1 < c2 /\ width[c1]=width[c2]
 /\ length[c1]=length[c2]
 /\ class[c1]=class[c2])
 (lex_lesseq([Left[c1], Bottom[c1]],
 [Left[c2], Bottom[c2]]))`
- *Square-container orientation canonicalisation.* Containers with $width = length$ have their rotation flag fixed, eliminating the trivial rotation symmetry that would otherwise double-count square placements:
`forall(c in Containers where width[c]=length[c])
 (not rotated[c])`

References

- [1] Özgür Akgün, Alan M. Frisch, Ian P. Gent, Christopher Jefferson, Ian Miguel, and Peter Nightingale. Conjure: Automatic generation of constraint models from problem specifications. *Artificial Intelligence*, 310:103751, 2022.
- [2] David Bau, Bolei Zhou, Aditya Khosla, Aude Oliva, and Antonio Torralba. Network dissection: Quantifying interpretability of deep visual representations. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, 2017.
- [3] Nicolas Beldiceanu and Helmut Simonis. A model seeker: Extracting global constraint models from positive examples. In *Principles and Practice of Constraint Programming (CP)*, 2012.
- [4] Christian Bessiere, Rémi Coletta, Emmanuel Hebrard, George Katsirelos, Nadjib Lazaar, Nina Narodytska, Claude-Guy Quimper, and Toby Walsh. Constraint acquisition. *Artificial Intelligence*, 244:315–342, 2017.
- [5] John Charnley, Simon Colton, and Ian Miguel. Automatic generation of implied constraints. In *European Conference on Artificial Intelligence (ECAI)*, 2006.
- [6] Geoffrey Chu. Chuffed: A lazy clause generation solver. 2018. <https://github.com/chuffed/chuffed>.
- [7] James Crawford, Matthew Ginsberg, Eugene Luks, and Amitabha Roy. Symmetry-breaking predicates for search problems. In *Knowledge Representation and Reasoning (KR)*, 1996.
- [8] Nguyen Dang, Özgür Akgün, Joan Espasa, Ian Miguel, and Peter Nightingale. A framework for generating informative benchmark instances. In *Principles and Practice of Constraint Programming (CP)*, volume 235, pages 18:1–18:18, 2022.
- [9] Pierre Flener, Alan M. Frisch, Brahim Hnich, Zeynep Kiziltan, Ian Miguel, Justin Pearson, and Toby Walsh. Breaking row and column symmetries in matrix models. In *Principles and Practice of Constraint Programming (CP)*, pages 462–477, 2002.
- [10] Alan M. Frisch, Warwick Harvey, Christopher Jefferson, Bernadette Martínez Hernández, and Ian Miguel. Essence: A constraint language for specifying combinatorial problems. *Constraints*, 13(3):268–306, 2008.
- [11] Ian P. Gent, Christopher Jefferson, Tom Kelsey, Inês Lynce, Ian Miguel, Peter Nightingale, Barbara M. Smith, and S. Armagan Tarim. Search in the patience game ‘Black Hole’. In *AI Communications*, volume 20, pages 211–226, 2007.
- [12] Ian P. Gent and Toby Walsh. CSPLib: A benchmark library for constraints. <https://www.csplib.org/>, 1999. Online benchmark library; problem 010 (Social Golfers), 008 (Vessel Loading), 023 (Black Hole patience).
- [13] Carla P. Gomes and Meinolf Sellmann. Streamlined constraint reasoning. In *Principles and Practice of Constraint Programming (CP)*, 2004.
- [14] Ronan Le Bras, Carla P. Gomes, and Bart Selman. From streamlined combinatorial search to efficient constructive procedures. In *AAAI Conference on Artificial Intelligence*, 2012.

- [15] Nicholas Nethercote, Peter J. Stuckey, Ralph Becket, Sebastian Brand, Gregory J. Duck, and Guido Tack. MiniZinc: Towards a standard CP modelling language. In *Principles and Practice of Constraint Programming (CP)*, 2007.
- [16] Kexin Pei, David Bieber, Kensen Shi, Charles Sutton, and Pengcheng Yin. Can large language models reason about program invariants? In *International Conference on Machine Learning (ICML)*, 2023.
- [17] Bernardino Romera-Paredes, Mohammadamin Barekatin, Alexander Novikov, Matej Balog, M. Pawan Kumar, Emilien Dupont, Francisco J. R. Ruiz, Jordan S. Ellenberg, Pengming Wang, Omar Fawzi, Pushmeet Kohli, and Alhussein Fawzi. Mathematical discoveries from program search with large language models. *Nature*, 625:468–475, 2024.
- [18] Francesca Rossi, Peter van Beek, and Toby Walsh, editors. *Handbook of Constraint Programming*. Foundations of Artificial Intelligence. Elsevier, 2006.
- [19] Olivier Roussel. Controlling a solver execution: the **runsolver** tool. *Journal on Satisfiability, Boolean Modeling and Computation*, 7(4):139–144, 2011.
- [20] Daniel Selsam, Matthew Lamm, Benedikt Bünz, Percy Liang, Leonardo de Moura, and David L. Dill. Learning a SAT solver from single-bit supervision. *International Conference on Learning Representations (ICLR)*, 2019.
- [21] Casey Smith, Carla P. Gomes, and Cèsar Fernández. Streamlining local search for spatially balanced Latin squares. In *International Joint Conference on Artificial Intelligence (IJCAI)*, 2005.
- [22] Patrick Spracklen, Özgür Akgün, and Ian Miguel. Monte carlo tree search on a model lattice: Automatic streamliner generation. In *Principles and Practice of Constraint Programming (CP)*, 2018.
- [23] Patrick Spracklen, Nguyen Dang, Özgür Akgün, and Ian Miguel. Automatic streamlining for constrained optimisation. In *Principles and Practice of Constraint Programming (CP)*, 2019.
- [24] Patrick Spracklen, Nguyen Dang, Özgür Akgün, and Ian Miguel. Automated streamliner portfolios for constraint satisfaction problems. *Artificial Intelligence*, 319:103915, 2023. Benchmark instances and code: <https://github.com/stacs-cp/automated-streamliner-portfolios>.
- [25] Florentina Voboril, Vaidyanathan Peruvemba Ramaswamy, and Stefan Szeider. Generating streamlining constraints with large language models. *Journal of Artificial Intelligence Research*, 84:16:1–16:19, 2025. Code and instances: <https://zenodo.org/records/14757597>.
- [26] Po-Wei Wang, Priya Donti, Bryan Wilder, and J. Zico Kolter. SATNet: Bridging deep learning and logical reasoning using a differentiable satisfiability solver. In *International Conference on Machine Learning (ICML)*, 2019.
- [27] James Wetter, Özgür Akgün, and Ian Miguel. Automatically generating streamlined constraint models with Essence and Conjure. In *Principles and Practice of Constraint Programming (CP)*, 2015.
- [28] Haoze Wu, Clark Barrett, and Nina Narodytska. Lemur: Integrating large language models in automated program verification. In *International Conference on Learning Representations (ICLR)*, 2024.