


HIBERNATE PRACTICAL

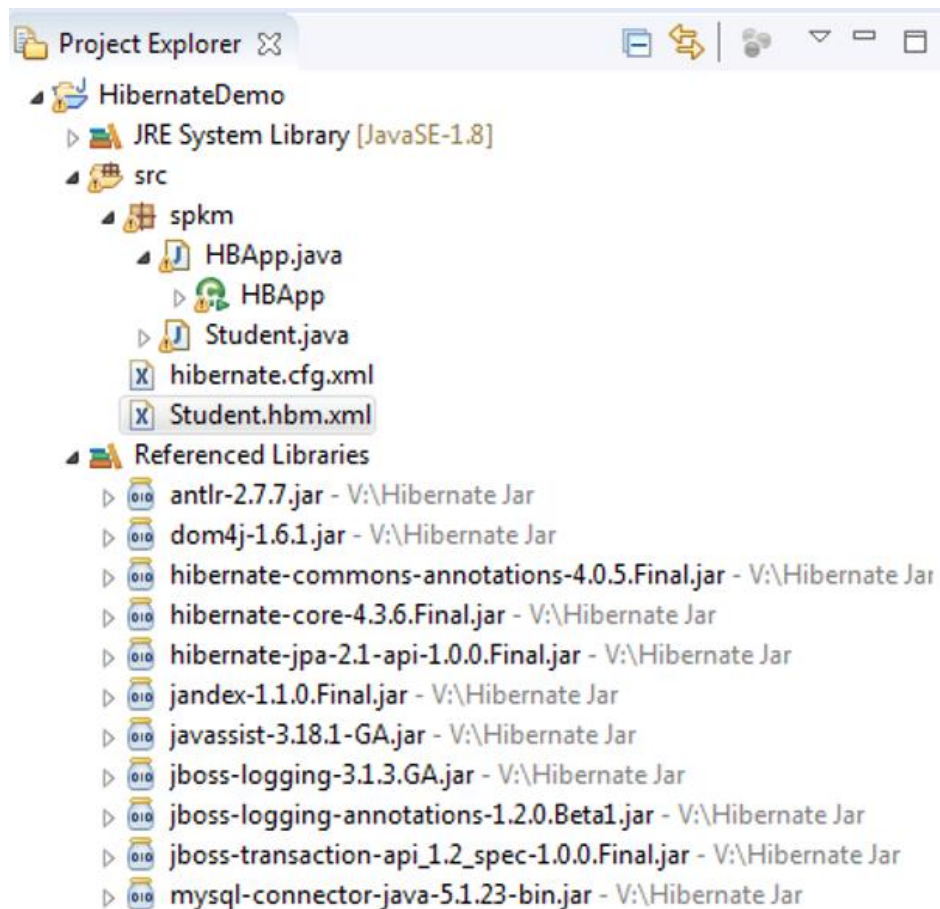

Server: localhost » Database: studdb » Table: student							
Browse Structure SQL Search Insert Export							
#	Name	Type	Collation	Attributes	Null	Default	Extra
☐ 1	id	int(11)			No	None	AUTO_INCREMENT
☐ 2	firstname	varchar(50)	latin1_swedish_ci		No	None	
☐ 3	lastname	varchar(50)	latin1_swedish_ci		No	None	

Student.java

```
// POJO Class

package spkm;

import java.io.Serializable;

public class Student implements Serializable
{

    int id;
    String firstName,lastName;
    Student()
    {}
    Student(String fn,String ln)
    {
        this.firstName=fn;
        this.lastName=ln;
    }
    public void setId(int id)
    {
        this.id=id;
    }
    public int getId()
    {
        return this.id;
    }
    public void setFirstName(String fn)
    {
        this.firstName=fn;
    }
    public String getFirstName()
    {
        return this.firstName;
    }
    public void setLastName(String ln)
    {
        this.lastName=ln;
    }
    public String getLastName()
    {
        return this.lastName;
    }
}
```

HApp.java

```
package spkm;

import java.util.List;
import java.util.Iterator;

import org.hibernate.SQLQuery;
import org.hibernate.Session;
import org.hibernate.SessionFactory;
import org.hibernate.Transaction;
import org.hibernate.cfg.Configuration;

public class HApp
{
    public static void main(String[] args)
    {
        try
        {
            //Hibernate configuration
            Configuration cf=new Configuration();
            cf.configure();
            SessionFactory sf=cf.buildSessionFactory();
            Session ses=sf.openSession();
            Transaction tx=ses.beginTransaction();

            //Insert Record

            Student st=new Student();
            st.setFirstName("Nilesh");
            st.setLastName("Maheta");
            ses.save(st);
            tx.commit();
            System.out.println("Record inserted...");

            //Update Record

            Student st1=(Student)ses.get(Student.class,1);
            st1.setFirstName("Janki");
            st1.setLastName("Maheta");
            ses.update(st1);
            tx.commit();
            System.out.println("Record updated...");

            //Delete Record

            Student st2=(Student)ses.get(Student.class,1);
            ses.delete(st2);
            tx.commit();
            System.out.println("Record deleted...");

            //Retrive Records

            String qry="SELECT * FROM student";
            SQLQuery query=ses.createSQLQuery(qry);
            query.addEntity(Student.class);
```

```
    List<Student> studs=query.list();
    System.out.println("ID FirstName LastName");
    for(Iterator x=studs.iterator();x.hasNext();)
    {
        Student s=(Student)x.next();
        System.out.println(s.getId()+" "+s.getFirstName()+"
                                "+s.getLastName());
    }

} catch (Exception e)
{
    e.printStackTrace();
}

}
```

hibernate.hbm.xml

```
<?xml version="1.0" encoding="UTF-8"?>

<!DOCTYPE hibernate-configuration PUBLIC
"-//Hibernate/Hibernate Configuration DTD//EN"
"http://hibernate.sourceforge.net/hibernate-configuration-3.0.dtd">

<hibernate-configuration>

    <session-factory>

        <property name="hibernate.connection.driver_class">com.mysql.jdbc.Driver </property>
        <property name="hibernate.connection.url">jdbc:mysql://localhost:3306/studdb</property>
        <property name="hibernate.connection.username">root</property>
        <property name="hibernate.connection.password"></property>
        <property name="hibernate.connection.pool_size">10</property>

        <property name="show_sql">>true</property>
        <property name="dialect">org.hibernate.dialect.MySQLDialect</property>
        <property name="hibernate.current_session_context_class">thread</property>

        <mapping resource="Student.hbm.xml"></mapping>

    </session-factory>

</hibernate-configuration>
```

Student.hbm.xml

```
<?xml version="1.0" encoding="UTF-8"?>

<!DOCTYPE hibernate-mapping PUBLIC
"-//Hibernate/Hibernate Mapping DTD//EN"
"http://www.hibernate.org/dtd/hibernate-mapping-3.0.dtd">

<hibernate-mapping>

    <class name="spkm.Student" table="student">
        <id name="id" column="id" type="int">
            <generator class="native"></generator>
        </id>

        <property name="firstName" column="firstname" type="string"></property>
        <property name="lastName" column="lastname" type="string"></property>

    </class>

</hibernate-mapping>
```