

Introduction to Neo4j



Introduction to Graph Databases

Table of Contents

About this module	1
The evolution of graph databases.....	1
What Is a graph database?	1
The case for graph databases.....	1
What is a graph?	2
Modeling relational to graph	2
Run-time behavior: RDBMS vs graph	3
How we model: RDBMS vs graph	3
How does Neo4j support the property graph model?	5
Check your understanding.....	6
Question 1	6
Question 2	6
Question 3	6
Summary	7

About this module

The Neo4j Graph Platform enables developers to create applications that are best architected as graph-powered systems that are built upon the rich connectedness of data.

At the end of this module, you should be able to:

- Describe what a graph database is.
- Describe some common use cases for using a graph database.
- Model a real-world scenario as a graph.

The evolution of graph databases

Today's business and user requirements demand applications that connect more and more of the world's data, yet still expect high levels of performance and data reliability. Many applications of the future will be built using graph databases like Neo4j.

In this video, you will learn how the need for graph databases has evolved.

<https://youtu.be/5Tl8WcaqZoc>

What Is a graph database?

A graph database is an online database management system with Create, Read, Update and Delete (CRUD) operations working on a graph data model. Graph databases are generally built for use with online transaction processing (OLTP) systems. Accordingly, they are normally optimized for transactional performance, and engineered with transactional integrity and operational availability in mind.

Unlike other databases, relationships take first priority in graph databases. This means your application doesn't have to infer data connections using foreign keys or out-of-band processing, such as MapReduce.

By assembling the simple abstractions of nodes and relationships into connected structures, graph databases enable us to build sophisticated models that map closely to our problem domain.

The case for graph databases

The biggest value that graphs bring to the development stack is their ability to store relationships and connections as first-class entities.

For instance, the early adopters of graph technology reimagined their businesses around the value of data relationships. These companies have now become industry leaders: LinkedIn, Google, Facebook and PayPal.

As pioneers in graph technology, each of these enterprises had to build their own graph database from scratch. Fortunately for today's developers, that's no longer the case, as graph database technology is now available off the shelf.

In this video, you will learn how graph databases help you to model real-world data that needs to be connected as well as how Neo4j is used to solve real problems facing enterprises today.

<https://youtu.be/-dCeFEqDkUI>

What is a graph?

A graph is composed of two elements: **nodes** and **relationships**.

Each node represents an entity (a person, place, thing, category or other piece of data), and each relationship represents how two nodes are connected. For example, the two nodes *Person* and *Location*, might have the relationship *LIVES_AT* pointing from a *Person* node to *Location* node. A relationship represents the verb or action between two entities.

This general-purpose structure allows you to model all kinds of scenarios: from a system of roads, to a network of devices, to a population's medical history, or anything else defined by relationships.

With Neo4j, nodes can have **labels** that are used to define types for nodes. For example, a *Location* node is a node with the label *Location*. That same node can also have a label, *Residence*. Another *Location* node can also have a label, *Business*. A label can be used to group nodes of the same type. For example, you may want to retrieve all of the *Business* nodes.

The Neo4j database is a property graph. You can add **properties** to nodes and relationships to further enrich the graph model. This enables you to closely align data and connections in the graph to your real-world application. For example, a *Person* node might have a property, *name* and a *Location* node might have a property, *address*.

In this video, you will learn how to model property graphs containing nodes and relationships and how Cypher is used to access a graph database.

<https://youtu.be/NH6WoJHN4UA>

Modeling relational to graph

Many applications' data is modeled as relational data. There are some similarities between a relational model and a graph model:


Relational	Graph
Rows	Nodes
Joins	Relationships
Table names	Labels
Columns	Properties

But, there are some ways in which the relational model differs from the graph model:

Relational	Graph
Rows in the same table have the same set of fields.	Nodes with the same label aren't required to have the same set of properties.
Joins are calculated at query time.	Relationships are stored on disk when they are created.
A row can belong to one table.	A node can have many labels.

Run-time behavior: RDBMS vs graph

How data is retrieved is very different between an RDBMS and a graph database:

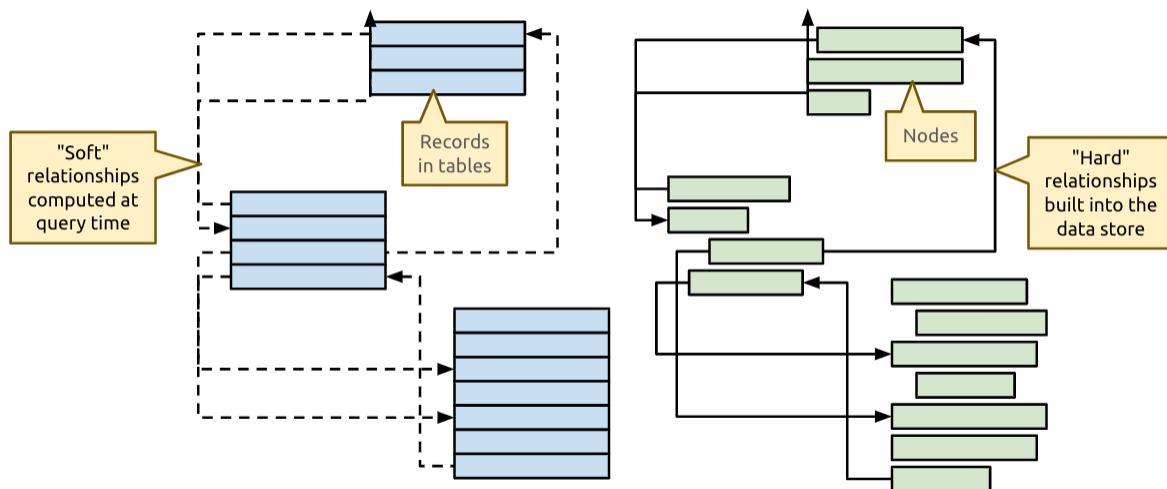


How we model: RDBMS vs graph

How you model data from relational vs graph differs:


Relational	Graph
Try and get the schema defined and then make minimal changes to it after that.	It's common for the schema to evolve with the application.
More abstract focus when modeling i.e. focus on classes rather than objects.	Common to use actual data items when modeling.

If we were modeling a football transfers graph in relational and graph databases these diagrams show what common approaches might look like.

Here is the relational model:

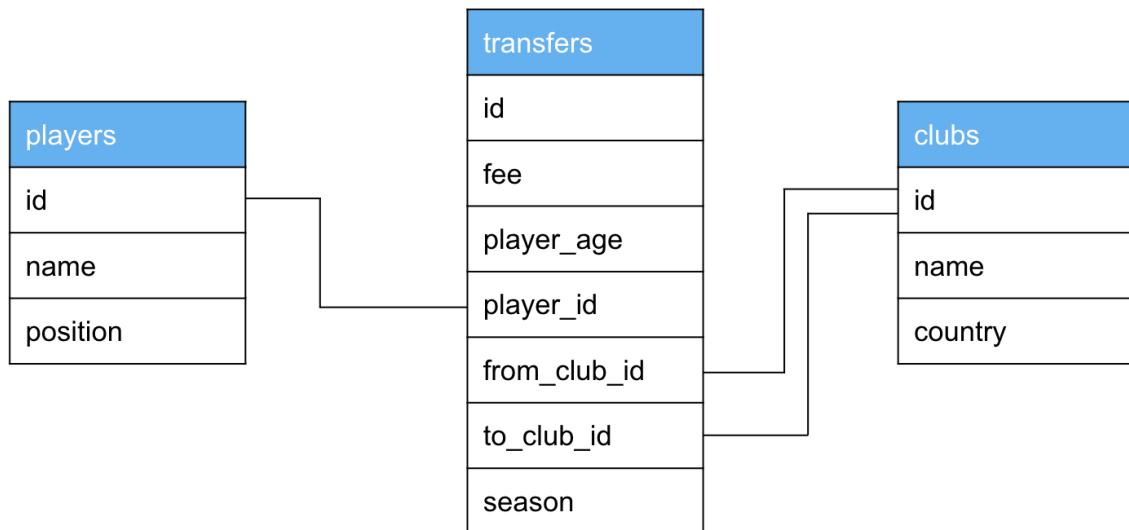


And here is the corresponding graph model:

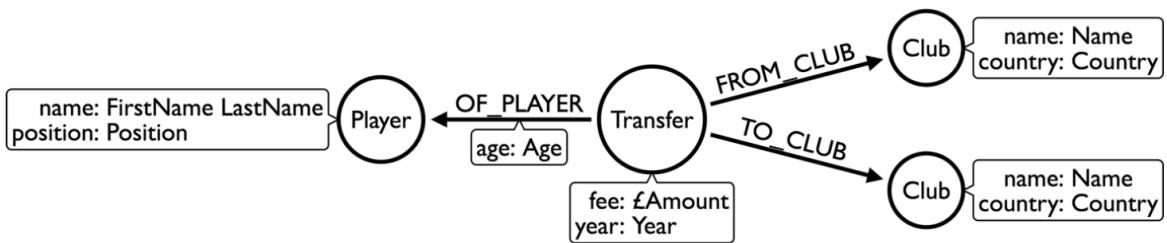

With the graph model we might sketch out examples with actual values and derive the 'schema' while doing that modeling process.

In Neo4j, the data model might evolve to something like this:

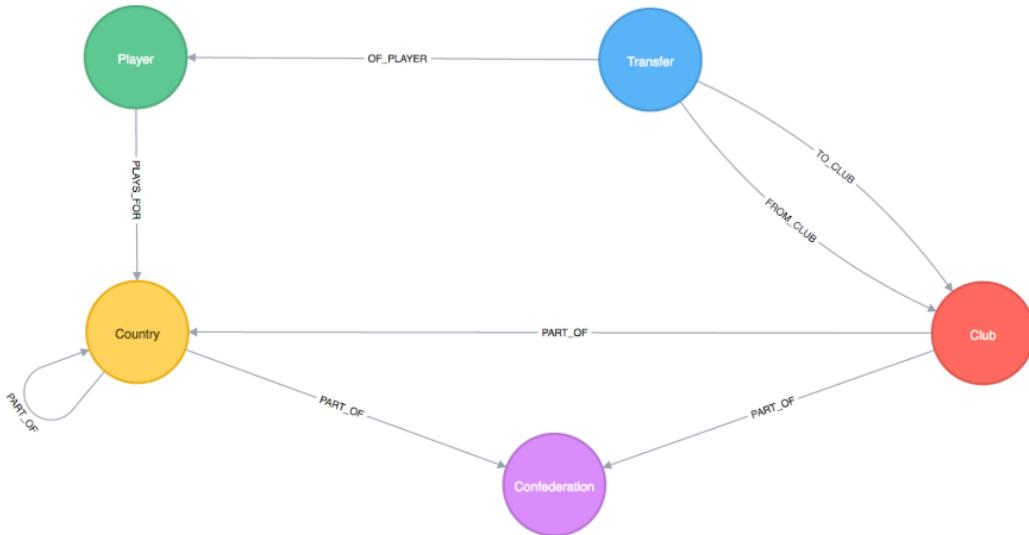

How does Neo4j support the property graph model?

- Neo4j is a **Database** - use it to reliably **store information** and **find it later**.
- Neo4j's data model is a **Graph**, in particular a **Property Graph**.
- **Cypher** is Neo4j's graph query language (**SQL for graphs!**).
- Cypher is a declarative query language: it describes **what** you are interested in, not **how** it is acquired.
- Cypher is meant to be very **readable** and **expressive**.

Check your understanding

Question 1

What elements make up a graph?

Select the correct answers.

- tuples
- nodes
- documents
- relationships

Question 2

Suppose that you want to create a graph to model customers, products, what products a customer buys, and what products a customer rated. You have created nodes in the graph to represent the customers and products. In this graph, what relationships would you define?

Select the correct answers.

- BOUGHT
- IS_A_CUSTOMER
- IS_A_PRODUCT
- RATED

Question 3

What query language is used with a Neo4j Database?

Select the correct answer.

- SQL
- CQL
- Cypher
- OPath

Summary

You should now be able to:

- Describe what a graph database is.
- Describe some common use cases for using a graph database.
- Model a real-world scenario as a graph.

Introduction to Neo4j

Table of Contents

About this module	1
Neo4j Graph Platform	1
Neo4j Database	1
Neo4j Database: Index-free adjacency	1
Neo4j Database: ACID (Atomic, Consistent, Isolated, Durable)	1
Clusters	2
Graph engine	2
Language and driver support	2
Libraries	3
Tools	3
Whiteboard modeling	4
Neo4j Graph Platform architecture	4
Check your understanding	5
Question 1	5
Question 2	5
Question 3	5
Summary	6

About this module

The Neo4j Graph Platform enables developers to create applications that are best architected as graph-powered systems that are built upon the rich connectedness of data.

At the end of this module, you should be able to:

- Describe the components and benefits of the Neo4j Graph Platform.


Neo4j Graph Platform

The Neo4j Graph Platform includes components that enable you to develop your graph-enabled application. To better understand the Neo4j Graph Platform, you will learn about these components and the benefits they provide.

Neo4j Database


The heart of the Neo4j Graph Platform is the Neo4j Database. The Neo4j Graph Platform includes out-of-the-box tooling that enables you to access graphs in Neo4j Databases. In addition, Neo4j provides APIs and drivers that enable you to create applications and custom tooling for accessing and visualizing graphs.

Neo4j Database: Index-free adjacency

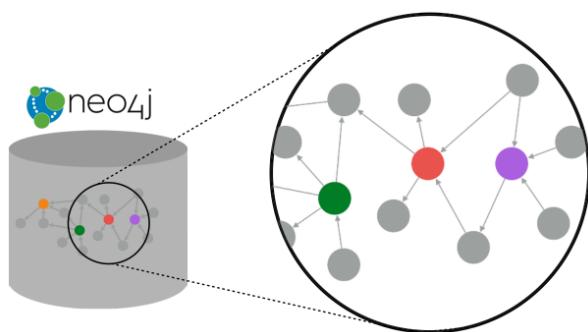


With index free adjacency, when a node or relationship is written to the database, it is stored in the database as connected and any subsequent access to the data is done using pointer navigation which is very fast. Since Neo4j is a native graph database, it supports very large graphs where connected data can be traversed in constant time without the need for an index.

Neo4j Database: ACID (Atomic, Consistent, Isolated, Durable)

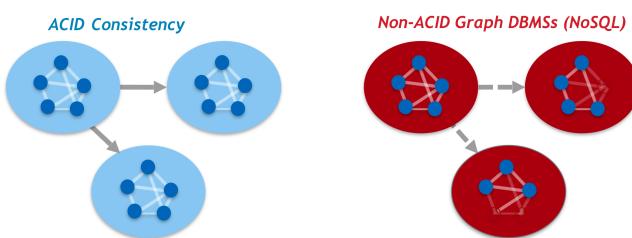

ACID is extremely important for an application that requires ACID transactions. If a relationship between nodes is created, not only is the relationship created, but the nodes are updated as connected. All of these updates to the database must all succeed or fail.

Clusters

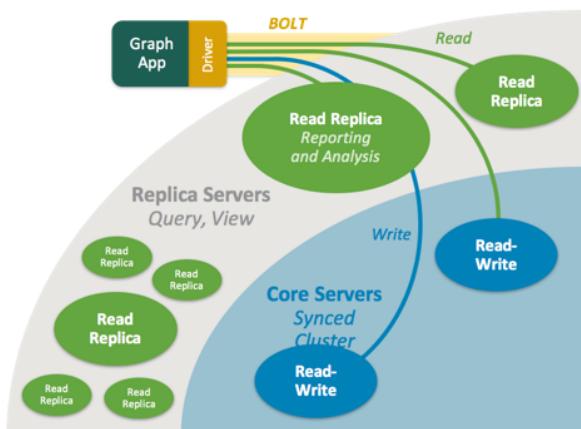

Neo4j fully supports ACID transactions that update data across locations. For some applications, this is critical. Updates to graphs that span locations must also support ACID in many applications. That is where other NoSQL databases fall short and cannot provide the propagation of transactions across clusters (locations) as Neo4j can.

Graph engine

The Neo4j graph engine is used to interpret Cypher statements and also executes kernel-level code to store and retrieve data, whether it is on disk, or cached in memory. The graph engine has been improved with every release of Neo4j to provide the most efficient access to an application's graph data. There are many ways that you can tune the performance of the engine to suit your particular application needs. Neo4j has worked closely with hardware vendors to ensure that the I/O required by Neo4j is optimal.


Language and driver support

Because Neo4j is open source, you can delve into the details of how the Neo4j Database is accessed, but most developers simply use Neo4j without needing a deeper understanding of the underlying code. Neo4j provides a full stack that implements all levels of access to the database and clustering layer where you can use our published APIs. The language used for querying the Neo4j database is Cypher, an open source language.

In addition, Neo4j supports Java, JavaScript, Python, C#, and Go drivers out of the box that use Neo4j's bolt protocol for binary access to the database layer. Bolt is an efficient binary protocol that compresses data sent over the wire as well as encrypting the data. For example, you can write a Java application that uses the Bolt driver to access the Neo4j database, and the application may use other packages that allow data integration between Neo4j and other data stores or uses as common framework such as spring.


It is also possible for you to develop your own server-side extensions in Java that access the data in the database directly without using Cypher. The Neo4j community has developed drivers for a number of languages including Ruby, PHP, and R. You can also extend the functionality of Neo4j by creating user defined functions and procedures that are callable from Cypher.

Libraries

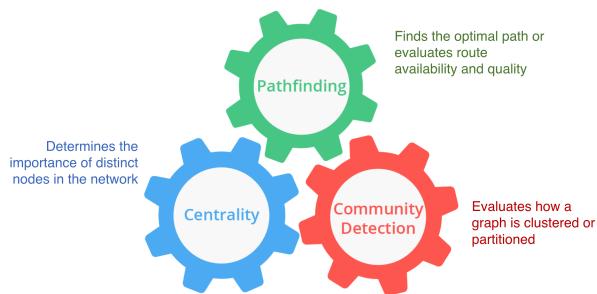

Neo4j has a published, open source Cypher library, Awesome Procedures on Cypher (APOC) that contain many useful procedures you can call from Cypher. Another Cypher library is the Graph Algorithms library, shown here, that can help you to analyze data in your graphs. Graph analytics are important because with Neo4j, the technology can expose questions about the data that you never thought to ask. And finally, you can use the GraphQL library (tree-based subset of a graph) to access a Neo4j Database. These libraries are available as plug-ins to your Neo4j development environment, but there are many other libraries that have been written by users for accessing Neo4j.


Tools

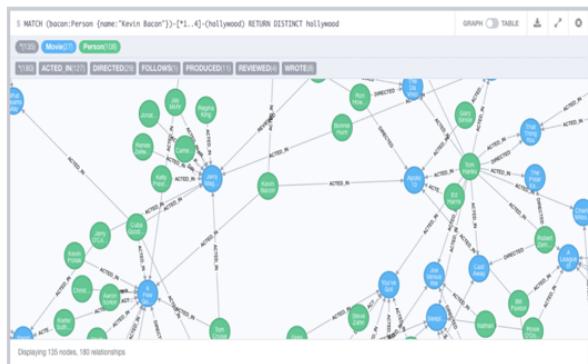


In a development environment, you will use the Neo4j Browser or a Web browser to access data and test your Cypher statements, most of which will be used as part of your application code. Neo4j Browser is an application that uses the JavaScript Bolt driver to access the graph engine of the Neo4j database server. Neo4j also has a new tool called **Bloom** that enables you to visualize a graph without knowing much about Cypher. In addition, there are many tools for importing and exporting data between flat files and a Neo4j Database, as well as an ETL tool.

Whiteboard modeling

With a property graph model, it is very easy to collaborate with colleagues to come up with a whiteboard model of your data that is easy to understand and easy modify. You then use the model to create the nodes, relationships, labels, and properties you will use for your Neo4j data. Even after the graph has been defined and populated with data, it is easy to modify the graph as your application needs change.

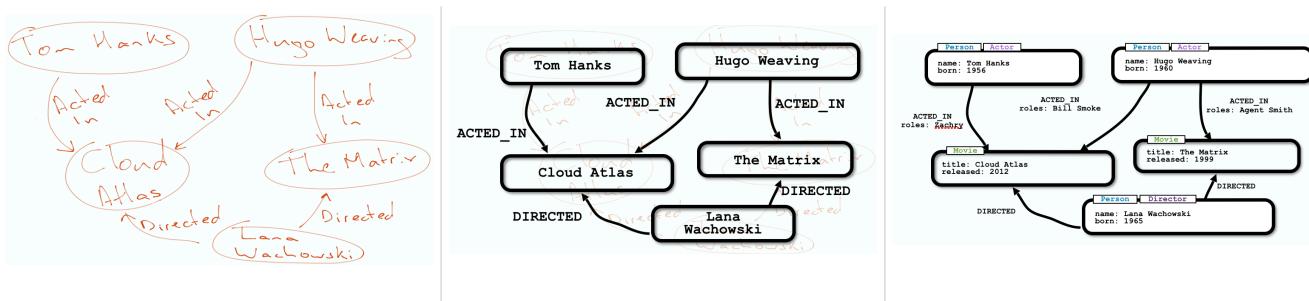

Neo4j Graph Platform architecture

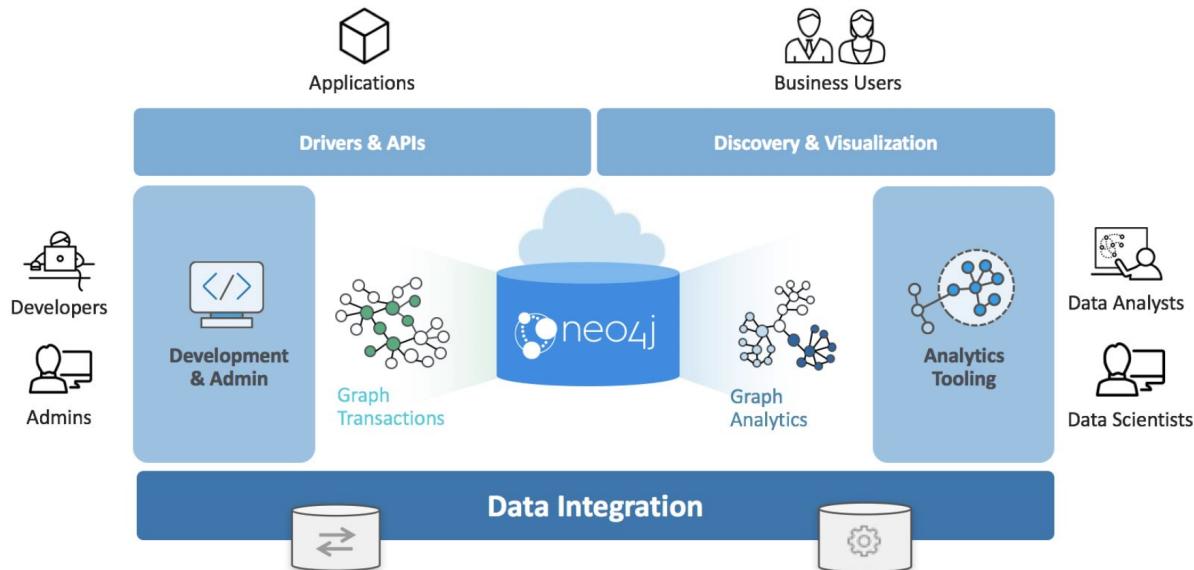

Here is the big picture of the Neo4j Graph Platform. The Neo4j Database provides support for graph transactions and analytics. Developers use the Neo4j Desktop, along with Neo4j Browser to develop graphs and test them, as well as implement their applications in a number of languages using supported drivers, tools and APIs. Administrators use tools to manage and monitor Neo4j Databases and clusters. Business users use out-of-the box graph visualization tools or they use custom tools. Data analysts and scientists use the analytics capabilities in the Graph Algorithm libraries or use custom libraries to understand and report findings to the enterprise. Applications can also integrate with existing databases (SQL or NoSQL), layering Neo4j on top of them to provide rich, graph-enabled access to the data.

Check your understanding

Question 1

What are some of the benefits provided by the Neo4j Graph Platform?

Select the correct answers.

- Database clustering
- ACID
- Index free adjacency
- Optimized graph engine

Question 2

What libraries are included with Neo4j Graph Platform?

Select the correct answers.

- APOC
- JGraph
- GRAPH ALGORITHMS
- GraphQL

Question 3

What are some of the language drivers that come with Neo4j out of the box?

Select the correct answers.

- Java
- Ruby
- Python
- JavaScript

Summary

You should now be able to:

- Describe the components and benefits of the Neo4j Graph Platform.

Setting Up Your Development Environment

Table of Contents

About this module	1
Neo4j Desktop	1
Neo4j Sandbox	2
Guided Exercise: Getting Started with Neo4j Desktop	2
Guided Exercise: Creating a Neo4j Sandbox	2
Using Neo4j Browser	3
Guided Exercise: Getting Started with Neo4j Browser	3
Check your understanding	4
Question 1	4
Question 2	4
Question 3	4
Summary	5

About this module


As a developer, you will create Neo4j Databases, add and update data in them, and query the data. When you learn to use Neo4j as a developer, you have two options the Neo4j Desktop or the Neo4j Sandbox. In this module you will learn how to use each of these development environments and select the option that is best for your needs while you are learning about Neo4j.

Many graph-enabled applications have been developed and deployed using Neo4j's Community Edition (free). If your enterprise requires production features such as failover, clustering, monitoring, advanced access control, secure routing, etc. you will use Neo4j's Enterprise Edition which you can download and start using for free.

At the end of this module, you should be able to:


- Determine the development environment that is best for you:
 - Install and start using the Neo4j Desktop.
 - Create a Neo4j Sandbox for learning Neo4j.
- Start using Neo4j Browser.

Neo4j Desktop

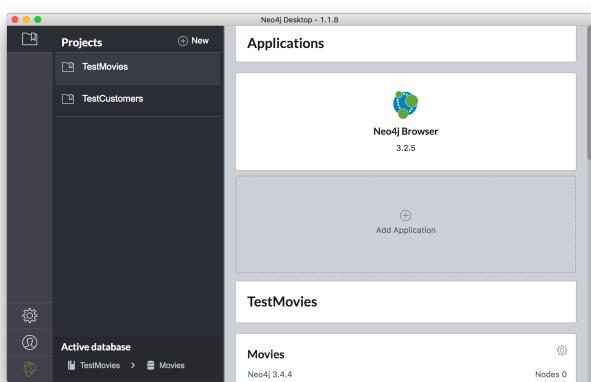

The Neo4j Desktop includes the Neo4j Database server which includes the graph engine and kernel so that Cypher statements can be executed to access a database on your system. It includes an application called Neo4j Browser. Neo4j Browser enables you to access a Neo4j database using Cypher. You can also call built-in procedures that communicate with the database server. There are a number of additional libraries and drivers for accessing the Neo4j database from Cypher or from another programming language that you can install in your development environment. If you are looking to use your system for application development and you want to be able to create multiple Neo4j databases on your machine, you should consider downloading the Neo4j Desktop (free download). The Neo4j Desktop runs on MAC OS, Linux, and Windows.

Neo4j Sandbox

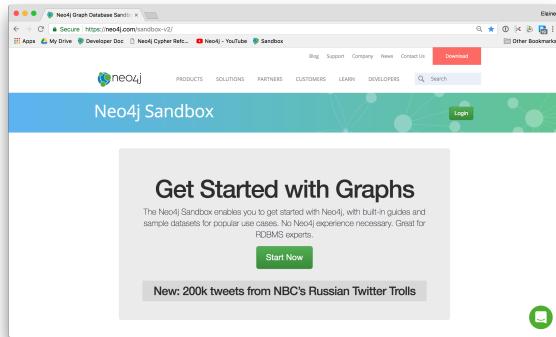

The Neo4j sandbox is another way that you can begin development with Neo4j. It is a temporary, cloud-based instance of a Neo4j Server with its associated graph that you can access from any Web browser.

By default, the Neo4j sandbox is available for three days, but you can extend it for up to 10 days. If you do not want to install Neo4j Desktop on your system, consider creating a Neo4j sandbox. You must make sure that you extend your lease of the sandbox, otherwise you will lose your graph and any saved Cypher scripts you have created in the sandbox. However, you can use Neo4j Browser Sync to save Cypher scripts from your sandbox. We recommend you use the Desktop for a real development project. The Sandbox is intended as a temporary environment or for learning about the features of Neo4j as well as specific graph use-cases.

Guided Exercise: Getting Started with Neo4j Desktop

Note: In order to perform the hands-on exercises for this training, you must install Neo4j Desktop or you must create a Neo4j Sandbox.

If you want to download and install Neo4j Desktop on your system, follow along with your instructor or this video to download, install and get started using Neo4j Desktop. If you will be using Neo4j Desktop in your development environment, you can follow these steps create a TestMovies project with its corresponding Movies database.

<https://youtu.be/8yWhuUnPapw>

Guided Exercise: Creating a Neo4j Sandbox

Note: In order to perform the hands-on exercises for this training, you must install Neo4j Desktop or you must create a Neo4j Sandbox.

If you want to run the Neo4j Database server in the cloud using a Neo4j sandbox, follow along with your instructor or this video to create a Neo4j sandbox for training purposes. For this course, you should select the latest GA release of Neo4j for your sandbox as you want a blank sandbox for this course.


<https://youtu.be/rmfgRKPjh18>

Using Neo4j Browser

Neo4j Browser is a tool that enables you to access a Neo4j Database by executing Cypher statements to create or update data in the graph and to query the graph to return data. The data returned is typically visualized as nodes and relationships in a graph, but can also be displayed as tables. In addition to executing Cypher statements, you can execute a number of system calls that are related to the database being accessed by the Browser. For example, you can retrieve the list of queries that are currently running in the server.

There are two ways that you can use Neo4j Browser functionality:

- Open the Neo4j Browser application from Neo4j Desktop (database is local)
- Use the Neo4j Browser Web interface by specifying a URL in a Web browser using port 7474 (database is local or in the cloud)

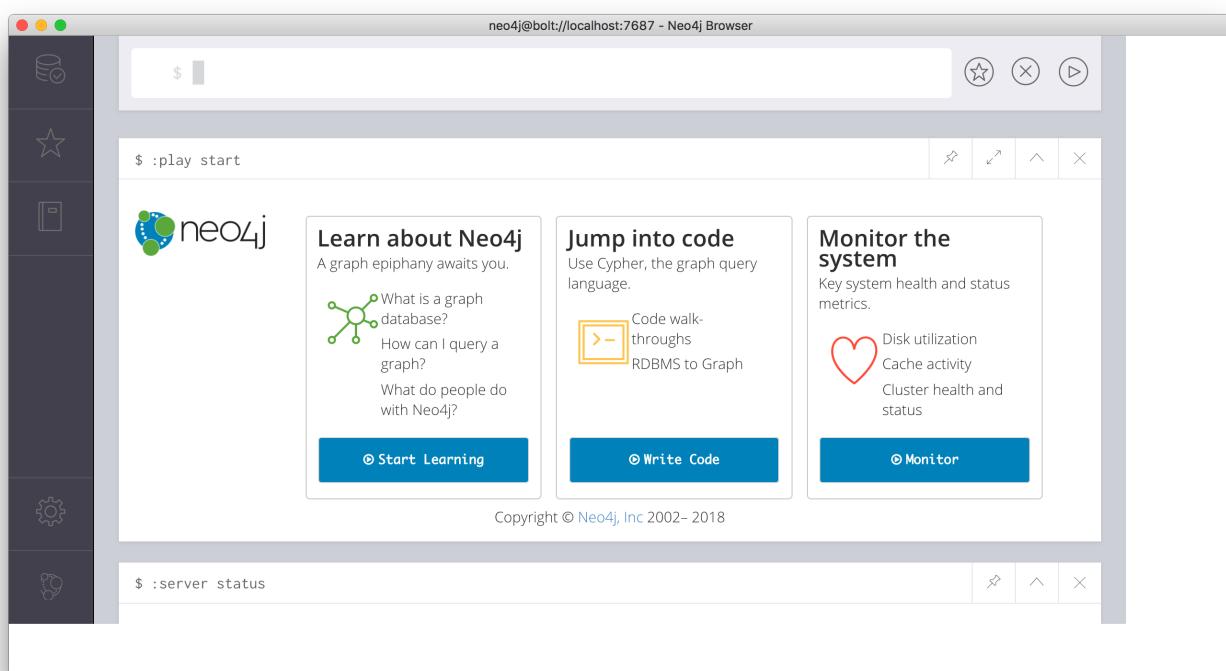

The user interface and behavior for the Neo4j Browser application and Neo4j Browser Web interface is identical, except that in the Web interface, you have the option of syncing your settings and scripts to the cloud.

Guided Exercise: Getting Started with Neo4j Browser

Follow along with your instructor or this video to become familiar with common tasks in Neo4j Browser. You will use Neo4j Browser to populate the Movies database that is used for training as well as syncing your settings and scripts to the cloud.

Note: Before you perform these tasks, you must have either created and started the database in the Neo4j Desktop or created a Neo4j Sandbox that comes with a database already started.

<https://youtu.be/rQTximyaETA>

Check your understanding

Question 1

What development environment should you use if you want to develop a graph-enabled application using a local Neo4j Database?

Select the correct answer.

- Neo4j Desktop
- Neo4j Sandbox

Question 2

What development environment should you use if you want develop a graph-enabled application using a temporary, cloud-based Neo4j Database?

Select the correct answer.

- Neo4j Desktop
- Neo4j Sandbox

Question 3

Which Neo4j Browser command do you use to view a browser guide for the Movie graph?

Select the correct answer.

- MATCH (Movie Graph)
- :MATCH (Movie Graph)
- play Movie Graph
- :play Movie Graph

Summary

You should now be able to:

- Determine the development environment that is best for you:
 - Install and start using the Neo4j Desktop.
 - Create a Neo4j Sandbox for learning Neo4j.
- Start using Neo4j Browser.

Introduction to Cypher

Table of Contents

About this module	1
What is Cypher?	1
Cypher is ASCII art	1
Nodes	2
Labels	2
Comments in Cypher	3
Examining the data model	3
Using MATCH to retrieve nodes	4
Viewing nodes as table data	6
Exercise 1: Retrieving nodes	6
Properties	6
Examining property keys	7
Retrieving nodes filtered by a property value	8
Returning property values	9
Specifying aliases	10
Exercise 2: Filtering queries using property values	11
Relationships	11
ASCII art	11
Querying using relationships	11
Examining relationships	12
Using a relationship in a query	13
Querying by multiple relationships	14
Using anonymous nodes in a query	14
Using an anonymous relationship for a query	15
Retrieving the relationship types	16
Retrieving properties for relationships	17
Using patterns for queries	18
Querying by any direction of the relationship	19
Traversing relationships	20
Using relationship direction to optimize a query	21
Cypher style recommendations	22
Exercise 3: Filtering queries using relationships	23
Check your understanding	24
Question 1	24
Question 2	24
Question 3	24
Summary	25

About this module

Cypher is the query language you use to retrieve data from the Neo4j Database, as well as create and update the data.

At the end of this module, you should be able to write Cypher statements to:

- Retrieve nodes from the graph.
- Filter nodes retrieved using labels and property values of nodes.
- Retrieve property values from nodes in the graph.
- Filter nodes retrieved using relationships.

Throughout this training, you should refer to:

- [Neo4j Developer Manual](#)
- [Cypher Reference card](#)


What is Cypher?

Cypher is a declarative query language that allows for expressive and efficient querying and updating of graph data. Cypher is a relatively simple and very powerful language. Complex database queries can easily be expressed through Cypher, allowing you to focus on your domain instead of getting lost in the syntax of database access.

Cypher is designed to be a human-friendly query language, suitable for both developers and other professionals. The guiding goal is to make the simple things easy, and the complex things possible.

Cypher is ASCII art


Optimized for being read by humans, Cypher's construct uses English prose and iconography (called ASCII Art) to make queries more self-explanatory.

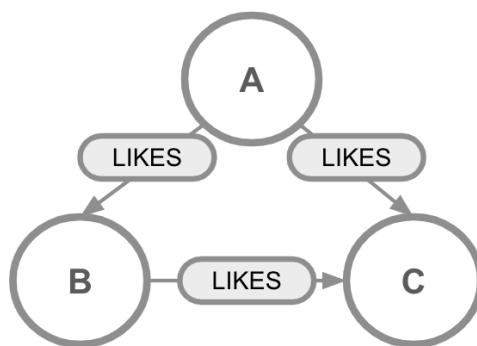

(A) - [:LIKES] -> (B) , (A) - [:LIKES] -> (C) , (B) - [:LIKES] -> (C)

(A) - [:LIKES] -> (B) - :LIKES] -> (C) <- [:LIKES] - (A)

Being a declarative language, Cypher focuses on the clarity of expressing **what** to retrieve from a graph, not on **how** to retrieve it. You can think of Cypher as mapping English language sentence structure to patterns in a graph. For example, the nouns are nodes of the graph, the verbs are the relationships in the graph, and the adjectives and adverbs are the properties.

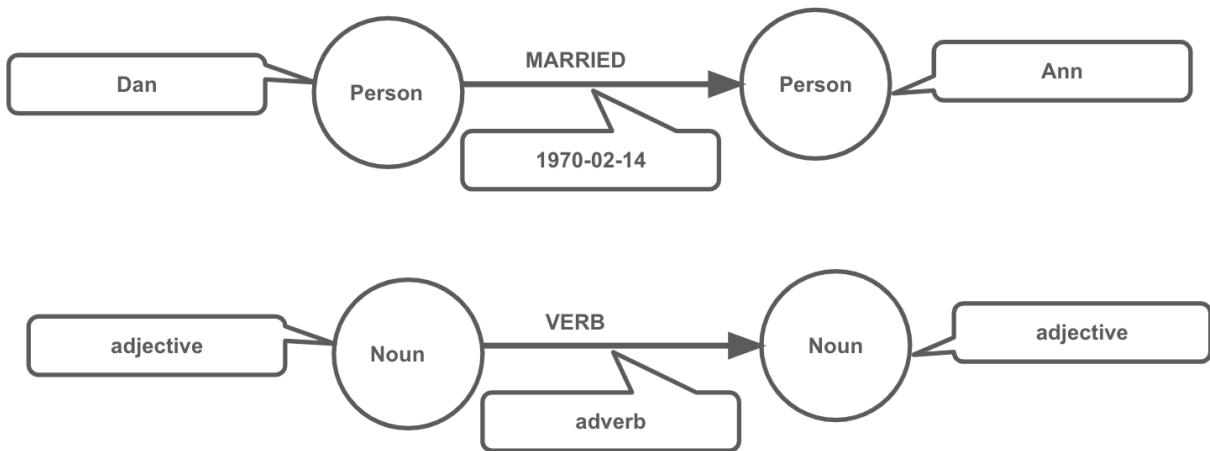

This is in contrast to imperative, programmatic APIs for database access. This approach makes query optimization an implementation detail instead of a burden on the developer, removing the requirement to update all traversals just because the physical database structure has changed.

Cypher is inspired by a number of different approaches and builds upon established practices for expressive querying. Many of the Cypher keywords like `WHERE` and `ORDER BY` are inspired by SQL. The pattern matching functionality of Cypher borrows concepts from SPARQL. And some of the collection semantics have been borrowed from languages such as Haskell and Python.

The Cypher language has been made available to anyone to implement and use via openCypher (openCypher.org), allowing any database vendor, researcher or other interested party to reap the benefits of our years of effort and experience in developing a first class graph query language.

Nodes

Cypher uses a pair of parentheses like `()`, `(n)` to represent a node, much like a circle on a whiteboard. Recall that a node typically represents an entity in your domain. An anonymous node, `()`, represents one or more nodes during a query processing where there are no restrictions of the type of node or the properties of the node. When you specify `(n)` for a node, you are telling the query processor that for this query, use the variable `n` to represent nodes that will be processed later in the query for further query processing or for returning values from the query.

Labels

Nodes in a graph are typically labeled. Labels are used to group nodes and filter queries against the graph. That is, labels can be used to optimize queries. In the *Movie* database you will be working with, the nodes in this graph are labeled *Movie* or *Person* to represent two types of nodes.

For example, you can see the labels in the database by simply clicking the Database icon in Neo4j Browser:

Database Information

Node Labels

*(171) Movie Person

You can filter the types of nodes that you are querying, by specifying a **label** for a node. A node can have zero or more labels.

Here are simplified syntax examples for specifying a node:

```
()  
(variable)  
(:Label)  
(variable:Label)  
(:Label1:Label2)  
(variable:Label1:Label2)
```

Notice that a node must have the parentheses. The labels and the variable for a node are optional.

Here are examples of specifying nodes in Cypher:

```
()          // anonymous node not be referenced later in the query  
(p)        // variable p, a reference to a node used later  
(:Person)   // anonymous node of type Person  
(p:Person)  // p, a reference to a node of type Person  
(p:Actor:Director) // p, a reference to a node of types Actor and Director
```

A node can have multiple labels. For example a node can be created with a label of *Person* and that same node can be modified to also have the label of *Actor* and/or *Director*.


Comments in Cypher

In Cypher, you can place a comment (starts with `//`) anywhere in your Cypher to specify that the rest of the line is interpreted as a comment.

Examining the data model

When you are first learning about the data (nodes, labels, etc.) in a graph, it is helpful to examine the data model of the graph. You do so by executing `CALL db.schema`, which calls the Neo4j procedure that returns information about the nodes, labels, and relationships in the graph.

For example, when we run this procedure in our training environment, we see the following in the result pane. Here we see that the graph has 2 labels defined for nodes, *Person* and *Movie*. Each type of nodes is displayed in a different color. The relationships between nodes are also displayed, which you will learn about later in this module.

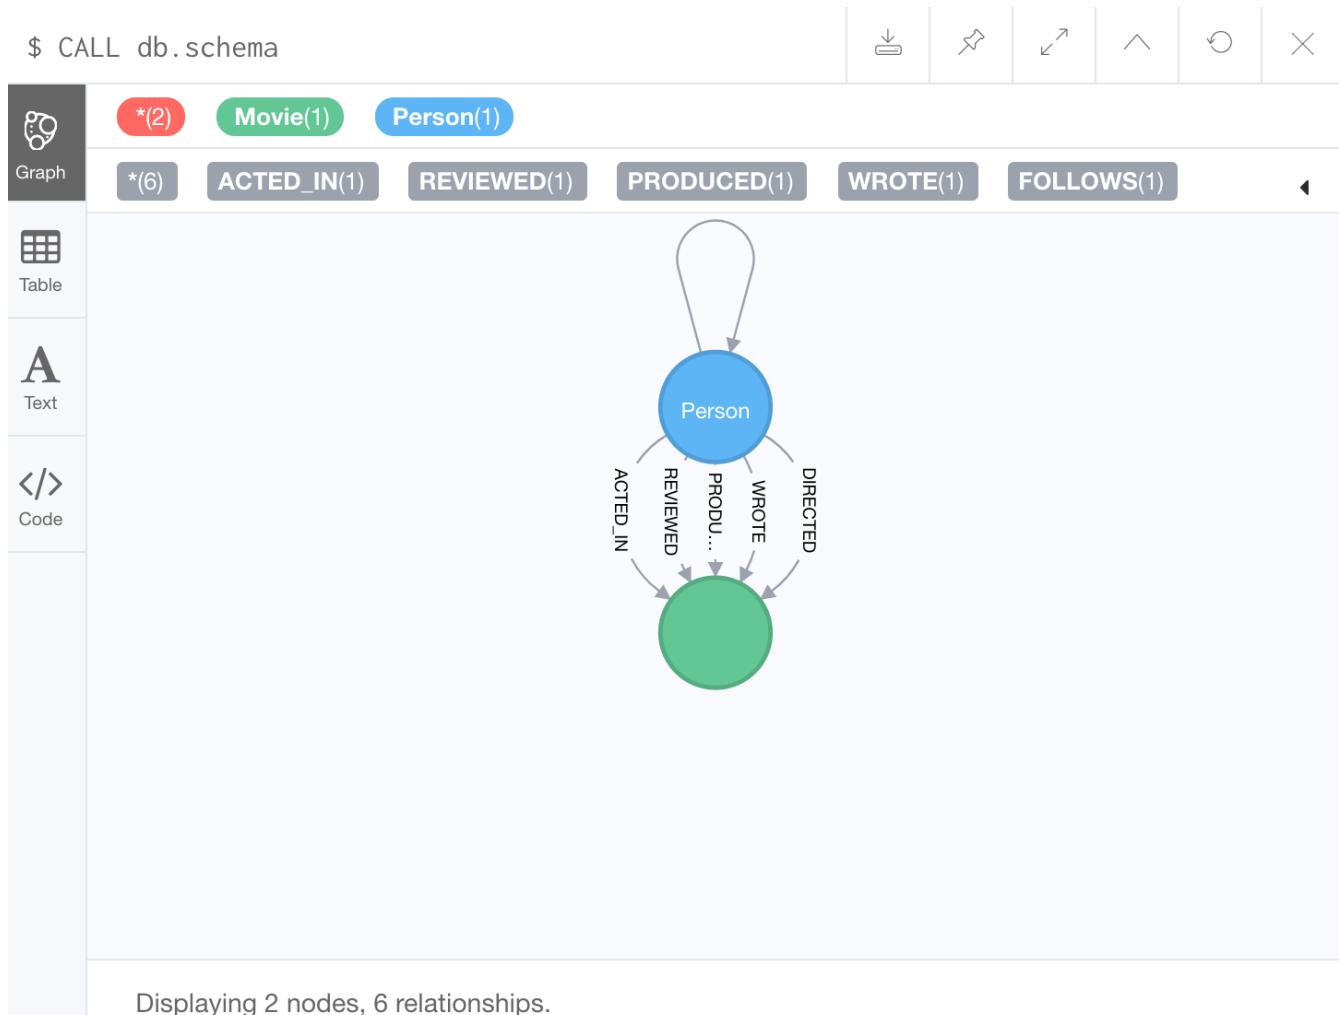

Using MATCH to retrieve nodes

The most widely used Cypher clause is **MATCH**. The **MATCH** clause performs a pattern match against the data in the graph. During the query processing, the graph engine traverses the graph to find all nodes that match the graph pattern. As part of query, you can return nodes or data from the nodes using the **RETURN** clause. The **RETURN** clause must be the last clause of a query to the graph. Later in this training, you will learn how to use **MATCH** to select nodes and data for updating the graph. First, you will learn how to simply return nodes.

Here are simplified syntax examples for a query:

```
MATCH (variable)
RETURN variable
```

```
MATCH (variable:Label)
RETURN variable
```

Notice that the Cypher keywords **MATCH** and **RETURN** are upper-case. This coding convention is

described in the *Cypher Style Guide* and will be used in this training. This `MATCH` clause returns all nodes in the graph, where the optional *Label* is used to return a subgraph if the graph contains nodes of different types. The *variable* must be specified here, otherwise the query will have nothing to return.


Here are example queries to the *Movie* database:

```
MATCH (n)          // returns all nodes in the graph
RETURN n
```

```
MATCH (p:Person)    // returns all Person nodes in the graph
RETURN p
```

When we execute the Cypher statement, `MATCH (p:Person) RETURN p`, the graph engine returns all nodes with the label *Person*. The default view of the returned nodes are the nodes that were referenced by the variable *p*.

The result returned is:

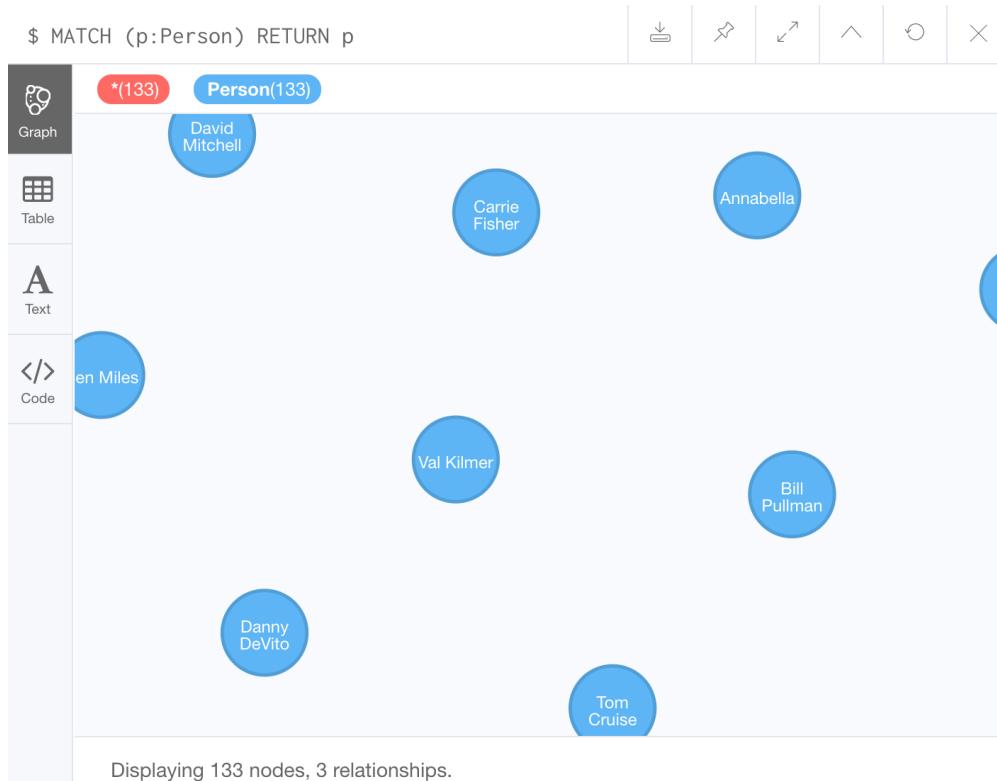

Important: When you specify a pattern for a `MATCH` clause, you should always specify a node label if possible. In doing so, the graph engine uses an index to retrieve the nodes which will perform better than not using a label for the `MATCH`.

Viewing nodes as table data

We can also view the nodes as table data where the nodes and their associated property values are shown in a JSON-style format:

The screenshot shows the Neo4j Browser interface. On the left, there is a sidebar with four tabs: 'Graph' (selected), 'Table' (highlighted with a red border), 'Text', and 'Code'. The main area displays the results of a Cypher query: '\$ MATCH (p:Person) RETURN p'. The results are presented in a tabular format with one column labeled 'p'. Three rows of data are shown, each representing a person node with properties 'name' and 'born'. The first row is for Keanu Reeves, born 1964. The second row is for Carrie-Anne Moss, born 1967. The third row is for Laurence Fishburne, born 1961. The JSON output for each row is as follows:

p
{ "name": "Keanu Reeves", "born": 1964 }
{ "name": "Carrie-Anne Moss", "born": 1967 }
{ "name": "Laurence Fishburne", "born": 1961 }

When nodes are displayed as table values, the node labels and ids are not shown, only the property values for the nodes. Node ids are unique identifiers and are set by the graph engine when a node is created.


Exercise 1: Retrieving nodes

In the query edit pane of Neo4j Browser, execute the browser command: `:play intro-neo4j-exercises` and follow the instructions for Exercise 1.

Properties

In Neo4j, a node (and a relationship, which you will learn about later) can have properties that are used to further define a node. A property is identified by its property key. Recall that nodes are used to represent the entities of your business model. A property is defined for a node and not for a type of node. All nodes of the same type need not have the same properties.

For example, in the *Movie* graph, all *Movie* nodes have both *title* and *released* properties. However, it is not a requirement that every *Movie* node has a property, *tagline*.

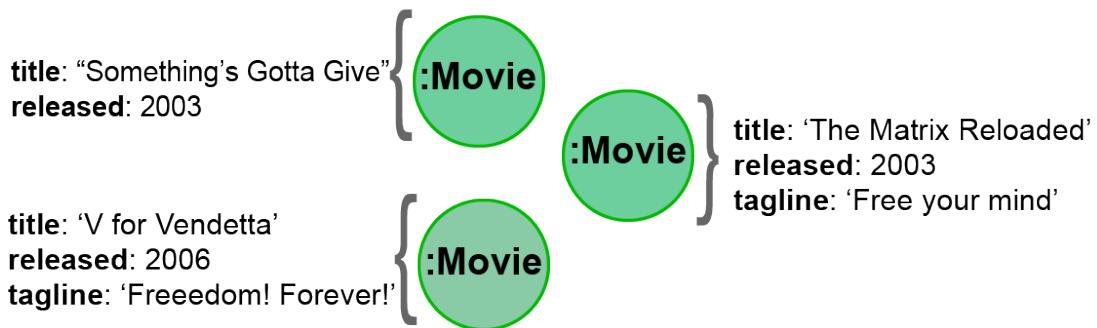

Properties can be used to filter queries so that a subset of the graph is retrieved. In addition, with the `RETURN` clause, you can return property values from the retrieved nodes, rather than the nodes.

Examining property keys

As you prepare to create Cypher queries that use property values to filter a query, you can view the values for property keys of a graph by simply clicking the Database icon in Neo4j Browser. Alternatively, you can execute `CALL db.propertyKeys`, which calls the Neo4j library method that returns the property keys for the graph.

Here is what you will see in the result pane when you call the method to return the property keys in the *Movie* graph. This result stream contains all property keys in the graph. It does not display which nodes utilize these property keys.

```
$ CALL db.propertyKeys
```

propertyKey
"title"
"released"
"tagline"
"name"
"born"
"roles"
"summary"
"rating"
"id"
"share_link"
"favorite_count"
"display_name"

Started streaming 12 records in less than 1 ms and completed in less than 1 ms.

Retrieving nodes filtered by a property value

You have learned previously that you can filter node retrieval by specifying a label. Another way you can filter a retrieval is to specify a value for a property. Any node that matches the value will be retrieved.

Here are simplified syntax examples for a query where we specify one or more values for properties that will be used to filter the query results and return a subset of the graph:

```
MATCH (variable {propertyKey: propertyName})
RETURN variable
```

```
MATCH (variable:Label {propertyKey: propertyName})
RETURN variable
```


```
MATCH (variable {propertyKey1: propertyName1, propertyKey2: propertyName2})
RETURN variable
```

```
MATCH (variable:Label {propertyKey: propertyName, propertyKey2: propertyName2})
RETURN variable
```

Here is an example where we filter the query results using a property value. We only retrieve *Person* nodes that have a *born* property value of 1970.

```
MATCH (p:Person {born: 1970})
RETURN p
```

The result returned is:

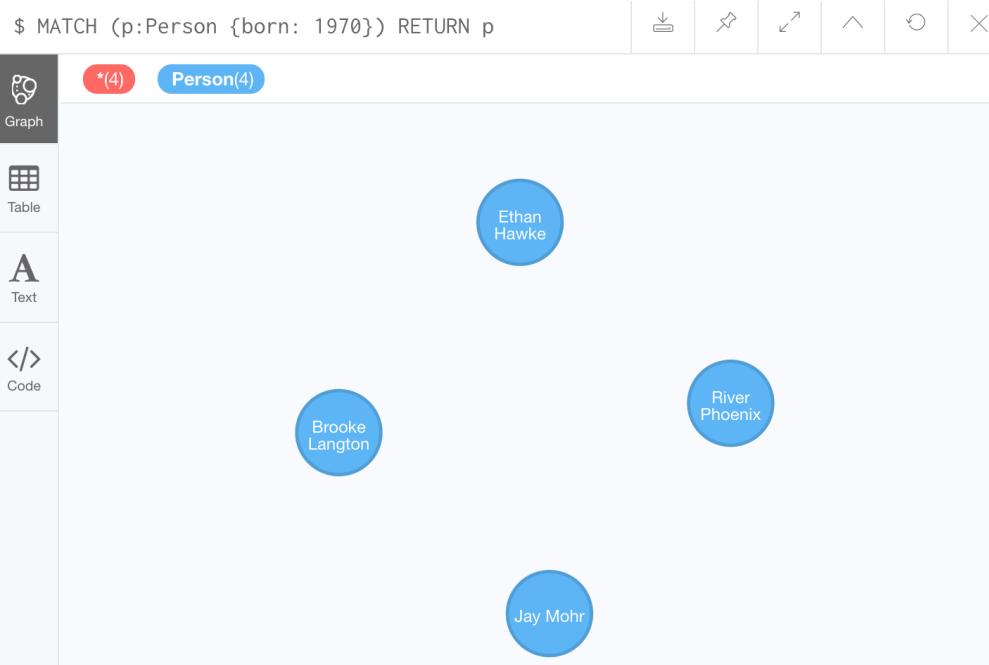

Here is an example where we specify two property values for the query.

```
MATCH (m:Movie {released: 2003, tagline: 'Free your mind'})  
RETURN m
```

Here is the result returned:

```
$ MATCH (m:Movie {released: 2003, tagline: "Free your mind"}) RETURN m
```

The screenshot shows the Neo4j browser interface. On the left, there is a sidebar with four tabs: Graph (selected), Table, Text, and Code. The main area displays the results of a query. At the top, it says 'm'. Below that is a JSON object: { "title": "The Matrix Reloaded", "tagline": "Free your mind", "released": 2003 }. At the bottom, a message says 'Started streaming 1 records after 1 ms and completed after 2 ms.'

As it turns out, there is only one movie with the *tagline*, *Free your mind* in the *Movie* database, but if we had specified a different year, the query would not have returned a value because when you specify properties, both properties must match.

Returning property values

Thus far, you have seen how to retrieve nodes and return nodes (entire graph or a subset of the graph). You can use the **RETURN** clause to return property values of nodes retrieved.

Here are simplified syntax examples for returning property values, rather than nodes:

```
MATCH (variable {prop1: value})  
RETURN variable.prop2
```

```
MATCH (variable:Label {prop1: value})  
RETURN variable.prop2
```

```
MATCH (variable:Label {prop1: value, prop2: value})  
RETURN variable.prop3
```

```
MATCH (variable {prop1:value})  
RETURN variable.prop2, variable.prop3
```

In this example, we use the *born* property to refine the query, but rather than returning the nodes, we return the *name* and *born* values for every node that satisfies the query.

```
MATCH (p:Person {born: 1965})  
RETURN p.name, p.born
```

The result returned is:

A screenshot of the Neo4j Browser interface. On the left, there's a sidebar with three buttons: 'Table' (selected), 'Text', and 'Code'. The main area shows a table with two columns: 'p.name' and 'p.born'. The data rows are: "Lana Wachowski" (1965), "Tom Tykwer" (1965), and "John C. Reilly" (1965). At the bottom of the table, it says 'Started streaming 3 records in less than 1 ms and completed after 1 ms.'

p.name	p.born
"Lana Wachowski"	1965
"Tom Tykwer"	1965
"John C. Reilly"	1965

Specifying aliases

If you want to customize the headings for a table containing property values, you can specify **aliases** for column headers.

Here is the simplified syntax for specifying an alias for a property value:

```
MATCH (variable:Label {propertyKey1: propertyName1})  
RETURN variable.propertyKey2 AS alias2
```


Important: If you want a heading to contain a space between strings, you must specify the alias with the back tick ` character, rather than a single or double quote character. In fact, you can specify any variable, label, relationship type, or property key with a space also by using the back tick ` character.

Here we specify aliases for the returned property values:

```
MATCH (p:Person {born: 1965})  
RETURN p.name AS name, p.born AS 'birth year'
```

The result returned is:

```
$ MATCH (p:Person {born: 1965}) RETURN p.name AS name, p.born AS `birth year`
```

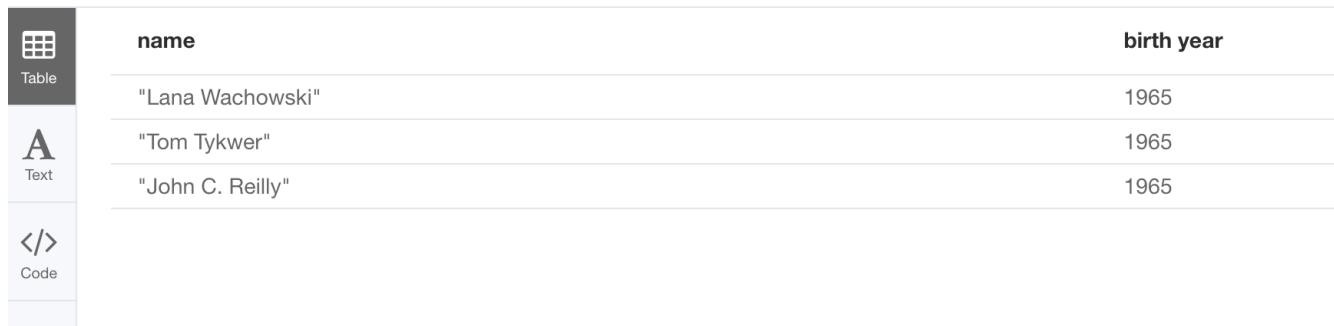

The screenshot shows the Neo4j Browser interface with a sidebar on the left containing three buttons: 'Table' (selected), 'Text', and '</> Code'. The main area displays a table with two columns: 'name' and 'birth year'. The data rows are: "Lana Wachowski" (1965), "Tom Tykwer" (1965), and "John C. Reilly" (1965).

	name	birth year
	"Lana Wachowski"	1965
	"Tom Tykwer"	1965
	"John C. Reilly"	1965

Exercise 2: Filtering queries using property values

In the query edit pane of Neo4j Browser, execute the browser command: `:play intro-neo4j-exercises` and follow the instructions for Exercise 2.

Relationships

Relationships are what make Neo4j graphs such a powerful tool for connecting complex and deep data. A relationship is a **directed** connection between two nodes that has a **relationship type** (name). In addition, a relationship can have properties, just like nodes. In a graph where you want to retrieve nodes, you can use relationships between nodes to filter a query.

ASCII art

Thus far, you have learned how to specify a node in a **MATCH** clause. You can specify nodes and their relationships to traverse the graph and quickly find the data of interest.

Here is how Cypher uses ASCII art to specify path used for a query:

```
()          // a node
()--()      // 2 nodes have some type of relationship
()-->()    // the first node has a relationship to the second node
()<--()    // the second node has a relationship to the first node
```

Querying using relationships

In your **MATCH** clause, you specify how you want a relationship to be used to perform the query. The relationship can be specified with or without direction.

Here are simplified syntax examples for retrieving a set of nodes that satisfy one or more directed and typed relationships:

```
MATCH (node1)-[:REL_TYPE]->(node2)  
RETURN node1, node2
```

```
MATCH (node1)-[:REL_TYPEA | :REL_TYPEB]->(node2)  
RETURN node1, node2
```

where:

node1 is a specification of a node where you may include node labels and property values for filtering.

:REL_TYPE is the type (name) for the relationship. For this syntax the relationship is from *node1* to *node2*.


:REL_TYPEA, *:REL_TYPEB* are the relationships from *node1* to *node2*. The nodes are returned if at least one of the relationships exists.

node2 is a specification of a node where you may include node labels and property values for filtering.

Examining relationships

You can run `CALL db.schema` to view the relationship types in the graph. In the *Movie* graph, we see these relationships between the nodes:

Here we see that this graph has a total of 6 relationship types between the nodes. Some *Person* nodes are connected to other *Person* nodes using the *FOLLOW*s relationship type. All of the other relationships in this graph are from *Person* nodes to *Movie* nodes.

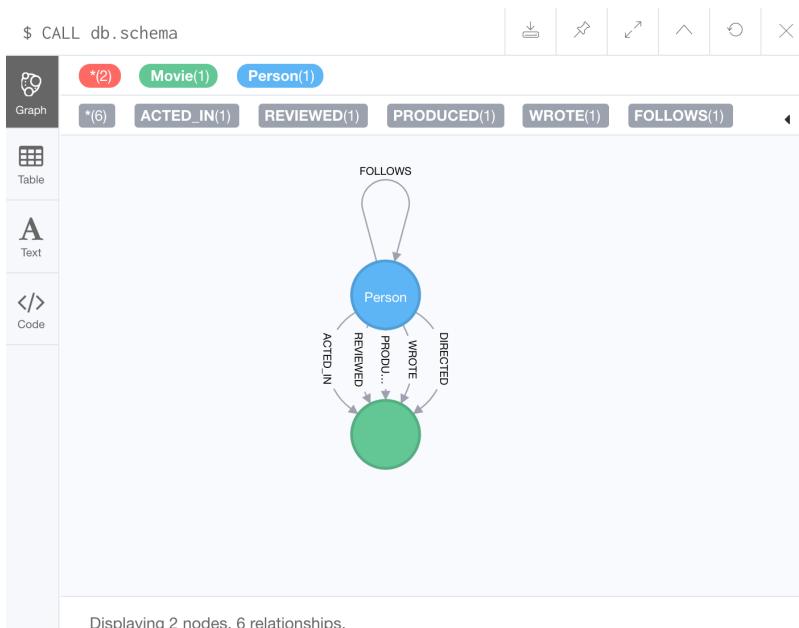

The relationship types can also be viewed by selecting the arrow to the right in the relationship

type row.


Using a relationship in a query

Here is an example where we retrieve the *Person* nodes that have the *ACTED_IN* relationship to the *Movie*, *The Matrix*. In other words, show me the actors that acted in *The Matrix*.

```
MATCH (p:Person)-[rel:ACTED_IN]->(m:Movie {title: 'The Matrix'})  
RETURN p, rel, m
```

The result returned is:

```
$ MATCH (p:Person)-[rel:ACTED_IN]->(m:Movie {title: 'The Matrix'}) RETURN p, rel, m
```

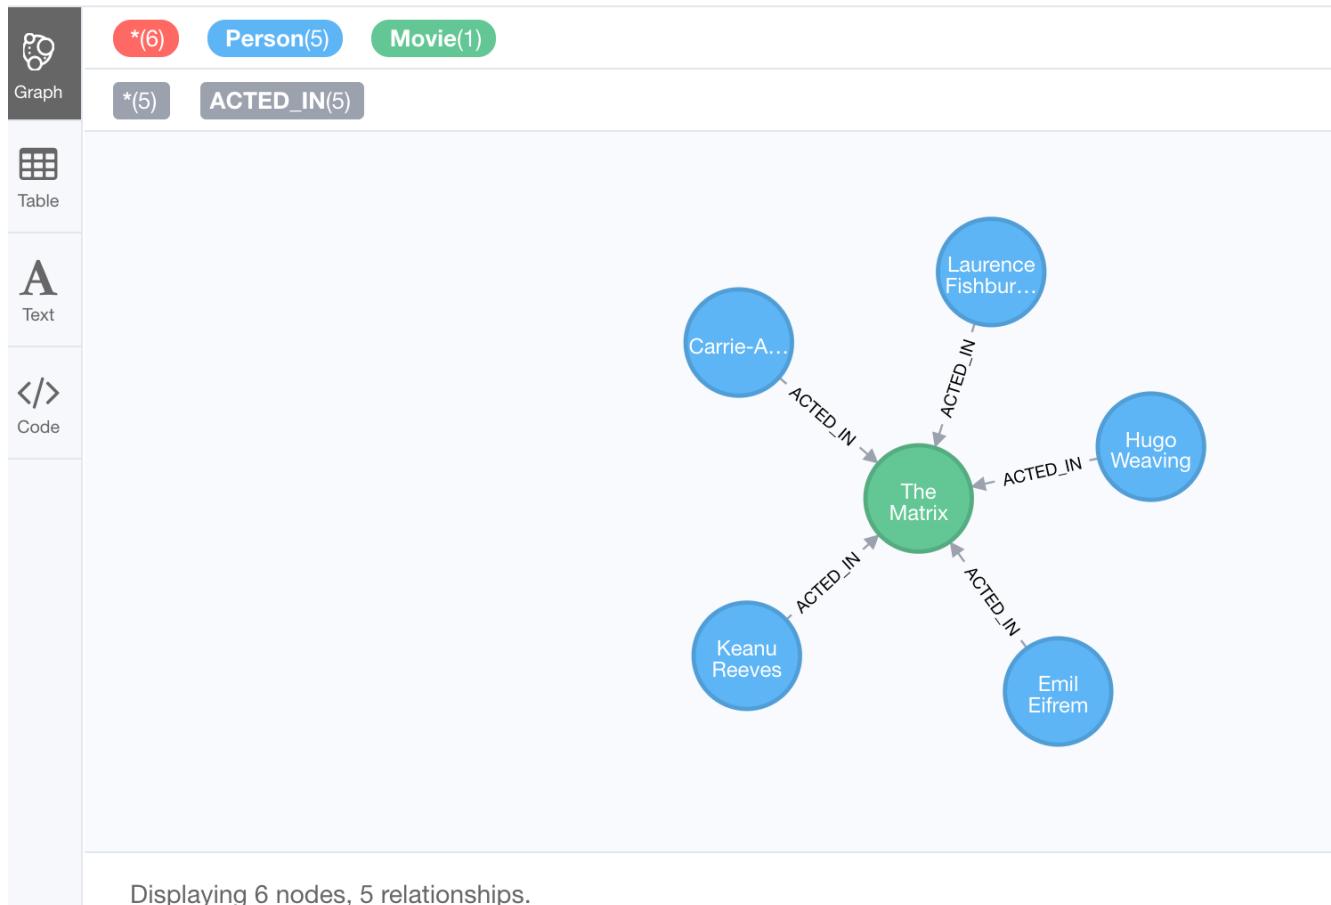

Displaying 6 nodes, 5 relationships.

For this query, we are using the variable *p* to represent the *Person* nodes during the query, the variable *m* to represent the *Movie* node retrieved, and the variable *rel* to represent the relationship for the relationship type, *ACTED_IN*. We return a graph with the *Person* nodes, the *Movie* node and their *ACTED_IN* relationships.

Important: You specify node labels whenever possible in your queries as it optimizes the retrieval in the graph engine. That is, you should **not** specify this same query as:

```
MATCH (p)-[rel:ACTED_IN]->(m {title:'The Matrix'})  
RETURN p,m
```

Querying by multiple relationships

Here is another example where we want to know the movies that *Tom Hanks* acted in and directed:

```
MATCH (p:Person {name: 'Tom Hanks'})-[:ACTED_IN | :DIRECTED]->(m:Movie)
RETURN p.name, m.title
```

The result returned is:

```
$ MATCH (p:Person {name: 'Tom Hanks'})-[:ACTED_IN | :DIRECTED]->(m:Movie) RETURN p.name, m.title
```

p.name	m.title
"Tom Hanks"	"Apollo 13"
"Tom Hanks"	"Cast Away"
"Tom Hanks"	"The Polar Express"
"Tom Hanks"	"A League of Their Own"
"Tom Hanks"	"Charlie Wilson's War"
"Tom Hanks"	"Cloud Atlas"
"Tom Hanks"	"The Da Vinci Code"
"Tom Hanks"	"The Green Mile"
"Tom Hanks"	"You've Got Mail"
"Tom Hanks"	"That Thing You Do"
"Tom Hanks"	"That Thing You Do"
"Tom Hanks"	"Joe Versus the Volcano"
"Tom Hanks"	"Sleepless in Seattle"

Started streaming 13 records after 1 ms and completed after 1 ms.

Notice that there are multiple rows returned for the movie, *That Thing You Do*. This is because *Tom Hanks* acted in and directed that movie.

Using anonymous nodes in a query

Suppose you wanted to retrieve the actors that acted in *The Matrix*, but you do not need any information returned about the *Movie* node. You need not specify a variable for a node in a query if that node is not returned or used for later processing in the query. You can simply use the anonymous node in the query as follows:

```
MATCH (p:Person)-[:ACTED_IN]->(:Movie {title: 'The Matrix'})
RETURN p.name
```

The result returned is:

```
$ MATCH (p:Person)-[:ACTED_IN]->(:Movie {title:'The Matrix'}) RETURN p.name
```



p.name

No node variable specified here

"Emil Eifrem"

"Hugo Weaving"

"Laurence Fishburne"

"Carrie-Anne Moss"

"Keanu Reeves"

Started streaming 5 records after 1 ms and completed after 2 ms.


Note: A best practice is to place named nodes (those with variables) before anonymous nodes in a **MATCH** clause.

Using an anonymous relationship for a query

Suppose you want to find all people who are in any way connected to the movie, *The Matrix*. You can specify an empty relationship type in the query so that all relationships are traversed and the appropriate results are returned. In this example, we want to retrieve all *Person* nodes that have any type of connection to the *Movie* node, with the *title*, *The Matrix*. This query returns more nodes with the relationships types, *DIRECTED*, *ACTED_IN*, and *PRODUCED*.

```
MATCH (p:Person)->(:Movie {title: 'The Matrix'})  
RETURN p, m
```

The result returned is:

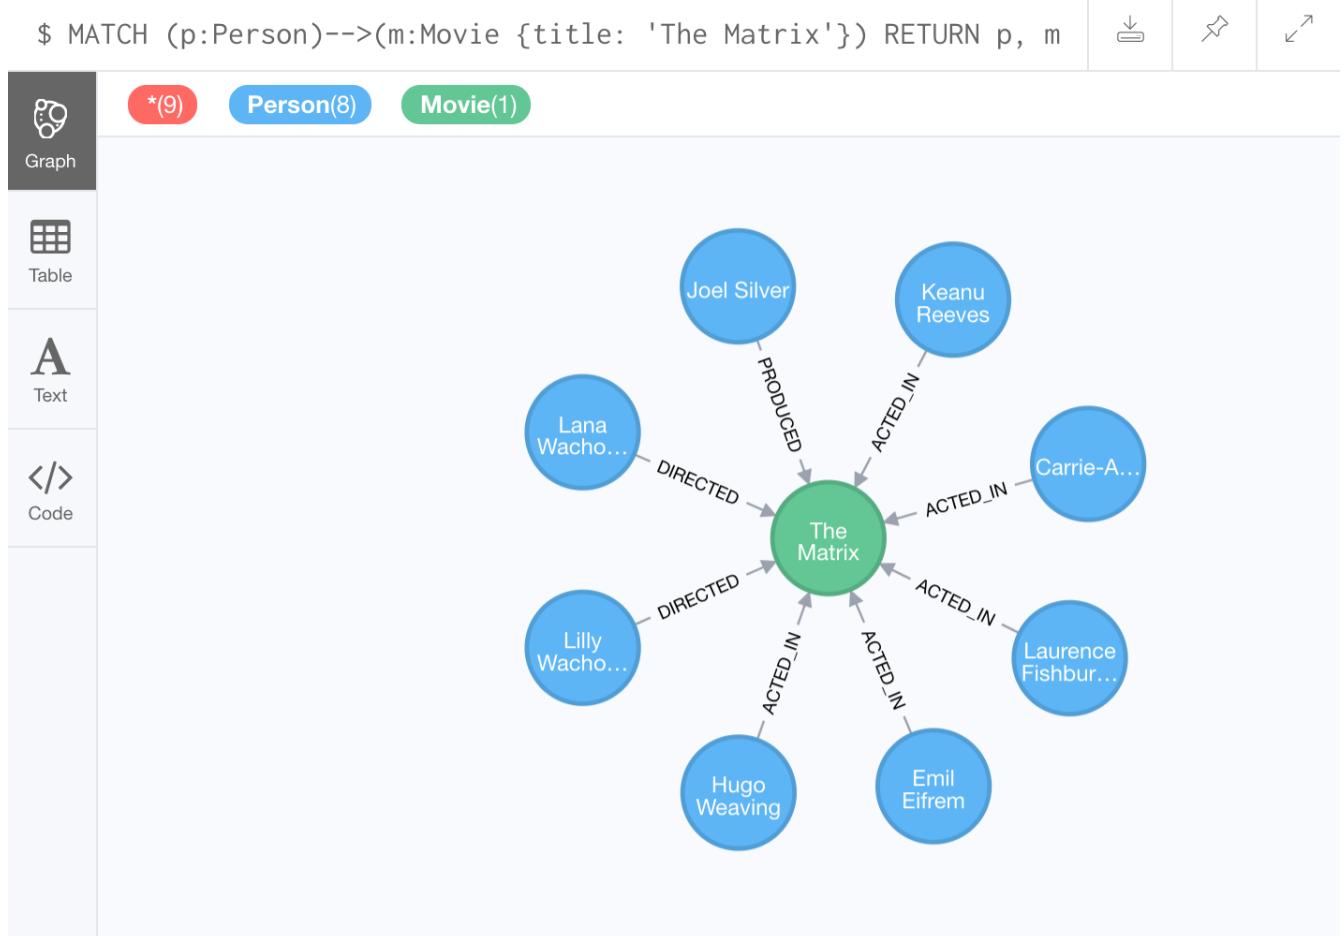

Here are other examples of using the anonymous relationship:

```
MATCH (p:Person)--(m:Movie {title: 'The Matrix'})  
RETURN p, m
```

```
MATCH (m:Movie)<-(p:Person {name: 'Keanu Reeves'})  
RETURN p, m
```

In this training, we will use `->`, `--`, and `<-` to represent anonymous relationships as it is a Cypher best practice.

Retrieving the relationship types

There is a built-in function, `type()` that returns the relationship type of a relationship. Here is an example where we use the `rel` variable to hold the relationships retrieved. We then use this variable to return the relationship types.

```
MATCH (p:Person)-[rel]->(:Movie {title:'The Matrix'})  
RETURN p.name, type(rel)
```

The result returned is:

```
$ MATCH (p:Person)-[rel]->(:Movie {title:'The Matrix'}) RETURN p.name, type(rel)
```


	p.name	type(rel)
Table	"Emil Eifrem"	"ACTED_IN"
Text	"Joel Silver"	"PRODUCED"
	"Lana Wachowski"	"DIRECTED"
Code	"Lilly Wachowski"	"DIRECTED"
	"Hugo Weaving"	"ACTED_IN"
	"Laurence Fishburne"	"ACTED_IN"
	"Carrie-Anne Moss"	"ACTED_IN"
	"Keanu Reeves"	"ACTED_IN"

Started streaming 8 records after 1 ms and completed after 2 ms.

Retrieving properties for relationships

Recall that a node can have a set of properties, each identified by its property key. Relationships can also have properties. This enables your graph model to provide more data about the relationships between the nodes.

Here is an example from the *Movie* graph. The movie, *The Da Vinci Code* has two people that reviewed it, *Jessica Thompson* and *James Thompson*. Each of these *Person* nodes has the *REVIEWED* relationship to the *Movie* node for *The Da Vinci Code*. Each relationship has properties that further describe the relationship using the *summary* and *rating* properties.

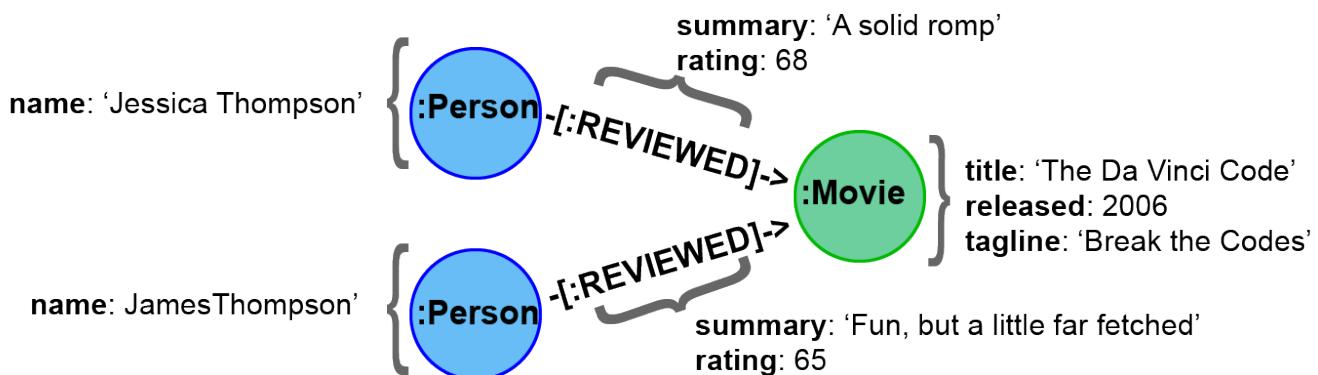

Just as you can specify property values for filtering nodes for a query, you can specify property values for a relationship. This query returns the name of the person who gave the movie a rating of 65.

```
MATCH (p:Person)-[:REVIEWED {rating: 65}]->(:Movie {title: 'The Da Vinci Code'})  
RETURN p.name
```

The result returned is:


```
$ MATCH (p:Person)-[:REVIEWED {rating: 65}]->(:Movie {title: 'The Da Vinci Code'}) RETURN p.name
```

Table	p.name
"James Thompson"	"James Thompson"

Using patterns for queries

Thus far, you have learned how to specify nodes, properties, and relationships in your Cypher queries. Since relationships are directional, it is important to understand how patterns are used in graph traversal during query execution. How a graph is traversed for a query depends on what directions are defined for relationships and how the pattern is specified in the `MATCH` clause.

Here is an example of where the `FOLLOWS` relationship is used in the *Movie* graph. Notice that this relationship is directional.

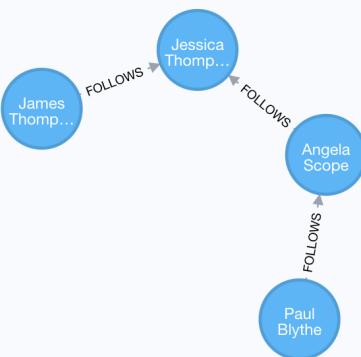

We can perform a query that returns all *Person* nodes who follow *Angela Scope*:

```
MATCH (p:Person)-[:FOLLOWS]->(:Person {name: 'Angela Scope'})  
RETURN p
```

The result returned is:



If we reverse the direction in the pattern, the query returns different results:

```
MATCH (p:Person)<-[:FOLLOWS]-(:Person {name:'Angela Scope'})  
RETURN p
```

The result returned is:




Querying by any direction of the relationship

We can also find out what *Person* nodes are connected by the *FOLLOWED* relationship in either direction by removing the directional arrow from the pattern.

```
MATCH (p1:Person)-[:FOLLOWS]-(p2:Person {name:'Angela Scope'})  
RETURN p1, p2
```

The result returned is:

```
$ MATCH (p1:Person)-[:FOLLOWS]-(p2:Person {name:'Angela Scope'}) RETURN p1, p2
```

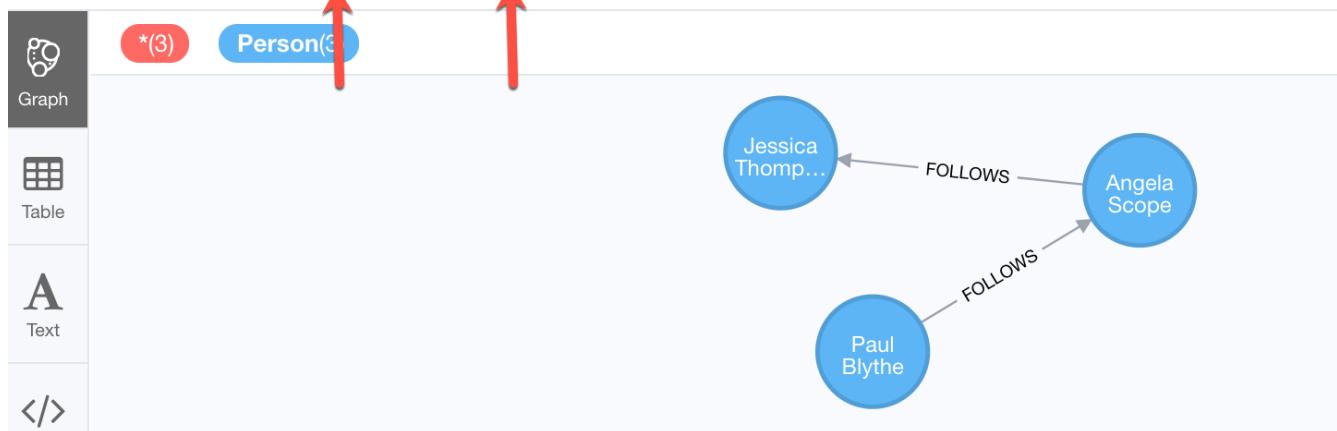


Traversing relationships

Since we have a graph, we can traverse through nodes to obtain relationships further into the traversal. For example, we can write a Cypher query to return all followers of the followers of *Jessica Thompson*.

```
MATCH (p:Person)-[:FOLLOWS]->(:Person)-[:FOLLOWS]->(:Person {name:'Jessica Thompson'})
RETURN p
```

The result returned is:

```
$ MATCH (p:Person)-[:FOLLOWS]->(:Person)-[:FOLLOWS]->(:Person {name:'Jessica Thompson'}) RETURN p
```

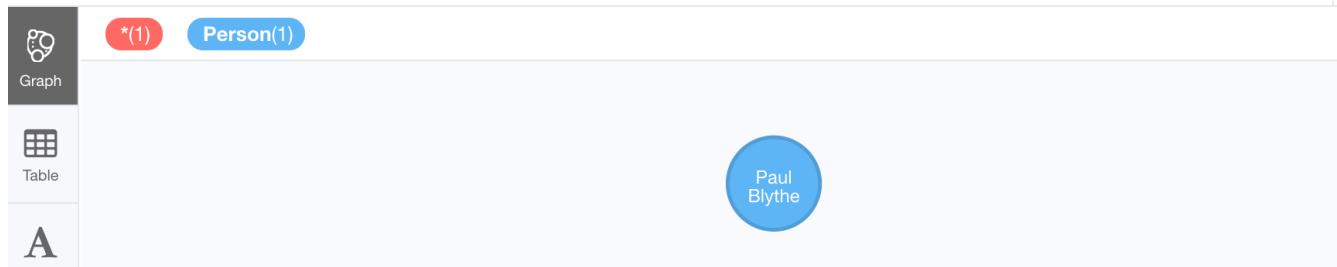


This query could also be modified to return each person along the path by specifying variables for the nodes and returning them. In addition, you can assign a variable to the path and return the path as follows:

```
MATCH path = (:Person)-[:FOLLOWS]->(:Person)-[:FOLLOWS]->(:Person {name:'Jessica Thompson'})
RETURN path
```

The result returned is:

```
$ MATCH path = (:Person)-[:FOLLOWS]->(:Person)-[:FOLLOWS]->(:Person {name:'Jessica T...')
```

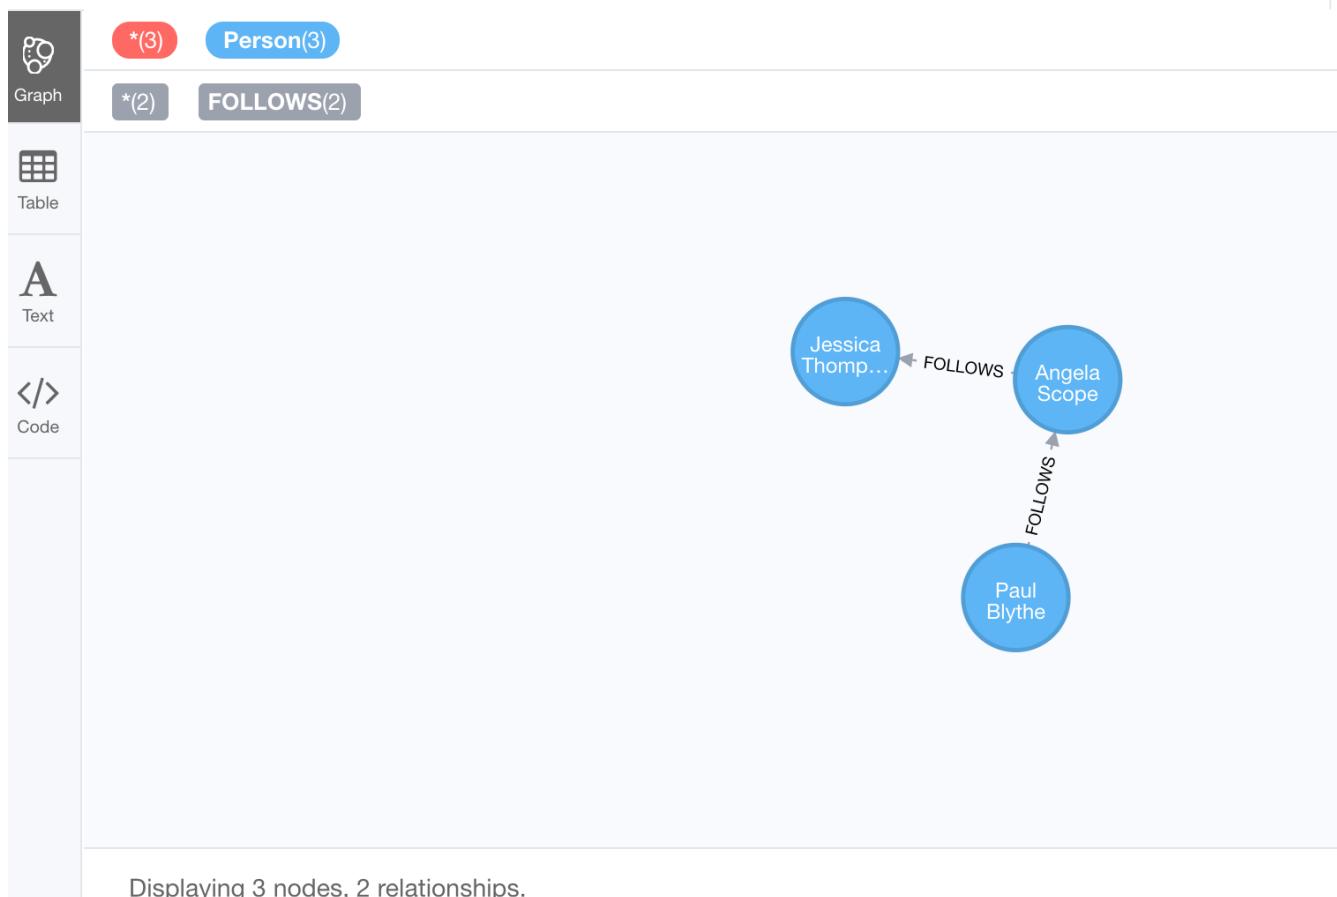

Using relationship direction to optimize a query

When querying the relationships in a graph, you can take advantage of the direction of the relationship to traverse the graph. For example, suppose we wanted to get a result stream containing rows of actors and the movies they acted in, along with the director of the particular movie.

Here is the Cypher query to do this. Notice that the direction of the traversal is used to focus on a particular movie during the query:

```
MATCH (a:Person)-[:ACTED_IN]->(m:Movie)<-[:DIRECTED]-(d:Person)
RETURN a.name, m.title, d.name
```

The result returned is:

a.name	m.title	d.name
"Emil Eifrem"	"The Matrix"	"Lana Wachowski"
"Hugo Weaving"	"The Matrix"	"Lana Wachowski"
"Laurence Fishburne"	"The Matrix"	"Lana Wachowski"
"Carrie-Anne Moss"	"The Matrix"	"Lana Wachowski"
"Keanu Reeves"	"The Matrix"	"Lana Wachowski"
"Emil Eifrem"	"The Matrix"	"Lily Wachowski"
"Hugo Weaving"	"The Matrix"	"Lily Wachowski"
"Laurence Fishburne"	"The Matrix"	"Lily Wachowski"
"Carrie-Anne Moss"	"The Matrix"	"Lily Wachowski"
"Keanu Reeves"	"The Matrix"	"Lily Wachowski"
"Hugo Weaving"	"The Matrix Reloaded"	"Lana Wachowski"
"Laurence Fishburne"	"The Matrix Reloaded"	"Lana Wachowski"
"Carrie-Anne Moss"	"The Matrix Reloaded"	"Lana Wachowski"
"Keanu Reeves"	"The Matrix Reloaded"	"Lana Wachowski"

In this query, notice that there are multiple records returned for a movie, each with its set of values for the actor and director.

Later in this training, you will learn other ways to query data and how to control the results returned.

Cypher style recommendations

Here are the **Neo4j-recommended** Cypher coding standards that we use in this training:

- Node labels are CamelCase and begin with an upper-case letter (examples: *Person*, *NetworkAddress*). Note that node labels are case-sensitive.
- Property keys, variables, parameters, aliases, and functions are camelCase and begin with a lower-case letter (examples: *businessAddress*, *title*). Note that these elements are case-sensitive.
- Relationship types are in upper-case and can use the underscore. (examples: *ACTED_IN*, *FOLLOWS*). Note that relationship types are case-sensitive and that you cannot use the "-" character in a relationship type.
- Cypher keywords are upper-case (examples: **MATCH**, **RETURN**). Note that Cypher keywords are case-insensitive, but a best practice is to use upper-case.
- String constants are in single quotes, unless the string contains a quote or apostrophe (examples: *'The Matrix'*, *"Something's Gotta Give"*). Note that you can also escape single or double quotes within strings that are quoted with the same using a backslash character.
- Specify variables only when needed for use later in the Cypher statement.
- Place named nodes and relationships (that use variables) before anonymous nodes and relationships in your **MATCH** clauses when possible.
- Specify anonymous relationships with **->**, **--**, or **<-**

Here is an example showing some best coding practices:

```
MATCH (:Person {name: 'Diane Keaton'})-[movRel:ACTED_IN]->
(:Movie {title:"Something's Gotta Give"})
RETURN movRel.roles
```

We recommend that you follow the [Cypher Style Guide](#) when writing your Cypher statements.

Exercise 3: Filtering queries using relationships

In the query edit pane of Neo4j Browser, execute the browser command: `:play intro-neo4j-exercises` and follow the instructions for Exercise 3.

Check your understanding

Question 1

Suppose you have a graph that contains nodes representing customers and other business entities for your application. The node label in the database for a customer is *Customer*. Each *Customer* node has a property named *email* that contains the customer's email address. What Cypher query do you execute to return the email addresses for all customers in the graph?

Select the correct answer.

- `MATCH (n) RETURN n.Customer.email`
- `MATCH (c:Customer) RETURN c.email`
- `MATCH (Customer) RETURN email`
- `MATCH (c) RETURN Customer.email`

Question 2

Suppose you have a graph that contains *Customer* and *Product* nodes. A *Customer* node can have a *BOUGHT* relationship with a *Product* node. *Customer* nodes can have other relationships with *Product* nodes. A *Customer* node has a property named *customerName*. A *Product* node has a property named *productName*. What Cypher query do you execute to return all of the products (by name) bought by customer 'ABCCO'.

Select the correct answer.

- `MATCH (c:Customer {customerName: 'ABCCO'}) RETURN c.BOUGHT.productName`
- `MATCH (:Customer 'ABCCO')-[:BOUGHT]->(p:Product) RETURN p.productName`
- `MATCH (p:Product)-[:BOUGHT_BY]-(:Customer 'ABCCO') RETURN p.productName`
- `MATCH (:Customer {customerName: 'ABCCO'})-[:BOUGHT]->(p:Product) RETURN p.productName`

Question 3

When must you use a variable in a MATCH clause?

Select the correct answer.

- When you want to query the graph using a node label.
- When you specify a property value to match the query.
- When you want to use the node or relationship to return a result.
- When the query involves 2 types of nodes.

Summary

You should now be able to write Cypher statements to:

- Retrieve nodes from the graph.
- Filter nodes retrieved using property values of nodes.
- Retrieve property values from nodes in the graph.
- Filter nodes retrieved using relationships.

Getting More Out of Queries

Table of Contents

About this module	1
Filtering queries using WHERE	1
Specifying ranges in WHERE clauses	2
Testing labels	3
Testing the existence of a property	3
Testing strings	4
Testing with regular expressions	5
Testing with patterns	5
Testing with list values	7
Exercise 4: Filtering queries using the WHERE clause	8
Controlling query processing	9
Specifying multiple MATCH patterns	9
Example 1: Using two MATCH patterns	9
Example 2: Using two MATCH patterns	10
Setting path variables	11
Specifying varying length paths	12
Finding the shortest path	14
Specifying optional pattern matching	15
Collecting results	15
Counting results	16
Additional processing using WITH	16
Exercise 5: Controlling query processing	18
Controlling how results are returned	18
Eliminating duplication	18
Using WITH and DISTINCT to eliminate duplication	20
Ordering results	21
Limiting the number of results	21
Controlling the number of results using WITH	22
Exercise 6: Controlling results returned	23
Working with Cypher data	23
Lists	23
Unwinding lists	24
Dates	25
Exercise 7: Working with Cypher data	26
Check your understanding	27
Question 1	27
Question 2	27
Question 3	28

Summary	29
---------------	----

About this module

You have learned how to query nodes and relationships in a graph using simple patterns. You learned how to use node labels, relationship types, and properties to filter your queries. Cypher provides a rich set of **MATCH** clauses and keywords you can use to get more out of your queries.

At the end of this module, you should be able to write Cypher statements to:

- Filter queries using the **WHERE** clause
- Control query processing
- Control what results are returned
- Work with Cypher lists and dates

Filtering queries using **WHERE**

You have learned how to specify values for properties of nodes and relationships to filter what data is returned from the **MATCH** and **RETURN** clauses. The format for filtering you have learned thus far only tests equality, where you must specify values for the properties to test with. What if you wanted more flexibility about how the query is filtered? For example, you want to retrieve all movies released after 2000, or retrieve all actors born after 1970 who acted in movies released before 1995. Most applications need more flexibility in how data is filtered.

The most common clause you use to filter queries is the **WHERE** clause that follows a **MATCH** clause. In the **WHERE** clause, you can place conditions that are evaluated at runtime to filter the query.

Previously, you learned to write simple query as follows:

```
MATCH (p:Person)-[:ACTED_IN]->(m:Movie {released: 2008})
RETURN p, m
```

Here is one way you specify the same query using the **WHERE** clause:

```
MATCH (p:Person)-[:ACTED_IN]->(m:Movie)
WHERE m.released = 2008
RETURN p, m
```

In this example, you can only refer to named nodes or relationships in a **WHERE** clause so remember that you must specify a variable for any node or relationship you are testing in the **WHERE** clause. The benefit of using a **WHERE** clause is that you can specify potentially complex conditions for the query.

For example:

```
MATCH (p:Person)-[:ACTED_IN]->(m:Movie)
WHERE m.released = 2008 OR m.released = 2009
RETURN p, m
```

Specifying ranges in WHERE clauses

Not only can the equality `=` be tested, but you can test ranges, existence, strings, as well as specify logical operations during the query.

Here is an example of specifying a range for filtering the query:

```
MATCH (p:Person)-[:ACTED_IN]->(m:Movie)
WHERE m.released >= 2003 AND m.released <= 2004
RETURN p.name, m.title, m.released
```

Here is the result:

Table	p.name	m.title	m.released
A	"Carrie-Anne Moss"	"The Matrix Reloaded"	2003
Text	"Laurence Fishburne"	"The Matrix Reloaded"	2003
</>	"Keanu Reeves"	"The Matrix Reloaded"	2003
Code	"Hugo Weaving"	"The Matrix Reloaded"	2003
	"Laurence Fishburne"	"The Matrix Revolutions"	2003
	"Hugo Weaving"	"The Matrix Revolutions"	2003
	"Keanu Reeves"	"The Matrix Revolutions"	2003
	"Carrie-Anne Moss"	"The Matrix Revolutions"	2003
	"Jack Nicholson"	"Something's Gotta Give"	2003
	"Diane Keaton"	"Something's Gotta Give"	2003
	"Keanu Reeves"	"Something's Gotta Give"	2003
	"Tom Hanks"	"The Polar Express"	2004

Started streaming 12 records after 1 ms and completed after 8 ms.

You can also specify the same query as:

```
MATCH (p:Person)-[:ACTED_IN]->(m:Movie)
WHERE 2003 <= m.released <= 2004
RETURN p.name, m.title, m.released
```

You can specify conditions in a `WHERE` clause that return a value of `true` or `false` (for example predicates). For testing numeric values, you use the standard numeric comparison operators. Each condition can be combined for runtime evaluation using the boolean operators `AND`, `OR`, `XOR`, and `NOT`. There are a number of numeric functions you can use in your conditions. See the *Developer Manual*'s section *Mathematical Functions* for more information.

A special condition in a query is when the retrieval returns an unknown value called `null`. You should read the *Developer Manual's* section *Working with null* to understand how `null` values are used at runtime.

Testing labels

Thus far, you have used the node labels to filter queries in a `MATCH` clause. You can filter node labels in the `WHERE` clause also:

For example, these two Cypher queries:

```
MATCH (p:Person)
RETURN p.name
```

```
MATCH (p:Person)-[:ACTED_IN]->(:Movie {title: 'The Matrix'})
RETURN p.name
```

can be rewritten using `WHERE` clauses as follows:

```
MATCH (p)
WHERE p:Person
RETURN p.name
```

```
MATCH (p)-[:ACTED_IN]->(m)
WHERE p:Person AND m:Movie AND m.title='The Matrix'
RETURN p.name
```

Not all node labels need to be tested during a query, but if your graph has multiple labels for the same node, filtering it by the node label will provide better query performance.

Testing the existence of a property

Recall that a property is associated with a particular node or relationship. A property is not associated with a node with a particular label or relationship type. In one of our queries earlier, we saw that the movie "Something's Gotta Give" is the only movie in the *Movie* database that does not have a *tagline* property. Suppose we only want to return the movies that the actor, *Jack Nicholson* acted in with the condition that they must all have a *tagline*.

Here is the query to retrieve the specified movies where we test the existence of the *tagline* property:

```
MATCH (p:Person)-[:ACTED_IN]->(m:Movie)
WHERE p.name='Jack Nicholson' AND exists(m.tagline)
RETURN m.title, m.tagline
```

Here is the result:

The screenshot shows the Neo4j browser interface with a query results table. The table has two columns: 'm.title' and 'm.tagline'. The rows are as follows:

m.title	m.tagline
"A Few Good Men"	"In the heart of the nation's capital, in a courthouse of the U.S. government, one man will stop at nothing to keep his honor, and one will stop at nothing to find the truth."
"As Good as It Gets"	"A comedy from the heart that goes for the throat."
"Hoffa"	"He didn't want law. He wanted justice."
"One Flew Over the Cuckoo's Nest"	"If he's crazy, what does that make you?"

Testing strings

Cypher has a set of string-related keywords that you can use in your `WHERE` clauses to test string property values. You can specify `STARTS WITH`, `ENDS WITH`, and `CONTAINS`.

For example, to find all actors in the *Movie* database whose first name is *Michael*, you would write:

```
MATCH (p:Person)-[:ACTED_IN]->()
WHERE p.name STARTS WITH 'Michael'
RETURN p.name
```

Here is the result:

```
$ MATCH (p:Person)-[:ACTED_IN]->() WHERE p.name STARTS WITH 'Michael' RETURN p.name
```

The screenshot shows the Neo4j browser interface with a query results table. The table has one column: 'p.name'. The rows are as follows:

p.name
"Michael Clarke Duncan"
"Michael Sheen"

Note that the comparison of strings is case-sensitive. There are a number of string-related functions you can use to further test strings. For example, if you want to test a value, regardless of its case, you could call the `toLowerCase()` function to convert the string to lower case before it is compared.

```
MATCH (p:Person)-[:ACTED_IN]->()
WHERE toLower(p.name) STARTS WITH 'michael'
RETURN p.name
```

Note: In this example where we are converting a property to lower case, if an index has been created for this property, it will not be used at runtime.

See the *String functions* section of the *Developer Manual* for more information. It is sometimes useful to use the built-in string functions to modify the data that is returned in the query in the `RETURN` clause.


Testing with regular expressions

If you prefer, you can test property values using regular expressions. You use the syntax `=~` to specify the regular expression you are testing with. Here is an example where we test the name of the *Person* using a regular expression to retrieve all *Person* nodes with a *name* property that begins with 'Tom':

```
MATCH (p:Person)
WHERE p.name =~ 'Tom.*'
RETURN p.name
```

Here is the result:

```
$ MATCH (p:Person) WHERE p.name =~ 'Tom.*' RETURN p.name
```

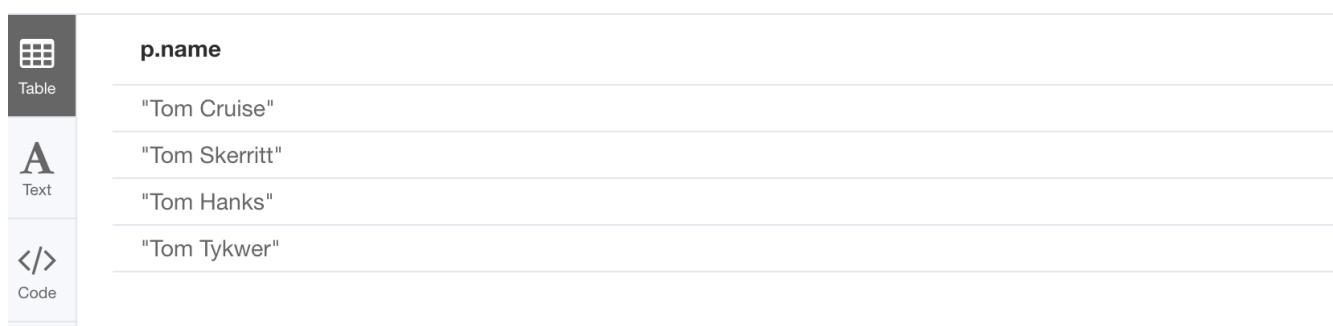

The screenshot shows a Neo4j browser interface with a sidebar on the left containing three buttons: 'Table' (selected), 'Text', and '</>'. The main area displays a table with one column labeled 'p.name'. The table contains four rows with the following values: "Tom Cruise", "Tom Skerritt", "Tom Hanks", and "Tom Tykwer".

p.name
"Tom Cruise"
"Tom Skerritt"
"Tom Hanks"
"Tom Tykwer"

Note: If you specify a regular expression. The index will never be used. In addition, the property value must fully match the regular expression.

Testing with patterns

Sometimes during a query, you may want to perform additional filtering using the relationships between nodes being visited during the query. For example, during retrieval, you may want to exclude certain paths traversed. You can specify a **NOT** specifier on a pattern in a **WHERE** clause.

Here is an example where we want to return all *Person* nodes of people who wrote movies:

```
MATCH (p:Person)-[:WROTE]->(m:Movie)
RETURN p.name, m.title
```

Here is the result:

```
$ MATCH (p:Person)-[:WROTE]->(m:Movie) RETURN p.name, m.title
```

p.name	m.title
"Aaron Sorkin"	"A Few Good Men"
"Jim Cash"	"Top Gun"
"Cameron Crowe"	"Jerry Maguire"
"Nora Ephron"	"When Harry Met Sally"
"David Mitchell"	"Cloud Atlas"
"Lilly Wachowski"	"V for Vendetta"
"Lana Wachowski"	"V for Vendetta"
"Lana Wachowski"	"Speed Racer"
"Lilly Wachowski"	"Speed Racer"
"Nancy Meyers"	"Something's Gotta Give"

Started streaming 10 records in less than 1 ms and completed after 1 ms.

Next, we modify this query to exclude people who directed that movie:

```
MATCH (p:Person)-[:WROTE]->(m:Movie)
WHERE NOT exists( (p)-[:DIRECTED]->() )
RETURN p.name, m.title
```

Here is the result:


```
$ MATCH (p:Person)-[:WROTE]->(m:Movie) WHERE NOT exists( (p)-[:DIRECTED]->() ) RETURN p.name, m.tit...
```

p.name	m.title
"Aaron Sorkin"	"A Few Good Men"
"Jim Cash"	"Top Gun"
"David Mitchell"	"Cloud Atlas"

Here is another example where we want to find *Gene Hackman* and the movies that he acted in with another person who also directed the movie.

```
MATCH (gene:Person)-[:ACTED_IN]->(m:Movie)<-[:ACTED_IN]-(other:Person)
WHERE gene.name= 'Gene Hackman'
AND exists( (other)-[:DIRECTED]->() )
RETURN gene, other, m
```

Here is the result:

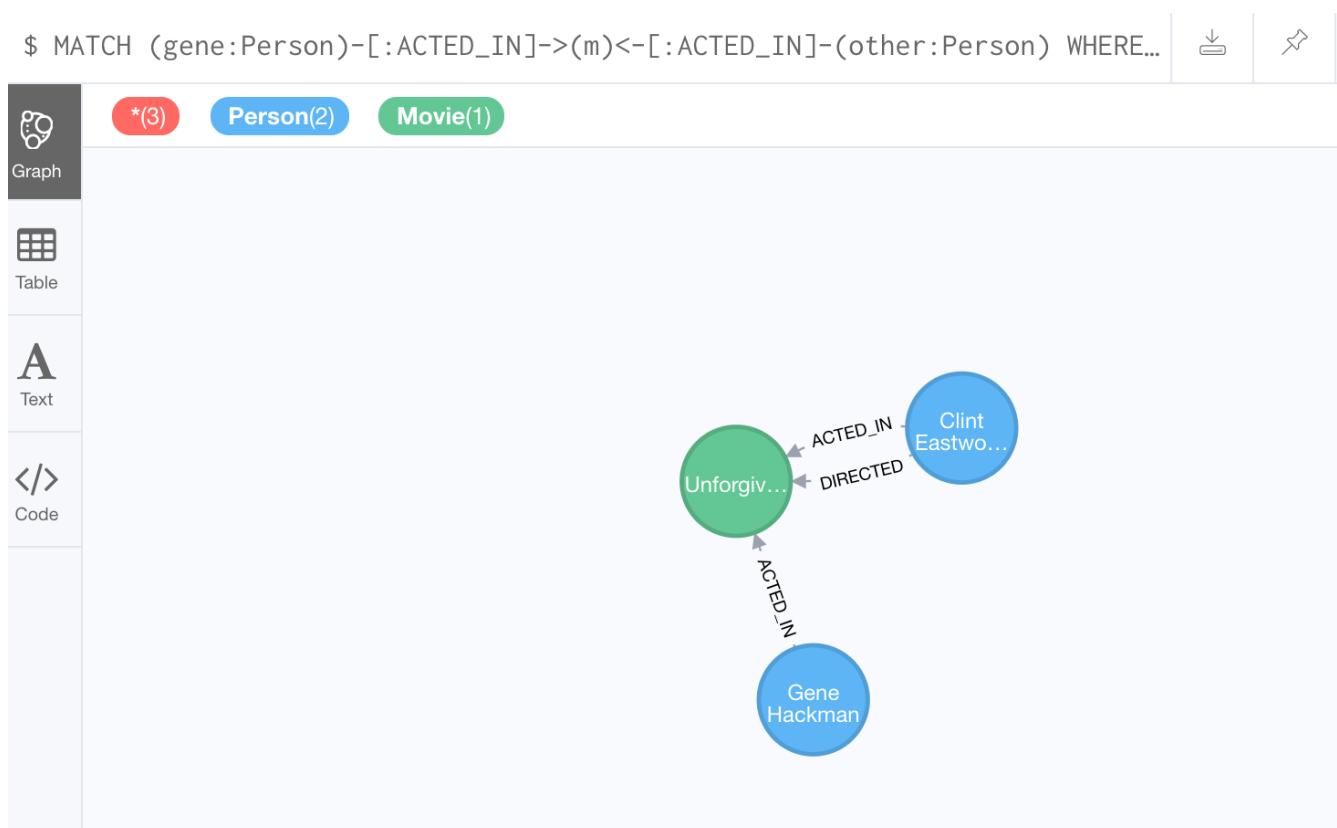

Testing with list values

If you have a set of values you want to test with, you can place them in a list or you can test with an existing list in the graph.

You can define the list in the `WHERE` clause. During the query, the graph engine will compare each property with the values `IN` the list. You can place either numeric or string values in the list, but typically, elements of the list are of the same type of data. If you are testing with a property of a string type, then all the elements of the list should be strings.

In this example, we only want to retrieve `Person` nodes of people born in 1965 or 1970:

```
MATCH (p:Person)
WHERE p.born IN [1965, 1970]
RETURN p.name as name, p.born as yearBorn
```

Here is the result:

```
$ MATCH (p:Person) WHERE p.born IN [1965, 1970] RETURN p.name as name, p.born as yearBorn
```

Table

A
Text

</>
Code

name	yearBorn
"Lana Wachowski"	1965
"Jay Mohr"	1970
"River Phoenix"	1970
"Ethan Hawke"	1970
"Brooke Langton"	1970
"Tom Tykwer"	1965
"John C. Reilly"	1965

Started streaming 7 records after 1 ms and completed after 2 ms.

You can also compare a value to an existing list in the graph.

We know that the `:ACTED_IN` relationship has a property, `roles` that contains the list of roles an actor had in a particular movie they acted in. Here is the query we write to return the name of the actor who played *Neo* in the movie *The Matrix*:

```
MATCH (p:Person)-[r:ACTED_IN]->(m:Movie)
WHERE 'Neo' IN r.roles AND m.title='The Matrix'
RETURN p.name
```

Here is the result:

```
$ MATCH (p:Person)-[r:ACTED_IN]->(m:Movie) WHERE "Neo" IN r.roles and m.title="The Matrix" RETURN p.name
```

Table

A

p.name
"Keanu Reeves"

Note: There are a number of syntax elements of Cypher that we have not covered in this training. For example, you can specify `CASE` logic in your conditional testing for your `WHERE` clauses. You can learn more about these syntax elements in the *Developer Manual*.

Exercise 4: Filtering queries using the `WHERE` clause

In the query edit pane of Neo4j Browser, execute the browser command: `:play intro-neo4j-exercises` and follow the instructions for Exercise 4.

Controlling query processing

Now that you have learned how to provide filters for your queries by testing properties, relationships, and patterns using the `WHERE` clause, you will learn some additional Cypher techniques for controlling what the graph engine does during the query.

Specifying multiple `MATCH` patterns

A best practice is to create your queries using a single `MATCH` pattern. This `MATCH` clause includes a pattern specified by two paths separated by a comma:

```
MATCH (a:Person)-[:ACTED_IN]->(m:Movie),  
      (m:Movie)<-[DIRECTED]-(d:Person)  
WHERE m.released = 2000  
RETURN a.name, m.title, d.name
```

If possible, you should write the same query as follows:

```
MATCH (a:Person)-[:ACTED_IN]->(m:Movie)<-[DIRECTED]-(d:Person)  
WHERE m.released = 2000  
RETURN a.name, m.title, d.name
```

There are, however, some queries where you will need to specify two or more patterns. Multiple patterns are used when a query is complex and cannot be satisfied with a single pattern. This is useful when you are looking for a specific node in the graph and want to connect it to a different node. You will learn about creating nodes and relationships later in this training.

Example 1: Using two `MATCH` patterns

Here are some examples of specifying two paths in a `MATCH` clause. In the first example, we want the actors that worked with *Keanu Reeves* to meet *Hugo Weaving*, who has worked with *Keanu Reeves*. Here we retrieve the actors who acted in the same movies as *Keanu Reeves*, but not when *Hugo Weaving* acted in the same movie. To do this, we specify two paths for the `MATCH`:

```
MATCH (keanu:Person)-[:ACTED_IN]->(movie:Movie)<-[ACTED_IN]-(n:Person),  
      (hugo:Person)  
WHERE keanu.name='Keanu Reeves' AND  
      hugo.name='Hugo Weaving'  
AND NOT (hugo)-[:ACTED_IN]->(movie)  
RETURN n.name
```

When you perform this type of query, you may see a warning in the query edit pane stating that the pattern represents a cartesian product and may require a lot of resources to perform the query. You should only perform these types of queries if you know the data well and the implications of doing the query.

The screenshot shows the Neo4j Browser interface. In the top right corner, the URL is neo4j@bolt://localhost:7687 - Neo4j Browser. A warning message is displayed in a box: "⚠️ 1 MATCH (keanu:Person)-[:ACTED_IN]->(movie:Movie)<-[:ACTED_IN]-(n:Person), Reeves" AND aving". Below the message, it says: "This query builds a cartesian product between disconnected patterns. If a part of a query contains multiple disconnected patterns, this will build a cartesian product between all those parts. This may produce a large amount of data and slow down query processing. IN]->(movie) While occasionally intended, it may often be possible to reformulate the query that avoids the use of this cross product, perhaps by adding a relationship between the different parts or by using OPTIONAL MATCH (identifier is: (hugo))".

Here is the result of executing this query:

The screenshot shows the results of the executed query in the Neo4j Browser. On the left, there is a sidebar with icons for Table, Text, and Code. The main area displays the results of the query: \$ MATCH (keanu:Person)-[:ACTED_IN]->(movie:Movie)<-[:ACTED_IN]-(n:Person), Reeves" AND aving". The results are listed under the heading "n.name":

n.name
"Jack Nicholson"
"Diane Keaton"
"Ice-T"
"Takeshi Kitano"
"Dina Meyer"
"Brooke Langton"
"Gene Hackman"
"Orlando Jones"
"Al Pacino"
"Charlize Theron"

At the bottom, a message states: Started streaming 10 records in less than 1 ms and completed in less than 1 ms.

Example 2: Using two MATCH patterns

Here is another example where two patterns are necessary. Suppose we want to retrieve the movies that *Meg Ryan* acted in and their respective directors, as well as the other actors that acted in these movies. Here is the query to do this:

```
MATCH (meg:Person)-[:ACTED_IN]->(m:Movie)<-[ :DIRECTED]-(d:Person),
      (other:Person)-[:ACTED_IN]->(m)
WHERE meg.name = 'Meg Ryan'
RETURN m.title as movie, d.name AS director , other.name AS 'co-actors'
```

Here is the result returned:

The screenshot shows the Neo4j browser interface with a table of results. On the left, there's a sidebar with icons for Table, Text, and Code. The main area has a header row with columns: movie, director, and co-actors. Below are 20 rows of data. The 'movie' column lists various movies like "Joe Versus the Volcano", "When Harry Met Sally", "Sleepless in Seattle", and "Top Gun". The 'director' column lists directors such as "John Patrick Stanley", "Rob Reiner", "Nora Ephron", and "Tony Scott". The 'co-actors' column lists co-actors like "Tom Hanks", "Nathan Lane", "Bruno Kirby", and "Tom Skerritt".

movie	director	co-actors
"Joe Versus the Volcano"	"John Patrick Stanley"	"Tom Hanks"
"Joe Versus the Volcano"	"John Patrick Stanley"	"Nathan Lane"
"When Harry Met Sally"	"Rob Reiner"	"Bruno Kirby"
"When Harry Met Sally"	"Rob Reiner"	"Carrie Fisher"
"When Harry Met Sally"	"Rob Reiner"	"Billy Crystal"
"Sleepless in Seattle"	"Nora Ephron"	"Rosie O'Donnell"
"Sleepless in Seattle"	"Nora Ephron"	"Tom Hanks"
"Sleepless in Seattle"	"Nora Ephron"	"Bill Pullman"
"Sleepless in Seattle"	"Nora Ephron"	"Victor Garber"
"Sleepless in Seattle"	"Nora Ephron"	"Rita Wilson"
"You've Got Mail"	"Nora Ephron"	"Dave Chappelle"
"You've Got Mail"	"Nora Ephron"	"Steve Zahn"
"You've Got Mail"	"Nora Ephron"	"Greg Kinnear"
"You've Got Mail"	"Nora Ephron"	"Parker Posey"
"You've Got Mail"	"Nora Ephron"	"Tom Hanks"
"Top Gun"	"Tony Scott"	"Tom Skerritt"


Started streaming 20 records in less than 1 ms and completed after 2 ms.

Setting path variables

You have previously seen how you can assign a path used in a `MATCH` clause to a variable. This is useful if you want to reuse the path later in the same query or if you want to return the path. So the previous Cypher statement could return the path as follows:


```
MATCH megPath = (meg:Person)-[:ACTED_IN]->(m:Movie)<-[ :DIRECTED]-(d:Person),  
      (other:Person)-[:ACTED_IN]->(m)  
WHERE meg.name = 'Meg Ryan'  
RETURN megPath
```

Here is the result returned:

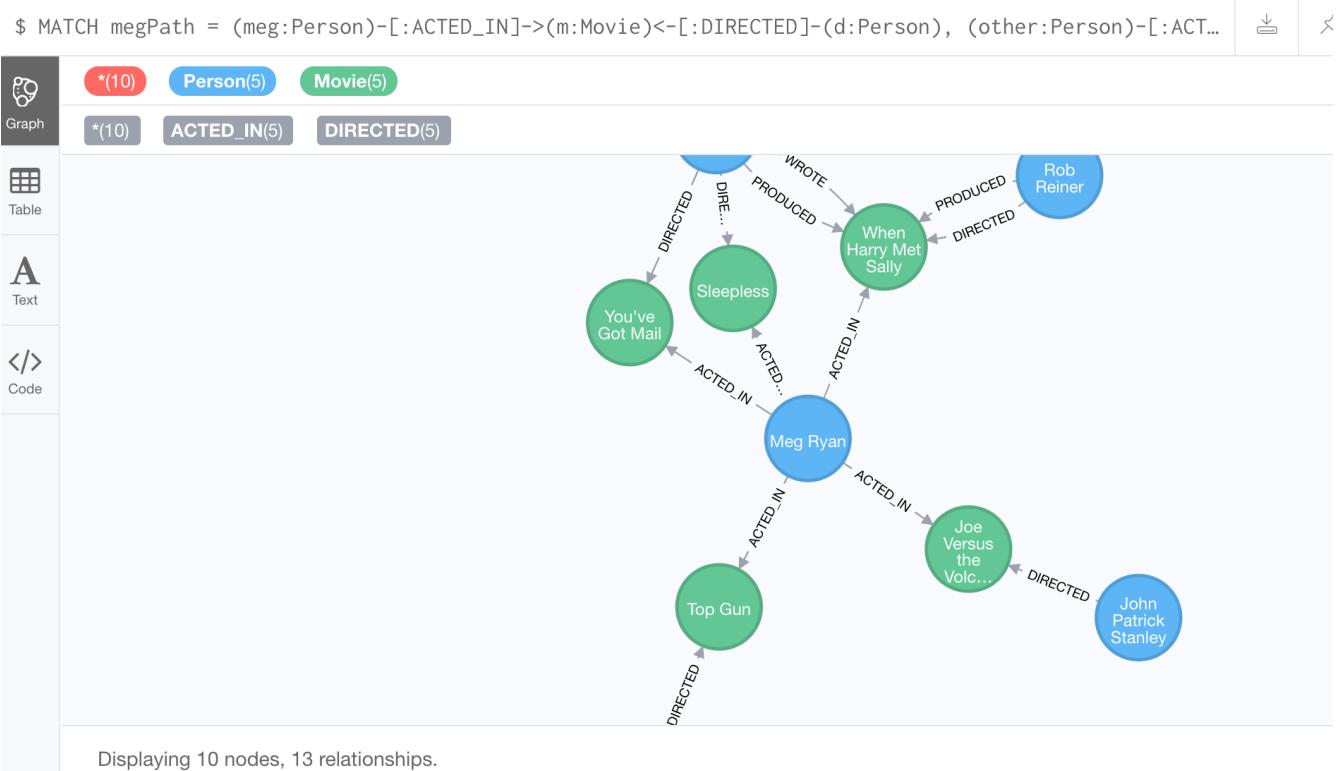

Specifying varying length paths

Any graph that represents social networking, trees, or hierarchies will most likely have multiple paths of varying lengths. Think of the *connected* relationship in *LinkedIn* and how connections are made by people connected to more people. The *Movie* database for this training does not have much depth of relationships, but it does have the *:FOLLOWS* relationship that you learned about earlier:

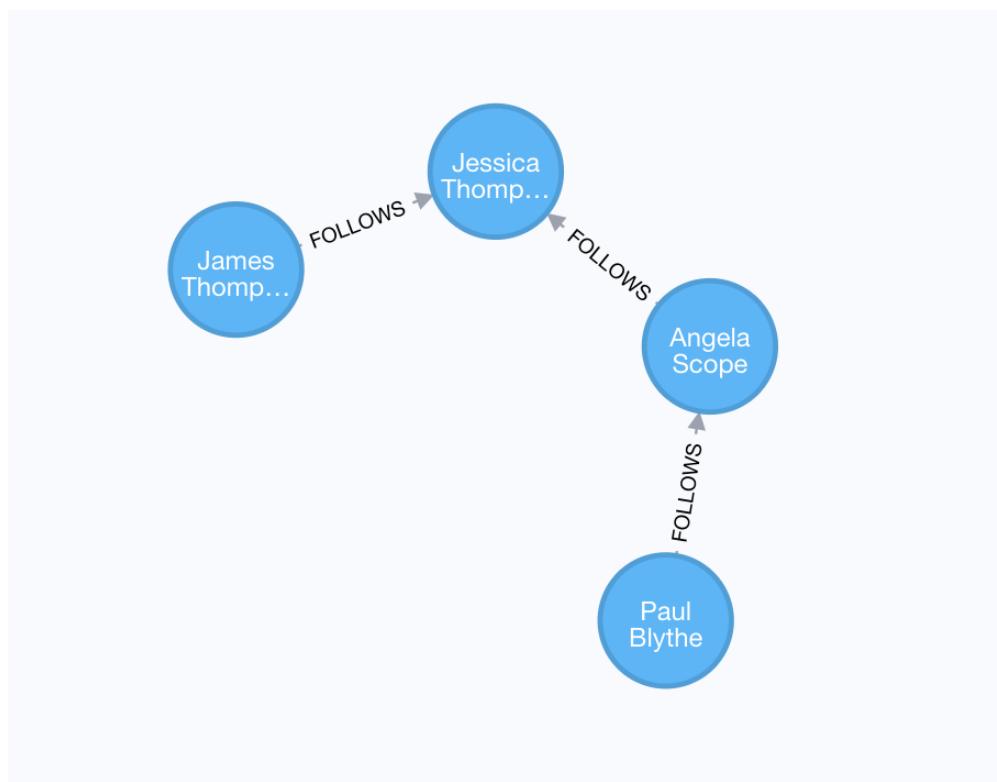


You write a `MATCH` clause where you want to find all of the followers of the followers of a *Person* by specifying a numeric value for the number of hops in the path. Here is an example where we want to retrieve all *Person* nodes that are exactly two hops away:

```
MATCH (follower:Person)-[:FOLLOWS*2]->(p:Person)
WHERE follower.name = 'Paul Blythe'
RETURN p
```

Here is the result returned:

```
$ MATCH (follower:Person)-[:FOLLOWS*2]->(p:Person) WHERE follower.name = 'Paul Blythe' RETURN p
```

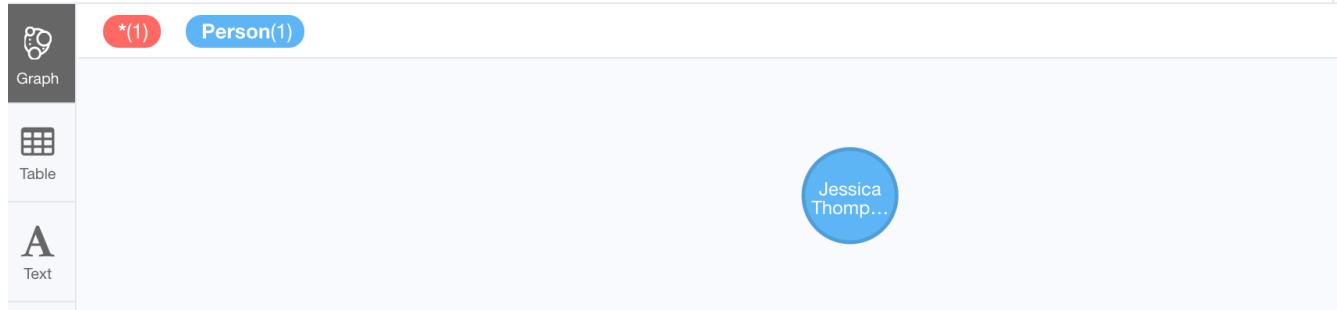

If we had specified `[:FOLLOWS*]` rather than `[:FOLLOWS*2]`, the query would return all *Person* nodes that are two hops away in the `:FOLLOWS` path from *Paul Blythe*.

Here is the simplified syntax for how varying length patterns are specified in Cypher:

<code>(nodeA)-[:RELTYPE*]->(nodeB)</code>	Retrieve <u>all</u> paths of any length with the relationship, <code>RELTYPE</code> from <i>nodeA</i> to <i>nodeB</i> and beyond.
<code>(nodeA)-[:RELTYPE*]->(nodeB)</code>	Retrieve <u>all</u> paths of any length with the relationship, <code>RELTYPE</code> from <i>nodeA</i> to <i>nodeB</i> or from <i>nodeB</i> to <i>nodeA</i> and beyond. This is usually a very expensive query so you should place limits on how many nodes are retrieved.
<code>(node1)-[:RELTYPE*3]->(node2)</code>	Retrieve the paths of length 3 with the relationship, <code>RELTYPE</code> from <i>nodeA</i> to <i>nodeB</i> .
<code>(node1)-[:RELTYPE*1..3]->(node2)</code>	Retrieve the paths of lengths 1, 2, or 3 with the relationship, <code>RELTYPE</code> from <i>nodeA</i> to <i>nodeB</i> , <i>nodeB</i> to <i>nodeC</i> , as well as, <i>nodeC</i> to <i>_nodeD</i> (up to three hops).

You can learn more about varying paths in the *Patterns* section of the *Developer Manual*.

Finding the shortest path


A built-in function that you may find useful in a graph that has many ways of traversing the graph to get to the same node is the `shortestPath()` function. Using the shortest path between two nodes improves the performance of the query.

In this example, we want to discover a shortest path between the movies *The Matrix* and *A Few Good Men*. In our `MATCH` clause, we set the variable `p` to the result of calling `shortestPath()`, and then return `p`. In the call to `shortestPath()`, notice that we specify `*` for the relationship. This means any relationship; for the traversal.

```
MATCH p = shortestPath((m1:Movie)-[*]-(m2:Movie))
WHERE m1.title = 'A Few Good Men' AND
      m2.title = 'The Matrix'
RETURN p
```

Here is the result returned:

```
$ MATCH p = shortestPath((m1:Movie)-[*]-(m2:Movie)) WHERE m1.title = 'A Few Good Men...'
```

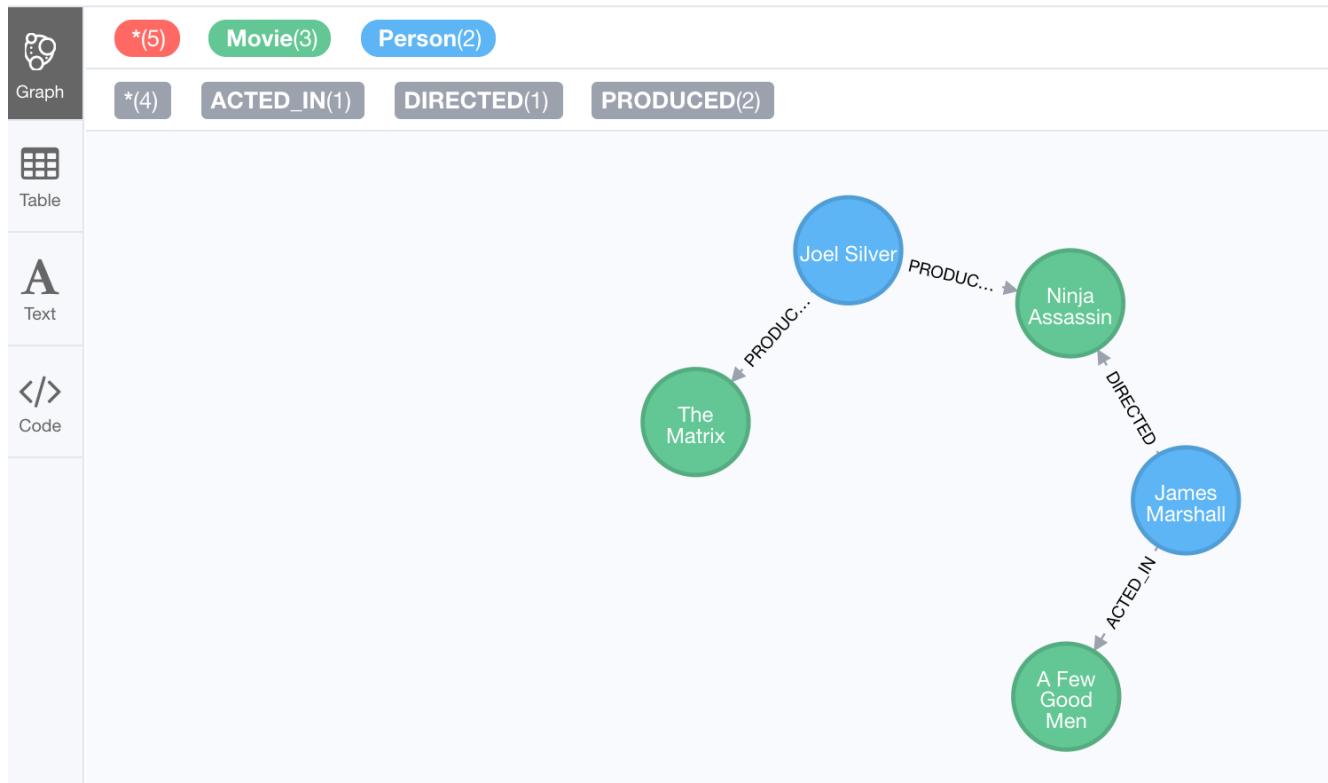

Notice that the graph engine has traversed many types of relationships to get to the end node.

When you use the `shortestPath()` function, the query editor will show a warning that this type of query could potentially run for a long time. You should heed the warning, especially for large graphs. Read the *Graph Algorithms* documentation about the shortest path algorithm.

When you use `ShortestPath()`, you can specify an upper limit for the shortest path. In addition, you should aim to provide the patterns for the from and to nodes that execute efficiently. For example, use labels and indexes.

Specifying optional pattern matching

`OPTIONAL MATCH` matches patterns with your graph, just like `MATCH` does. The difference is that if no matches are found, `OPTIONAL MATCH` will use NULLs for missing parts of the pattern. `OPTIONAL MATCH` could be considered the Cypher equivalent of the outer join in SQL.

Here is an example where we query the graph for all people whose name starts with *James*. The `OPTIONAL MATCH` is specified to include people who have reviewed movies.

```
MATCH (p:Person)
WHERE p.name STARTS WITH 'James'
OPTIONAL MATCH (p)-[r:REVIEWED]->(m:Movie)
RETURN p.name, type(r), m.title
```

Here is the result returned:

```
$ MATCH (p:Person) WHERE p.name STARTS WITH 'James' OPTIONAL MATCH (p)-[r:REVIEWED]->(m:Movie) RETU...
```

	p.name	type(r)	m.title
Table	"James Marshall"	null	null
A	"James L. Brooks"	null	null
Text	"James Cromwell"	null	null
</>	"James Thompson"	"REVIEWED"	"The Replacements"
Code	"James Thompson"	"REVIEWED"	"The Da Vinci Code"

Notice that for all rows that do not have the `:REVIEWED` relationship, a `null` value is returned for the movie part of the query, as well as the relationship.

Collecting results

Cypher has a built-in function, `collect()` that enables you to aggregate a value into a list. Here is an example where we collect the list of movies that *Tom Cruise* acted in:

```
MATCH (p:Person)-[:ACTED_IN]->(m:Movie)
WHERE p.name = 'Tom Cruise'
RETURN collect(m.title) AS 'movies for Tom Cruise'
```

Here is the result returned:

```
$ MATCH (p:Person)-[:ACTED_IN]->(m:Movie) WHERE p.name = 'Tom Cruise' RETURN collect(m.title) AS 'mo...
```

	movies for Tom Cruise
Table	["Jerry Maguire", "Top Gun", "A Few Good Men"]

In Cypher, there is no "GROUP BY" clause as there is in SQL. The graph engine uses non-aggregated columns as an automatic grouping key.

Counting results

The Cypher `count()` function is very useful when you want to count the number of occurrences of a particular query result. If you specify `count(n)`, the graph engine calculates the number of occurrences of `n`. If you specify `count(*)`, the graph engine calculates the number of rows retrieved, including those with `null` values. When you use `count(_)`, the graph engine does an implicit group by based upon the aggregation.

Here is an example where we count the paths retrieved where an actor and director collaborated in a movie and the `count()` function is used to count the number of paths found for each actor/director collaboration.

```
MATCH (actor:Person)-[:ACTED_IN]->(m:Movie)<-[DIRECTED]-(director:Person)
RETURN actor.name, director.name, count(m) AS collaborations, collect(m.title) AS movies
```

Here is the result returned:

	actor.name	director.name	collaborations	movies
"Lori Petty"	"Penny Marshall"	1	[{"A League of Their Own"}]	
"Emile Hirsch"	"Lana Wachowski"	1	[{"Speed Racer"}]	
"Val Kilmer"	"Tony Scott"	1	[{"Top Gun"}]	
"Gene Hackman"	"Howard Deutch"	1	[{"The Replacements"}]	
"Rick Yune"	"James Marshall"	1	[{"Ninja Assassin"}]	
"Audrey Tautou"	"Ron Howard"	1	[{"The Da Vinci Code"}]	
"Halle Berry"	"Tom Tykwer"	1	[{"Cloud Atlas"}]	
"Cuba Gooding Jr."	"James L. Brooks"	1	[{"As Good as It Gets"}]	
"Kevin Bacon"	"Rob Reiner"	1	[{"A Few Good Men"}]	
"Tom Hanks"	"Ron Howard"	2	[{"The Da Vinci Code", "Apollo 13"}]	
"Laurence Fishburne"	"Lana Wachowski"	3	[{"The Matrix", "The Matrix Reloaded", "The Matrix Revolutions"}]	
"Hugo Weaving"	"Lana Wachowski"	4	[{"The Matrix", "The Matrix Reloaded", "The Matrix Revolutions", "Cloud Atlas"}]	
"Jay Mohr"	"Cameron Crowe"	1	[{"Jerry Maguire"}]	
"Hugo Weaving"	"James Marshall"	1	[{"V for Vendetta"}]	
"Philip Seymour Hoffman"	"Mike Nichols"	1	[{"Charlie Wilson's War"}]	
"Werner Herzog"	"Vincent Ward"	1	[{"What Dreams May Come"}]	

Started streaming 175 records after 14 ms and completed after 14 ms.

There are more aggregating functions such as `min()` or `max()` that you can also use in your queries. These are described in the *Aggregating Functions* section of the *Developer Manual*.


Additional processing using WITH

During the execution of a `MATCH` clause, you can specify that you want some intermediate calculations or values that will be used for further processing of the query, or for limiting the number of results before further processing is done. You use the `WITH` clause to perform intermediate processing or data flow operations.

Here is an example where we start the query processing by retrieving all actors and their movies. During the query processing, want to only return actors that have 2 or 3 movies. All other actors and the aggregated results are filtered out. This type of query is a replacement for SQL's "HAVING" clause. The **WITH** clause does the counting and collecting, but is then used in the subsequent **WHERE** clause to limit how many paths are visited.

```
MATCH (a:Person)-[:ACTED_IN]->(m:Movie)
WITH a, count(a) AS numMovies, collect(m.title) as movies
WHERE numMovies > 1 AND numMovies < 4
RETURN a.name, numMovies, movies
```

Here is the result returned:

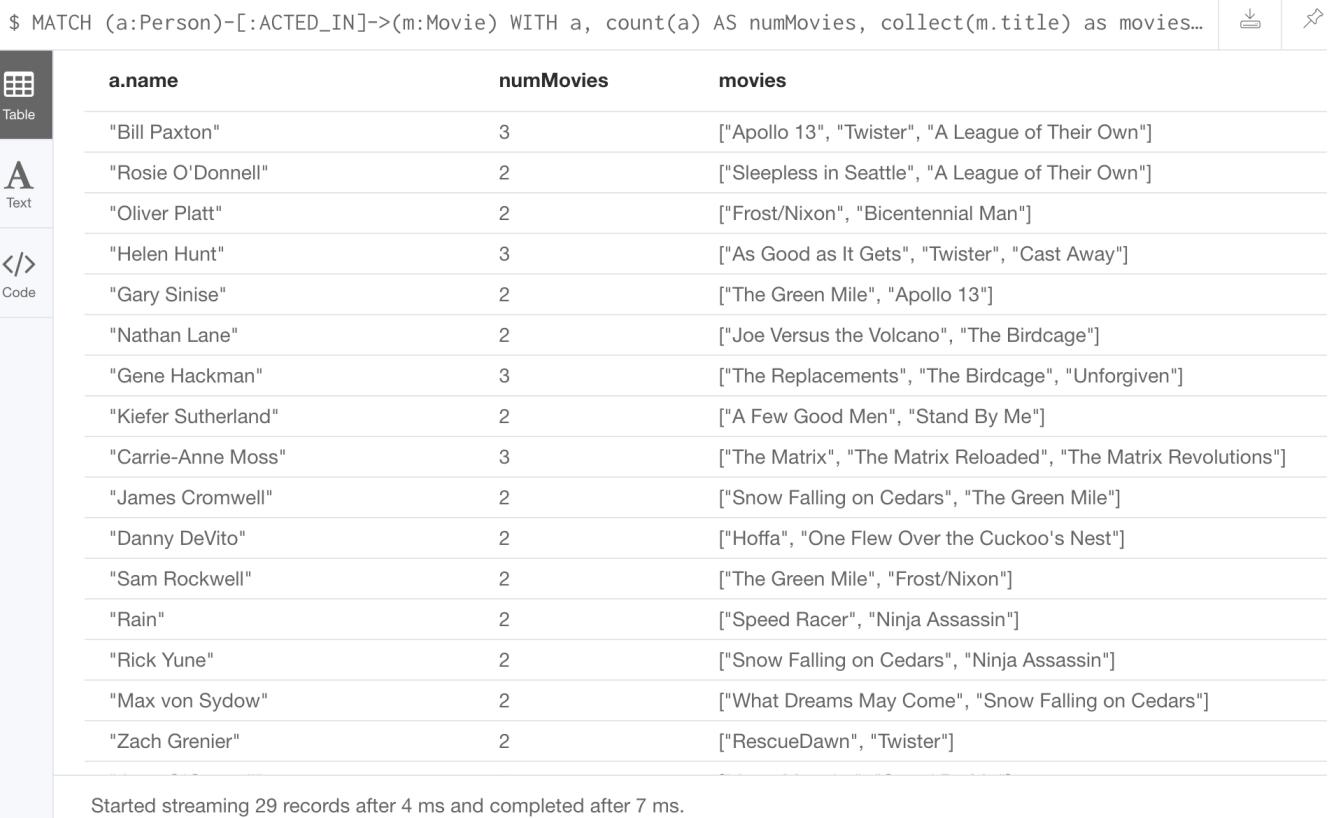

The screenshot shows the Neo4j browser interface with a query results table. The table has three columns: **a.name**, **numMovies**, and **movies**. The data is as follows:

a.name	numMovies	movies
"Bill Paxton"	3	["Apollo 13", "Twister", "A League of Their Own"]
"Rosie O'Donnell"	2	["Sleepless in Seattle", "A League of Their Own"]
"Oliver Platt"	2	["Frost/Nixon", "Bicentennial Man"]
"Helen Hunt"	3	["As Good as It Gets", "Twister", "Cast Away"]
"Gary Sinise"	2	["The Green Mile", "Apollo 13"]
"Nathan Lane"	2	["Joe Versus the Volcano", "The Birdcage"]
"Gene Hackman"	3	["The Replacements", "The Birdcage", "Unforgiven"]
"Kiefer Sutherland"	2	["A Few Good Men", "Stand By Me"]
"Carrie-Anne Moss"	3	["The Matrix", "The Matrix Reloaded", "The Matrix Revolutions"]
"James Cromwell"	2	["Snow Falling on Cedars", "The Green Mile"]
"Danny DeVito"	2	["Hoffa", "One Flew Over the Cuckoo's Nest"]
"Sam Rockwell"	2	["The Green Mile", "Frost/Nixon"]
"Rain"	2	["Speed Racer", "Ninja Assassin"]
"Rick Yune"	2	["Snow Falling on Cedars", "Ninja Assassin"]
"Max von Sydow"	2	["What Dreams May Come", "Snow Falling on Cedars"]
"Zach Grenier"	2	["RescueDawn", "Twister"]

Started streaming 29 records after 4 ms and completed after 7 ms.

When you use the **WITH** clause, you specify the variables from the previous part of the query you want to pass on to the next part of the query. In this example, the variable *a* is specified to be passed on in the query, but *m* is not. Since *m* is not specified to be passed on, *m* will not be available later in the query. Notice that for the **RETURN** clause, *a*, *numMovies*, and *movies* are available for use.

Note: You have to name all expressions with an alias in a **WITH** that are not simple variables.

Here is another example where we want to find all actors who have acted in at least five movies, and find (optionally) the movies they directed and return the person and those movies.

```
MATCH (p:Person)
WITH p, size((p)-[:ACTED_IN]->(:Movie)) AS movies
WHERE movies >= 5
OPTIONAL MATCH (p)-[:DIRECTED]->(m:Movie)
RETURN p.name, m.title
```

Here is the result returned:

The screenshot shows the Neo4j Browser interface. On the left, there is a sidebar with three buttons: 'Table' (selected), 'Text', and 'Code'. The main area displays a table with two columns: 'p.name' and 'm.title'. The data rows are:

p.name	m.title
"Keanu Reeves"	null
"Hugo Weaving"	null
"Jack Nicholson"	null
"Meg Ryan"	null
"Tom Hanks"	"That Thing You Do"

In this example, we first retrieve all people, but then specify a pattern in the `WITH` clause where we calculate the number of `:ACTED_IN` relationships retrieved using the `size()` function. If this value is greater than five, we then also retrieve the `:DIRECTED` paths to return the name of the person and the title of the movie they directed. In the result, we see that these actors acted in more than five movies, but *Tom Hanks* is the only actor who directed a movie and thus the only person to have a value for the movie.

Exercise 5: Controlling query processing

In the query edit pane of Neo4j Browser, execute the browser command: `:play intro-neo4j-exercises` and follow the instructions for Exercise 5.

Controlling how results are returned

Next, you will learn some additional Cypher techniques for controlling how results are returned from a query.

Eliminating duplication

You have seen a number of query results where there is duplication in the results returned. In most cases, you want to eliminate duplicated results. You do so by using the `DISTINCT` keyword.

Here is a simple example where duplicate data is returned. *Tom Hanks* both acted in and directed the movie, *That Thing You Do*, so the movie is returned twice in the result stream.

```
MATCH (p:Person)-[:DIRECTED | :ACTED_IN]->(m:Movie)
WHERE p.name = 'Tom Hanks'
RETURN m.released, collect(m.title) AS movies
```

Here is the result returned:

```
$ MATCH (p:Person)-[:DIRECTED | :ACTED_IN]->(m:Movie) WHERE p.name = 'Tom Hanks' RETURN m.released,...
```

	m.released	movies
Table	2012	["Cloud Atlas"]
A	2006	["The Da Vinci Code"]
Text	2000	["Cast Away"]
</>	1993	["Sleepless in Seattle"]
Code	1996	["That Thing You Do", "That Thing You Do"]
	1990	["Joe Versus the Volcano"]
	1999	["The Green Mile"]
	1998	["You've Got Mail"]
	2007	["Charlie Wilson's War"]
	1992	["A League of Their Own"]
	1995	["Apollo 13"]
	2004	["The Polar Express"]

Started streaming 12 records after 2 ms and completed after 2 ms.

We can eliminate the duplication by specifying the DISTINCT keyword as follows:

```
MATCH (p:Person)-[:DIRECTED | :ACTED_IN]->(m:Movie)
WHERE p.name = 'Tom Hanks'
RETURN m.released, collect(DISTINCT m.title) AS movies
```

Here is the result returned:

```
$ MATCH (p:Person)-[:DIRECTED | :ACTED_IN]->(m:Movie) WHERE p.name = 'Tom Hanks' RETURN m.released,...
```

	m.released	movies
Table	2012	["Cloud Atlas"]
Text	2006	["The Da Vinci Code"]
Code	2000	["Cast Away"]
	1993	["Sleepless in Seattle"]
	1996	["That Thing You Do"]
	1990	["Joe Versus the Volcano"]
	1999	["The Green Mile"]
	1998	["You've Got Mail"]
	2007	["Charlie Wilson's War"]
	1992	["A League of Their Own"]
	1995	["Apollo 13"]
	2004	["The Polar Express"]

Started streaming 12 records after 1 ms and completed after 1 ms.

Using WITH and DISTINCT to eliminate duplication

Another way that you can avoid duplication is to use **WITH** and **DISTINCT** together as follows:

```
MATCH (p:Person)-[:DIRECTED | :ACTED_IN]->(m:Movie)
WHERE p.name = 'Tom Hanks'
WITH DISTINCT m
RETURN m.released, m.title
```

Here is the result returned:

	m.released	m.title
Table	2004	"The Polar Express"
Text	1995	"Apollo 13"
Code	1990	"Joe Versus the Volcano"
	1992	"A League of Their Own"
	1999	"The Green Mile"
	1996	"That Thing You Do"
	1998	"You've Got Mail"
	2000	"Cast Away"
	2012	"Cloud Atlas"
	1993	"Sleepless in Seattle"
	2007	"Charlie Wilson's War"
	2006	"The Da Vinci Code"

Started streaming 12 records after 1 ms and completed after 1 ms.

Ordering results

If you want the results to be sorted, you specify the expression to use for the sort using the `ORDER BY` keyword and whether you want the order to be descending using the `DESC` keyword. Ascending order is the default. Note that you can provide multiple sort expressions and the result will be sorted in that order. Just as you can use `DISTINCT` with `WITH` to eliminate duplication, you can use `ORDER BY` with `WITH` to control the sorting of results.

In this example, we specify that the release date of the movies for *Tom Hanks* will be returned in descending order.

```
MATCH (p:Person)-[:DIRECTED | :ACTED_IN]->(m:Movie)
WHERE p.name = 'Tom Hanks'
RETURN m.released, collect(DISTINCT m.title) AS movies ORDER BY m.released DESC
```

Here is the result returned:

```
$ MATCH (p:Person)-[:DIRECTED | :ACTED_IN]->(m:Movie) WHERE p.name = 'Tom Hanks' RETURN m.released,...
```

The screenshot shows the Neo4j browser interface. On the left, there is a sidebar with three buttons: 'Table' (selected), 'Text', and '</> Code'. The main area displays a table with two columns: 'm.released' and 'movies'. The data consists of 12 rows, each representing a movie released in a specific year, with the years listed in descending order from top to bottom: 2012, 2007, 2006, 2004, 2000, 1999, 1998, 1996, 1995, 1993, 1992, and 1990. The 'movies' column contains lists of movie titles for each year. At the bottom of the table, a message states: 'Started streaming 12 records after 2 ms and completed after 2 ms.'

m.released	movies
2012	["Cloud Atlas"]
2007	["Charlie Wilson's War"]
2006	["The Da Vinci Code"]
2004	["The Polar Express"]
2000	["Cast Away"]
1999	["The Green Mile"]
1998	["You've Got Mail"]
1996	["That Thing You Do"]
1995	["Apollo 13"]
1993	["Sleepless in Seattle"]
1992	["A League of Their Own"]
1990	["Joe Versus the Volcano"]

Limiting the number of results

Although you can filter queries to reduce the number of results returned, you may also want to limit the number of results. This is useful if you have very large result sets and you only need to see the beginning or end of a set of ordered results. You can use the `LIMIT` keyword to specify the number of results returned. Furthermore, you can use the `LIMIT` keyword with the `WITH` clause to limit results.

Suppose you want to see the titles of the ten most recently released movies. You could do so as follows where you limit the number of results using the **LIMIT** keyword as follows:

```
MATCH (m:Movie)
RETURN m.title as title, m.released as year ORDER BY m.released DESC LIMIT 10
```

Here is the result returned:

The screenshot shows the Neo4j browser interface. On the left, there are three buttons: 'Table' (selected), 'Text', and '</> Code'. The main area displays a table with two columns: 'title' and 'year'. The data consists of ten rows, each representing a movie and its release year. The table has a header row and nine data rows. At the bottom of the table, a message states: 'Started streaming 10 records after 1 ms and completed after 2 ms.'

	title	year
"Cloud Atlas"		2012
"Ninja Assassin"		2009
"Frost/Nixon"		2008
"Speed Racer"		2008
"Charlie Wilson's War"		2007
"V for Vendetta"		2006
"The Da Vinci Code"		2006
"RescueDawn"		2006
"The Polar Express"		2004
"The Matrix Reloaded"		2003

Started streaming 10 records after 1 ms and completed after 2 ms.

Controlling the number of results using **WITH**

Previously, you saw how you can use the **WITH** clause to perform some intermediate processing during a query. You can use the **WITH** clause to limit the number of results.

In this example, we count the number of movies during the query and we return the results once we have reached 5 movies.

```
MATCH (a:Person)-[:ACTED_IN]->(m:Movie)
WITH a, count(*) AS numMovies, collect(m.title) as movies
WHERE numMovies = 5
RETURN a.name, numMovies, movies
```

Here is the result returned:

The screenshot shows the Neo4j Browser interface with a query results table. The table has three columns: 'a.name', 'numMovies', and 'movies'. The data is as follows:

a.name	numMovies	movies
"Jack Nicholson"	5	["A Few Good Men", "As Good as It Gets", "Hoffa", "One Flew Over the Cuckoo's Nest", "Something's Gotta Give"]
"Hugo Weaving"	5	["The Matrix", "The Matrix Reloaded", "The Matrix Revolutions", "Cloud Atlas", "V for Vendetta"]
"Meg Ryan"	5	["Top Gun", "You've Got Mail", "Sleepless in Seattle", "Joe Versus the Volcano", "When Harry Met Sally"]

Exercise 6: Controlling results returned

In the query edit pane of Neo4j Browser, execute the browser command: `:play intro-neo4j-exercises` and follow the instructions for Exercise 6.

Working with Cypher data

Thus far, you have specified both string and numeric types in your Cypher queries. You have also learned that nodes and relationships can have properties, whose values are structured like JSON objects. You have also learned that the `collect()` function can create lists of values or objects where a list is comma-separated and you can use the `IN` keyword to search for a value in a list. Next, you will learn more about working with lists and dates in Cypher.

Lists


There are many built-in Cypher functions that you can use to build or access elements in lists. A Cypher `map` is list of key/value pairs where each element of the list is of the format `key: value`. For example, a list of months and the number of days per month could be:

```
{Jan: 31, Feb: 28, Mar: 31, Apr: 30, May: 31, Jun: 30, Jul: 31, Aug: 31, Sep: 30, Oct: 31, Nov: 30, Dec: 31}
```

You can collect values for a list during a query and when you return results, you can sort by the size of the list using the `size()` function as follows:

```
MATCH (a:Person)-[:ACTED_IN]->(m:Movie)
WITH m, count(m) AS numCast, collect(a.name) as cast
RETURN m.title, cast, numCast ORDER BY size(cast)
```

Here is the result returned:

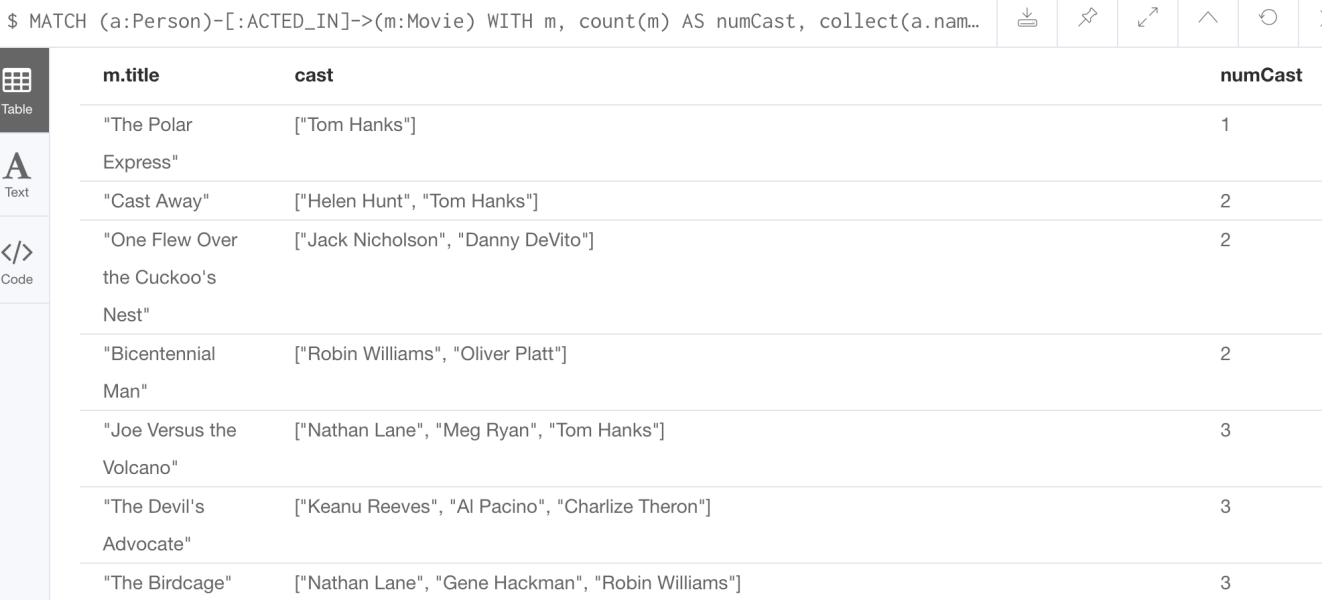

The screenshot shows the Neo4j browser interface with a sidebar on the left containing icons for Table, Text, and Code. The main area displays a table with three columns: m.title, cast, and numCast. The data in the table is as follows:

m.title	cast	numCast
"The Polar Express"	["Tom Hanks"]	1
"Cast Away"	["Helen Hunt", "Tom Hanks"]	2
"One Flew Over the Cuckoo's Nest"	["Jack Nicholson", "Danny DeVito"]	2
"Bicentennial Man"	["Robin Williams", "Oliver Platt"]	2
"Joe Versus the Volcano"	["Nathan Lane", "Meg Ryan", "Tom Hanks"]	3
"The Devil's Advocate"	["Keanu Reeves", "Al Pacino", "Charlize Theron"]	3
"The Birdcage"	["Nathan Lane", "Gene Hackman", "Robin Williams"]	3

You can read more about working with lists in the *List Functions* section of the *Developer Manual*.

Unwinding lists


There may be some situations where you want to perform the opposite of collecting results, but rather separate the lists into separate rows. This functionality is done using the `UNWIND` clause.

Here is an example where we create a list with three elements, unwind the list and then return the values. Since there are three elements, three rows are returned with the values:

```
WITH [1, 2, 3] AS list
UNWIND list AS row
RETURN list, row
```

Here is the result returned:

```
$ WITH [1, 2, 3] AS list UNWIND list AS row RETURN list, row
```

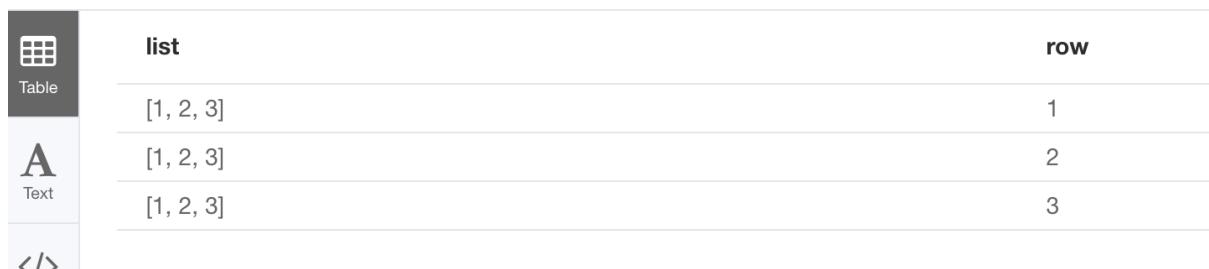

The screenshot shows the Neo4j browser interface with a sidebar on the left containing icons for Table, Text, and Code. The main area displays a table with two columns: list and row. The data in the table is as follows:

list	row
[1, 2, 3]	1
[1, 2, 3]	2
[1, 2, 3]	3

Notice that there is no `MATCH` clause. You need not query the database to execute Cypher statements, but you do need the `RETURN` clause here to return the calculated values from the Cypher query.

Note: The `UNWIND` clause is frequently used when importing data into a graph.

Dates

Cypher has a built-in `date()` function, as well as other temporal values and functions that you can use to calculate temporal values. You use a combination of numeric, temporal, spatial, list and string functions to calculate values that are useful to your application. For example, suppose you wanted to calculate the age of a *Person* node, given a year they were born (the *born* property must exist and have a value).

Here is example Cypher to retrieve all actors from the graph, and if they have a value for *born*, calculate the *age* value. Notice that the `date()` function is called and then converted to a string and then an integer to perform the age calculation.

```
MATCH (actor:Person)-[:ACTED_IN]->(:Movie)
WHERE exists(actor.born)
// calculate the age
with DISTINCT actor, date().year - actor.born as age
RETURN actor.name, age as `age today`
    ORDER BY actor.born DESC
```

Here is the result returned:

```
$ MATCH (actor:Person)-[:ACTED_IN]->(:Movie) WHERE exists(actor.born) with DISTINCT actor, date().y...
```



	Table
	Text
	Code

actor.name	age today
"Jonathan Lipnicki"	22
"Emile Hirsch"	33
"Rain"	36
"Natalie Portman"	37
"Christina Ricci"	38
"Emil Eifrem"	40
"Liv Tyler"	41
"Audrey Tautou"	42
"Charlize Theron"	43
"Jerry O'Connell"	44
"Christian Bale"	44
"Dave Chappelle"	45
"Wil Wheaton"	46
"Noah Wyle"	47
"Regina King"	47
"Corey Feldman"	47

Started streaming 101 records after 10 ms and completed after 10 ms.

Consult the *Developer Manual* for more information about the built-in functions available for working with data of all types:

- Predicate
- Scalar
- List
- Mathematical
- String
- Temporal
- Spatial

Exercise 7: Working with Cypher data

In the query edit pane of Neo4j Browser, execute the browser command: `:play intro-neo4j-exercises` and follow the instructions for Exercise 7.

Check your understanding

Question 1

Suppose you want to add a **WHERE** clause at the end of this statement to filter the results retrieved.

```
MATCH (p:Person)-[rel]->(m:Movie)<-[ :PRODUCED]-(:Person)
```

What variables, can you test in the **WHERE** clause:

Select the correct answers.

- p
- rel
- m
- PRODUCED

Question 2

Suppose you want to retrieve all movies that have a *released* property value that is 2000, 2002, 2004, 2006, or 2008. Here is an incomplete Cypher example to return the *title* property values of all movies released in these years.

```
MATCH (m:Movie)
WHERE m.released XX [2000, 2002, 2004, 2006, 2008]
RETURN m.title
```

What keyword do you specify for XX?

Select the correct answer.

- CONTAINS
- IN
- IS
- EQUALS

Question 3

Given this Cypher query:

```
MATCH (a:Person)-[:ACTED_IN]->(m:Movie)
WITH m, count(m) AS numMovies, collect(m.title) as movies
WHERE numMovies > 1 AND numMovies < 4
RETURN //??
```

What variables or aliases can be used to return values?

Select the correct answers.

- a
- m
- numMovies
- movies

Summary

You should now be able to write Cypher statements to:

- Filter queries using the **WHERE** clause
- Control query processing
- Control what results are returned
- Work with Cypher lists and dates

Creating Nodes and Relationships

Table of Contents

About this module	1
Creating nodes	2
Creating multiple nodes	3
Adding labels to a node	4
Removing labels from a node	5
Adding properties to a node	6
Removing properties from a node	9
Exercise 8: Creating Nodes	10
Creating relationships	11
Adding properties to relationships	12
Removing properties from a relationship	14
Exercise 9: Creating Relationships	15
Deleting nodes and relationships	16
Deleting relationships	16
Deleting nodes and relationships	19
Exercise 10: Deleting Nodes and Relationships	20
Merging data in the graph	21
Using MERGE to create nodes	21
Using MERGE to create relationships	23
Specifying creation behavior when merging	23
Using MERGE to create relationships	25
Exercise 11: Merging Data in the graph	26
Check your understanding	27
Question 1	27
Question 2	27
Question 3	27
Summary	28

About this module

You have learned how to query a graph using a number of Cypher clauses and keywords that start with the `MATCH` clause. You learned how to retrieve data based upon label values, property key values, and relationship types, and how to perform some useful intermediate processing during a query to control what data is returned.

At the end of this module, you should be able to write Cypher statements to:

- Create a node
 - Add and remove node labels
 - Add and remove node properties
 - Update properties
- Create a relationship
 - Add and remove properties for a relationship
- Delete a node
- Delete a relationship
- Merge data in a graph
 - Creating nodes
 - Creating relationships

Creating nodes

Recall that a node is an element of a graph representing a domain entity that has zero or more labels, properties, and relationships to or from other nodes in the graph.

When you create a node, you can add it to the graph without connecting it to another node.

Here is the simplified syntax for creating a node:

```
CREATE (optionalVariable optionalLabels {optionalProperties})
```

If you plan on referencing the newly created node, you must provide a variable. Whether you provide labels or properties at node creation time is optional. In most cases, you will want to provide some label and property values for a node when created. This will enable you to later retrieve the node. Provided you have a reference to the node (for example, using a **MATCH** clause), you can always add, update, or remove labels and properties at a later time.

Here are some examples of creating a single node in Cypher:

```
CREATE (:Movie  
{title: 'Batman Begins'})
```

Adds a node to the graph of type *Movie* with the *title Batman Begins*. This node can be retrieved using the title. A set of nodes with the label *Movie* can also be retrieved which will contain this node.

```
CREATE (:Movie:Action  
{title: 'Batman Begins'})
```

Adds a node with two labels to the graph of types *Movie* and *Action* with the *title Batman Begins*. This node can be retrieved using the title. A set of nodes with the labels *Movie* or *Action* can also be retrieved which will contain this node.

```
CREATE (m:Movie:Action  
{title: 'Batman Begins'})
```

Adds a node to the graph of types *Movie* and *Action* with the *title Batman Begins*. This node can be retrieved using the title. A set of nodes with the labels *Movie* or *Action* can also be retrieved which will contain this node. The variable *m* can be used for later processing after the **CREATE** clause.

```
CREATE` (m:Movie:Action  
{title: ' Batman Begins'})  
)  
RETURN m.title
```

Adds a node to the graph of types *Movie* and *Action* with the *title Batman Begins*. This node can be retrieved using the title. A set of nodes with the labels *Movie* or *Action* can also be retrieved which will contain this node. Here we return the title of the node.

Here is what you see in Neo4j Browser when you create a node for the movie, *Batman Begins* where we have selected the node returned to view its properties.:

The screenshot shows the Neo4j Browser interface. On the left is a sidebar with icons for Graph (selected), Table, Text, and Code. The main area displays a single node named "Batman Begins" highlighted with a green circle. Below the graph, a status bar shows "Movie <id>: 568 title: Batman Begins".

When the graph engine creates a node, it automatically assigns a read-only, unique ID to the node. Here we see that the *id* of the node is 568. This is not a property of a node, but rather an internal value.

After you have created a node, you can add more properties or labels to it and most importantly, connect it to another node.

Creating multiple nodes

You can create multiple nodes by simply separating the nodes specified with commas, or by specifying multiple CREATE statements.

Here is an example, where we create some *Person* nodes that will represent some of the people associated with the movie *Batman Begins*.

```
CREATE
(:Person {name: 'Michael Caine', born: 1933}),
(:Person {name: 'Liam Neeson', born: 1952}),
(:Person {name: 'Katie Holmes', born: 1978}),
(:Person {name: 'Benjamin Melniker', born: 1913})
```

Here is the result of running this Cypher statement:

```
$ CREATE (:Person {name: 'Michael Caine', born: 1933}), (:Person {name: 'Liam Nees...
```



Added 4 labels, created 4 nodes, set 8 properties, completed after 1 ms.



Important: The graph engine will create a node with the same properties of a node that already exists. You can prevent this from happening in one of two ways:

1. You can use **MERGE** rather than **CREATE** when creating the node.
2. You can add constraints to your graph.

You will learn about merging data later in this module. Constraints are configured globally for a graph and are covered later in this training.

Adding labels to a node

You may not know ahead of time what label or labels you want for a node when it is created. You can add labels to a node using the **SET** clause.

Here is the simplified syntax for adding labels to a node:

SET x:Label	// adding one label to node referenced by the variable x
SET x:Label1:Label2	// adding two labels to node referenced by the variable x

If you attempt to add a label to a node for which the label already exists, the **SET** processing is ignored.

Here is an example where we add the *Action* label to the node that has a label, *Movie*:

```
MATCH (m:Movie)
WHERE m.title = 'Batman Begins'
SET m:Action
RETURN labels(m)
```

Assuming that we have previously created the node for the movie, here is the result of running this Cypher statement:

```
$ MATCH (m:Movie) WHERE m.title = 'Batman Begins' SET m:Action RETURN labels(m)
```

Table	labels(m)
	["Movie", "Action"]

Added 1 label, started streaming 1 records after 8 ms and completed after 8 ms.

Notice here that we call the built-in function, `labels()` that returns the set of labels for the node.

Removing labels from a node

Perhaps your data model has changed or the underlying data for a node has changed so that the label for a node is no longer useful or valid.

Here is the simplified syntax for removing labels from a node:

```
REMOVE x:Label // remove the label from the node referenced by the variable x
```

If you attempt to remove a label from a node for which the label does not exist, the `SET` processing is ignored.

Here is an example where we remove the *Action* label from the node that has a labels, *Movie* and *Action*:

```
MATCH (m:Movie:Action)
WHERE m.title = 'Batman Begins'
REMOVE m:Action
RETURN labels(m)
```

Assuming that we have previously created the node for the movie, here is the result of running this Cypher statement:

```
$ MATCH (m:Movie:Action) WHERE m.title = 'Batman Begins' REMOVE m:Action RETURN labe...
```

labels(m)
[\"Movie\"]

Removed 1 label, started streaming 1 records after 22 ms and completed after 22 ms.

Adding properties to a node

After you have created a node and have a reference to the node, you can add properties to the node, again using the **SET** keyword.

Here are simplified syntax examples for adding properties to a node referenced by the variable **x**:

```
SET x.propertyName = value  
SET x.propertyName1 = value1 , x.propertyName2 = value2  
SET x = {propertyName1: value1, propertyName2: value2}  
SET x += {propertyName1: value1, propertyName2: value2}
```

If the property does not exist, it is added to the node. If the property exists, its value is updated. If the value specified is **null**, the property is removed.

Note that the type of data for a property is not enforced. That is, you can assign a string value to a property that was once a numeric value and visa versa.

When specify the JSON-style object for assignment (using **=**) of the property values for the node, the object must include all of the properties and their values for the node as the existing properties for the node are overwritten. However, if you specify **+=** when assigning to a property, the value at *valueX* is updated if the *propertyNameX* exists for the node. If the *propertyNameX* does not exist for the node, then the property is added to the node.

Here is an example where we add the properties *released* and *lengthInMinutes* to the movie *Batman Begins*:

```
MATCH (m:Movie)
WHERE m.title = 'Batman Begins'
SET m.released = 2005, m.lengthInMinutes = 140
RETURN m
```

Assuming that we have previously created the node for the movie, here is the result of running this Cypher statement:

```
$ MATCH (m:Movie) WHERE m.title = 'Batman Begins' SET m.released = 2005, m.lengthInMinutes = 140 .
```

m

```
{  
    "title": "Batman Begins",  
    "lengthInMinutes": 140,  
    "released": 2005  
}
```

Set 2 properties, started streaming 1 records after 6 ms and completed after 6 ms.

Here is another example where we set the property values to the movie node using the JSON-style object containing the property keys and values. Note that all properties must be included in the object.

```
MATCH (m:Movie)
WHERE m.title = 'Batman Begins'
SET m = {title: 'Batman Begins',
         released: 2005,
         lengthInMinutes: 140,
         videoFormat: 'DVD',
         grossMillions: 206.5}
RETURN m
```

Here is the result of running this Cypher statement:

```
$ MATCH (m:Movie) WHERE m.title = 'Batman Begins' SET m = {title: 'Batman Begins', released: 200...
```

The screenshot shows the Neo4j browser interface. On the left is a sidebar with four tabs: Graph (selected), Table, Text, and Code. The main area displays the results of a Cypher query. The results are shown in a table with one row and one column. The column header is 'm'. The value is a JSON object representing the movie 'Batman Begins':

```
{  
    "lengthInMinutes": 140,  
    "grossMillions": 206.5,  
    "title": "Batman Begins",  
    "videoFormat": "DVD",  
    "released": 2005  
}
```

Below the table, a message states: "Set 5 properties, started streaming 1 records after 1 ms and completed after 1 ms."

Note that when you add a property to a node for the first time in the graph, the property key is added to the graph. So for example, in the previous example, we added the `videoFormat` and `grossMillions` property keys to the graph as they have never been used before for a node in the graph. Once a property key is added to the graph, it is never removed. When you examine the property keys in the database (by executing `CALL db.propertyKeys()`), you will see all property keys created for the graph, regardless of whether they are currently used for nodes and relationships.

```
$ call db.propertyKeys()
```

The screenshot shows the Neo4j browser interface. On the left is a sidebar with four tabs: Table (selected), Graph, Text, and Code. The main area displays the results of a Cypher query. The results are shown in a table with one row and one column. The column header is 'propertyKey'. The values are listed vertically:

- "title"
- "released"
- "tagline"
- "name"
- "born"
- "roles"
- "summary"
- "rating"
- "id"
- "share_link"
- "favorite_count"
- "display_name"
- "lengthInMinutes"
- "videoFormat"
- "grossMillions"

Here is an example where we use the JSON-style object to add the *awards* property to the node and update the *grossMillions* property:

```
MATCH (m:Movie)
WHERE m.title = 'Batman Begins'
SET m += { grossMillions: 300,
           awards: 66}
RETURN m
```

The screenshot shows the Neo4j browser interface. On the left, there is a sidebar with icons for Graph (selected), Table, Text, and Code. The main area displays a node for 'Batman Begins' with a green background and yellow border. The node has three outgoing relationships represented by lines: one with a lock icon, one with a person icon, and one with a movie camera icon. Below the node, its properties are listed: **Movie** <id>: 2088 awards: 66 grossMillions: 300 lengthInMinutes: 140 released: 2005 title: Batman Begins videoFormat: DVD.

Removing properties from a node

There are two ways that you can remove a property from a node. One way is to use the REMOVE keyword. The other way is to set the property's value to `null`.

Here are simplified syntax examples for removing properties from a node referenced by the variable `x`:

```
REMOVE x.propertyName
SET x.propertyName = null
```

Suppose we determined that no other *Movie* node in the graph has the properties, *videoFormat* and *grossMillions*. There is no restriction that nodes of the same type must have the same properties. However, we have decided that we want to remove these properties from this node. Here is example Cypher to remove this property from this *Batman Begins* node:

```
MATCH (m:Movie)
WHERE m.title = 'Batman Begins'
SET m.grossMillions = null
REMOVE m.videoFormat
RETURN m
```

Assuming that we have previously created the node for the movie with the these properties, here is the result of running this Cypher statement where we remove each property a different way. One way we remove the property using the **SET** clause to set the property to null. And in another way, we use the **REMOVE** clause.

```
$ MATCH (m:Movie) WHERE m.title = 'Batman Begins' SET m.grossMillions = null REMOVE m.videoFormat ...
```

The screenshot shows the Neo4j Browser interface. On the left, there is a sidebar with four tabs: Graph (selected), Table, Text, and Code. The main area displays a JSON object representing a node named 'm':

```
{  
  "title": "Batman Begins",  
  "lengthInMinutes": 140,  
  "released": 2005  
}
```

Below the JSON object, a message states: "Set 2 properties, started streaming 1 records after 2 ms and completed after 2 ms."

Exercise 8: Creating Nodes

In the query edit pane of Neo4j Browser, execute the browser command: `:play intro-neo4j-exercises` and follow the instructions for Exercise 8.

Creating relationships

As you have learned in the previous exercises where you query the graph, you often query using connections between nodes. The connections capture the semantic relationships and context of the nodes in the graph.

Here is the simplified syntax for creating a relationship between two nodes referenced by the variables x and y:

```
CREATE (x)-[:REL_TYPE]->(y)  
CREATE (x)<-[:REL_TYPE]-(y)
```

When you create the relationship, it must have direction. You can query nodes for a relationship in either direction, but you must create the relationship with a direction. An exception to this is when you create a node using **MERGE** that you will learn about later in this module.


In most cases, unless you are connecting nodes at creation time, you will retrieve the two nodes, each with their own variables, for example, by specifying a **WHERE** clause to find them, and then use the variables to connect them.

Here is an example. We want to connect the actor, *Michael Caine* with the movie, *Batman Begins*. We first retrieve the nodes of interest, then we create the relationship.

```
MATCH (a:Person), (m:Movie)  
WHERE a.name = 'Michael Caine' AND m.title = 'Batman Begins'  
CREATE (a)-[:ACTED_IN]->(m)  
RETURN a, m
```

Here is the result of running this Cypher statement:

```
$ MATCH (a:Person), (m:Movie) WHERE a.name = 'Michael Caine' AND m.title = 'B...
```

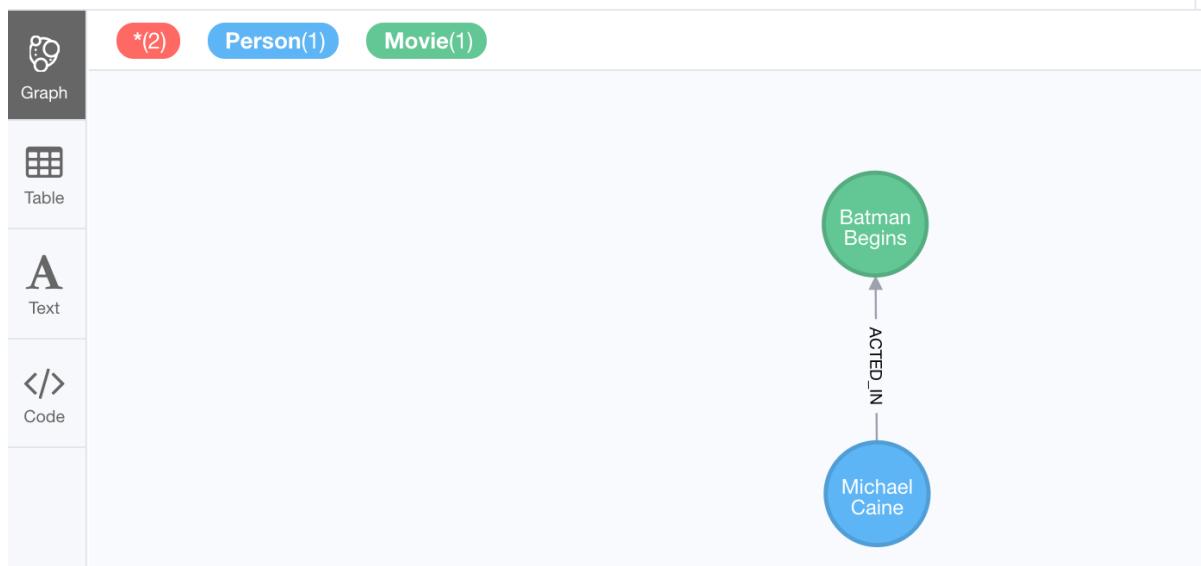

Note: Before you run these Cypher statements, you may see a warning in Neo4j Browser that you are creating a query that is a cartesian product that could potentially be a performance issue. You will see this warning if you have no unique constraint on the lookup keys. You will learn about uniqueness constraints later in the next module. If you are familiar with the data in the graph and can be sure that the **MATCH** clauses will not retrieve large amounts of data, you can continue. In our case, we are simply looking up a particular *Person* node and a particular *Movie* node so we can create the relationship.


You can create multiple relationships at once by simply providing the pattern for the creation that includes the relationship types, their directions, and the nodes that you want to connect.

Here is an example where we have already created *Person* nodes for an actor, *Liam Neeson*, and a producer, *Benjamin Melniker*. We create two relationships in this example, one for *ACTED_IN* and one for *PRODUCED*.

```
MATCH (a:Person), (m:Movie), (p:Person)
WHERE a.name = 'Liam Neeson' AND
      m.title = 'Batman Begins' AND
      p.name = 'Benjamin Melniker'
CREATE (a)-[:ACTED_IN]->(m)<-[:PRODUCED]-(p)
RETURN a, m, p
```

Here is the result of running this Cypher statement:

```
$ MATCH (a:Person), (m:Movie), (p:Person) WHERE a.name = 'Liam Neeson' AND m...
```

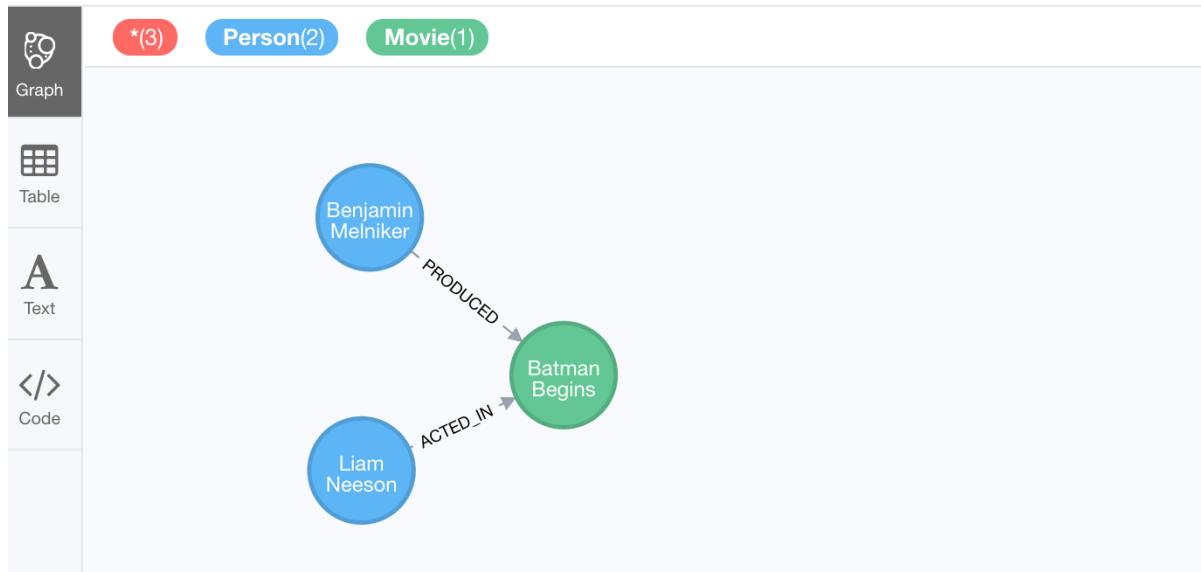

Important: When you create relationships based upon a **MATCH** clause, you must be certain that only a single node is returned for the **MATCH**, otherwise multiple relationships will be created.

Adding properties to relationships

You can add properties to a relationship, just as you add properties to a node. You use the **SET** clause to do so.

Here is the simplified syntax for adding properties to a relationship referenced by the variable r:

```
SET r.propertyName = value  
SET r.propertyName1 = value1 , r.propertyName2 = value2  
SET r = {propertyName1: value1, propertyName2: value2}  
SET r += {propertyName1: value1, propertyName2: value2}
```


If the property does not exist, it is added to the relationship. If the property exists, its value is updated for the relationship. When specifying the JSON-style object for assignment to the relationship using `=`, the object must include all of the properties for the relationship, just as you need to do for nodes. If you use `+=`, you can add or update properties, just as you do for nodes.

Here is an example where we will add the `roles` property to the `ACTED_IN` relationship from *Christian Bale* to *Batman Begins* right after we have created the relationship.

```
MATCH (a:Person), (m:Movie)  
WHERE a.name = 'Christian Bale' AND m.title = 'Batman Begins'  
CREATE (a)-[rel:ACTED_IN]->(m)  
SET rel.roles = ['Bruce Wayne', 'Batman']  
RETURN a, m
```

Here is the result of running this Cypher statement:

```
$ MATCH (a:Person), (m:Movie) WHERE a.name = 'Christian Bale' AND m.title
```

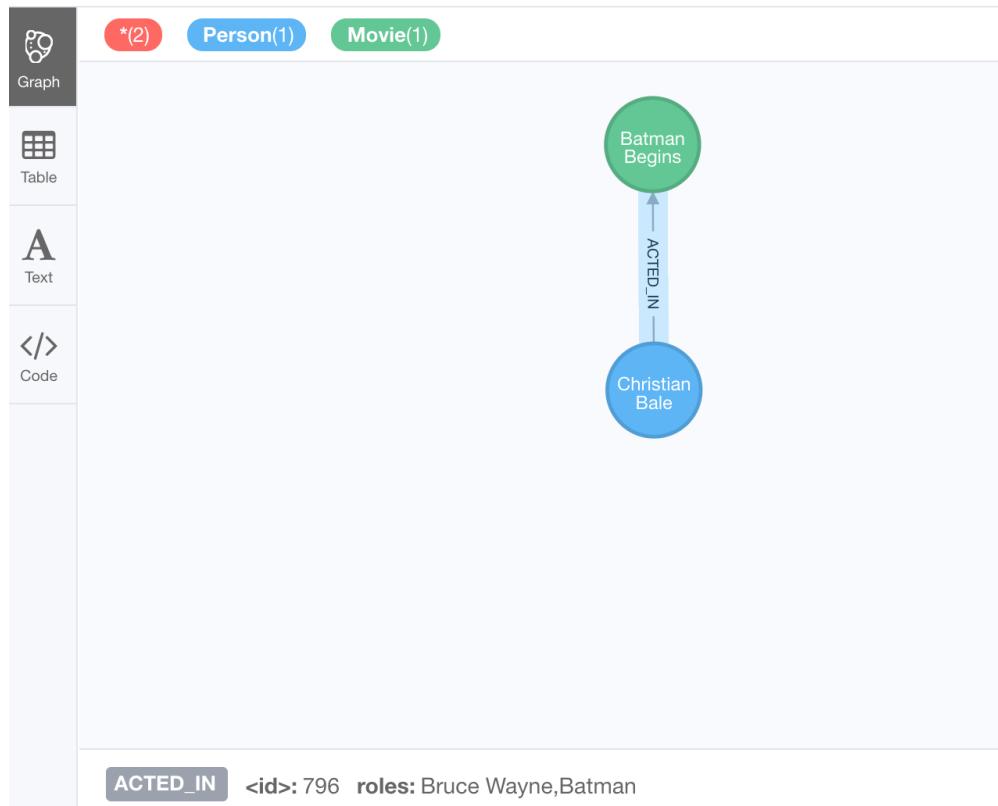

The `roles` property is a list so we add it as such. If the relationship had multiple properties, we could have added them as a comma separated list or as an object, like can do for node properties.

You can also add properties to a relationship when the relationship is created. Here is another way to create and add the properties for the relationship:

```
MATCH (a:Person), (m:Movie)
WHERE a.name = 'Christian Bale' AND m.title = 'Batman Begins'
CREATE (a)-[:ACTED_IN {roles: ['Bruce Wayne', 'Batman']}]->(m)
RETURN a, m
```

By default, the graph engine will create a relationship between two nodes, even if one already exists. You can test to see if the relationship exists before you create it as follows:

```
MATCH (a:Person),(m:Movie)
WHERE a.name = 'Christian Bale' AND
      m.title = 'Batman Begins' AND
      NOT exists((a)-[:ACTED_IN]->(m))
CREATE (a)-[rel:ACTED_IN]->(m)
SET rel.roles = ['Bruce Wayne', 'Batman']
RETURN a, rel, m
```

Note: You can prevent duplication of relationships by merging data using the **MERGE** clause, rather than the **CREATE** clause. You will learn about merging data later in this module.


Removing properties from a relationship

There are two ways that you can remove a property from a node. One way is to use the REMOVE keyword. The other way is to set the property's value to **null**, just as you do for properties of nodes.

Suppose we have added the *ACTED_IN* relationship between *Christian Bale* and the movie, *Batman Returns* where the *roles* property is added to the relationship. Here is an example to remove the *roles* property, yet keep the *ACTED_IN* relationship:

```
MATCH (a:Person)-[rel:ACTED_IN]->(m:Movie)
WHERE a.name = 'Christian Bale' AND m.title = 'Batman Begins'
REMOVE rel.roles
RETURN a, rel, m
```

Here is the result returned. An alternative to `REMOVE rel.roles` would be `SET rel.roles = null`

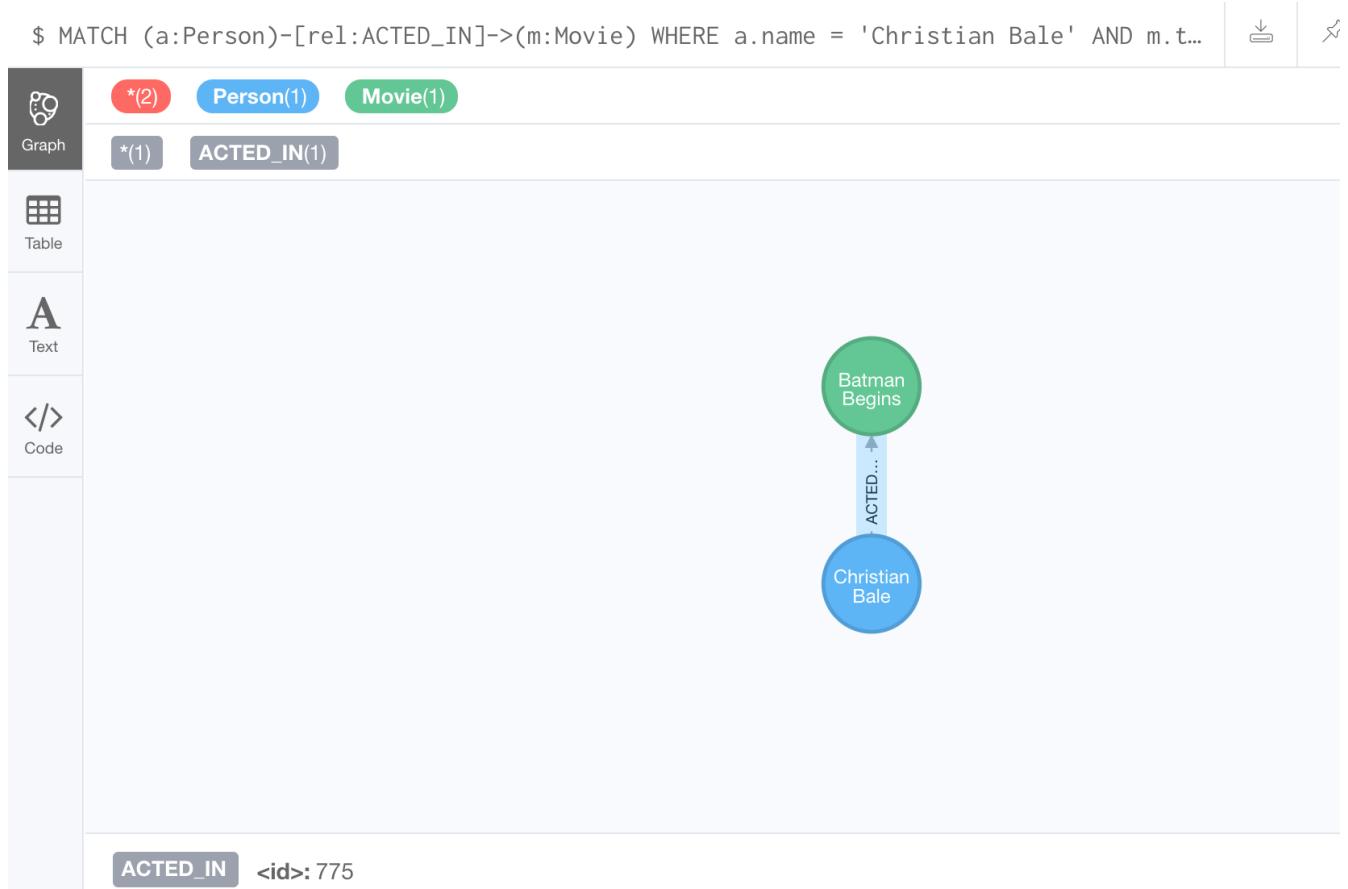

Exercise 9: Creating Relationships

In the query edit pane of Neo4j Browser, execute the browser command: `:play intro-neo4j-exercises` and follow the instructions for Exercise 9.

Deleting nodes and relationships


If a node has no relationships to any other nodes, you can simply delete it from the graph using the `DELETE` clause. Relationships are also deleted using the `DELETE` clause.

Note: If you attempt to delete a node in the graph that has relationships in or out of the node, the graph engine will return an error because deleting such a node will leave *orphaned* relationships in the graph.

Deleting relationships

Here are the existing nodes and relationships for the *Batman Begins* movie:

```
$ MATCH (a:Person)-[rel]->(m:Movie) WHERE m.title = 'Batman Begins' RETURN a, rel, m
```

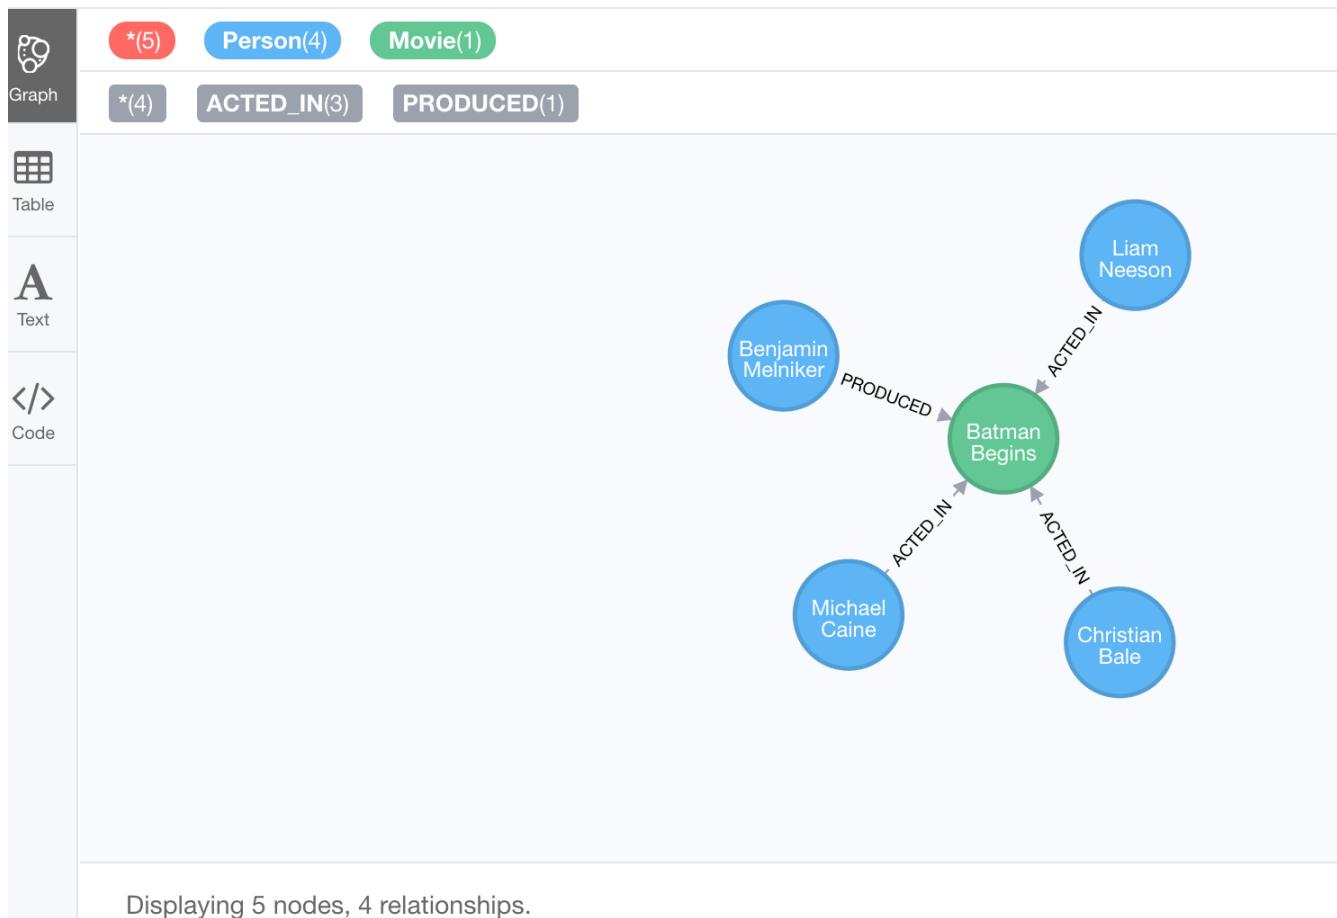


You can delete a relationship between nodes by first finding it in the graph and then deleting it.

In this example, we want to delete the `ACTED_IN` relationship between *Christian Bale* and the movie *Batman Begins*. We find the relationship, and then delete it.

```
MATCH (a:Person)-[rel:ACTED_IN]->(m:Movie)
WHERE a.name = 'Christian Bale' AND m.title = 'Batman Begins'
DELETE rel
RETURN a, m
```

Here is the result of running this Cypher statement:


```
$ MATCH (a:Person)-[rel:ACTED_IN]->(m:Movie) WHERE a.name = 'Christian Bale' AND m.t...
```

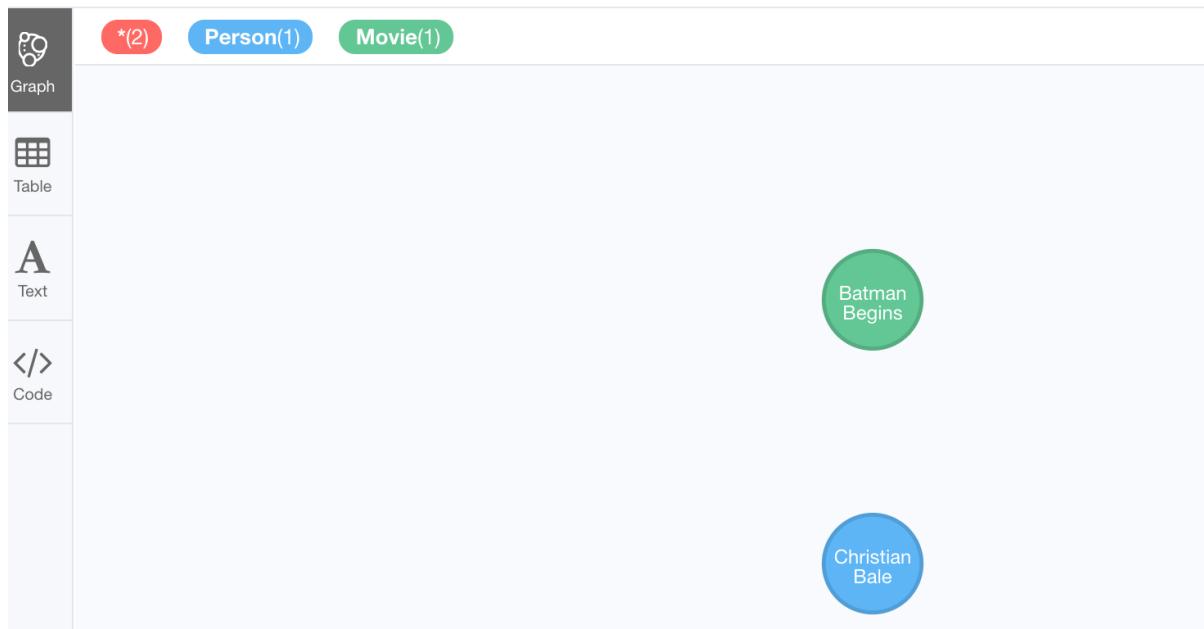

Notice that there no longer exists the relationship between *Christian Bale* and the movie *Batman Begins*.


We can now query the nodes related to *Batman Begins* to see that this movie now only has two actors and one producer connected to it:

```
$ MATCH (a:Person)-[rel]->(m:Movie) WHERE m.title = 'Batman Begins' RETURN a, rel, m
```

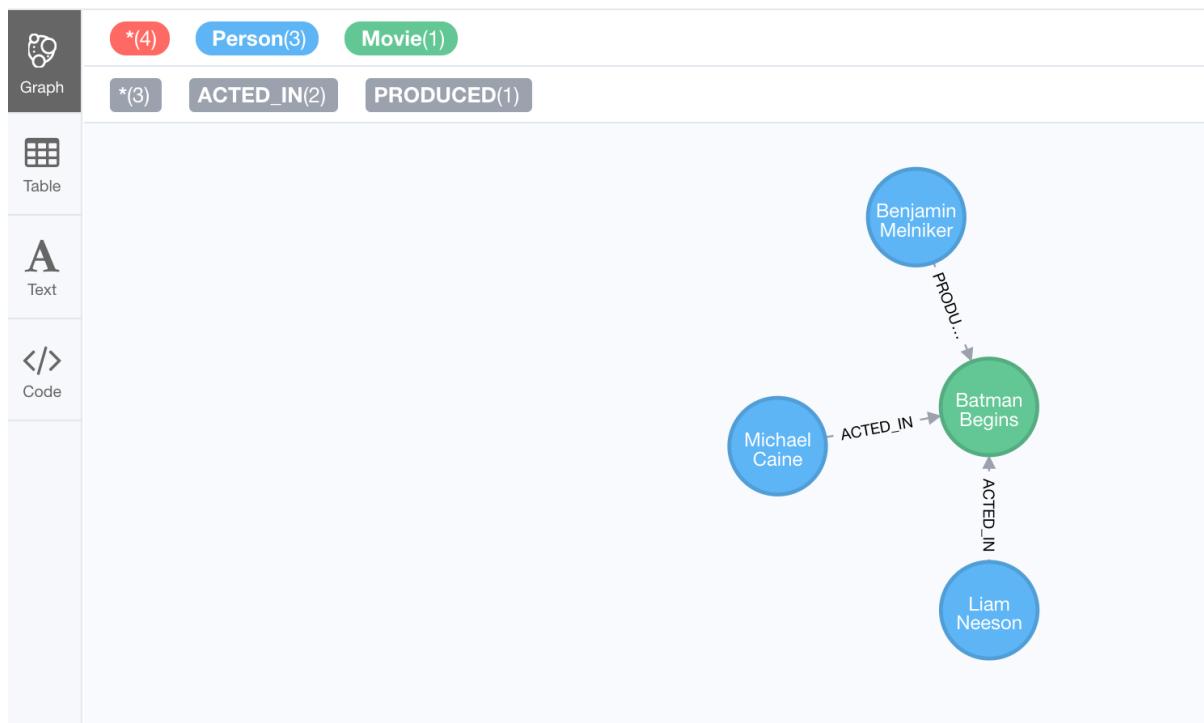

Even though, we have deleted the relationship between actor, *Christian Bale* and the movie *Batman Begins*, we note that this actor is connected to another movie in the graph, so we should not delete this *Christian Bale* node.

```
$ MATCH (a:Person)-[rel:ACTED_IN]->(m:Movie) WHERE a.name = 'Christian Bale' RETURN a, rel, m
```

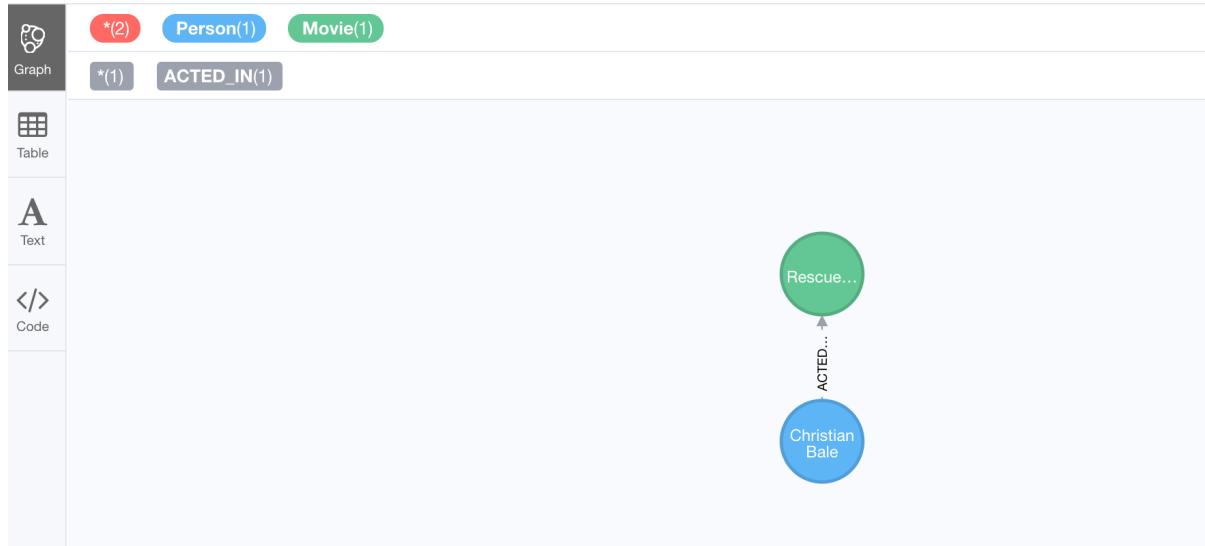


In this example, we find the node for the producer, *Benjamin Melniker*, as well as his relationship to movie nodes. First, we delete the relationship(s), then we delete the node:

```
MATCH (p:Person)-[rel:PRODUCED]->(:Movie)
WHERE p.name = 'Benjamin Melniker'
DELETE rel, p
```

Here is the result of running this Cypher statement:

```
$ MATCH (p:Person)-[rel:PRODUCED]->(:Movie) WHERE p.name = 'Benjamin Melniker' DELETE rel, p
```

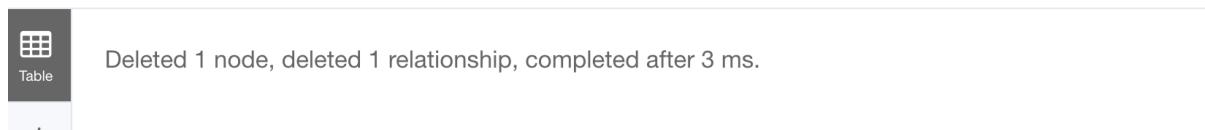

And here we see that we now have only two connections to the *Batman Begins* movie:

```
$ MATCH (a:Person)-[rel]->(m:Movie) WHERE m.title = 'Batman Begins' RETURN a, rel, m
```



Displaying 3 nodes, 2 relationships.

Deleting nodes and relationships

The most efficient way to delete a node and its corresponding relationships is to specify **DETACH DELETE**. When you specify **DETACH DELETE** for a node, the relationships to and from the node are deleted, then the node is deleted.

If we were to attempt to delete the *Liam Neeson* node without first deleting its relationships:

```
MATCH (p:Person)
WHERE p.name = 'Liam Neeson'
DELETE p
```

We would see this error:

\$ MATCH (p:Person) WHERE p.name = 'Liam Neeson' DELETE p

Error

Neo.ClientError.Schema.ConstraintValidationFailed

Neo.ClientError.Schema.ConstraintValidationFailed: Cannot delete node<1899>, because it still has relationships. To delete this node, you must first delete its relationships.

⚠ Neo.ClientError.Schema.ConstraintValidationFailed: Cannot delete node<1899>, because it still has relationships. To delete this node, you must first...

Here we delete the *Liam Neeson* node and its relationships to any other nodes:

```
MATCH (p:Person)
WHERE p.name = 'Liam Neeson'
DETACH DELETE p
```


Here is the result of running this Cypher statement:

```
$ MATCH (p:Person) WHERE p.name = 'Liam Neeson' DETACH DELETE p
```

Deleted 1 node, deleted 1 relationship, completed after 10 ms.

And here is what the *Batman Begins* node and its relationships now look like. There is only one actor, *Michael Caine* connected to the movie.

```
$ MATCH (a:Person)--(m:Movie) WHERE m.title = 'Batman Begins' RETURN a, m
```

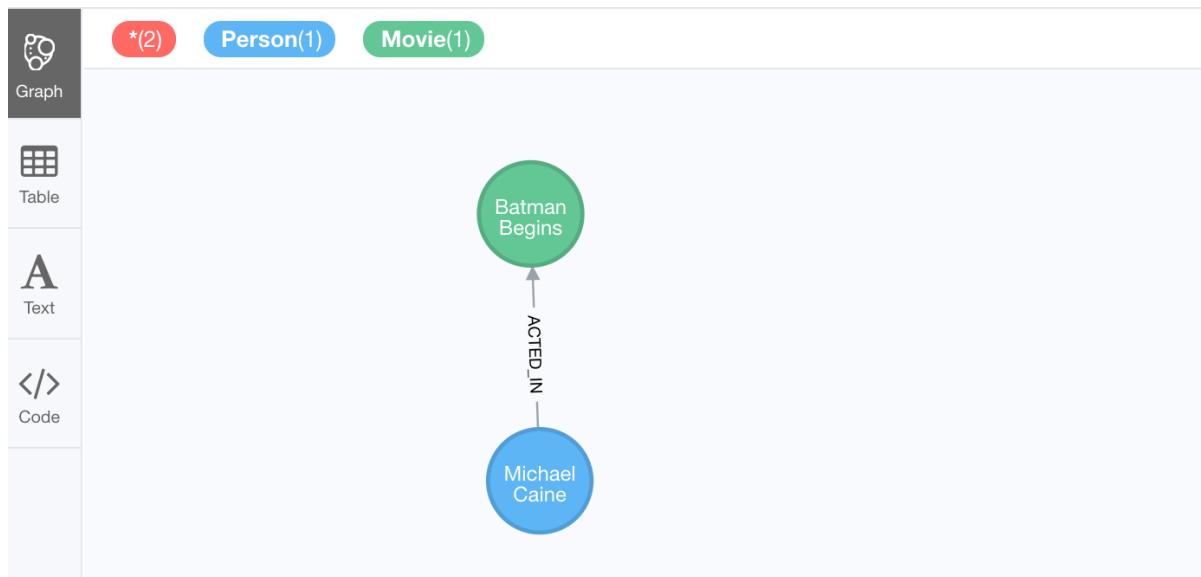

Exercise 10: Deleting Nodes and Relationships

In the query edit pane of Neo4j Browser, execute the browser command: `:play intro-neo4j-exercises` and follow the instructions for Exercise 10.

Merging data in the graph

Thus far, you have learned how to create nodes, labels, properties, and relationships in the graph. You can use **MERGE** to either create new nodes and relationships or to make structural changes to existing nodes and relationships.

For example, how the graph engine behaves when a duplicate element is created depends on the type of element:

If you use CREATE :	The result is:
Node	If a node with the same property values exists, a duplicate node is created.
Label	If the label already exists for the node, the node is not updated.
Property	If the node or relationship property already exists, it is updated with the new value. Note: If you specify a set of properties to be created using <code>=</code> rather than <code>+=</code> , it could remove existing properties if they are not included in the set.
Relationship	If the relationship exists, a duplicate relationship is created.

Important: You should never create duplicate nodes or relationships in a graph.

The **MERGE** clause is used to find elements in the graph. But if the element is not found, it is created.

You use the **MERGE** clause to:

- Create a unique node based on label and key information for a property and if it exists, optionally update it.
- Create a unique relationship.
- Create a node and relationship to it uniquely in the context of another node.

Using **MERGE** to create nodes

Here is the simplified syntax for the **MERGE** clause for creating a node:

```
MERGE (variable:Label{nodeProperties})  
RETURN variable
```

If there is an existing node with *Label* and *nodeProperties* found in the graph, no node is created. If, however the node is not found in the graph, then the node is created.

When you specify *nodeProperties* for **MERGE**, you should only use properties that satisfy some sort of uniqueness constraint. You will learn about uniqueness constraints in the next module.

Here is what we currently have in the graph for the *Person*, *Michael Caine*. This node has values for *name* and *born*. Notice also that the label for the node is *Person*.

```
$ MATCH (a:Person {name: 'Michael Caine', born: 1933}) RETURN a
```

The screenshot shows the Neo4j browser interface. On the left is a sidebar with three buttons: 'Graph' (selected), 'Table' (disabled), and 'Text'. The main area displays a node labeled 'a'. Below the node, its properties are shown in JSON format:

```
{  
  "name": "Michael Caine",  
  "born": 1933  
}
```

Here we use **MERGE** to find a node with the *Actor* label with the key property *name* of *Michael Caine*, and we set the *born* property to *1933*. Our data model has never used the label, *Actor* so this is a new entity type in our graph.

```
MERGE (a:Actor {name: 'Michael Caine'})  
SET a.born = 1933  
RETURN a
```

Here is the result of running this Cypher example. We do not find a node with the label *Actor* so the graph engine creates one.

```
$ MERGE (a:Actor {name: 'Michael Caine'}) SET a.born=1933 RETURN a
```

The screenshot shows the Neo4j browser interface. On the left is a sidebar with three buttons: 'Graph' (selected), 'Table' (disabled), and 'Text'. The main area displays a node labeled 'a'. Below the node, its properties are shown in JSON format:


```
{  
  "name": "Michael Caine",  
  "born": 1933  
}
```

Important: When you specify the node to merge, you should only use properties that have a unique index. You will learn about uniqueness later in this training.

If we were to repeat this **MERGE** clause, no additional *Actor* nodes would be created in the graph.

At this point, however, we have two *Michael Caine* nodes in the graph, one of type *Person*, and one of type *Actor*:

```
$ MATCH (a {name: 'Michael Caine'}), (m:Movie) WHERE m.title = 'Batman Begins' RETURN a, m
```

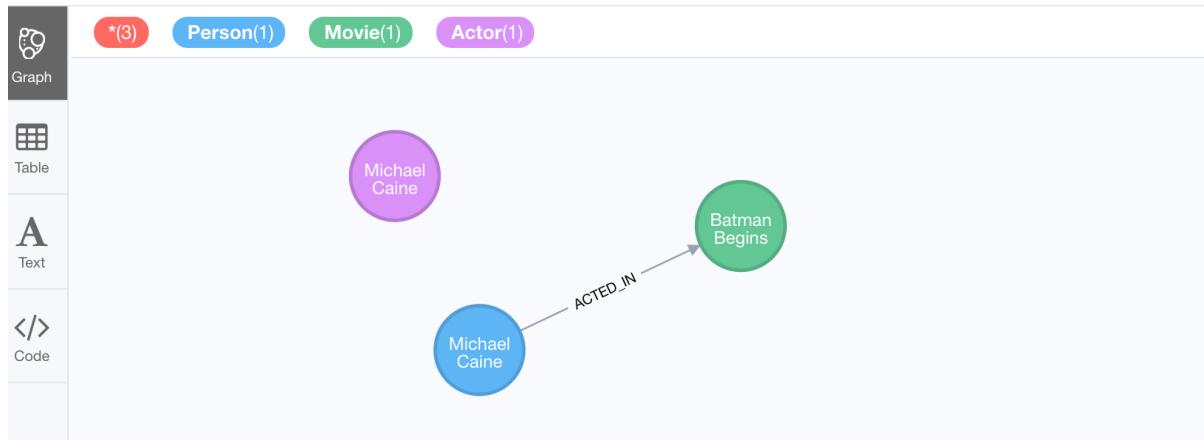

Important: Be mindful that node labels and the properties for a node are significant when merging nodes.

Using `MERGE` to create relationships

Here is the simplified syntax for the `MERGE` clause for creating relationships:

```
MERGE (variable:Label{nodeProperties})-[:REL_TYPE]->(otherNode)  
RETURN variable
```

If there is an existing node with *Label* and *nodeProperties* with the *REL_TYPE* to *otherNode* found in the graph, no relationship is created. If the relationship does not exist, it is created.

Although, you can leave out the direction of the relationship being created with the `MERGE`, in which case a left-to-right arrow will be assumed, a best practice is to always specify the direction of the relationship.

Specifying creation behavior when merging

You can use the `MERGE` clause, along with `ON CREATE` to assign specific values to a node being created as a result of an attempt to merge.


Here is an example where create a new node, specifying property values for the new node.

```
MERGE (a:Person {name: 'Sir Michael Caine'})  
ON CREATE SET a.birthPlace = 'London',  
           a.born = 1934  
RETURN a
```

We know that there are no existing *Sir Michael Caine Person* nodes. When the `MERGE` executes, it will

not find any matching nodes so it will create one and will execute the `ON CREATE` clause where we set the `birthplace` and `born` property values.

Here is the resulting nodes that have anything to do with *Michael Caine*. The most recently created node has the `name` value of *Sir Michael Caine*.

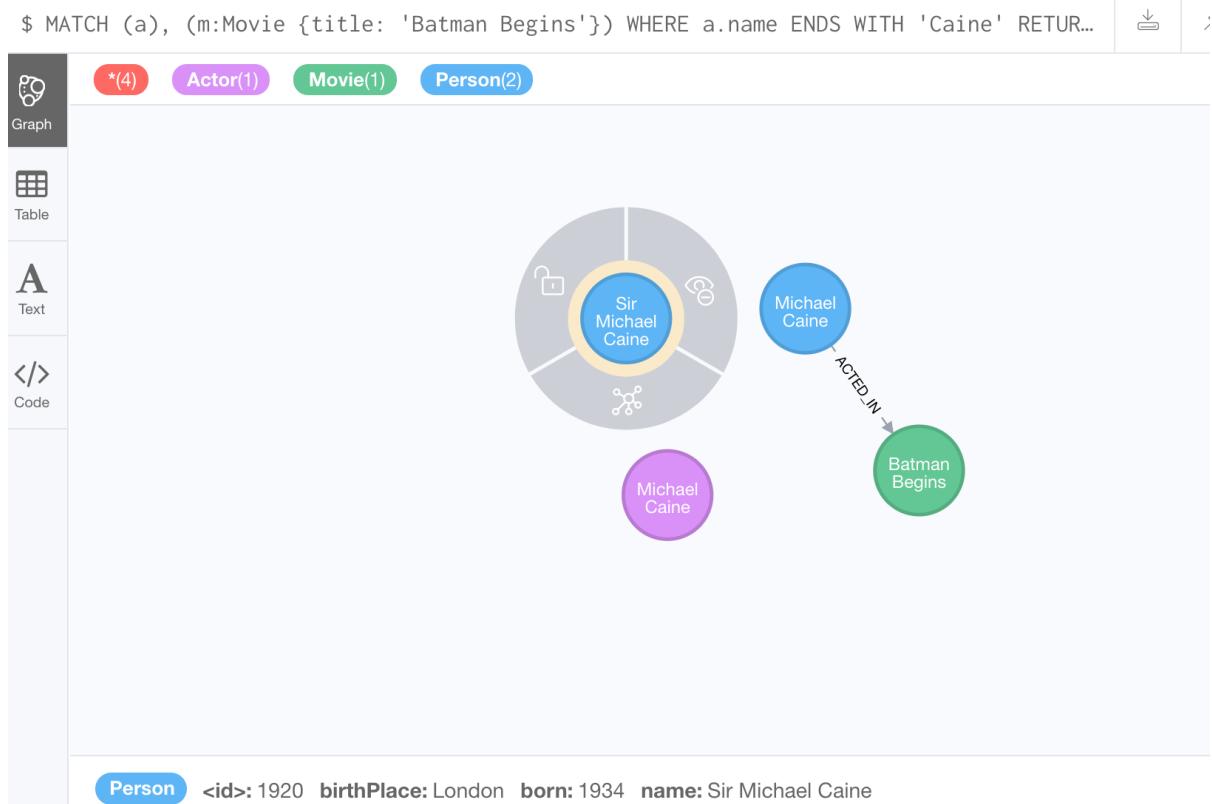

You can also specify an `ON MATCH` clause during merge processing. If the exact node is found, you can update its properties or labels. Here is an example:

```
MERGE (a:Person {name: 'Sir Michael Caine'})
ON CREATE SET a.born = 1934,
    a.birthPlace = 'UK'
ON MATCH SET a.birthPlace = 'UK'
RETURN a
```

And here we see that the found node (with the `<id>` of 1920) was updated with the new value for `birthPlace`.

```
$ MERGE (a:Person {name: 'Sir Michael Caine'}) ON CREATE SET a.born = 1934, a.birth...
```

The screenshot shows the Neo4j browser interface. On the left is a sidebar with icons for Graph (selected), Table, Text, and Code. The main area displays a circular node for 'Sir Michael Caine' with a blue center and a yellow border. Inside the node, the name 'Sir Michael Caine' is written. Four small circular icons are positioned around the node: a lock icon at the top-left, an eye icon at the top-right, a network icon at the bottom-left, and a gear icon at the bottom-right. Below the node, the text 'Person <id>: 1920 birthPlace: UK born: 1934 name: Sir Michael Caine' is displayed. At the top right, there are two buttons: a red one labeled '*'(1)' and a blue one labeled 'Person(1)'.


Using `MERGE` to create relationships

Using `MERGE` to create relationships is expensive and you should only do it when you need to ensure that a relationship is unique and you are not sure it already exists.

In this example, we use the `MATCH` clause to find all `Person` nodes that represent *Michael Caine* and we find the movie, *Batman Begins* that we want to connect to all of these nodes. We already have a connection between one of the `Person` nodes and the `Movie` node. We do not want this relationship to be duplicated. This is where we can use `MERGE` as follows:

```
MATCH (p:Person), (m:Movie)
WHERE m.title = 'Batman Begins' AND p.name ENDS WITH 'Caine'
MERGE (p)-[:ACTED_IN]->(m)
RETURN p, m
```

Here is the result of executing this Cypher statement. It went through all the nodes and added the relationship to the nodes that didn't already have the relationship.

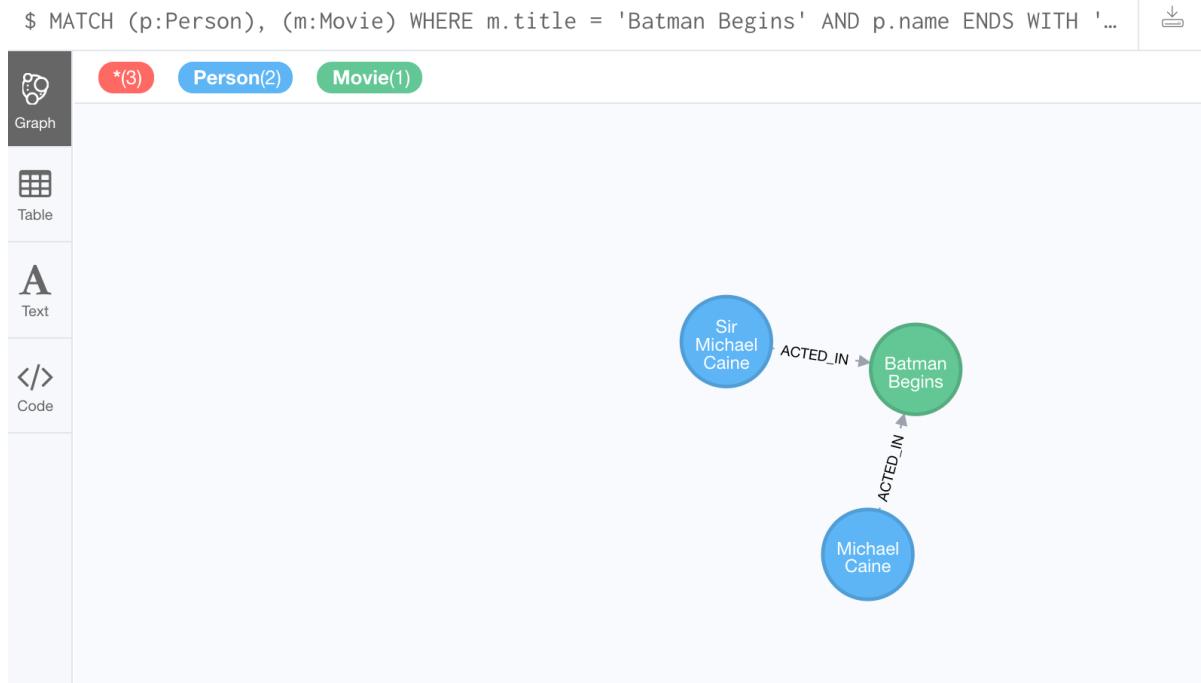

You must be aware of the behavior of the **MERGE** clause and how it will automatically create nodes and relationships. **MERGE** tries to find a full pattern and if it doesn't find it, it creates that full pattern. That's why in most cases you should first **MERGE** your nodes and then your relationship afterwards.

Only if you intentionally want to create a node within the context of another (like a month within a year) then a MERGE pattern with one bound and one unbound node makes sense.

For example:

```
MERGE (fromDate:Date {year: 2018})-[:IN_YEAR]-(toDate:Date {month: 'January'})
```

Exercise 11: Merging Data in the graph

In the query edit pane of Neo4j Browser, execute the browser command: `:play intro-neo4j-exercises` and follow the instructions for Exercise 11.

Check your understanding

Question 1

What Cypher clauses can you use to create a node?

Select the correct answers.

- CREATE
- CREATE NODE
- MERGE
- ADD

Question 2

Suppose that you have retrieved a node, *s* with a property, *color*:

```
MATCH (s:Shape {location: [20,30]})  
???  
RETURN s
```

What Cypher clause do you add here to delete the *color* property from this node?

Select the correct answers.

- DELETE s.color
- SET s.color=null
- REMOVE s.color
- SET s.color=?

Question 3

Suppose you retrieve a node, *n* in the graph that is related to other nodes. What Cypher clause do you write to delete this node and its relationships in the graph?

Select the correct answer.

- DELETE n
- DELETE n WITH RELATIONSHIPS
- REMOVE n
- DETACH DELETE n

Summary

You should now be able to write Cypher statements to:

- Create a node
 - Add and remove node labels
 - Add and remove node properties
 - Update properties
- Create a relationship
 - Add and remove properties for a relationship
- Delete a node
- Delete a relationship
- Merge data in a graph
 - Creating nodes
 - Creating relationships

Getting More Out of Neo4j

Table of Contents

About this module	1
Cypher parameters.....	2
Using Cypher parameters.....	2
Exercise 12: Using Cypher parameters.....	4
Analyzing Cypher execution	5
Monitoring queries.....	8
Exercise 13: Analyzing and monitoring queries	9
Managing constraints and node keys	10
Ensuring that a property value for a node is unique	10
Ensuring that properties exist	11
Retrieving constraints defined for the graph.....	13
Dropping constraints	14
Creating node keys	14
Exercise 14: Managing constraints and node keys.....	16
Managing indexes	17
Indexes for range searches	17
Creating indexes.....	18
Retrieving indexes.....	20
Dropping indexes.....	20
Exercise 15: Managing indexes.....	20
Importing data	21
Importing normalized data using LOAD CSV.....	21
Importing denormalized data.....	26
Importing a large dataset.....	27
Exercise 16: Importing data	27
Accessing Neo4j resources	28
Check your understanding.....	29
Question 1	29
Question 2	29
Question 3	29
Summary	30

About this module

You have learned how to set up your development environment for accessing a Neo4j graph and how to write basic Cypher statements for querying the graph modifying the graph.

At the end of this module, you should be able to:

- Use parameters in your Cypher statements.
- Analyze Cypher execution.
- Monitor queries.
- Manage constraints and node keys for the graph.
- Import data into a graph from CSV files.
- Manage indexes for the graph.
- Access Neo4j resources.

Cypher parameters

In a deployed application, you should not **hard code** values in your Cypher statements. You use a variety values when you are testing your Cypher statements. But you don't want to change the Cypher statement every time you test. In addition, you typically include Cypher statements in an application where parameters are passed in to the Cypher statement before it executes. For these scenarios, you should parameterize values in your Cypher statements.

Using Cypher parameters

In your Cypher statements, a parameter name begins with the `$` symbol.

Here is an example where we have parameterized the query:

```
MATCH (p:Person)-[:ACTED_IN]->(m:Movie)
WHERE p.name = $actorName
RETURN m.released, m.title ORDER BY m.released DESC
```

At runtime, if the parameter `$actorName` has a value, it will be used in the Cypher statement when it runs in the graph engine.

In Neo4j Browser, you can set values for Cypher parameters that will be in effect during your session.

You can set the value of a single parameter in the query editor pane as shown in this example where the value *Tom Hanks* is set for the parameter `actorName`:

```
:param actorName => 'Tom Hanks'
```

Note: You can even specify a Cypher expression to the right of `=>` to set the value of the parameter.

Here is the result of executing the `:param` command:

```
$ :param actorName => 'Tom Hanks'
{
  "actorName": "Tom Hanks"
}

See :help param for usage of the :param command.
```

Successfully set your parameters.

Notice here that `:param` is a client-side browser command. It takes a name and expression and

stores the value of that expression for the name in the session.

After the *actorName* parameter is set, you can run the query that uses the parameter:

```
$ MATCH (p:Person)-[:ACTED_IN]->(m:Movie) WHERE p.name = $actorName RETURN m.released, m.title 0...
```

Table

A
Text

</>
Code

m.released	m.title
2012	"Cloud Atlas"
2007	"Charlie Wilson's War"
2006	"The Da Vinci Code"
2004	"The Polar Express"
2000	"Cast Away"
1999	"The Green Mile"
1998	"You've Got Mail"
1996	"That Thing You Do"
1995	"Apollo 13"
1994	"Forrest Gump"
1993	"Sleepless in Seattle"
1992	"A League of Their Own"
1990	"Joe Versus the Volcano"

Subsequently, you need only change the value of the parameter and not the Cypher statement to test with different values.

After we have changed the *actorName* parameter to 'Tom Cruise', we get a different result with the same Cypher query:

```
$ MATCH (p:Person)-[:ACTED_IN]->(m:Movie) WHERE p.name = $actorName RETURN m.released, m.title 0...
```

Table

A
Text

</>

m.released	m.title
2000	"Jerry Maguire"
1992	"A Few Good Men"
1986	"Top Gun"

You can also use the JSON-style syntax to set all of the parameters in your Neo4j Browser session. The values you can specify in this object are numbers, strings, and booleans. In this example we set two parameters for our session:

```
:params {actorName: 'Tom Cruise', movieName: 'Top Gun'}
```

With the result:

```
$ :param {actorName: 'Tom Cruise', movieName: 'Top Gun'}
```

```
{  
  "actorName": "Tom Cruise",  
  "movieName": "Top Gun"  
}
```

See `:help param` for usage of the `:param` command.

Successfully set your parameters.

If you want to remove an existing parameter from your session, you do by by using the JSON-style syntax and excluding the parameter for your session.

If you want to view the current parameters and their values, simply type `:params`:

```
$ :params
```

```
{  
  "actorName": "Tom Cruise",  
  "movieName": "Top Gun"  
}
```

See `:help param` for usage of the `:param` command.

Exercise 12: Using Cypher parameters

In the query edit pane of Neo4j Browser, execute the browser command: `:play intro-neo4j-exercises` and follow the instructions for Exercise 12.

Analyzing Cypher execution

The *Movie* graph that you have been using during training is a very small graph. As you start working with large datasets, it will be important to not only add appropriate indexes to your graph, but also write Cypher statements that execute as efficiently as possible.

There are two Cypher keywords you can prefix a Cypher statement with to analyze a query:

- **EXPLAIN** provides estimates of the graph engine processing that will occur, but does not execute the Cypher statement.
- **PROFILE** provides real profiling information for what has occurred in the graph engine during the query and executes the Cypher statement.


The **EXPLAIN** option provides the Cypher query plan. You can compare different Cypher statements to understand the stages of processing that will occur when the Cypher executes.

Here is an example where we have set the *actorName* and *year* parameters for our session and we execute this Cypher statement:

```
EXPLAIN MATCH (p:Person)-[:ACTED_IN]->(m:Movie)
WHERE p.name = $actorName AND
      m.released < $year
RETURN p.name, m.title, m.released
```

Here is the query plan returned:

```
$ EXPLAIN MATCH (p:Person)-[:ACTED_IN]->(m:Movie) WHERE p.name = $actorName AND m.released < $year RE...
```

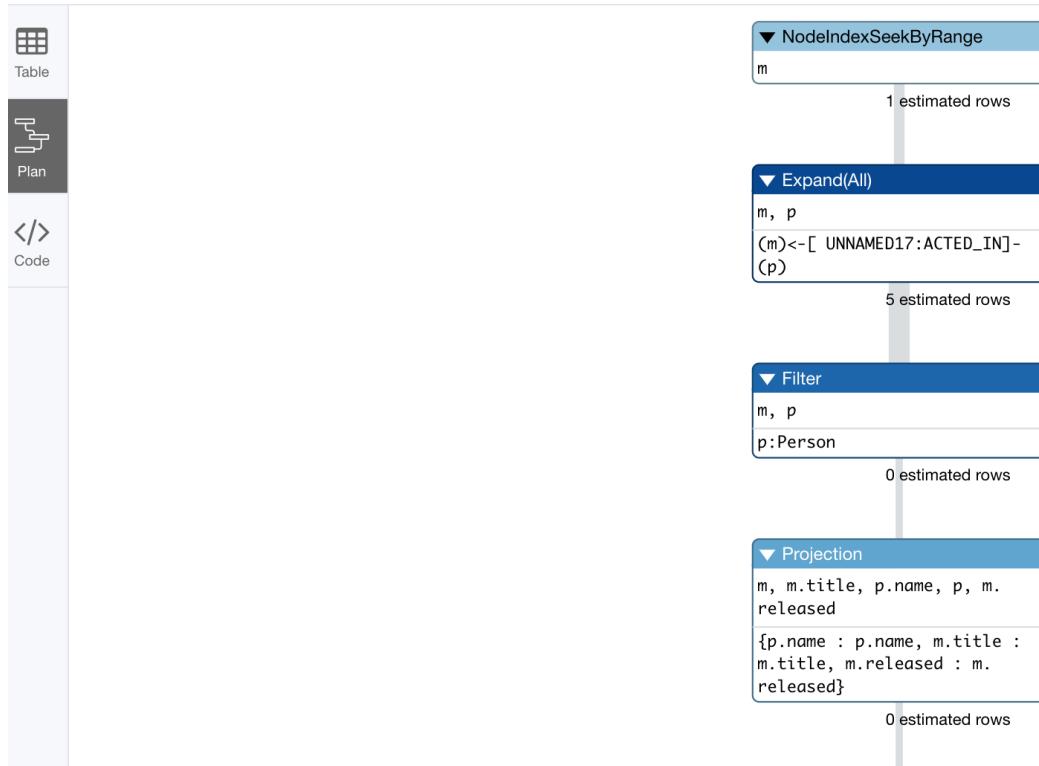


You can expand each phase of the Cypher execution to examine what code is expected to run. Each

phase of the query presents you with an estimate of the number of rows expected to be returned. With **EXPLAIN**, the query does not run, the graph engine simply produces the query plan.

For a better metric for analyzing how the Cypher statement will run you use the **PROFILE** keyword which runs the Cypher statement and gives you run-time performance metrics.


Here is the result returned using **PROFILE** for this Cypher statement:

```
$ PROFILE MATCH (p:Person)-[:ACTED_IN]->(m:Movie) WHERE p.name = $actorName AND m.released < $year RE...
```

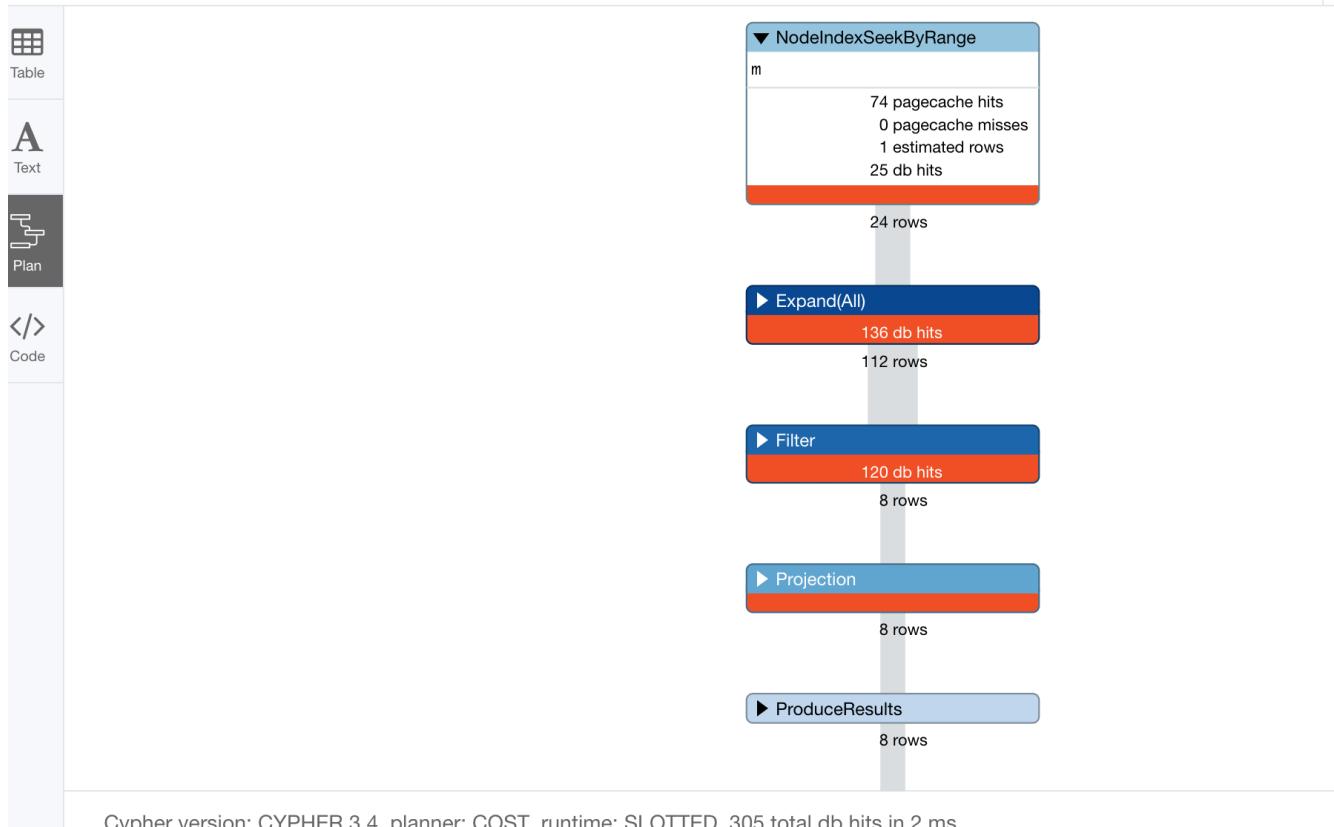

Here we see that for each phase of the graph engine processing, we can view the cache hits and most importantly the number of times the graph engine accessed the database (db hits). This is an important metric that will affect the performance of the Cypher statement at run-time.

For example, if we were to change the Cypher statement so that the node labels are not specified, we see these metrics when we profile:

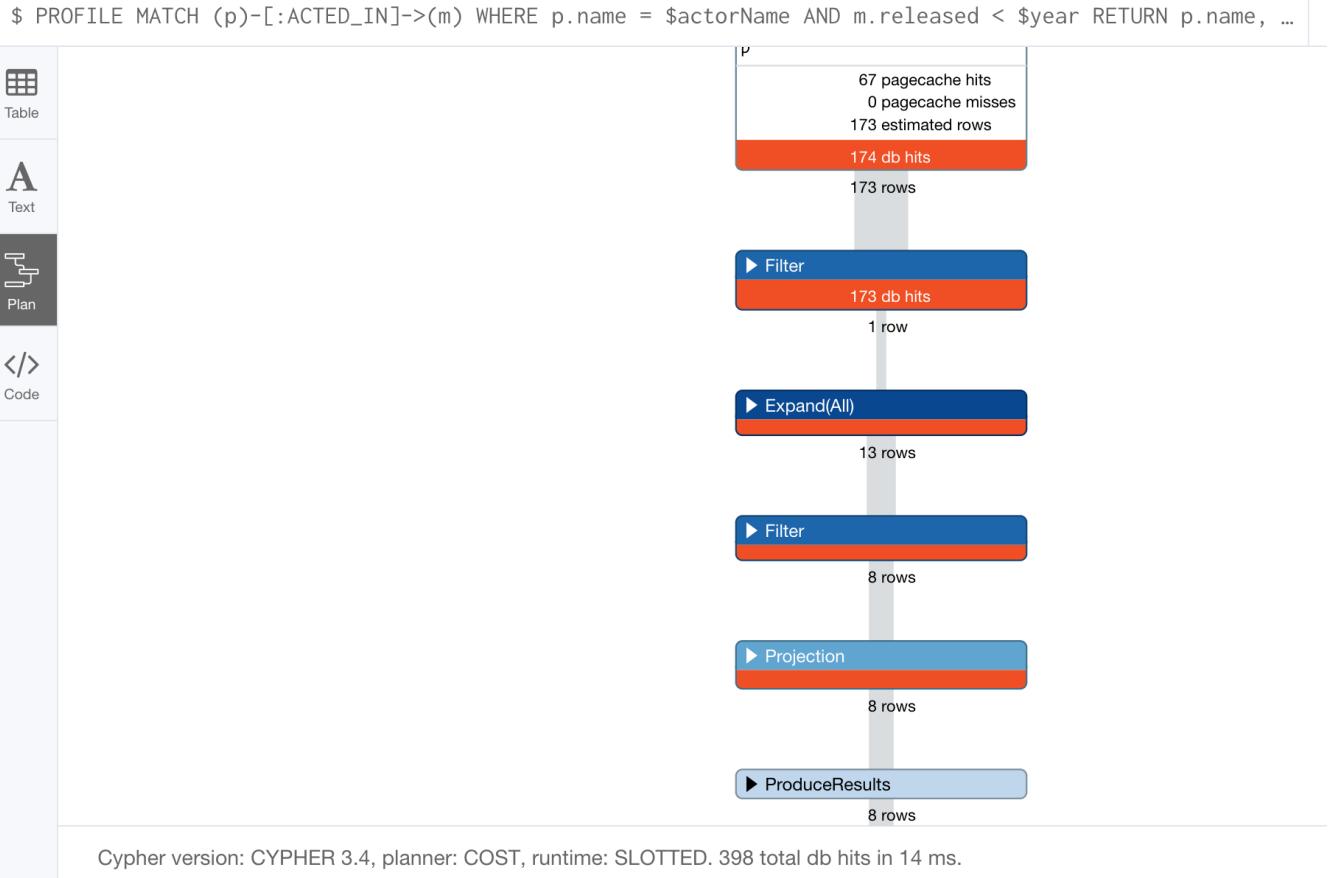

Here we see more db hits which makes sense because all nodes need to be scanned for perform this query.

Monitoring queries

If you are testing an application and have run several queries against the graph, there may be times when your Neo4j Browser session hangs with what seems to be a very long-running query. There are two reasons why a Cypher query may take a long time:

- The query returns a lot of data. The query completes execution in the graph engine, but it takes a long time to create the result stream.
 - Example: `MATCH (a)--(b)--(c)--(d)--(e)--(f) RETURN a`
- The query takes a long time to execute in the graph engine.
 - Example: `MATCH (a), (b), (c), (d), (e) RETURN count(id(a))`

If the query executes and then **returns a lot of data**, there is no way to monitor it or kill the query. All that you can do is close your Neo4j Browser session and start a new one. If the server has many of these **rogue** queries running, it will slow down considerably so you should aim to limit these types of queries. If you are running Neo4j Desktop, you can simply restart the database to clear things up, but if you are using a Neo4j Sandbox, you cannot do so. The database server is always running and you cannot restart it. Your only option is to shut down the Neo4j Sandbox and create a new Neo4j Sandbox, but then you lose any data you have worked with.

If, however, the query is a **long-running query**, you can monitor it by using the `:queries` command. Here is a screenshot where we are monitoring a long-running query in another Neo4j Browser session:

\$:queries						
Database URI	User	Query	Params	Meta	Elapsed time	Kill
bolt://localhost:7687	neo4j	<code>CALL dbms.listQueries</code>	{}	{}	0 ms	
bolt://localhost:7687	neo4j	<code>match (a), (b), (c), (d), (e) return count (id(a))</code>	{}	{}	55526 ms	

The `:queries` command calls `dbms.listQueries` under the hood, which is why we see two queries here. We have turned on **AUTO-REFRESH** so we can monitor the number of ms used by the graph engine thus far. You can kill the running query by double-clicking the icon in the *Kill* column. Alternatively, you can execute the statement `CALL dbms.killQuery('query-id')`.

\$:queries						
Database URI	User	Query	Params	Meta	Elapsed time	Kill
bolt://localhost:7687	neo4j	<code>match (a), (b), (c), (d), (e) return count (id(a))</code>	{}	{}	135525 ms	
bolt://localhost:7687	neo4j	<code>CALL dbms.listQueries</code>	{}	{}	0 ms	

Here is what happens in the Neo4j Browser session where the long-running query was run:

The screenshot shows the Neo4j Browser interface. In the top-left query editor pane, the command `$ match (a), (b), (c), (d), (e) return count (id(a))` is entered. To the right of the editor are several small icons: a magnifying glass, a double arrow, a triangle, a circle, and an X. On the far left, there is a vertical sidebar with a document icon and the word "Error". Below the sidebar, a red button labeled "ERROR" is visible. The main content area displays the error message: "Neo.TransientError.Transaction.Terminated". A detailed description follows: "Neo.TransientError.Transaction.Terminated: The transaction has been terminated. Retry your operation in a new transaction, and you should see a successful result. Explicitly terminated by the user." At the bottom of the error message box, there is a red warning icon followed by the text "⚠ Neo.TransientError.Transaction.Terminated: The transaction has been terminated. Retry your operation in a new transa...".

Note: The `:queries` command is only available in the Enterprise Edition of Neo4j.

Exercise 13: Analyzing and monitoring queries

In the query edit pane of Neo4j Browser, execute the browser command: `:play intro-neo4j-exercises` and follow the instructions for Exercise 13.

Managing constraints and node keys

You have seen that you can accidentally create duplicate nodes in the graph if you're not protected. In most graphs, you will want to prevent duplication of data. Unfortunately, you cannot prevent duplication by checking the existence of the exact node (with properties) as this type of test is not cluster or multi-thread safe as no locks are used. This is one reason why **MERGE** is preferred over **CREATE**, because **MERGE** does use locks.

In addition, you have learned that a node or relationship need not have a particular property. What if you want to ensure that all nodes or relationships of a specific type (label) must set values for certain properties?

A third scenario with graph data is where you want to ensure that a set of property values for nodes of the same type, have a unique value. This is the same thing as a primary key in a relational database.

All of these scenarios are common in many graphs. In Neo4j, you can use Cypher to:

- Add a constraint that ensures that a value for a property is unique for all nodes of that type.
- Add a constraint that ensures that when a node or relationship is created or modified, it must have certain properties set. (**Important:** Not available in the Community Edition of Neo4j.)
- Add a node key that ensures that a set of values for properties of a node of a given type is unique. (**Important:** Not available in the Community Edition of Neo4j.)

Constraints and node keys that enforce uniqueness are related to indexes which you will learn about later in this module.

Ensuring that a property value for a node is unique

You add a uniqueness constraint to the graph by creating a constraint that asserts that a particular node property is unique in the graph for a particular type of node.


Here is an example for ensuring that the *title* for a node of type *Movie* is unique:

```
CREATE CONSTRAINT ON (m:Movie) ASSERT m.title IS UNIQUE
```

This Cypher statement will fail if the graph already has multiple *Movie* nodes with the same value for the *title* property. Note that you can create a uniqueness constraint, even if some *Movie* nodes do not have a *title* property.

Here is the result of running this Cypher statement on the *Movie* graph:

```
$ CREATE CONSTRAINT ON (m:Movie) ASSERT m.title IS ...
```



Added 1 constraint, completed after 370 ms.

And if we attempt to create a *Movie* with the *title*, *The Matrix*, the Cypher statement will fail because the graph already has a movie with that title:

```
CREATE (:Movie {title: 'The Matrix'})
```

Here is the result of running this Cypher statement on the *Movie* graph:

The screenshot shows the Neo4j browser interface. In the top left, there's a dark grey sidebar with a document icon and the word "Error". The main area has a red "ERROR" button at the top. Below it, the error message "Neo.ClientError.Schema.ConstraintValidationFailed" is displayed in bold black text. A larger text box contains the detailed error message: "Neo.ClientError.Schema.ConstraintValidationFailed: Node(874) already exists with label `Movie` and property `title` = 'The Matrix'". At the bottom of the error message box, there's a red warning icon followed by the text "⚠ Neo.ClientError.Schema.ConstraintValidationFailed: Node(874) already exists with label `Movie` ...". Above the error message, the original Cypher command "CREATE (:Movie {title: 'The Matrix'})" is visible. To the right of the error message, there are several small, light-grey navigation icons.

In addition, if you attempt to modify the value of a property where the uniqueness assertion fails, the property will not be updated.

Ensuring that properties exist

Having uniqueness for a property value is only useful in the graph if the property exists. In most cases, you will want your graph to also enforce the existence of properties, not only for those node properties that require uniqueness, but for other nodes and relationships where you require a property to be set. Uniqueness constraints can only be created for nodes, but existence constraints can be created for node or relationship properties.

You add an existence constraint to the graph by creating a constraint that asserts that a particular type of node or relationship property must exist in the graph when a node or relationship of that type is created or updated.

Recall that in the *Movie* graph, the movie, *Something's Gotta Give* has no *tagline* property:

```
$ MATCH (m:Movie) WHERE m.title STARTS WITH 'Something' RETURN m
```

The screenshot shows the Neo4j browser interface. On the left, there is a sidebar with three tabs: "Graph" (selected), "Table", and "Text". The main area displays a single node labeled "m" with the following properties:

```
{  
    "title": "Something's Gotta Give",  
    "released": 2003  
}
```

Here is an example for adding the existence constraint to the *tagline* property of all *Movie* nodes in the graph:

```
CREATE CONSTRAINT ON (m:Movie) ASSERT exists(m.tagline)
```

Here is the result of running this Cypher statement:

The screenshot shows the Neo4j browser interface after running the Cypher statement. The sidebar shows the "Error" tab is selected. A red "ERROR" button is visible. The error message is:

Neo.DatabaseError.Schema.ConstraintCreationFailed

```
Neo.DatabaseError.Schema.ConstraintCreationFailed: Unable to create  
CONSTRAINT ON ( movie:Movie ) ASSERT exists(movie.tagline):  
Node(1208) with label `Movie` must have the property `tagline`
```

A red warning message at the bottom states:

⚠ Neo.DatabaseError.Schema.ConstraintCreationFailed: Unable to create CONSTRAINT ON (movie:Movie) ASSERT exist...

The constraint cannot be added to the graph because a node has been detected that violates the constraint.

We know that in the *Movie* graph, all *:REVIEWED* relationships currently have a property, *rating*. We can create an existence constraint on that property as follows:

```
CREATE CONSTRAINT ON ()-[rel:REVIEWED]-() ASSERT exists(rel.rating)
```

Notice that when you create the constraint on a relationship, you need not specify the direction of the relationship. With the result:

```
$ CREATE CONSTRAINT ON ()-[rel:REVIEWED]-() ASSERT exists(rel.rating)
```



Added 1 constraint, completed after 2 ms.



So after creating this constraint, if we attempt to create a :REVIEWED relationship without setting the *rating* property:

```
MATCH (p:Person), (m:Movie)
WHERE p.name = 'Jessica Thompson' AND
      m.title = 'The Matrix'
MERGE (p)-[:REVIEWED {summary: 'Great movie!'}]->(m)
```

We see this error:

```
$ MATCH (p:Person), (m:Movie) WHERE p.name = 'Jessica Thompson' AND m.ti... ✘ ↴ ⌂ ⌂ ⌂ ✕
```



ERROR

Neo.ClientError.Schema.ConstraintValidationFailed

Neo.ClientError.Schema.ConstraintValidationFailed: Relationship(1807) with type `REVIEWED` must have the property `rating`

⚠ Neo.ClientError.Schema.ConstraintValidationFailed: Relationship(1807) with type `REVIEWED` must have the property `rating`

You will also see this error if you attempt to remove a property from a node or relationship where the existence constraint has been created in the graph.

Retrieving constraints defined for the graph

You can run the browser command :schema to view existing indexes and constraints defined for the graph.

Just as you have used other db related methods to query the schema of the graph, you can query for the set of constraints defined in the graph as follows:

```
CALL db.constraints()
```

And here is what is returned from the graph:

```
$ CALL db.constraints
```

Table	description
	"CONSTRAINT ON (movie:Movie) ASSERT movie.title IS UNIQUE"
	"CONSTRAINT ON ()-[reviewed:REVIEWED]-() ASSERT exists(reviewed.rating)"

Note: Using the method notation for the CALL statement enables you to use the call for returning results that may be used later in the Cypher statement.

Dropping constraints

You use similar syntax to drop an existence or uniqueness constraint, except that you use the **DROP** keyword rather than **CREATE**

Here we drop the existence constraint for the *rating* property for all *REVIEWED* relationships in the graph:

```
DROP CONSTRAINT ON ()-[rel:REVIEWED]-() ASSERT exists(rel.rating)
```

With the result:

```
$ DROP CONSTRAINT ON ()-[rel:REVIEWED]-() ASSERT exists(rel.rating)
```

Table	Removed 1 constraint, completed after 1 ms.

Creating node keys

A node key is used to define the uniqueness constraint for multiple properties of a node of a certain type. A node key is also used as a composite index in the graph.

Suppose that in our *Movie* graph, we will not allow a *Person* node to be created where both the *name* and *born* properties are the same. We can create a constraint that will be a node key to ensure that this uniqueness for the set of properties is asserted.

Here is an example to create this node key:

```
CREATE CONSTRAINT ON (p:Person) ASSERT (p.name, p.born) IS NODE KEY
```

Here is the result of running this Cypher statement on our *Movie* graph:

```
$ CREATE CONSTRAINT ON (p:Person) ASSERT (p.name, p.born) IS NODE KEY
```

ERROR

Neo.DatabaseError.Schema.ConstraintCreationFailed

Neo.DatabaseError.Schema.ConstraintCreationFailed: Unable to create CONSTRAINT ON (person:Person) ASSERT exists(person.name, person.born): Node(1183) with label `Person` must have the properties `name, born`

⚠ Neo.DatabaseError.Schema.ConstraintCreationFailed: Unable to create CONSTRAINT ON (person:Person) ASSERT exists..

This attempt to create the constraint failed because there are *Person* nodes in the graph that do not have the *born* property defined.

If we set these properties for all nodes in the graph that do not have *born* properties with:

```
MATCH (p:Person)
WHERE NOT exists(p.born)
SET p.born = 0
```

Then the creation of the node key succeeds:

```
$ CREATE CONSTRAINT ON (p:Person) ASSERT (p.name, p.born) IS NODE KEY
```

Table

Added 1 constraint, completed after 251 ms.

Any subsequent attempt to create or modify an existing *Person* node with *name* or *born* values that violate the uniqueness constraint as a node key will fail.

For example, executing this Cypher statement will fail:

```
CREATE (:Person {name: 'Jessica Thompson', born: 0})
```

Here is the result:

The screenshot shows the Neo4j Browser interface. In the top left, there's a dark grey sidebar with a document icon and the word "Error". The main area has a red "ERROR" button at the top. Below it, the error message "Neo.ClientError.Schema.ConstraintValidationFailed" is displayed in bold black text. A larger text box contains the detailed error message: "Neo.ClientError.Schema.ConstraintValidationFailed: Node(1223) already exists with label `Person` and properties `name` = 'Jessica Thompson', `born` = 0". At the bottom of the screen, there's a red warning icon followed by the same error message: "⚠ Neo.ClientError.Schema.ConstraintValidationFailed: Node(1223) already exists with label `Person` and properties `name` = '...'".

Exercise 14: Managing constraints and node keys

In the query edit pane of Neo4j Browser, execute the browser command: `:play intro-neo4j-exercises` and follow the instructions for Exercise 14.

Managing indexes

The uniqueness and node key constraints that you add to a graph are essentially single-property and composite indexes respectively. Indexes are used to improve initial node lookup performance, but they require additional storage in the graph to maintain and also add to the cost of creating or modifying property values that are indexed.

Here is a brief summary of when single-property and composite indexes are used:

- Equality checks `=`
- Range comparisons `>`, `>=`, `<`, `<=`
- List membership `IN`
- String comparisons `STARTS WITH`, `ENDS WITH`, `CONTAINS`
- Existence checks `exists()`
- Spatial distance searches `distance()`
- Spatial bounding searches `point()`

In this module, we introduce the basics of Neo4j indexes, but you should consult the Neo4j *Operations Manual* for more details about creating and maintaining indexes.

Note: Because index maintenance incurs additional overhead when nodes are created, We recommend that for large graphs, indexes are created after the data has been loaded into the graph. You can view the progress of the creation of an index when you use the `:schema` command.


Indexes for range searches

When you add an index for a property of a node, it can greatly reduce the number of nodes the graph engine needs to visit in order to satisfy a query.

In this query we are testing the value of the `released` property of a *Movie* node using ranges:

```
MATCH (m:Movie)
WHERE 1990 < m.released < 2000
SET m.videoFormat = 'DVD'
```

The graph engine, using an index, will find the pointers to all nodes that satisfy the query without having to visit all of the nodes:

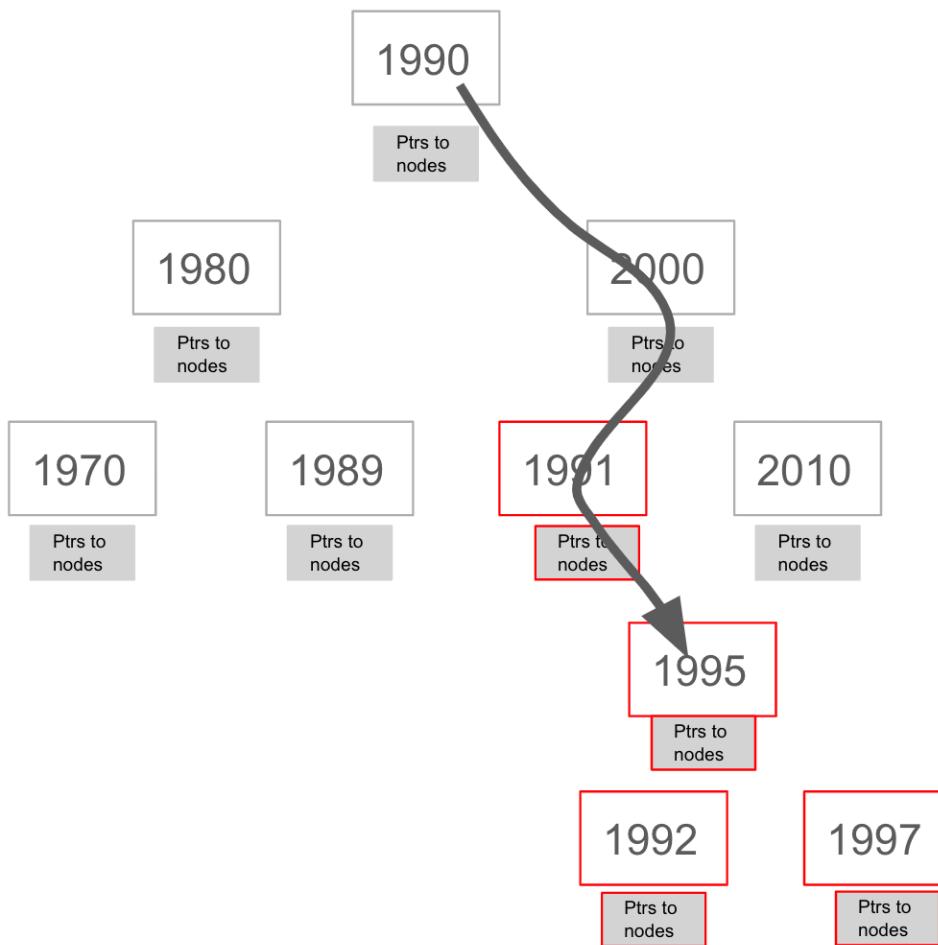

Creating indexes

You create an index to improve graph engine performance. A unique constraint on a property is an index so you need not create an index for any properties you have created uniqueness constraints for. An index on its own does not guarantee uniqueness.

Here is an example of how we would create a single-property index on the *released* property of all nodes of type *Movie*:

```
CREATE INDEX ON :Movie(released)
```

With the result:

```
$ CREATE INDEX ON :Movie(released)
```



Added 1 index, completed after 4 ms.

If a set of properties for a node must be unique for every node, then you should create a constraint

as a node key, rather than an index.

If, however, there can be duplication for a set of property values, but you want faster access to them, then you can create a composite index. A composite index is based upon multiple properties for a node.

Suppose we added the property, *videoFormat* to every *Movie* node and set its value, based upon the released date of the movie as follows:

```
MATCH (m:Movie)
WHERE m.released >= 2000
SET m.videoFormat = 'DVD';
MATCH (m:Movie)
WHERE m.released < 2000
SET m.videoFormat = 'VHS'
```

With the result:

```
$ MATCH (m:Movie) WHERE m.released >= 2000 SET m.videoFormat = ['DVD', 'BlueRay']; MATCH (m:Movie) WH...
```



\$ MATCH (m:Movie) WHERE m.released >= 2000 SET m.videoFormat = ['DVD', 'BlueRay']	<input checked="" type="checkbox"/>
\$ MATCH (m:Movie) WHERE m.released < 2000 SET m.videoFormat = ['VHS', 'DVD']	<input checked="" type="checkbox"/>



Important: Notice that in the above Cypher statements we use the semi-colon ; to separate Cypher statements. In general, you need not end a Cypher statement with a semi-colon, but if you want to execute multiple Cypher statements, you must separate them. You have already used the semi-colon to separate Cypher statements when you loaded the *Movie* database in the training exercises.

Now that the graph has *Movie* nodes with both the properties, *released* and *videoFormat*, we can create a composite index on these properties as follows:

```
CREATE INDEX ON :Movie(released, videoFormat)
```

With the result:

```
$ CREATE INDEX ON :Movie(released, videoFormat)
```



Added 1 index, completed after 2 ms.

Retrieving indexes

Just as you can retrieve the constraints defined for the graph using `:schema` or `CALL db.constraints()`, you can retrieve the indexes:

```
CALL db.indexes()
```

With the result:

description	label	properties	state	type	provider
"INDEX ON :Movie(released)"	"Movie"	["released"]	"ONLINE"	"node_label_property"	{ "version": "2.0", "key": "lucene+native" }
"INDEX ON :Movie(released, videoFormat)"	"Movie"	["released", "videoFormat"]	"ONLINE"	"node_label_property"	{ "version": "2.0", "key": "lucene+native" }
"INDEX ON :Person(name, born)"	"Person"	["name", "born"]	"ONLINE"	"node_unique_property"	{ "version": "2.0", "key": "lucene+native" }
"INDEX ON :Movie(title)"	"Movie"	["title"]	"ONLINE"	"node_unique_property"	{ "version": "2.0", "key": "lucene+native" }

Notice that the unique constraints and node keys are also shown as indexes in the graph.

Dropping indexes

You can drop an existing index that you created with `CREATE INDEX`.

Here is an example of dropping the composite index that we just created:

```
DROP INDEX ON :Movie(released, videoFormat)
```

Here is the result:

```
$ DROP INDEX ON :Movie(released, videoFormat)
```



Removed 1 index, completed after 8 ms.

Exercise 15: Managing indexes

In the query edit pane of Neo4j Browser, execute the browser command: `:play intro-neo4j-exercises` and follow the instructions for Exercise 15.

Importing data

In many applications, it is the case that the data that you want to populate your graph with comes from data that was written to .csv files or files of other types. There are many nuances and best practices for loading data into a graph from files. In this module, you will be introduced to some simple steps for loading CSV data into your graph with Cypher. If you are interested in direct loading of data from a relational DBMS into a graph, you should read about the Neo4j Extract Transform Load (ETL) tool at <http://neo4j.com/developer/neo4j-etl/>, as well as many of the useful pre-written procedures that are available for your use in the APOC library.

In Cypher, you can:

- Load data from a URL (http(s) or file).
- Process data as a stream of records.
- Create or update the graph with the data being loaded.
- Use transactions during the load.
- Transform and convert values from the load stream.
- Load up to 10M nodes and relationships.

CSV import is commonly used to import data into a graph. If you want to import data from CSV, you will need to first develop a model that describes how data from your CSV maps to data in your graph.

Importing normalized data using `LOAD CSV`

Cypher provides an elegant built-in way to import tabular CSV data into graph structures.

The `LOAD CSV` clause parses a local in the `import` directory of your Neo4j installation or a remote file into a stream of rows which represent maps (with headers) or lists. Then you can use whichever Cypher operations you want to either create nodes or relationships or to merge with the existing graph.

Here is the simplified syntax for using `LOAD CSV`:

```
LOAD CSV WITH HEADERS FROM url-value
AS row      // row is a variable that is used to extract data from each row read
create-or-merge-clause
```

The first line of the file must contain a comma-separated list of column names. The *url-value* can be a resource or a file on your system. Each line contains data that is interpreted as values for each column name. When each line is read from the file, you can perform the necessary processing to create or merge data into the graph.

As CSV files usually represent either node or relationship lists, you will run multiple passes to create nodes and relationships separately.

The **movies_to_load.csv** file (sample below) contains the data that will add *Movie* nodes:

```
id,title,country,year,summary
1,Wall Street,USA,1987, Every dream has a price.
2,The American President,USA,1995, Why can't the most powerful man in the world have
the one thing he wants most?
3,The Shawshank Redemption,USA,1994, Fear can hold you prisoner. Hope can set you
free.
```

Before you load data from CSV files into your graph, you should first confirm that the data retrieved looks OK. Rather than creating nodes or relationships, you can simply return information about the data to be loaded.

For example you can execute this Cypher statement to get a count of the data to be loaded from the **movies_to_load.csv** file so you have an idea of how much data will be loaded:

```
LOAD CSV WITH HEADERS
FROM 'http://data.neo4j.com/intro-neo4j/movies_to_load.csv'
AS line
RETURN count(*)
```

Here is the count result for this particular file:

```
$ LOAD CSV WITH HEADERS FROM "http://data.neo4j.com/intro-neo4j/movies_to_load.csv" AS line RETURN count(*)
```

count(*)
3

You might even want to visually inspect the data before you load it to see if it is what you were expecting:

```
LOAD CSV WITH HEADERS
FROM 'https://data.neo4j.com/intro-neo4j/movies_to_load.csv'
AS line
RETURN * LIMIT 1
```

Here is the result of running the Cypher statement to visually inspect the data:

```
$ LOAD CSV WITH HEADERS FROM "http://data.neo4j.com/intro-neo4j/movies_to_load.csv" AS line RETURN * LIMIT 1
```

line

Table	{ "summary": " Every dream has a price.", "country": "USA", "id": "1", "title": "Wall Street", "year": "1987" }
-------	--

Started streaming 1 records after 245 ms and completed after 346 ms.

Notice here that the *summary* column's data has an extra space before the data in the file. In order to ensure that all *tagline* values in our graph do not have an extra space, we will trim the value before assigning it to the tagline property. Once we are sure you want to load the data into your graph, we do so by assigning values from each row read in to a new node.

You may want to format the data before it is loaded to confirm it matches what you want in your graph:

```
LOAD CSV WITH HEADERS  
FROM 'http://data.neo4j.com/intro-neo4j/movies_to_load.csv'  
AS line  
RETURN line.id, line.title, toInteger(line.year), trim(line.summary)
```

Here we see how the data will be formatted before it is loaded:

```
$ LOAD CSV WITH HEADERS FROM 'http://data.neo4j.com/intro-neo4j/movies_to_load.csv' ...
```

line.id	line.title	toInteger(line.year)	lTrim(line.summary)
"1"	"Wall Street"	1987	"Every dream has a price."
"2"	"The American President"	1995	"Why can't the most powerful man in the world have the one thing he wants most?"
"3"	"The Shawshank Redemption"	1994	"Fear can hold you prisoner. Hope can set you free."

The following query creates the *Movie* nodes using some of the data from **movies_to_load.csv** as properties:

```
LOAD CSV WITH HEADERS
FROM 'https://data.neo4j.com/intro-neo4j/movies_to_load.csv'
AS line
CREATE (movie:Movie { movieId: line.id, title: line.title, released:
toInteger(line.year) , tagline: trim(line.summary)})
```

We assign a value to *movieId* from the *id* data in the CSV file. In addition, we assign the data from *summary* to the *tagline* property, with a trim. We also convert the data read from *year* to an integer using the built-in function **toInteger()** before assigning it to the *released* property.

Here is the result of loading the **movies_to_load.csv** data into the graph:

```
$ LOAD CSV WITH HEADERS FROM "http://data.neo4j.com/intro-neo4j/movies_to_load.csv" AS line CREATE (movie:Movie {...
```



Added 3 labels, created 3 nodes, set 12 properties, completed after 289 ms.

The **persons_to_load.csv** file (sample below) holds the data that will populate the *Person* nodes.

```
Id,name,birthyear
1,Charlie Sheen, 1965
2,Oliver Stone, 1946
3,Michael Douglas, 1944
4,Martin Sheen, 1940
5,Morgan Freeman, 1937
```

In case you already have people in your database, you will want to avoid creating duplicates. That's why instead of just creating them, we use **MERGE** to ensure unique entries after the import. We use the **ON CREATE** clause to set the values for *name* and *born*.

```
LOAD CSV WITH HEADERS
FROM 'https://data.neo4j.com/intro-neo4j/persons_to_load.csv'
AS line
MERGE (actor:Person { personId: line.Id })
ON CREATE SET actor.name = line.name,
    actor.born = toInteger(trim(line.birthyear))
```

There are a couple of things to note here. The name of the column is case-sensitive. In addition, notice that the data for the *birthyear* column has an extra space before the data. To allow this data to be converted to an integer, we must first trim the whitespace using the **trim()** built-in function.

Here is the result of loading the **persons_to_load.csv** data into the graph:

```
$ LOAD CSV WITH HEADERS FROM 'http://data.neo4j.com/intro-neo4j/persons_to_load.csv' AS li...
```

Added 5 labels, created 5 nodes, set 15 properties, completed after 359 ms.



Table



Code

Added 5 labels, created 5 nodes, set 15 properties, completed after 359 ms.

The **roles_to_load.csv** file (sample below) holds the data that will populate the relationships between the nodes.

```
personId,movieId,role
1,1,Bud Fox
4,1,Carl Fox
3,1,Gordon Gekko
4,2,A.J. MacInerney
3,2,President Andrew Shepherd
5,3,Ellis Boyd 'Red' Redding
```

The query below matches the entries of *line.personId* and *line.movieId* to their respective *Movie* and *Person* nodes, and creates an *ACTED_IN* relationship between the person and the movie. This model includes a relationship property of *role*, which is passed via *line.role*.

```
LOAD CSV WITH HEADERS
FROM 'https://data.neo4j.com/intro-neo4j/roles_to_load.csv'
AS line
MATCH (movie:Movie { movieId: line.movieId })
MATCH (person:Person { personId: line.personId })
CREATE (person)-[:ACTED_IN { roles: [line.role]}]->(movie)
```

Here is the result of loading the **roles_to_load.csv** data into the graph:

```
$ LOAD CSV WITH HEADERS FROM "http://data.neo4j.com/intro-neo4j/roles_to_load.csv" AS line MATCH (movie:Movie { m...
```

Set 6 properties, created 6 relationships, completed after 323 ms.



Table

Importing denormalized data

If your file contains denormalized data, you can run the same file with multiple passes and simple operations as shown above. Alternatively, you might have to use `MERGE` to create nodes and relationships uniquely.

For our use case, we can import the data using a CSV structure like this:

`movie_actor_roles_to_load.csv`:

```
title;released;summary;actor;birthyear;characters
Back to the Future;1985;17 year old Marty McFly got home early last night. 30 years
early.;Michael J. Fox;1961;Marty McFly
Back to the Future;1985;17 year old Marty McFly got home early last night. 30 years
early.;Christopher Lloyd;1938;Dr. Emmet Brown
```

Here are the Cypher statements to load this data:

```
LOAD CSV WITH HEADERS
FROM 'https://data.neo4j.com/intro-neo4j/movie_actor_roles_to_load.csv'
AS line FIELDTERMINATOR ';'
MERGE (movie:Movie { title: line.title })
ON CREATE SET movie.released = toInteger(line.released),
    movie.tagline = line.summary
MERGE (actor:Person { name: line.actor })
ON CREATE SET actor.born = toInteger(line.birthyear)
MERGE (actor)-[r:ACTED_IN]->(movie)
ON CREATE SET r.roles = split(line.characters,',')
```

Notice a couple of things in this Cypher statement. This file uses a semi-colon as a field terminator, rather than the default comma. In addition, the built-in method `split()` is used to create the list for the `roles` property.

Here is the result of loading the `movie_actor_roles_to_load.csv` data into the graph:

```
$ LOAD CSV WITH HEADERS FROM "http://data.neo4j.com/intro-neo4j/movie_actor_roles_to_load.csv" AS line FIELDTERMI...
```



Added 3 labels, created 3 nodes, set 9 properties, created 2 relationships, completed after 302 ms.

For large denormalized files, it may still make sense to create nodes and relationships separately in multiple passes. That would depend on the complexity of the operations and the experienced performance.

Importing a large dataset

If you import a larger amount of data (more than 10,000 rows), it is recommended to prefix your `LOAD CSV` clause with a `PERIODIC COMMIT` hint. This allows the database to regularly commit the import transactions to avoid memory churn for large transaction-states.

Exercise 16: Importing data

In the query edit pane of Neo4j Browser, execute the browser command: `:play intro-neo4j-exercises` and follow the instructions for Exercise 16.

Accessing Neo4j resources

There are many ways that you can learn more about Neo4j. A good starting point for learning about the resources available to you is the **Neo4j Learning Resources** page at <https://neo4j.com/developer/resources/>.

Check your understanding

Question 1

What Cypher keyword can you use to prefix any Cypher statement to examine how many db hits occurred when the statement executed?

Select the correct answer.

- ANALYZE
- EXPLAIN
- PROFILE
- MONITOR

Question 2

What types of constraints can you define for a graph that are asserted when a node or relationship is created or updated?

Select the correct answers.

- unique values for a property of a node
- unique values for a property of a relationship
- a node must have a certain set of properties with values
- a relationship must have a certain set of properties with values

Question 3

In general, what is the maximum number of nodes or relationships that you can easily create using LOAD CSV?

Select the correct answer.

- 1K
- 10K
- 1M
- 10M

Summary

You should now be able to:

- Use parameters in your Cypher statements.
- Analyze Cypher execution.
- Monitor queries.
- Manage constraints and node keys for the graph.
- Import data into a graph from CSV files.
- Manage indexes for the graph.
- Access Neo4j resources.