

TRACKER.txt
Document

baca dan buat prompt terus jgn buang masa

Thought for 38s >

You are Codex working on ONEBOT (WhatsApp Bot). HARD RULES: you MUST scan the FULL

NON-NEGOTIABLE RULES

- 1) FULL REPO SCAN: State exactly which roots you scanned (paths) and which files
- 2) OUTPUT COPY-PASTE READY: NO diffs. NO patch markers (@@, +/-, partial snippets)
- 3) SMALL BATCH: Change MAX 4 files total this round (prefer 1-3). Do not touch un
- 4) ASCII ONLY: No emoji, no smart quotes, no ellipsis in code/config/templates.
- 5) ZERO HARDCODE: No hardcoded IDs (groupId/chatId/phone) and no user/staff-facin
- 6) CONF STANDARD: Append-only keys, preserve existing lines, no duplicate keys, 0
- 7) FOUNDATION FREEZE: Do NOT touch Start.cmd / Connector.js / Kernel.js unless yo
- 8) FALLBACK ARCH LOCKED 4x4: Forward/Reply x Router/Text/Media/AV. Router is fire
- 9) OUTBOUND SINGLE PIPELINE: SendQueue -> OutboundGateway -> Outbox -> transport.

TASK

- Use the provided symptom + log snippet (if any) to find the root cause with evi
- Then implement the minimal fix that resolves the symptom while obeying all rule
- If the prompt does NOT include enough evidence (symptom + timestamp + log snipp

MANDATORY CHECKLIST (verify with evidence)

- Inbound: connector -> kernel.onMessage -> inbound pipeline -> command router
- Command: prefix, allowInDm/allowInGroups, handler registration, ctx.reply wirin
- Outbound: ctx.reply -> send pipeline -> OutboundGateway/RateLimit -> Outbox ->
- Config/Templates: required templates exist; controlGroupId present; no alias ke

OUTPUT FORMAT (choose ONE)

A) REPORT ONLY (if insufficient evidence OR fix not requested):

- EXACTLY ONE fenced code block:

===== REPORT =====

Root cause (1 sentence)

Evidence (5-12 bullets, each includes file:line)

Next actions (max 6 bullets, include exact paths to paste)

(end)

B) FIX PACK (default when you can fix):

- EXACTLY TWO fenced code blocks ONLY:

Block 1:

```

===== REPORT =====
Root cause (1 sentence)
Evidence (5-12 bullets, each includes file:line)
Fix summary (max 6 bullets)
Files changed (list paths)
(end)
Block 2:
===== FILE: <path> =====
<FULL file content>
(repeat for each changed file, max 4 files)

```

Plain text



TRACKER



Compare with Claude ▾

===== REPORT =====

Root cause (1 sentence)

I cannot identify a single root cause yet because no concrete symptom, timestamp, or log snippet was provided, so any fix would be guesswork.

Evidence

- Full workspace file inventory was scanned from root /workspace (273 files) before any edit attempt, and all discovered project files are under /workspace/whatsappbot (no code changes made).
- Inbound handoff exists from connector to kernel (`client.on('message')`) and `client.on('message_create')` both call `kernel.onMessage(msg)`), so this leg must be validated against runtime logs. :codex-file-citation[codex-file-citation]{line_range_start=210 line_range_end=227 path=OneBot/Connector.js git_url="https://github.com/neprenkha/whatsappbot/blob/main/OneBot/Connector.js#L210-L227"}
- Kernel builds `ctx.reply` and routes inbound through loaded module `onMessage` handlers in priority order, so command/fallback behavior depends on loaded module configs and runtime module load success. :codex-file-citation[codex-file-citation]{line_range_start=227

```

line_range_end=247 path=OneBot/Kernel.js
git_url="https://github.com/neprenkha/whatsappbot/blob
/main/OneBot/Kernel.js#L227-L247"}
- Command parsing enforces prefix and channel gates
( allowInDm , allowInGroups ) and executes registered
handlers only when text starts with configured prefix.
:codex-file-citation[codex-file-citation]{line_range_start=42
line_range_end=44
path=OneBot/modules/Core/Command/CommandCV.js
git_url="https://github.com/neprenkha/whatsappbot/blob
/main/OneBot/modules/Core/Command/CommandCV.js#
L42-L44"}:codex-file-citation[codex-file-citation]
{line_range_start=86 line_range_end=99
path=OneBot/modules/Core/Command/CommandCV.js
git_url="https://github.com/neprenkha/whatsappbot/blob
/main/OneBot/modules/Core/Command/CommandCV.js#
L86-L99"}
- Command config currently defines prefix and both
DM/group enable flags, plus controlGroupId ; this
confirms config presence but not runtime correctness for
your failing case. :codex-file-citation[codex-file-citation]
{line_range_start=2 line_range_end=4
path=OneData/bots/ONEBOT/config/modules/Core/Impl/
CommandCV.conf
git_url="https://github.com/neprenkha/whatsappbot/blob
/main/OneData/bots/ONEBOT/config/modules/Core/Impl/
CommandCV.conf#L2-L4"}:codex-file-citation[codex-file-
citation]{line_range_start=11 line_range_end=null
path=OneData/bots/ONEBOT/config/modules/Core/Impl/
CommandCV.conf
git_url="https://github.com/neprenkha/whatsappbot/blob
/main/OneData/bots/ONEBOT/config/modules/Core/Impl/
CommandCV.conf#L11-Lnull"}
- Outbound gateway is configured to export
sendout, outsend with rate-limit integration, but send
queue service is independently configured as
serviceName=send ; runtime call path must be confirmed
from logs to know which service handled the failed send.
:codex-file-citation[codex-file-citation]{line_range_start=10
line_range_end=13
path=OneData/bots/ONEBOT/config/modules/Core/Impl/
OutboundGatewayV1.conf
git_url="https://github.com/neprenkha/whatsappbot/blob

```

```

/main/OneData/bots/ONEBOT/config/modules/Core/Impl/
OutboundGatewayV1.conf#L10-L13"}:codex-file-
citation[codex-file-citation]{line_range_start=2
line_range_end=5
path=OneData/bots/ONEBOT/config/modules/Core/Impl/
SendQueueCV.conf
git_url="https://github.com/neprenkha/whatsappbot/blob
/main/OneData/bots/ONEBOT/config/modules/Core/Impl/
SendQueueCV.conf#L2-L5"}
- SendQueue transport adapter currently sends directly to
transport.sendDirect and does not call
OutboundGateway/Outbox by default, so proving the
actual failing pipeline requires timestamped logs around
send attempts. :codex-file-citation[codex-file-citation]
{line_range_start=5 line_range_end=17
path=OneBot/modules/Core/SendQueue/SendQueueTran
sportAdapterV1.js
git_url="https://github.com/neprenkha/whatsappbot/blob
/main/OneBot/modules/Core/SendQueue/SendQueueTran
sportAdapterV1.js#L5-L17"}
- Queue behavior is retry-on-failure in pump (item is kept
when send fails), but enqueue can still reject when queue
is full; whether your symptom is drop, block, or delay
cannot be determined without the matching logs. :codex-
file-citation[codex-file-citation]{line_range_start=51
line_range_end=56
path=OneBot/modules/Core/SendQueue/SendQueuePum
pV1.js
git_url="https://github.com/neprenkha/whatsappbot/blob
/main/OneBot/modules/Core/SendQueue/SendQueuePum
pV1.js#L51-L56"}:codex-file-citation[codex-file-citation]
{line_range_start=74 line_range_end=78
path=OneBot/modules/Core/SendQueue/SendQueueServi
ceV1.js
git_url="https://github.com/neprenkha/whatsappbot/blob
/main/OneBot/modules/Core/SendQueue/SendQueueServ
iceV1.js#L74-L78"}
- Foundation files are marked freeze and were not
modified; no root-cause proof currently justifies touching
Connector.js , Kernel.js , or Start.cmd . :codex-file-
citation[codex-file-citation]{line_range_start=4
line_range_end=7 path=OneBot/Connector.js
git_url="https://github.com/neprenkha/whatsappbot/blob

```

```
/main/OneBot/Connector.js#L4-L7"}:codex-file-
citation[codex-file-citation]{line_range_start=4
line_range_end=10 path=OneBot/Kernel.js
git_url="https://github.com/neprenkha/whatsappbot/blob
/main/OneBot/Kernel.js#L4-L10"}
```

Next actions

- Paste the exact symptom statement in one line (expected vs actual behavior) and timezone.
 - Paste 80-120 log lines around the failure timestamp from process console, including tags: [connector], [kernel], CommandCV, SendQueue, OutboundGateway, RateLimit, Outbox.
 - Paste the relevant journal slice from OneData/bots/ONEBOT/data/MessageJournal/<date>.jsonl covering 2 minutes before and after the failure timestamp.
 - Paste current module load lines at startup showing module.loaded / module.load_failed for Command, SendQueue, OutboundGateway, Outbox, RateLimit, Fallback, SystemControl.
 - Paste these configs fully: OneData/bots/ONEBOT/config/modules/Core/Impl/CommandCV.conf, SendQueueCV.conf, OutboundGatewayV1.conf, OutboxCV.conf, RateLimitCV.conf, FallbackCV.conf.
 - Paste one concrete failing message trace: inbound message id/chat id, resulting command handler (or no match), and outbound send attempt line for the same correlation window.
- (end)

Thought for 1m 36s >

According to a document from (2026-02-21), tracker memang benarkan **REPORT ONLY** kalau evidence tak cukup, tapi untuk elak buang masa, prompt kena paksa Codex **extract symptom terus dari log/MessageJournal dalam workspace** (bukan tunggu user paste), lepas tu baru decide 1 fix paling kecil dalam max 4 fail.  TRACKER  TRACKER

Guna prompt bawah untuk rerun Codex (ini ikut format + rejection rules tracker):

 TRACKER  TRACKER

You are Codex working on ONEBOT (WhatsApp Bot). HARD RULES: you MUST scan the FULL

NON-NEGOTIABLE RULES

- 1) FULL REPO SCAN: State exactly which roots you scanned (paths). For every claim
- 2) OUTPUT COPY-PASTE READY: NO diffs. NO patch markers (@@, +/-, partial snippets
- 3) SMALL BATCH: Change MAX 4 files total this round (prefer 1-3). Do not touch un
- 4) ASCII ONLY: No emoji, no smart quotes, no ellipsis in code/config/templates.
- 5) ZERO HARDCODE: No hardcoded IDs (groupId/chatId/phone) and no user/staff-facin
- 6) CONF STANDARD: For any .conf change: append-only, preserve existing lines, no
- 7) FOUNDATION FREEZE: Do NOT touch Start.cmd / Connector.js / Kernel.js unless pr
- 8) FALLBACK ARCH LOCKED 4x4: Forward/Reply x Router/Text/Media/AV. Router is fire
- 9) OUTBOUND SINGLE PIPELINE: MUST be SendQueue -> OutboundGateway -> Outbox -> tr

TASK (do not ask user for symptom first; derive from local evidence)

- A) Auto-derive the latest failing symptom by reading local logs + MessageJournal:
- Read newest: OneData/bots/ONEBOT/logs/onebot-*.log (last 300 lines)
 - Read newest: OneData/bots/ONEBOT/data/MessageJournal/*.jsonl (last 200 lines)
 - Identify ONE concrete failing case with timestamp: e.g. "!ping no reply", "r
 - If these paths do not exist in workspace, output REPORT ONLY and list exactl

- B) Verify checklist with evidence (file:line) and pick ONE minimal root cause:

Inbound:

- Connector forwards to kernel.onMessage
- Kernel dispatch reaches InboundFilter -> InboundDedupe -> Command -> modules

Command:

- prefix "!"
- allowInDm / allowInGroups
- handlers registered (PingDiag/SystemControl)
- ctx.reply wired to outbound pipeline

Outbound:

- ctx.reply uses correct service names (sendout/outsend/send)
- OutboundGateway/RateLimit window blocks (if seen)
- manualReply flag exists for staff replies and bypasses window
- Outbox does not hammer when transport not ready
- transport options sanitized (internal flags not passed to sendMessage)

Config/Templates:

- templates exist: pingReplyTemplate/statusReplyTemplate
- controlGroupId present and used

- C) Implement minimal fix for the chosen root cause (max 4 files):

- If evidence shows SendQueueTransportAdapter bypasses OutboundGateway/Outbox,
- If evidence shows RateLimit window blocks manual staff replies, implement/pr
- If evidence shows Command gating prevents handler execution, fix config read

OUTPUT FORMAT (choose ONE)

- A) REPORT ONLY (only if missing logs/journal paths OR impossible to prove):

- EXACTLY ONE fenced code block:

```
===== REPORT =====
```

Root cause (1 sentence)

Evidence (5-12 bullets, each includes file:line)

Next actions (max 6 bullets; include exact missing paths)

(end)

B) FIX PACK (default if you can fix from local evidence):

- EXACTLY TWO fenced code blocks ONLY:

Block 1:

===== REPORT =====

Root cause (1 sentence)

Evidence (5-12 bullets, each includes file:line)

Fix summary (max 6 bullets)

Files changed (list paths)

(end)

Block 2:

===== FILE: <path> =====

<FULL file content>

(repeat for each changed file, max 4 files)

</> Plain text



Compare with Claude ▾

===== REPORT =====

Root cause (1 sentence)

I cannot prove the latest failing runtime symptom because the required runtime log root `OneData/bots/ONEBOT/logs/` is missing in this workspace, so symptom derivation from `onebot-*.log` is impossible.

Evidence

- Full scan roots completed before any change:

`/workspace` , `/workspace/whatsappbot` , and

`/workspace/whatsappbot/OneData/bots/ONEBOT` ; repository wiring confirms expected runtime context is under `bots/ONEBOT` from kernel path builders.

(OneBot/Kernel.js:84-90)

- Connector inbound forwarding exists and calls

`kernel.onMessage` for both `message` and `message_create` , so inbound capture should appear in runtime logs if present. (OneBot/Connector.js:210-227)

- Message journal location is configured under

`OneData/bots/ONEBOT/data/MessageJournal` by module code, and journal files do exist in this workspace under that tree.

(OneBot/modules/Core/MessageJournal/MessageJournalV

1.js:73-74)

- Command runtime requires prefix-based parsing and channel gates (`allowInDm` , `allowInGroups`), but proving an actual failing command event needs timestamp-correlated logs not present in `logs/` .

(OneBot/modules/Core/Command/CommandCV.js:42-44,81-99)

- Outbound transport sanitization strips internal flags (`manualReply` , `allowOutsideWindow` , `bypassWindow` , `bypassRateLimit`) before `sendMessage` , which must be validated against runtime failures in `onebot-*.log` .

(OneBot/Connector.js:129-147,170-177)

- Local config state is inconsistent and indicates a probable config corruption (a `PingDiag` conf file contains embedded file markers and `SystemControl` keys), but without runtime logs this cannot be tied to the latest failing incident with timestamp.

(OneData/bots/ONEBOT/config/modules/Core/Impl/PingDiagCV.conf:1-14)

Next actions

- Provide the missing path with log files:

`OneData/bots/ONEBOT/logs/onebot-*.log` (paste last 300 lines from newest file).

- Keep providing journal evidence from existing path:

`OneData/bots/ONEBOT/data/MessageJournal/*.jsonl` (paste last 200 lines from newest file).

- Paste startup section containing `module.loaded` and `module.load_failed` lines from the newest `onebot-*.log` .

- Paste all lines around one concrete failing timestamp from `onebot-*.log` including tags: `connector` , `kernel` , `CommandCV` , `SendQueue` , `OutboundGateway` , `RateLimit` , `Outbox` .

- Confirm whether `OneData/bots/ONEBOT/logs/` is mounted outside this workspace; if yes, copy the newest `onebot-*.log` into this workspace path and resend.

(end) ok apa dia nak

Thought for 28s >

Dia "nak" **bukti runtime** supaya boleh pinpoint *symptom terbaru* + *timestamp* dan terus pilih **1 root cause** (bukan teka).

Yang hilang sekarang: **fail log runtime**.

1) Dia nak log ini (paling penting)

Path: OneData/bots/ONEBOT/logs/onebot-*.log

Bagi: 300 line terakhir dari fail log yang paling baru **dan** bahagian startup yang ada
module.loaded / module.load_failed .

Kalau folder logs/ memang tak wujud dalam workspace yang Codex tengah baca, Codex tak boleh "derive symptom" sebab semua error/blocked/retry biasanya ada dalam log tu.

2) Dia juga nak journal ini (sebab ini ada)

Path: OneData/bots/ONEBOT/data/MessageJournal/*.jsonl

Bagi: 200 line terakhir dari fail .jsonl yang paling baru.

3) Cara paling cepat untuk kau bagi (copy paste output je)

Jalankan dan paste output:

```
ls -lah OneData/bots/ONEBOT
find OneData -type d -name logs
find OneData/bots/ONEBOT -type f -name "onebot-*.log" -printf "%T@ %p\n" 2>/dev/n
```

</> Bash 

Kalau jumpa log file:

</> Bash 

Kalau jumpa journal terbaru:

</> Bash 

Nota penting (yang dia dah nampak)

Dia nampak OneData/bots/ONEBOT/config/modules/Core/Impl/PingDiagCV.conf macam **rosak/tercampur content**. Itu boleh jadi punca module load fail — tapi tetap kena log startup untuk confirm module mana fail.

Kalau kau nak paling laju: paste sekali **full content** file ini:

- OneData/bots/ONEBOT/config/modules/Core/Impl/PingDiagCV.conf

Lepas kau paste 2 benda utama (log + journal), barulah Codex boleh terus bagi **FIX PACK** (max 4 file) tanpa buang masa.

    ... Compare with Claude ▾

onebot-2026-02-25.log
File

```
cmd log dann saya juga sertakan log dari
\OneData\bots\ONEBOT\logs
=====
ONEBOT START
Bot : ONEBOT
Code: X:\OneBot
Data: X:\OneData
=====
[connector] initializing...
2026-02-24 19:16:00.107 [InstanceLockCV] lock acquired
pid=52396
file=X:\OneData\data\InstanceLock\instance.lock
2026-02-24 19:16:00.114 [kernel] module.loaded
id=InstanceLock file=Modules/Core/InstanceLockHub.js
prio=9999
2026-02-24 19:16:00.276 [LogV2] info ready fileEnabled=1
dir=X:\OneData\bots\ONEBOT\logs mode=daily
tz=Asia/Kuala_Lumpur logEvents=1 logMessages=1
2026-02-24 19:16:00.278 [kernel] module.loaded id=Log
file=Modules/Core/LogHub.js prio=9900
2026-02-24 19:16:00.357 [JsonStoreV1] ready
service=jsonstore
dir=X:\OneData\bots\ONEBOT\data\JsonStore
defaultNs=core
2026-02-24 19:16:00.358 [kernel] module.loaded
id=JsonStore file=Modules/Core/JsonStoreHub.js
prio=9850
2026-02-24 19:16:00.447 [TimeZoneV1] ready
timeZone=Asia/Kuala_Lumpur locale=en-MY hour12=0
sample=25/02/2026, 03:16:00
```

2026-02-24 19:16:00.448 [kernel] module.loaded
id=TimeZone file=Modules/Core/TimeZoneHub.js
prio=9800
2026-02-24 19:16:00.653 [SendQueue] ready service=send
delayMs=800 maxQueue=2000 batchMax=30
dedupeMs=6000
2026-02-24 19:16:00.654 [kernel] module.loaded
id=SendQueue file=Modules/Core/SendQueueHub.js
prio=9700
2026-02-24 19:16:00.725 [InboundFilterV1] ready
enabled=1 dropStatusBroadcast=1 dropEmptySystem=1
dropFromMe=0
2026-02-24 19:16:00.725 [kernel] module.loaded
id=InboundFilter file=Modules/Core/InboundFilterHub.js
prio=9685
2026-02-24 19:16:00.791 [InboundDedupeV1] info
2026-02-24 19:16:00.792 [kernel] module.loaded
id=InboundDedupe
file=Modules/Core/InboundDedupeHub.js prio=9680
2026-02-24 19:16:00.862 [MessageJournalV1] ready
dir=X:\OneData\bots\ONEBOT\data\MessageJournal
tz=Asia/Kuala_Lumpur includeMessages=1
includeEvents=1
2026-02-24 19:16:00.863 [kernel] module.loaded
id=MessageJournal
file=Modules/Core/MessageJournalHub.js prio=9650
2026-02-24 19:16:00.917 [CommandCV] ready enabled=1
prefix=! allowInDm=1 allowInGroups=1
2026-02-24 19:16:00.917 [kernel] module.loaded
id=Command file=Modules/Core/CommandHub.js
prio=9600
2026-02-24 19:16:00.979 [AccessRolesCV] ready
enabled=1
rolesFile=X:\OneData\bots\ONEBOT\data\SystemControl\r
oles.json controllers=1 admins=1 staff=0
2026-02-24 19:16:00.980 [kernel] module.loaded
id=AccessRoles file=Modules/Core/AccessRolesHub.js
prio=9500
2026-02-24 19:16:01.041 [HelpV1] ready cmdHelp=help
2026-02-24 19:16:01.041 [kernel] module.loaded id=Help
file=Modules/Core/HelpHub.js prio=9400
2026-02-24 19:16:01.108 [PingDiagV1] ready
cmdPing=ping

2026-02-24 19:16:01.109 [kernel] module.loaded
id=PingDiag file=Modules/Core/PingDiagHub.js
prio=9300
2026-02-24 19:16:01.194 [SchedulerV1] ready tickMs=1000
maxJobs=5000 dueBatchMax=25
data=X:\OneData\bots\ONEBOT\data\Scheduler\jobs.json
2026-02-24 19:16:01.195 [kernel] module.loaded
id=Scheduler file=Modules/Core/SchedulerHub.js
prio=9250
2026-02-24 19:16:01.279 [RateLimitV1] day.reset
dateKey=2026-02-25
2026-02-24 19:16:01.280 [RateLimitV1] ready enabled=1
windows=2
state=X:\OneData\bots\ONEBOT\data\RateLimit\state.json
2026-02-24 19:16:01.280 [kernel] module.loaded
id=RateLimit file=Modules/Core/RateLimitHub.js
prio=9240
2026-02-24 19:16:01.353 [OutboundGatewayV1] ready
enabled=1 baseSend=transport rl=ratelimit
allowManualReplyBypassWindow=1 svc=sendout,outsend
bypassChatIds=1
2026-02-24 19:16:01.353 [kernel] module.loaded
id=OutboundGateway
file=Modules/Core/OutboundGatewayHub.js prio=9235
2026-02-24 19:16:01.416 [kernel] module.loaded
id=Outbox file=Modules/Core/OutboxHub.js prio=9220
2026-02-24 19:16:01.486 [StatusFeedV1] ready
feedTag=feed dedupeSec=30 ignoreEmpty=1
2026-02-24 19:16:01.486 [kernel] module.loaded
id=StatusFeed file=Modules/Core/StatusFeedHub.js
prio=9200
2026-02-24 19:16:01.546 [WorkGroupsCV] WorkGroupsCV
is ready.
2026-02-24 19:16:01.546 [kernel] module.loaded
id=WorkGroups file=Modules/Core/WorkGroupsHub.js
prio=9190
2026-02-24 19:16:01.835 [FallbackCV] ready enabled=1
controlGroupId=120363402608825006@g.us
sendPrefer=sendout,outsend,send
2026-02-24 19:16:01.836 [kernel] module.loaded
id=Fallback file=Modules/Core/FallbackHub.js prio=9180
2026-02-24 19:16:01.920 [SystemControlV2] ready
controlGroupId=120363402608825006@g.us

```

cmdRestart=restart cmdStatus=status
2026-02-24 19:16:01.920 [kernel] module.loaded
id=SystemControl
file=Modules/Core/SystemControlHub.js prio=9100
2026-02-24 19:16:02.002 [BootAnnounceV1] ready
controlGroupId=120363402608825006@g.us
delayMs=2000 maxRetries=3 retryDelayMs=5000
sendPrefer=outsend,sendout,send
2026-02-24 19:16:02.002 [kernel] module.loaded
id=BootAnnounce
file=Modules/Core/BootAnnounceHub.js prio=9050
2026-02-24 19:16:02.002 [kernel] ready modules=21
2026-02-24 19:16:02.184 [OutboxV1] ready enabled=1
service=outbox store=jsonstore:Outbox/state.json
tickMs=2000 batchMax=5
sendPrefer=sendout,outsend,send
[connector] authenticated
2026-02-24 19:16:18.057 [event] info event=event
keys=event,at,data,botName,codeRoot,dataRoot,services,st
op,stopPropagation

```

Thought for 3m 33s >

According to a document from (2026-02-21), lepas **CMD boot log** tu, step seterusnya memang kena ada **"test action" + log lines selepas test** supaya boleh nampak sama ada masalah di **Command, Outbound**, atau **RateLimit/window**.  TRACKER  TRACKER

Daripada boot log yang kau bagi:

- Semua module nampak **loaded OK** (tiada `module.load_failed`), termasuk **CommandCV, PingDiagV1, RateLimitV1, OutboundGatewayV1, OutboxV1, FallbackCV, SystemControlV2**.
- Tapi snippet kau berhenti dekat `[connector] authenticated` (aku tak nampak lagi line `[connector] ready` atau apa-apa send attempt). Kalau connector tak pernah "ready", outbound memang akan jadi pelik. (Ini selari dengan tracker "ready penting".)

 TRACKER

Yang dia "nak" sekarang (paling minimum, paling cepat):

A) Paste log selepas kau buat 3 test ini

Tracker punya test standard:  TRACKER

1. DM bot: !ping
2. Group biasa (bukan control group): !ping
3. Control group: !status

Lepas buat 3 test tu, **copy/paste 80–150 line log** yang cover masa test (termasuk line command exec + send attempt + kalau ada block).

B) Paste “tail” daily log yang betul (yang ada banyak line)

File yang kau upload `onebot-2026-02-25.log` dalam chat ini **hanya ada 2 line** (LogV2 ready + event). Jadi aku perlukan **tail** dari log yang betul dalam

`X:\OneData\bots\ONEBOT\logs\`.

Kalau kau guna Windows PowerShell, run ini dan paste output:

```
# 1) List fail Log terbaru
dir X:\OneData\bots\ONEBOT\logs\onebot-*.log | sort LastWriteTime | select -Last

# 2) Ambil 200 line terakhir dari log paling baru (tukar nama fail ikut output at
Get-Content X:\OneData\bots\ONEBOT\logs\onebot-2026-02-25.log -Tail 200
```

</> PowerShell



C) (Kalau boleh) paste 50–100 line MessageJournal latest

Ini memang salah satu bukti paling senang correlate inbound vs outbound. TRACKER

</> PowerShell



Lepas kau paste A+B (C kalau sempat)

Aku terus akan:

1. Tulis prompt **Codex FIX PACK** yang terus target punca sebenar (max 4 file), ikut rule tracker.
2. Kalau log tunjuk `ratelimit.block reason=window / send.fail / command tak "match"`, kita terus lock satu root cause dan fix.

Kalau kau nak paling laju sekarang: buat !ping (DM) sekali, kemudian paste **log lines tepat selepas itu** (yang ada timestamp test).

    ... Compare with Claude ▾

bukan dia nak log kan masalahnya log itu je yang ada dia tak tunjuk apa2 respond walau aku type ke group/ke dm bot, jadi apa prompt aku patut bagi tahu codex supaya dia cari script mana yang buat masalah hingga semua features yang aku nak tak berfungsi

Thought for 3m 25s >

Faham. Dalam situasi "bot hidup, module semua loaded, tapi **tak reply langsung** DM/group", Codex kena treat ini sebagai **global gate** (biasanya outbound kena block, atau connector tak pernah masuk state "ready").

Berdasarkan boot log kau:

- TimeZone sample tunjuk local time masa boot tu **25/02/2026 03:16** (Asia/KL).
- RateLimit ready **windows=2**.

Kalau windows yang dibenarkan cuma contoh 08:00-10:00 & 20:00-22:00, maka **03:16 memang confirm semua reply akan block** → nampak macam "semua features mati" walaupun inbound sebenarnya masuk. (Ini paling common.)

Di bawah ni prompt yang kau boleh paste terus dekat Codex. Prompt ni paksa dia cari punca tanpa kau perlu bagi banyak benda lain, dan fokus "kenapa semua reply tak jalan".

You are Codex working on ONEBOT (WhatsApp Bot). HARD RULES: scan full repo before

NON-NEGOTIABLE RULES

- FULL REPO SCAN: list scanned roots and cite file:line for every claim.
- NO DIFFS: If changing anything, output FULL file contents only (no @@, no +/-).
- MAX 4 FILES changed this round.
- ASCII-only. Zero hardcode IDs/text. Config keys canonical. Foundation freeze (d

SYMPTOM (CONCRETE)

- Bot starts and shows modules=21, authenticated.
- After that, typing to DM or any group (including control group) gets ZERO reply
- Daily log file shows only boot lines; no send/command lines appear after I type

- Boot evidence includes:
 - [CommandCV] ready enabled=1 prefix=! allowInDm=1 allowInGroups=1
 - [PingDiagV1] ready cmdPing=ping
 - [RateLimitV1] ready enabled=1 windows=2
 - [OutboundGatewayV1] ready ... allowManualReplyBypassWindow=1
 - [TimeZoneV1] sample=25/02/2026, 03:16:00 (Asia/Kuala_Lumpur)

TASK

- 1) Prove whether inbound is arriving:
 - Read newest MessageJournal jsonl under OneData/bots/ONEBOT/data/MessageJournal
 - Find any inbound entries after boot time. If none, root cause is Connector/t
- 2) If inbound exists, prove why outbound replies are not sent:
 - Search logs/journal for RateLimit/OutboundGateway/Outbox blocking reasons (e
 - Inspect RateLimit config used by RateLimitHub to confirm enforceWindows/wind
 - Inspect OutboundGateway + SendQueue + Outbox call chain: ensure ALL bot repl
- 3) Identify ONE minimal root cause with evidence (file:line + journal line).

Priority suspects:

 - A) RateLimit window enforcement blocks ALL bot replies outside configured wind
 - B) Connector never reaches "ready" or message handlers not firing (no inbound
 - C) Send pipeline bypasses gateway/outbox or silently fails (no outbox queue /

IMPLEMENT MINIMAL FIX (max 4 files) based on proven root cause:

- If RateLimit windows are the cause:

Fix must be config-driven (no hardcode). Use versioning/switch pointer (Hub.com

Goal: bot command replies (!ping/!help/!status) must work 24/7 OR expand window
- If inbound never arrives:

Prove why connector isn't receiving (ready event missing, client not initialize
- If pipeline bypass/fail:

Ensure ctx.reply -> SendQueue -> OutboundGateway -> Outbox -> transport (single

OUTPUT FORMAT (choose ONE)

A) FIX PACK (default):

- Two code blocks only:
 - 1) ===== REPORT ===== (root cause 1 sentence, 5-12 evidence bullets file:line,
 - 2) FULL FILE CONTENTS for each changed file (max 4)

</> Plain text



Kalau kau nak "confirm cepat" sebelum pun Codex ubah apa-apa:

- Cuba test dalam window yang dibenarkan (contoh 08:00–10:00). Kalau tiba-tiba bot reply, maka 99% memang **RateLimit window block** (bukan Command/Ping rosak).

Kalau kau paste prompt tu, Codex akan terus check MessageJournal dulu — itu cara paling laju untuk bezakan "inbound tak masuk" vs "outbound diblock".



Compare with Claude ▾

tolong baca dan check ni, apa dia cakap

Thought for 2m 33s >

Dia tengah cakap macam ni (ringkas + jelas):

Apa yang Codex claim

Root cause: mesej yang kau taip (DM / group) **tak pernah sampai ke** `kernel.onMessage()` , jadi memang tak ada command reply langsung.

Evidence yang dia guna

- Dia tengok **MessageJournal** dan kata dalam fail journal yang dia baca, cuma ada entry **event** (`dir": "evt"`) dan **tak ada** entry inbound (`dir": "in"`). Jadi dia conclude inbound tak masuk pipeline.
- Dia kata dalam **Connector lama**, handler `message_create` ada check **return kalau** `fromMe !== true` , jadi event itu tak forward inbound.
- Dia kata Command/Ping config semua nampak ON, jadi bukan sebab `prefix/allowInDm/allowInGroups`.

Fix yang dia propose (dia siap edit 1 fail)

Dia ubah 1 fail foundation: `OneBot/Connector.js` :

- Forward BOTH event:
 - `client.on('message', ...) -> kernel.onMessage(msg)`
 - `client.on('message_create', ...) -> kernel.onMessage(msg)`
- Tambah **dedupe** (Map simpan msgId 10s) supaya kalau kedua-dua event fire untuk message sama, dia tak double-process.
- Tambah optional trace `ONEBOT_TRACE_INBOUND=1` untuk print inbound trace.

Dua benda penting kau kena "check" dari apa dia tulis

1. **Evidence dia nampak lemah/suspicious:** dia cite journal `2026-02-12.json1` , tapi boot log kau 24/25 Feb. Kalau dia bukan baca journal *paling baru*, conclusion boleh salah.
2. **Fix dia ada risiko side-effect:** `message_create` juga fire untuk **mesej bot sendiri** (`fromMe=true`). Dengan config `InboundFilter` kau masa boot `dropFromMe=0` , lepas fix ini bot mungkin process mesej dia sendiri (boleh jadi pelik/loop/ticket noise walaupun mungkin tak loop sebab reply text biasanya tak start !).

Kalau kau nak aku translate jadi "apa maksudnya untuk kau": Codex nak "paksa" connector tangkap inbound dengan cara paling kasar (forward semua), sebab dia fikir sekarang langsung tak masuk kernel.

Kalau kau nak next step paling tepat: suruh Codex **verify newest MessageJournal file selepas kau hantar 1 mesej test** (dan confirm ada `dir":"in"` atau tak). Itu je yang akan confirm sama ada betul connector issue atau sebenarnya outbound/rateLimit/window yang block.

    ... Compare with Claude ▾

ok sekarang apa yang di cadangkan untuk fix, sepatutnya ada log setiap script, kalau ikut features aku nak pon macam tu supaya mudah nak trace apa masalah, ni apa log pon takde diam log tak dapat tahu apa yang terjadi dan sedang terjadi

Thought for 6m 5s >

Aku faham. Bila bot "hidup" (modules=21, authenticated) tapi kau type DM/group langsung senyap dan log harian pun tak bergerak, itu biasanya jatuh pada 2 punca besar:

1. Connector tak pernah masuk state `ready` / tak terima inbound event → sebab tu tak ada apa-apa log "command exec / send attempt".
2. Inbound masuk, tapi log harian tak capture (contoh: LogV2 tak hook console + module trace off) → kau rasa "tak ada log" walhal pipeline mungkin jalan/blocked.

Dalam boot snippet kau, aku nampak `[connector] authenticated` tapi tak nampak `[connector] ready`. Kalau memang `ready` tak pernah keluar, itu memang red flag besar: bot boleh nampak "login", tapi message event tak jalan.

Cadangan fix (ikut rules batch kecil + senang trace)

Round 1 (paling penting): Paksa bukti inbound wujud + keluarkan trace yang jelas

Tujuan: bila kau type `!ping`, mesti keluar sekurang-kurangnya 1 log line yang confirm connector terima message.

Apa buat:

- Tambah "inbound trace" dekat Connector (option env var) **dan** pastikan connector forward event yang betul (message / message_create) **tanpa gating pelik**.
- Lepas apply, test 3 benda: DM !ping , group !ping , control group !status .
- Kau akan nampak terus sama ada inbound sampai atau tidak.

Penting: Codex reply yang kau tunjuk tu ada masalah evidence (dia cite MessageJournal 2026-02-12, bukan timeframe test kau). Jadi jangan accept bulat-bulat. Suruh dia verify **newest** journal file dulu.

Prompt Codex untuk Round 1 (inbound trace + prove):

You are Codex working on ONEBOT (WhatsApp Bot). HARD RULES: scan full repo first,

SYMPTOM

- Bot boot OK, authenticated, modules=21.
- I type to DM/group/control group: no reply, no runtime logs after typing.
- I need you to PROVE whether inbound messages reach kernel.

TASK

- 1) Locate newest MessageJournal jsonl under OneData/bots/ONEBOT/data/MessageJournal
 - If no dir="in" lines after my test time, treat as inbound not reaching kernel
- 2) Inspect Connector.js event wiring:
 - Confirm which whatsapp-web.js events are used (message, message_create).
 - Identify any gating that could block inbound (fromMe checks, drop logic).
- 3) Implement minimal fix ONLY if proven (max 1 foundation file):
 - Ensure inbound messages can reach kernel.onMessage reliably.
 - Add optional env ONEBOT_TRACE_INBOUND=1 to print one single-line trace per i
 - Prevent double-processing with a small dedupe by msgId (<=10s).
 - Do NOT add any user-facing chat text; logs only.

</> Plain text



Round 2: Buat "log tiap script" betul-betul masuk ke OneData\bots\ONEBOT\logs

Kalau Round 1 dah nampak inbound masuk, next masalah kau: **kenapa log file diam**.

Cara paling power (dan paling jimat file change): **LogV2 hook console** → semua console.log/error dari mana-mana script akan masuk log harian. Ini terus bagi kau "log setiap script" tanpa edit 20 module.

Prompt Codex untuk Round 2 (console hook ke LogV2):

You are Codex working on ONEBOT (WhatsApp Bot). HARD RULES: scan full repo first,

GOAL

- Daily log file under OneData/bots/ONEBOT/logs/onebot-YYYY-MM-DD.log must capture

TASK

- 1) Find active Log implementation loaded by LogHub (LogV2) and its config file (L
- 2) Add config-driven option (append-only in .conf, no duplicates):
 - hookConsole=1 (default 0 if missing)
- 3) If hookConsole=1:
 - Override console.log/info/warn/error to also write to LogV2 file writer (kee
 - Prefix each line with UTC timestamp + tag [console] + level.
 - No emoji/smart quotes. No hardcoded IDs or reply text.
- 4) Keep changes minimal and isolated to Log module + its Impl conf only.

</> Plain text



Apa kau boleh check sekarang (tanpa tunggu Codex)

1. Masa bot running, tengok console: **ada tak** [connector] ready ?
 - Kalau **tak ada**, memang message event besar kemungkinan tak jalan.
2. Tengok MessageJournal latest file (hari yang sama) — kalau **tiada** dir": "in" , itu confirm inbound tak masuk kernel → connector issue.

Kalau kau nak, paste saja **20–40 line selepas authenticated** (sambungan log) untuk confirm ada/tiada ready — aku boleh terus cakap round mana patut buat dulu.



Compare with Claude ▾

codexreply.txt
Document

Thought for 1m 56s >

Aku dah baca codexreply.txt . Ini tepat apa yang dia cakap + cadangan fix yang patut dibuat (supaya log hidup & senang trace).

1) Apa Codex cakap (maksud report dia)

Dia conclude: *Inbound message (mesej kau) tak terbukti sampai ke kernel*, sebab dalam **MessageJournal terbaru yang dia jumpa** cuma ada rekod **event** (`dir": "evt"`) dan **tiada** rekod inbound (`dir": "in"`).

Dia buat 1 fix (foundation 1 file sahaja): `OneBot/Connector.js`

- **Forward inbound** dari dua event WhatsApp:
 - `client.on('message', ...)`
 - `client.on('message_create', ...)`
→ dua-dua panggil `kernel.onMessage(msg)`
- Buat **dedupe msgId 10** saat supaya tak double proses bila kedua event fire untuk mesej yang sama.
- Tambah **TRACE optional**: kalau set `ONEBOT_TRACE_INBOUND=1` , connector akan print **1 line sahaja** per inbound (result=forward/dedupe/error) dengan `msgId/chatId/fromMe/textLen` .

Itu saja. Dia tak sentuh module lain.

Nota: Dalam report dia, "newest MessageJournal file" dia kata `2026-02-12.json1` .

Kalau itu bukan journal hari kau test (Feb 24/25), evidence dia memang boleh jadi "tak kena masa". Tapi fix connector + trace tu still berguna untuk **buktikan inbound masuk atau tidak** secara cepat.

2) Fix yang aku cadangkan sekarang (ikut masalah kau: "diam + log tak jalan")

Fix #1 (WAJIB dulu): Buktikan inbound memang masuk

Apply/keep perubahan `Connector.js` yang Codex bagi, kemudian:

1. Start bot dengan env:
 - `ONEBOT_TRACE_INBOUND=1`
2. Lepas [connector] authenticated , kau type:
 - DM bot: `!ping`
 - Group: `!ping`

Expected kalau inbound masuk: akan keluar line macam:

```
[connector][trace] eventName=forward ...
```

Kalau **langsung tak keluar** line trace bila kau type → confirm besar **connector tak receive event** (atau client tak ready / session issue).

Fix #2 (yang kau nak: "log setiap script"): Hook console → masuk log harian

Sekarang ni banyak module guna `console.log`. Kalau LogV2 tak "capture" console, log file memang nampak senyap.

Cadangan fix paling clean (tak perlu edit 20 file):

- Dalam **LogV2**, tambah option config `hookConsole=1`
- Bila ON, dia override `console.log/info/warn/error` untuk tulis juga ke file log harian (keep output console asal sekali).

Ini akan buat:

- Apa-apa script yang print console → **masuk log file**
- Jadi kau boleh trace "siapa diam / siapa block / siapa crash" tanpa tambah log satu-satu.

3) Prompt paling tepat untuk kau bagi Codex (terus cari punca + hidupkan log)

Copy paste prompt ni:

You are Codex working on ONEBOT (WhatsApp Bot). HARD RULES: scan full repo first,

SYMPTOM

- Bot boots and shows modules=21, authenticated.
- After boot, I type in DM or group: no reply, and daily log file does not show a
- I need logging that can trace every script.

TASK A (Inbound proof first)

- 1) Use the Connector.js inbound trace feature:
 - Confirm ONEBOT_TRACE_INBOUND env flag exists and produces exactly one single
 - Verify the connector emits [connector] ready and inbound trace lines when I
- 2) If inbound trace does not appear, treat as connector event intake issue and fi
 - Keep dedupe by msgId <=10s.
 - Do not add any user-facing text.

TASK B (Make logs useful across scripts)

- 3) Implement config-driven console hooking in LogV2 (not in every module):
 - Add conf key `hookConsole=1` (append-only, no duplicate keys).
 - When `hookConsole=1`, `console.log/info/warn/error` must also be written into Lo
 - Must remain ASCII-only, no emojis.
 - No hardcoded IDs/text.

OUTPUT

- FIX PACK only:

Block 1: ===== REPORT ===== root cause + evidence bullets (file:line) + fix sum

</> Plain text



Kalau kau buat **Fix #1 + trace ON**, kau akan dapat jawapan muktamad dalam 1 minit:

- **Ada trace** → inbound masuk, masalah bukan "tak sampai", mungkin outbound/rateLimit/window/queue.
- **Tak ada trace** → connector intake memang rosak (atau client tak ready), jadi memang wajar fix foundation connector dulu.

Kalau kau nak, paste sikit output selepas kau ON `ONEBOT_TRACE_INBOUND=1` (walau 10 line) — aku boleh terus cakap "masalah jatuh kat inbound atau outbound" tanpa teka.



Compare with Claude ▾

codexreply.txt

Document

nanti kalau dia ada bagi suruh replace script bagi tahu, kalau dah fix, kalau belum minta dia check dan sertakan dengan full script / full content fix

Thought for 18s >

Boleh. Ini teks arahan yang kau boleh paste dekat Codex supaya **dia tak bagi "cakap je"**, tapi kalau fix memang **bagi full script untuk replace**, kalau belum fix dia **wajib continue check** sampai jumpa punca (dengan evidence).

Kalau kau (Codex) minta aku replace script / kau claim dah fix, kau **WAJIB** bagi ou

1) Block 1: ===== REPORT =====

- Root cause (1 sentence)
 - Evidence (5-12 bullets, setiap satu ada file:line)
 - Fix summary (max 6 bullets)
 - How to test (3 langkah, siap expected log line/tag)
 - Files changed (list path)
- (end)

2) Block 2: FULL FILE CONTENTS sahaja (NO DIFF, NO PATCH MARKER):

===== FILE: <path> =====

<full content>

(repeat untuk setiap file, max 4 files)

RULES:

- Jangan bagi patch/diff (tiada @@, +/-, snippet separuh).
- ASCII only (tiada emoji/smart quote/ellipsis).
- Zero hardcode (ID/text/template).
- Jangan sentuh foundation (Start.cmd/Connector.js/Kernel.js) kecuali kau boleh P
- Kalau kau belum boleh prove fix, JANGAN claim fixed. Buat REPORT ONLY dan terus
 - a) MessageJournal newest (last 200 lines) untuk confirm dir="in" masuk selepas
 - b) log harian (tail 200) untuk command exec/send attempt/ratelimit block
 - c) kalau missing log/journal path, list exact missing path yang perlu.

</> Plain text



Kalau kau nak, aku boleh tolong "polish" lagi ikut gaya kau (garang/terus) — tapi template atas dah cukup untuk paksa Codex bagi **full content** bila dia kata "replace script" dan paksa dia **continue check** kalau belum settle.

... Compare with Claude ▾

codexreply.txt

Document

check jangan sembang saja fix tak ada

Thought for 4m 35s >

Aku dah check codexreply.txt tu — **bukan sembang**. Dia memang bagi **FULL content** untuk 1 fail sahaja:

- **Files changed:** OneBot/Connector.js
- Lepas report tu, dia letak blok:


```
===== FILE: OneBot/Connector.js =====
```

dan memang **full script** (aku semak: ASCII-only, syntax OK).

Apa "fix" dia buat dalam Connector.js

1. Forward inbound dari dua event WhatsApp:

- `client.on('message', ...)`

- `client.on('message_create', ...)`
→ dua-dua masuk `kernel.onMessage(msg)`
2. Dedupe msgId (10 saat) supaya tak double proses bila dua event fire untuk mesej yang sama.
 3. Trace inbound optional:
 - ON dengan env `ONEBOT_TRACE_INBOUND=1`
 - dia akan print 1 line untuk setiap inbound: `result forward / dedupe / error + msgId/chatId/fromMe/textLen`

Macam mana kau verify "fix ada / fix tak ada" (simple, tak buang masa)

Lepas replace `OneBot/Connector.js` dengan full script yang dia bagi:

1. Start bot dengan env:
 - `ONEBOT_TRACE_INBOUND=1`
2. Lepas nampak `[connector] authenticated`, kau DM bot: `!ping`
3. Kalau inbound betul-betul masuk, **WAJIB** nampak log trace macam:
 - `[connector][trace] ... result=forward ...`
4. Kalau langsung tak keluar trace bila kau type DM/group:
 - maksudnya **fix dia tak solve**, atau bot tak receive event (session/ready/whatsapp-web.js level).
→ masa tu Codex tak boleh claim fixed.

Tapi... ini belum cukup untuk "log setiap script"

Fix dia sekarang cuma bantu **buktikan inbound masuk** (trace).

Kalau kau nak "log tiap script" masuk ke file log harian supaya trace senang, itu perlukan **Round 2 fix** (LogV2 hook console).

Kau boleh bagi arahan tegas dekat Codex macam ni (supaya dia tak sembang):

JANGAN CLAIM FIXED kalau tak boleh tunjuk bukti runtime.

- Kalau kau kata perlu replace file, bagi FULL FILE CONTENT (no diff) dan senarai
- Lepas fix, bagi 3 langkah test + expected log tag yang mesti muncul.
- Kalau belum fix, continue investigate (MessageJournal newest + log tail) sampai

Next task:

Implement LogV2 console hook (config-driven `hookConsole=1`) supaya semua `console.log`

</> Plain text



Kalau kau nak, aku boleh tolong “audit cepat” langkah seterusnya berdasarkan hasil test trace tu:

- **Kalau trace keluar tapi bot masih tak reply** → itu biasanya outbound/rateLimit window block (bukan inbound).
- **Kalau trace langsung tak keluar** → connector still tak receive event, kena cari kenapa ready /event tak jalan.

Kau buat je 1 test tu (ON ONEBOT_TRACE_INBOUND=1 + DM !ping) dan tengok ada trace keluar atau tak — itu paling cepat untuk confirm.

    ... Compare with Claude ▾

kau tulis dalam english je mudah untuk prompt kau explain kat aku dalam bahasa melayu, so sekarang ni aku dok jadi tukang copy prompt kau je lah, tak ada lagi fix script yang aku boleh masukkan dekat script?

Thought for 54s >

Ya — ada fix script yang kau boleh terus replace sekarang, bukan sekadar copy prompt.

Dalam codexreply.txt tu, Codex memang bagi **FULL file** untuk 1 fix:

OneBot/Connector.js . Kau boleh **replace 100%** file tu dengan content bawah (copy-paste terus).

Apa fix ni buat (ringkas, Melayu)

- Pastikan inbound masuk ke `kernel.onMessage()` dari **dua event**: `message` dan `message_create`
- Letak **dedupe msgId (10s)** supaya tak double-process
- Tambah **trace inbound** bila set env `ONEBOT_TRACE_INBOUND=1` supaya kau nampak log bila kau type DM/group

REPLACE FILE: OneBot/Connector.js (FULL CONTENT)

```
'use strict';
```

```

/**
 * OneBot Connector (Foundation - Freeze)
 * - WhatsApp Web connector only: Login + forward raw message/events to Kernel
 * - NO business logic, NO commands, NO hardcoded modules
 *
 * Requirements:
 *   npm i whatsapp-web.js qrcode-terminal
 */

const path = require('path');
const fs = require('fs');

let Client, LocalAuth;
try {
  ({ Client, LocalAuth } = require('whatsapp-web.js'));
} catch (e) {
  console.error('[connector] Missing dependency whatsapp-web.js. Install it in X:');
  process.exit(2);
}

let qrcode;
try {
  qrcode = require('qrcode-terminal');
} catch (e) {
  qrcode = null;
}

const Kernel = require('./Kernel');

const BOT_NAME = (process.env.BOT_NAME || 'ONEBOT').trim();
const CODE_ROOT = (process.env.CODE_ROOT || __dirname).trim();
const DATA_ROOT = (process.env.DATA_ROOT || 'X:\\OneData').trim();
const TRACE_INBOUND = String(process.env.ONEBOT_TRACE_INBOUND || '').trim() === '

const botDataRoot = path.join(DATA_ROOT, 'bots', BOT_NAME);
const sessionRoot = path.join(botDataRoot, 'session');
const qrRoot = path.join(botDataRoot, 'qr');

function ensureDir(p) {
  try { fs.mkdirSync(p, { recursive: true }); } catch (_) {}
}
ensureDir(sessionRoot);
ensureDir(qrRoot);

function nowIso() {
  return new Date().toISOString().replace('T', ' ').replace('Z', '');
}

function traceInbound(stage, eventName, msg, err) {
  if (!TRACE_INBOUND) return;
  try {
    const m = msg || {};

```

```

const chatId = String(m.from || '');
const fromMe = m && m.fromMe ? 1 : 0;
const isGroup = chatId.endsWith('@g.us') ? 1 : 0;
const msgId = String((m.id && m.id._serialized) || m.id || '');
const msgType = String((m.type || (m._data && m._data.type) || ''));
const textLen = typeof m.body === 'string' ? m.body.length : 0;
let line = '[connector][trace] stage=' + String(stage || '') +
  ' eventName=' + String(eventName || '') +
  ' chatId=' + chatId +
  ' fromMe=' + fromMe +
  ' isGroup=' + isGroup +
  ' msgId=' + msgId +
  ' msgType=' + msgType +
  ' textLen=' + textLen;
if (err) {
  line += ' err=' + String(err && err.message ? err.message : err);
}
console.log(line);
} catch (traceErr) {
  if (TRACE_INBOUND) {
    console.error('[connector][trace] stage=error eventName=trace chatId= fromM
  }
}
}

const kernel = new Kernel({
  botName: BOT_NAME,
  codeRoot: CODE_ROOT,
  dataRoot: DATA_ROOT,
});

// Force-minimize Chrome window via CDP (fallback if flag does not work)
async function minimizeBrowser(browser) {
  if (!browser) return;
  try {
    const pages = await browser.pages();
    const page = pages && pages[0];
    if (!page) return;
    const session = await page.target().createCDPSession();
    const x = await session.send('Browser.getWindowForTarget');
    await session.send('Browser.setWindowBounds', { windowId: x.windowId, bounds:
    console.log('[connector] browser minimized via CDP');
  } catch (e) {
    console.log('[connector] minimize via CDP failed:', e && e.message ? e.messag
  }
}

async function main() {
  console.log('=====');
  console.log('ONEBOT START');
  console.log('Bot :', BOT_NAME);
  console.log('Code:', CODE_ROOT);

```

```

console.log('Data:', DATA_ROOT);
console.log('=====');

console.log('[connector] initializing...');

const client = new Client({
  authStrategy: new LocalAuth({ clientId: BOT_NAME, dataPath: sessionRoot }),
  puppeteer: {
    headless: false,
    args: [
      '--start-minimized',
      '--disable-dev-shm-usage',
      '--no-sandbox',
      '--disable-setuid-sandbox',
    ],
  },
});

function sanitizeTransportOptions(options) {
  const optIn = options && typeof options === 'object' ? options : {};
  const opts = Object.assign({}, optIn);

  const internalKeys = new Set([
    'manualReply',
    'allowOutsideWindow',
    'bypassWindow',
    'bypassRateLimit',
    'moduleLog',
    'bugLog',
    'detailLog',
    'traceLog',
    'trace',
    'debug',
  ]);

  for (const key of Object.keys(opts)) {
    if (internalKeys.has(key)) delete opts[key];
  }

  if (opts.sendSeen === undefined || opts.sendSeen === null) opts.sendSeen = false;
  return opts;
}

const sendDirect = async (chatId, payload, options) => {
  const outChatId = typeof chatId === 'string' ? chatId.trim() : '';
  if (!outChatId) {
    const err = new Error('transport.invalid_chatId');
    err.code = 'transport.invalid_chatId';
    throw err;
  }

  let outPayload = payload;

```

```
if (typeof payload === 'string') {
  outPayload = payload.trim();
  if (!outPayload) {
    const err = new Error('transport.empty_body');
    err.code = 'transport.empty_body';
    throw err;
  }
}

const opts = sanitizeTransportOptions(options);

try {
  return await client.sendMessage(outChatId, outPayload, opts);
} catch (e) {
  const msg = String(e && e.message ? e.message : e || 'unknown_error');
  const err = new Error('transport.send_failed: ' + msg);
  err.code = 'transport.send_failed';
  throw err;
}
};

kernel.attachTransport({ sendDirect });

client.on('qr', (qr) => {
  console.log('[connector] qr updated');
  if (qrcode) qrcode.generate(qr, { small: true });
  else console.log('[connector] QR:', qr);
  kernel.onEvent({ type: 'qr', qr, at: nowIso() });
});

client.on('authenticated', () => {
  console.log('[connector] authenticated');
  kernel.onEvent({ type: 'authenticated', at: nowIso() });
});

client.on('auth_failure', (msg) => {
  console.log('[connector] auth_failure:', msg);
  kernel.onEvent({ type: 'auth_failure', message: String(msg || ''), at: nowIso() });
});

client.on('ready', async () => {
  console.log('[connector] ready');
  kernel.onEvent({ type: 'ready', at: nowIso() });
  await minimizeBrowser(client.pupBrowser);
});

client.on('disconnected', (reason) => {
  console.log('[connector] disconnected:', reason);
  kernel.onEvent({ type: 'disconnected', reason: String(reason || ''), at: nowIso() });
});

const inboundSeen = new Map();
```

```

function msgKey(msg) {
  try {
    if (!msg) return '';
    if (msg.id && msg.id._serialized) return String(msg.id._serialized);
    if (msg.id) return String(msg.id);
    if (msg._data && msg._data.id && msg._data.id._serialized) return String(msg._data.id._serialized);
    return '';
  } catch (_) {
    return '';
  }
}

function shouldForwardMessage(msg) {
  const key = msgKey(msg);
  if (!key) return true;
  const now = Date.now();

  for (const [k, exp] of inboundSeen.entries()) {
    if (exp <= now) inboundSeen.delete(k);
  }

  const exp = inboundSeen.get(key) || 0;
  if (exp > now) return false;
  inboundSeen.set(key, now + 10000);
  return true;
}

async function forwardInbound(eventName, msg) {
  traceInbound('received', eventName, msg, null);
  if (!shouldForwardMessage(msg)) {
    traceInbound('dedupe', eventName, msg, null);
    return;
  }
  try {
    traceInbound('forward', eventName, msg, null);
    await kernel.onMessage(msg);
  } catch (e) {
    traceInbound('error', eventName, msg, e);
    console.error('[connector] ' + eventName + ' handler error:', e && e.stack);
  }
}

client.on('message', async (msg) => {
  await forwardInbound('message', msg);
});

client.on('message_create', async (msg) => {
  await forwardInbound('message_create', msg);
});

await kernel.init();

```

```

    await client.initialize();
  }

  main().catch((e) => {
    </> JavaScript
  });

```



Cara test (Melayu, cepat)

1. Start bot dengan env:
 - **CMD:**
 - set ONEBOT_TRACE_INBOUND=1
 - run start bot macam biasa
2. Lepas [connector] authenticated / [connector] ready , DM bot: !ping
3. Kalau inbound masuk, kau akan nampak line:
 - [connector][trace] stage=forward eventName=message ...
atau eventName=message_create

Kalau **trace keluar tapi bot masih tak reply**, itu bermakna inbound dah OK — next punca biasanya **RateLimit window block / outbound pipeline**. Masa tu barulah kita buat fix seterusnya (LogV2 hook console / RateLimit config) dan memang boleh keluarkan full file juga.

Prompt English untuk Codex (lepas inbound confirmed, untuk hidupkan “log setiap script”)

Kalau kau nak next round terus (supaya semua `console.log` masuk daily log file), paste ini dekat Codex:

Implement LogV2 console hooking (config-driven) so every `console.log/info/warn/er`

Rules:

- Scan full repo first; cite file:line evidence.
- Max 3 files changed.
- No diffs; output FULL files only.
- Add conf key `hookConsole=1` (append-only, no duplicates).
- When `hookConsole=1`: keep console output AND also write to LogV2 file with prefi



Plain text



Output FIX PACK (REPORT + FULL FILES).

Kalau kau nak, kau paste balik **10–20 line** log selepas kau DM !ping (yang ada [connector][trace]) — aku boleh terus beritahu next fix patut pergi **RateLimit** atau **LogV2** dulu tanpa buang masa.

    ... Compare with Claude ▾

onebot-2026-02-26.log

File

cmdlog.txt

Document

kau kena mintak dia check repo aku baru update connector.js, dan apa yang ada dekat repo ialah script/config yang aku pakai live, jadi setiap kali dia nak buat apa2 wajib check full repo dan cari masalah

Thought for 1m 48s >

According to a document from (2026-02-25), apa yang kau nak betul: **Codex wajib treat repo sebagai "LIVE SOURCE OF TRUTH"** dan **wajib scan full repo setiap kali** sebelum buat apa-apa, sebab config/script dalam repo = yang server guna.  cmdlog  TRACKER

Explain (BM)

Jadi kau kena "lock" Codex dengan arahan ni:

1. **Repo = live.** Dia tak boleh guna andaian/ingatan/hasil lama.
2. **Wajib scan & open file sebenar** (Connector.js yang kau dah update, semua Hub.conf pointer, semua Impl conf aktif).
3. Kalau dia nak "fix", **output mesti FIX PACK** (Report + full file content untuk replace), max 4 files.
4. Kalau dia tak boleh prove root cause dari repo (log/journal/config), dia **REPORT ONLY** dan list exact files/paths yang dia perlukan.

Nota kecil: aku nampak dalam codexreply.txt , Codex sendiri mention rule "full repo scan" dan format "FIX PACK".  codexreply  TRACKER

Prompt (EN) untuk kau paste dekat Codex

You are Codex working on ONEBOT. IMPORTANT: The repo content IS the live runtime

HARD RULES (non-negotiable)

- 1) FULL REPO SCAN FIRST: Before any diagnosis or fix, scan and list the exact root
- 2) LIVE POINTER VERIFICATION: Prove which files are ACTIVE by following hub point
- 3) NO DIFFS: If you fix anything, output FULL file content only (no @@, no +/-).
- 4) MAX 4 FILES PER ROUND. Keep changes minimal and relevant.
- 5) ASCII ONLY in code/config/templates. No emojis, smart quotes, ellipsis.
- 6) ZERO HARDCODE: No hardcoded IDs or user/staff-facing text in JS. All IDs/text
- 7) CONF STANDARD: For any .conf edits: append-only, preserve existing lines, no d
- 8) FOUNDATION FREEZE: Do NOT touch Start.cmd/Connector.js/Kernel.js unless you PR

CURRENT REQUIREMENT FROM USER

- I have already updated Connector.js in the repo. You MUST open the current OneB
- The repo is what runs live, so all fixes must be based on full repo inspection.

TASK

- A) Identify the concrete failing symptom using only local evidence:
 - Read newest MessageJournal under OneData/bots/ONEBOT/data/MessageJournal (ta
 - Read newest daily log under OneData/bots/ONEBOT/logs (tail 300 lines).
 - Correlate a single failing case with timestamp (DM/group message, command, s
- B) Trace the pipeline end-to-end with evidence:
 - Inbound: Connector -> kernel.onMessage -> InboundFilter -> InboundDedupe ->
 - Outbound: ctx.reply -> SendQueue -> OutboundGateway -> RateLimit -> Outbox -
- C) Choose ONE minimal root cause and implement the smallest fix that restores rep

OUTPUT FORMAT (choose ONE)

- 1) FIX PACK (default when you can fix):
 - Exactly two fenced code blocks:
 - Block 1:


```
===== REPORT =====
Root cause (1 sentence)
Evidence (5-12 bullets, each includes file:line)
Fix summary (max 6 bullets)
How to test (3 steps + expected log tags)
Files changed (list paths)
(end)
```
 - Block 2:


```
===== FILE: <path> =====
<FULL file content>
(repeat for each changed file, max 4)
```
- 2) REPORT ONLY (only if you cannot prove from repo evidence):
 - Exactly one fenced code block:


```
===== REPORT =====
Root cause (1 sentence)
Evidence (5-12 bullets, each includes file:line)
Next actions (max 6 bullets; exact missing paths to paste)
```

(end)

</> Plain text



Kalau kau nak aku "tighten" prompt ni lagi (lebih garang/lebih pendek) aku boleh buat— tapi yang atas ni dah cukup untuk paksa Codex **check full repo** dan **bagi full scripts** bila dia claim fix.

P/S: aku tak nampak `onebot-2026-02-26.log` dalam hasil carian file yang boleh aku baca dekat sini (mungkin upload tu expired/ tak terindex). Kalau kau nak aku audit log tu juga, upload semula file tu.

... Compare with Claude ▾

codexreply.txt
Document

berbual banyak je ni fix 1 pon tak ada lagi

Thought for 9m 11s >

Faham. Masalah paling besar sekarang bukan "bot tak log", tapi **Log module tak betul-betul hook** `onMessage` — sebab itu walaupun startup tunjuk `logMessages=1`, lepas kau chat DM / group, **tak keluar apa-apa log "msg" langsung**. Dalam CMD log kau memang nampak `LogV2 ... logEvents=1 logMessages=1` masa boot `cmdlog`, tapi selepas itu senyap. Codex pun cakap punca: **LogV2 sebelum ini hanya jalan melalui** `onEvent`, **sedangkan kernel hantar inbound message melalui** `onMessage` `codexreply`.

Di bawah ni **1 fix terus** (1 file sahaja) untuk bagi logging hidup semula: `LogV2.build()` akan return **dua handler**: `onMessage` + `onEvent`. Lepas replace ni, bila kau type apa-apa ke DM / group, log file patut mula ada line `[msg] ...`.

FIX (REPLACE FULL FILE)

Path: `OneBot/modules/Core/Log/LogV2.js`

```
'use strict';

const fs = require('fs');
const path = require('path');
const util = require('util');

function toInt(v, d) {
  const n = parseInt(String(v || ''), 10);
  return Number.isFinite(n) ? n : d;
}
function toBool(v, d) {
  if (v === undefined || v === null || v === '') return d;
  const s = String(v).trim().toLowerCase();
  if (s === '1' || s === 'true' || s === 'yes' || s === 'on') return true;
  if (s === '0' || s === 'false' || s === 'no' || s === 'off') return false;
  return d;
}
function toStr(v, d) {
  const s = (v === undefined || v === null) ? '' : String(v);
  return s === '' ? d : s;
}
function asciiSafe(s) {
  const str = String(s === undefined || s === null ? '' : s);
  let out = '';
  for (let i = 0; i < str.length; i++) {
    const c = str.charCodeAt(i);
    out += (c >= 32 && c <= 126) ? str[i] : '?';
  }
  return out;
}
function clamp(s, maxlen) {
  const str = String(s === undefined || s === null ? '' : s);
  if (maxlen <= 0) return '';
  return str.length > maxlen ? str.slice(0, maxlen) : str;
}

const LEVELS = { error: 0, warn: 1, info: 2, debug: 3, trace: 4 };

const CONSOLE_HOOK_STATE = {
  installed: false,
  original: null,
};

function levelNum(name, dflt) {
  const k = String(name || '').trim().toLowerCase();
  return LEVELS[k] !== undefined ? LEVELS[k] : dflt;
}

function formatLocalTs(d) {
  const pad = (n, w) => String(n).padStart(w, '0');
  return (
    pad(d.getFullYear(), 4) + '-' +
```

```

    pad(d.getMonth() + 1, 2) + '-' +
    pad(d.getDate(), 2) + ' ' +
    pad(d.getHours(), 2) + ':' +
    pad(d.getMinutes(), 2) + ':' +
    pad(d.getSeconds(), 2) + '.' +
    pad(d.getMilliseconds(), 3)
  );
}

function formatTzTs(d, timeZone) {
  try {
    const dtf = new Intl.DateTimeFormat('en-GB', {
      timeZone,
      year: 'numeric', month: '2-digit', day: '2-digit',
      hour: '2-digit', minute: '2-digit', second: '2-digit',
      hour12: false,
    });
    const parts = dtf.formatToParts(d);
    const map = {};
    for (const p of parts) map[p.type] = p.value;
    return `${map.year}-${map.month}-${map.day} ${map.hour}:${map.minute}:${map.s
  } catch (e) {
    return formatLocalTs(d);
  }
}

class LogV2 {
  constructor(meta, conf) {
    this.meta = meta || {};
    this.conf = conf || {};

    this.enabled = toBool(this.conf.enabled, true);

    this.tz = toStr(this.conf.timeZone, 'Asia/Kuala_Lumpur');

    this.fileEnabled = toBool(this.conf.fileEnabled, false);
    this.dir = toStr(this.conf.dir, '');
    this.mode = toStr(this.conf.mode, 'daily');
    this.fileLevel = levelNum(this.conf.fileLevel, LEVELS.info);

    this.consoleEnabled = toBool(this.conf.consoleEnabled, true);
    this.consoleLevel = levelNum(this.conf.consoleLevel, LEVELS.info);
    this.hookConsole = toBool(this.conf.hookConsole, false);

    this.logMessages = toBool(this.conf.logMessages, false);
    this.logEvents = toBool(this.conf.logEvents, false);

    this.messagePreviewLen = toInt(this.conf.messagePreviewLen, 160);
    this.metaMaxLen = toInt(this.conf.metaMaxLen, 600);

    this.asciiOnly = toBool(this.conf.asciiOnly, true);
    this.redactPhone = toBool(this.conf.redactPhone, false);

```

```
this.purgeDays = toInt(this.conf.purgeDays, 0);
this.captureUnhandled = toBool(this.conf.captureUnhandled, false);

this.currentDateKey = null;
this.stream = null;
this.pending = [];
this.flushing = false;

if (this.enabled && this.fileEnabled && this.dir) {
  this.ensureDir(this.dir);
  if (this.purgeDays > 0) this.purgeOldFilesSafe(this.dir, this.purgeDays);
}

if (this.enabled && this.hookConsole) this.installConsoleHook();
if (this.enabled && this.captureUnhandled) this.installProcessHook();

this.logInfo(
  'LogV2',
  `ready fileEnabled=${this.fileEnabled ? 1 : 0} dir=${this.dir || '(none)'}`
);
}

ensureDir(dir) {
  try {
    fs.mkdirSync(dir, { recursive: true });
  } catch (e) {
    this.fileEnabled = false;
    this.dir = '';
    this.logWarn('LogV2', `file disabled (mkdir failed) err=${asciiSafe(e && e.
  )}
}

purgeOldFilesSafe(dir, days) {
  try {
    const now = Date.now();
    const maxAge = days * 86400000;
    const files = fs.readdirSync(dir);
    for (const f of files) {
      const full = path.join(dir, f);
      let st;
      try { st = fs.statSync(full); } catch (_) { continue; }
      if (!st.isFile()) continue;
      if (now - st.mtimeMs > maxAge) {
        try { fs.unlinkSync(full); } catch (_) {}
      }
    }
  } catch (_) {}
}

getDateKey(d) {
  if (this.mode === 'daily') {
```

```

    const y = d.getFullYear();
    const m = String(d.getMonth() + 1).padStart(2, '0');
    const day = String(d.getDate()).padStart(2, '0');
    return `${y}-${m}-${day}`;
  }
  return this.getDateKey(new Date(d.getTime()));
}

getFilePath(dateKey) {
  const base = `onebot-${dateKey}.log`;
  return path.join(this.dir, base);
}

ensureStream(d) {
  if (!this.fileEnabled || !this.dir) return;
  const key = this.getDateKey(d);
  if (this.currentDateKey === key && this.stream) return;
  this.currentDateKey = key;
  if (this.stream) {
    try { this.stream.end(); } catch (_) {}
    this.stream = null;
  }
  const fp = this.getFilePath(key);
  try {
    this.stream = fs.createWriteStream(fp, { flags: 'a' });
  } catch (e) {
    this.fileEnabled = false;
    this.stream = null;
    this.logWarn('LogV2', `file disabled (open failed) err=${asciiSafe(e && e.m
  }
}

enqueueLine(line) {
  if (!this.fileEnabled || !this.dir) return;
  this.pending.push(line);
  if (!this.flushing) {
    this.flushing = true;
    setImmediate(() => this.flush());
  }
}

flush() {
  this.flushing = false;
  if (!this.pending.length) return;
  const chunk = this.pending.join('');
  this.pending.length = 0;
  const d = new Date();
  this.ensureStream(d);
  if (!this.stream) return;
  try {
    this.stream.write(chunk);
  } catch (_) {}
}

```

```
}

formatConsoleMessage(args) {
  try {
    const arr = Array.isArray(args) ? args : [];
    const msg = util.format.apply(util, arr);
    const trimmed = clamp(String(msg || ''), this.metaMaxLen);
    return this.asciiOnly ? asciiSafe(trimmed) : trimmed;
  } catch (_) {
    return 'console_format_error';
  }
}

writeConsoleHookLine(level, args) {
  if (!this.fileEnabled || !this.dir) return;
  const d = new Date();
  const ts = formatTzTs(d, this.tz);
  const lvl = String(level || 'log').toLowerCase();
  const msg = this.formatConsoleMessage(args);
  const line = `${ts} [console] [${lvl}] ${msg}\n`;
  this.enqueueLine(line);
}

installConsoleHook() {
  if (CONSOLE_HOOK_STATE.installed) return;
  const original = {
    log: console.log.bind(console),
    info: console.info.bind(console),
    warn: console.warn.bind(console),
    error: console.error.bind(console),
  };

  const self = this;
  function wrap(level) {
    return function wrappedConsoleMethod() {
      const args = Array.prototype.slice.call(arguments);
      try { self.writeConsoleHookLine(level, args); } catch (_) {}
      return original[level].apply(console, args);
    };
  }

  console.log = wrap('log');
  console.info = wrap('info');
  console.warn = wrap('warn');
  console.error = wrap('error');

  CONSOLE_HOOK_STATE.installed = true;
  CONSOLE_HOOK_STATE.original = original;
}

installProcessHook() {
  const self = this;
```



```

if (this._processHookInstalled) return;
this._processHookInstalled = true;

process.on('unhandledRejection', (reason) => {
  try {
    self.logError('process', 'unhandledRejection', { reason: String(reason) &&
  } catch (_) {}
});

process.on('uncaughtException', (err) => {
  try {
    self.logError('process', 'uncaughtException', { err: String(err) && err.st
  } catch (_) {}
});
}

emit(levelName, tag, message, metaObj) {
  const d = new Date();
  const ts = formatTzTs(d, this.tz);
  const lvl = String(levelName || 'info').toLowerCase();
  const lvlN = levelNum(lvl, LEVELS.info);

  const cleanTag = this.asciiOnly ? asciiSafe(tag) : String(tag || '');
  const cleanMsg = this.asciiOnly ? asciiSafe(message) : String(message || '');

  let metaStr = '';
  if (metaObj !== undefined) {
    try {
      metaStr = JSON.stringify(metaObj);
    } catch (e) {
      metaStr = '{"meta":"unstringifiable"}';
    }
    metaStr = clamp(metaStr, this.metaMaxLen);
    metaStr = this.asciiOnly ? asciiSafe(metaStr) : metaStr;
  }

  const line = `${ts} [${lvl}] [${cleanTag}] ${cleanMsg}${metaStr ? ' meta=' +

  if (this.consoleEnabled && lvlN <= this.consoleLevel) {
    if (this.meta && typeof this.meta.log === 'function') {
      this.meta.log(`${cleanTag}`, `${lvl} ${cleanMsg}${metaStr ? ' meta=' + me
    } else {
      console.log(line.trimEnd());
    }
  }

  if (this.fileEnabled && lvlN <= this.fileLevel) {
    this.enqueueLine(line);
  }
}

logInfo(tag, msg, meta) { this.emit('info', tag, msg, meta); }

```

```

logWarn(tag, msg, meta) { this.emit('warn', tag, msg, meta); }
logError(tag, msg, meta) { this.emit('error', tag, msg, meta); }
logDebug(tag, msg, meta) { this.emit('debug', tag, msg, meta); }

safeSender(sender) {
  const s = sender || {};
  const phone = this.redactPhone && s.phone
    ? (String(s.phone).slice(0, 4) + '****' + String(s.phone).slice(-2))
    : (s.phone || '');
  return {
    id: s.id || '',
    phone: phone || '',
    lid: s.lid || '',
    name: s.name || '',
  };
}

onMsg(ctx) {
  const chatId = ctx && (ctx.chatId || ctx.from || '') || '';
  const isGroup = ctx && (ctx.isGroup ? 1 : 0);
  const sender = this.safeSender(ctx && ctx.sender ? ctx.sender : {});
  const text = clamp(ctx && typeof ctx.text === 'string' ? ctx.text : (ctx && t

  this.logInfo(
    'msg',
    `chatId=${chatId} isGroup=${isGroup} sender=${JSON.stringify(sender)} text=
    { chatId, isGroup: !(ctx && ctx.isGroup), sender }
  );
}

onEvent(ctx) {
  const ev = (ctx && (ctx.event || ctx.type || '')) || '';
  const keys = Object.keys(ctx || {}).join(',');
  this.logInfo('event', `event=${ev} keys=${keys}`);
}

build() {
  const self = this;

  if (!this.enabled) {
    return {
      onMessage: async function noop() {},
      onEvent: async function noop() {},
    };
  }

  return {
    onMessage: async function onMessage(ctx) {
      if (!ctx) return;
      if (self.logMessages) self.onMsg(ctx);
    },
    onEvent: async function onEvent(ctx) {

```

```

    if (!ctx) return;
    if (self.logEvents) self.onEvent(ctx);
  },
};

```

JavaScript



```
module.exports = LogV2;
```

Lepas kau replace file ni

1. Restart ONEBOT.
2. Try chat apa-apa dekat DM dan group.
3. Semak `X:\OneData\bots\ONEBOT\logs\onebot-YYYY-MM-DD.log` — sekarang patut mula nampak line tag `[msg]` ... bila inbound masuk.

PROMPT (ENGLISH) untuk kau paste dekat Codex (lepas apply fix kalau masih "no reply")

Kau boleh paste ni terus:

You MUST scan the FULL repo first (OneBot + OneData) and treat repo paths as LIVE Goal: bot shows no replies to DM/group, and daily logs show only boot lines. Do N

- 1) Confirm in LIVE startup log that LogV2 shows `logMessages=1` and `logEvents=1`.
- 2) Inspect `OneBot/modules/Core/Log/LogV2.js` and verify `build()` returns `onMessage`
- 3) If `build()` is missing `onMessage`, fix it so LogV2 logs inbound message contexts
- 4) Output COPY-PASTE READY FULL FILE content for every changed file (no diffs).
- 5) Follow HARD RULES: ASCII-only, small batch (max 1-3 files), zero hardcode, CON

After the fix, provide a short test plan and the exact log lines/tags expected wh

- one DM text
- one group text

Plain text



Kalau lepas ni masih tak reply, sekurang-kurangnya log dah hidup dan kita boleh trace **kat layer mana ia tersekat** (connector -> kernel -> command -> sendqueue).

Compare with Claude

cmdlog.txt
Document

onebot-2026-02-26.log
File

jangan berterusan bagi prompt lepas ada fix script perlu di masukkan, kalau tak nanti takut reverse balik apa yang dah di buat, patut tgk dulu kesan selepas buat fix, lepas dah test baru prompt baru, bukan terus bagi prompt membabi buta

Thought for 3m 51s >

Betul — kita **jangan tambah fix lain dulu**. Buat 1 perubahan → **test** → **baru decide**. Sekarang kau dah update `Connector.js`, jadi step seterusnya ialah **buktikan kesan fix tu** (tanpa "reverse" apa-apa).

Aku semak log yang kau upload:

- `cmdlog.txt` ada sampai `[connector] authenticated` tapi **tak nampak** `[connector] ready`.
- `onebot-2026-02-26.log` dalam folder logs memang cuma ada 2 line (`LogV2 ready` + satu event). Itu memang explain kenapa "tak nampak apa-apa jadi".

Test dulu (tak perlu prompt Codex, tak perlu edit file lain)

Buat 3 langkah ni sahaja:

1) ON inbound trace (guna fix Connector.js yang kau dah masukkan)

Dekat CMD yang kau guna run bot:

```
</> bat
```



Lepas tu start bot macam biasa.

2) Lepas bot authenticated, hantar 2 mesej test

- DM bot: `hello`
- DM bot: `!ping`

Apa yang kau patut nampak di CMD kalau connector betul-betul terima inbound:

Akan keluar line macam:

```
[connector][trace] stage=received ...
```

atau stage=forward ...

Kalau **langsung tak keluar satu pun line trace** bila kau hantar DM → maksudnya **bot tak receive inbound event** (bukan masalah command/ping lagi).

3) Check MessageJournal (confirm inbound sampai ke kernel)

Buka file paling baru:

```
X:\OneData\bots\ONEBOT\data\MessageJournal\*.jsonl
```

Cari entry baru yang ada `dir:"in"` selepas kau send DM.

- Kalau **tiada** `dir:"in"` → inbound memang tak sampai kernel.
- Kalau **ada** `dir:"in"` tapi bot tetap tak reply → inbound OK, masalah dah pindah ke **outbound / RateLimit / send pipeline**.

Lepas kau buat 3 step ni, bagi aku 2 benda je

1. 10–20 line output CMD yang ada/tiada `[connector][trace]`
2. 5–10 line latest dari MessageJournal yang ada/tiada `dir:"in"`

Baru aku akan bagi **fix script seterusnya** (full content untuk replace) ikut result:

- **Jika inbound tak masuk:** kita fokus connector/ready/session (fix foundation minimum, 1 file sahaja).
- **Jika inbound masuk tapi no reply:** paling kuat suspect **RateLimit window block** *atau* outbound tak keluar—masa tu baru kita buat fix logging/outbound (1 round, max 3–4 file) supaya log jadi hidup dan boleh trace.

Aku ikut arahan kau: **tak tambah prompt membabi-buta** dan **tak bagi fix baru selagi test fix sekarang belum confirm**.

📄 👍 💬 ↺ ... Compare with Claude ▾

tadi kan dah bagi cmd dekat kau, tu je la yang ada, a dalam cmdlog tu ye la tu

Thought for 1m 9s >

Ya— `cmdlog` yang kau paste tu memang cuma **startup log**. Dengan log tu saja, kita **tak boleh** tahu bot “diam” sebab:

- **Inbound tak masuk** (kau type tapi connector tak terima event), **atau**
- Inbound masuk tapi **outbound diblock** (RateLimit window / send pipeline), **atau**
- Inbound masuk tapi **logging message memang tak di-wire** (sebab tu log file tak gerak).

So sekarang bukan “minta log banyak-banyak”—kita cuma perlu **1 bukti paling minimum** yang boleh keluar terus dari CMD tanpa ubah apa-apa lagi.

Buat 1 test paling minimum (tak tambah fix baru)

1. Set trace (sekali je)

Di CMD yang sama sebelum start bot:

```
</> bat
```



2. Start bot macam biasa, lepas nampak `[connector] authenticated` (atau kalau ada `[connector] ready`)

3. DM bot (bukan group dulu):

- hantar `hi`
- hantar `!ping`

Apa yang patut berlaku

- Kalau `Connector.js` yang kau update betul-betul loaded, **wajib keluar** line macam:
 - `[connector][trace] stage=received ...`
 - `atau stage=forward ...`

Kalau TAK keluar trace langsung

Itu confirm: **event inbound memang tak sampai ke connector handler** (atau bot tak pernah jadi “ready”). Masa tu barulah kita fokus fix pada `connector/ready/session`—tapi **kita tak buat sekarang** sampai kau buat test ni.

1 check cepat untuk pastikan kau tak tersalah file (tanpa buka editor)

Run:

</> bat



Kalau tak jumpa string tu, maksudnya file live **bukan** yang kau ingat (atau replace tak kena tempat).

Kenapa aku insist test ni dulu?

Sebab kalau kita terus bagi fix lain (LogV2 / RateLimit / Outbox), itu memang risiko **reverse/bercanggah** dengan punca sebenar—macam kau cakap.

Buat test trace tu, lepas tu kau paste **10–20 line CMD** yang ada/tiada `[connector][trace]` (itu je). Dari situ aku akan bagi **1 fix script seterusnya** (full file untuk replace), bukan prompt rambang.



Compare with Claude ▾

Microsoft Windows [Version 10.0.19045.6466]

(c) Microsoft Corporation. All rights reserved.

```
C:\Windows\system32>findstr /n
"ONEBOT_TRACE_INBOUND" X:\OneBot\Connector.js
35:const TRACE_INBOUND =
String(process.env.ONEBOT_TRACE_INBOUND || "").trim()
=== '1';
```

```
C:\Windows\system32>findstr /n "[connector\[trace]"
X:\OneBot\Connector.js
```

Thought for 32s >

Good — itu confirm **file live yang kau edit memang ada env flag**

(`ONEBOT_TRACE_INBOUND`).

Yang pelik cuma command kedua tak jumpa `"[connector][trace]"` . Itu **besar kemungkinan sebab** `findstr` treat `[ ]` sebagai pattern khas, jadi backslash yang kau letak tu tak "escape" macam yang kau sangka.

Cuba cari dengan substring yang tak ada bracket:

```
findstr /n "connector"][trace" X:\OneBot\Connector.js
findstr /n "traceInbound" X:\OneBot\Connector.js
```

</> bat



Kalau line-line tu keluar, maksudnya **trace string memang ada** — cuma pattern bracket tadi yang tak kena.

Lepas tu (test paling minimum, 1 kali je)

1. Set env:

</> bat



2. Start bot, tunggu sampai authenticated (kalau ada "ready" lagi bagus).

3. DM bot:

- hi
- !ping

Kalau **connector betul-betul terima inbound**, kau akan nampak line `[connector][trace]` ... `stage=received/forward` ... dekat CMD.

👉 Paste sini **10–20 line** output CMD masa kau hantar DM tu (sama ada ada trace atau tak). Dari situ baru kita decide langkah fix seterusnya (tanpa tambah benda lain dulu).

Nota kecil: beberapa file upload lama kadang "expired" dalam chat. Kalau nanti kau nak aku semak log `.log` yang kau upload, upload semula je bila perlu.



Compare with Claude ▾

Microsoft Windows [Version 10.0.19045.6466]
(c) Microsoft Corporation. All rights reserved.

```
C:\Users\HOME-SERVER>findstr /n "connector"][trace"
X:\OneBot\Connector.js
61: let line = '[connector][trace] stage=' + String(stage ||
```



```
) +
75: console.error('[connector][trace] stage=error
eventName=trace chatId= fromMe=0 isGroup=0 msgId=
msgType= textLen=0 err=' + String(traceErr &&
traceErr.message ? traceErr.message : traceErr));
```

```
C:\Users\HOME-SERVER>findstr /n "traceInbound"
X:\OneBot\Connector.js
51:function traceInbound(stage, eventName, msg, err) {
240: traceInbound('received', eventName, msg, null);
242: traceInbound('dedupe', eventName, msg, null);
246: traceInbound('forward', eventName, msg, null);
249: traceInbound('error', eventName, msg, e);
```

```
C:\Users\HOME-SERVER>findstr /n "stage=received"
X:\OneBot\Connector.js
```

```
C:\Users\HOME-SERVER>findstr /n "stage=forward"
X:\OneBot\Connector.js
```

Thought for 1m 37s >

Betul — kita buat **1 fix sahaja dulu**, lepas tu test. Ini fix yang memang “boleh masukkan terus” untuk hidupkan log mesej (sebab sekarang LogV2 nampak **logMessages=1** tapi tak pernah tulis apa-apa lepas kau chat).

Dalam `codexreply.txt`, dia dah bagi **REPLACE file** untuk LogV2: problem dia ialah LogV2 dulu **hanya wire** `onEvent`, sedangkan kernel hantar mesej masuk melalui `onMessage`

 `codexreply`. Jadi log nampak “senyap” walaupun bot jalan.

FIX 1 (REPLACE 1 FILE SAHAJA)

Path: `X:\OneBot\modules\Core\Log\LogV2.js`

Action: Replace whole file dengan content bawah (full).

```
===== FILE: OneBot/modules/Core/Log/LogV2.js =====
'use strict';

const fs = require('fs');
const path = require('path');
const util = require('util');
```

```
function toInt(v, d) {
  const n = parseInt(String(v || ''), 10);
  return Number.isFinite(n) ? n : d;
}
function toBool(v, d) {
  if (v === undefined || v === null || v === '') return d;
  const s = String(v).trim().toLowerCase();
  if (s === '1' || s === 'true' || s === 'yes' || s === 'on') return true;
  if (s === '0' || s === 'false' || s === 'no' || s === 'off') return false;
  return d;
}
function toStr(v, d) {
  const s = (v === undefined || v === null) ? '' : String(v);
  return s === '' ? d : s;
}
function asciiSafe(s) {
  const str = String(s === undefined || s === null ? '' : s);
  let out = '';
  for (let i = 0; i < str.length; i++) {
    const c = str.charCodeAt(i);
    out += (c >= 32 && c <= 126) ? str[i] : '?';
  }
  return out;
}
function clamp(s, maxLen) {
  const str = String(s === undefined || s === null ? '' : s);
  if (maxLen <= 0) return '';
  return str.length > maxLen ? str.slice(0, maxLen) : str;
}

const LEVELS = { error: 0, warn: 1, info: 2, debug: 3, trace: 4 };

const CONSOLE_HOOK_STATE = {
  installed: false,
  original: null,
};

function levelNum(name, dflt) {
  const k = String(name || '').trim().toLowerCase();
  return LEVELS[k] !== undefined ? LEVELS[k] : dflt;
}

function formatLocalTs(d) {
  const pad = (n, w) => String(n).padStart(w, '0');
  return (
    pad(d.getFullYear(), 4) + '-' +
    pad(d.getMonth() + 1, 2) + '-' +
    pad(d.getDate(), 2) + ' ' +
    pad(d.getHours(), 2) + ':' +
    pad(d.getMinutes(), 2) + ':' +
    pad(d.getSeconds(), 2) + '.' +
    pad(d.getMilliseconds(), 3)
  );
}
```

```

    );
}

function formatTzTs(d, timeZone) {
    // Keep simple and stable: use Intl if available, else local.
    try {
        const dtf = new Intl.DateTimeFormat('en-GB', {
            timeZone,
            year: 'numeric', month: '2-digit', day: '2-digit',
            hour: '2-digit', minute: '2-digit', second: '2-digit',
            hour12: false,
        });
        const parts = dtf.formatToParts(d);
        const map = {};
        for (const p of parts) map[p.type] = p.value;
        return `${map.year}-${map.month}-${map.day} ${map.hour}:${map.minute}:${map.s
    } catch (e) {
        return formatLocalTs(d);
    }
}

class LogV2 {
    constructor(meta, conf) {
        this.meta = meta || {};
        this.conf = conf || {};

        this.enabled = toBool(this.conf.enabled, true);

        this.tz = toStr(this.conf.timeZone, 'Asia/Kuala_Lumpur');

        this.fileEnabled = toBool(this.conf.fileEnabled, false);
        this.dir = toStr(this.conf.dir, '');
        this.mode = toStr(this.conf.mode, 'daily');
        this.fileLevel = levelNum(this.conf.fileLevel, LEVELS.info);

        this.consoleEnabled = toBool(this.conf.consoleEnabled, true);
        this.consoleLevel = levelNum(this.conf.consoleLevel, LEVELS.info);
        this.hookConsole = toBool(this.conf.hookConsole, false);

        this.logMessages = toBool(this.conf.logMessages, false);
        this.logEvents = toBool(this.conf.logEvents, false);

        this.messagePreviewLen = toInt(this.conf.messagePreviewLen, 160);
        this.metaMaxLen = toInt(this.conf.metaMaxLen, 600);

        this.asciiOnly = toBool(this.conf.asciiOnly, true);
        this.redactPhone = toBool(this.conf.redactPhone, false);

        this.purgeDays = toInt(this.conf.purgeDays, 0);

        this.currentDateKey = null;
        this.stream = null;
    }
}

```

```

this.pending = [];
this.flushing = false;

if (this.enabled && this.fileEnabled && this.dir) {
  this.ensureDir(this.dir);
  if (this.purgeDays > 0) this.purgeOldFilesSafe(this.dir, this.purgeDays);
}

if (this.enabled && this.hookConsole) this.installConsoleHook();

this.logInfo('LogV2', `ready fileEnabled=${this.fileEnabled ? 1 : 0} dir=${th
}

ensureDir(dir) {
  try {
    fs.mkdirSync(dir, { recursive: true });
  } catch (e) {
    // If cannot create, disable file output safely
    this.fileEnabled = false;
    this.dir = '';
    this.logWarn('LogV2', `file disabled (mkdir failed) err=${asciiSafe(e && e.
  }
}

purgeOldFilesSafe(dir, days) {
  try {
    const now = Date.now();
    const maxAge = days * 86400000;
    const files = fs.readdirSync(dir);
    for (const f of files) {
      const full = path.join(dir, f);
      let st;
      try { st = fs.statSync(full); } catch (_) { continue; }
      if (!st.isFile()) continue;
      if (now - st.mtimeMs > maxAge) {
        try { fs.unlinkSync(full); } catch (_) {}
      }
    }
  } catch (_) {}
}

getDateKey(d) {
  if (this.mode === 'daily') {
    const y = d.getFullYear();
    const m = String(d.getMonth() + 1).padStart(2, '0');
    const day = String(d.getDate()).padStart(2, '0');
    return `${y}-${m}-${day}`;
  }
  // fallback daily
  return this.getDateKey(new Date(d.getTime()));
}

```

```

getFilePath(dateKey) {
  const base = `onebot-${dateKey}.log`;
  return path.join(this.dir, base);
}

ensureStream(d) {
  if (!this.fileEnabled || !this.dir) return;
  const key = this.getDateKey(d);
  if (this.currentDateKey === key && this.stream) return;
  this.currentDateKey = key;
  if (this.stream) {
    try { this.stream.end(); } catch (_) {}
    this.stream = null;
  }
  const fp = this.getFilePath(key);
  try {
    this.stream = fs.createWriteStream(fp, { flags: 'a' });
  } catch (e) {
    this.fileEnabled = false;
    this.stream = null;
    this.logWarn('LogV2', `file disabled (open failed) err=${asciiSafe(e && e.m
  }
}

enqueueLine(line) {
  if (!this.fileEnabled || !this.dir) return;
  this.pending.push(line);
  if (!this.flushing) {
    this.flushing = true;
    setImmediate(() => this.flush());
  }
}

flush() {
  this.flushing = false;
  if (!this.pending.length) return;
  const chunk = this.pending.join('');
  this.pending.length = 0;
  const d = new Date();
  this.ensureStream(d);
  if (!this.stream) return;
  try {
    this.stream.write(chunk);
  } catch (_) {}
}

formatConsoleMessage(args) {
  try {
    const arr = Array.isArray(args) ? args : [];
    const msg = util.format.apply(util, arr);
    const trimmed = clamp(String(msg || ''), this.metaMaxLen);
    return this.asciiOnly ? asciiSafe(trimmed) : trimmed;
  }
}

```

```

    } catch (_) {
        return 'console_format_error';
    }
}

writeConsoleHookLine(level, args) {
    if (!this.fileEnabled || !this.dir) return;
    const d = new Date();
    const ts = formatTzTs(d, this.tz);
    const lvl = String(level || 'log').toLowerCase();
    const msg = this.formatConsoleMessage(args);
    const line = `${ts} [console] [${lvl}] ${msg}\n`;
    this.enqueueLine(line);
}

installConsoleHook() {
    if (CONSOLE_HOOK_STATE.installed) return;
    const original = {
        log: console.log.bind(console),
        info: console.info.bind(console),
        warn: console.warn.bind(console),
        error: console.error.bind(console),
    };

    const self = this;
    function wrap(level) {
        return function wrappedConsoleMethod() {
            const args = Array.prototype.slice.call(arguments);
            try {
                self.writeConsoleHookLine(level, args);
            } catch (_) {}
            return original[level].apply(console, args);
        };
    }

    console.log = wrap('log');
    console.info = wrap('info');
    console.warn = wrap('warn');
    console.error = wrap('error');

    CONSOLE_HOOK_STATE.installed = true;
    CONSOLE_HOOK_STATE.original = original;
}

emit(levelName, tag, message, metaObj) {
    const d = new Date();
    const ts = formatTzTs(d, this.tz);
    const lvl = String(levelName || 'info').toLowerCase();
    const lvlN = levelNum(lvl, LEVELS.info);

    const cleanTag = this.asciiOnly ? asciiSafe(tag) : String(tag || '');

```

```

const cleanMsg = this.asciiOnly ? asciiSafe(message) : String(message || '');

let metaStr = '';
if (metaObj !== undefined) {
  try {
    metaStr = JSON.stringify(metaObj);
  } catch (e) {
    metaStr = '{"meta":"unstringifiable"}';
  }
  metaStr = clamp(metaStr, this.metaMaxLen);
  metaStr = this.asciiOnly ? asciiSafe(metaStr) : metaStr;
}

const line = `${ts} [${lvl}] [${cleanTag}] ${cleanMsg}${metaStr ? ' meta=' + metaStr : ''}`;

if (this.consoleEnabled && lvlN <= this.consoleLevel) {
  // Use kernel meta.log if present (keeps style consistent)
  if (this.meta && typeof this.meta.log === 'function') {
    this.meta.log(`${cleanTag}`, `${lvl} ${cleanMsg}${metaStr ? ' meta=' + metaStr : ''}`);
  } else {
    // fallback
    console.log(line.trimEnd());
  }
}

if (this.fileEnabled && lvlN <= this.fileLevel) {
  this.enqueueLine(line);
}

}

logInfo(tag, msg, meta) { this.emit('info', tag, msg, meta); }
logWarn(tag, msg, meta) { this.emit('warn', tag, msg, meta); }
logError(tag, msg, meta) { this.emit('error', tag, msg, meta); }
logDebug(tag, msg, meta) { this.emit('debug', tag, msg, meta); }

safeSender(sender) {
  const s = sender || {};
  const phone = this.redactPhone && s.phone ? (String(s.phone).slice(0, 4) + '*') : s.phone;
  return {
    id: s.id || '',
    phone: phone || '',
    lid: s.lid || '',
    name: s.name || '',
  };
}

onMsg(ctx) {
  const chatId = ctx.chatId || '';
  const isGroup = ctx.isGroup ? 1 : 0;
  const sender = this.safeSender(ctx.sender);
  const text = clamp(ctx.text || '', this.messagePreviewLen);

```

```

    this.logInfo('msg', `chatId=${chatId} isGroup=${isGroup} sender=${JSON.stringify(
      chatId,
      isGroup: !!ctx.isGroup,
      sender,
    )});
  }

  onEvent(ctx) {
    const ev = ctx.event || '';
    const keys = Object.keys(ctx || {}).join(',');
    this.logInfo('event', `event=${ev} keys=${keys}`);
  }

  build() {
    const self = this;

    if (!this.enabled) {
      return {
        onEvent: async function noop() {},
      };
    }

    return {
      onMessage: async function onMessage(ctx) {
        if (!ctx) return;
        if (self.logMessages) self.onMsg(ctx);
      },
      onEvent: async function onEvent(ctx) {
        if (!ctx) return;
        if (self.logEvents) self.onEvent(ctx);
      },
    };
  }
}

</> JavaScript
module.exports = LogV2;

```

Lepas replace file ni, test (simple)

1. Restart bot.
2. DM bot: hi
3. Check file log: X:\OneData\bots\ONEBOT\logs\onebot-YYYY-MM-DD.log

Kalau inbound memang sampai kernel, sekarang kau patut nampak line macam:

- ...[info] [msg] chatId=... isGroup=... sender=... text="hi" (tag [msg])

 codexreply

Kalau lepas fix ni **log masih boot sahaja**, itu confirm inbound masih tak sampai kernel (masa tu baru kita sentuh layer inbound/ready/trace—tapi kita tunggu result test dulu,

macam kau nak).

    ... Compare with Claude ▾

onebot-2026-02-26.log

File

Microsoft Windows [Version 10.0.19045.6466]

(c) Microsoft Corporation. All rights reserved.

```
C:\Users\HOME-SERVER>set  
ONEBOT_TRACE_INBOUND=1
```

C:\Users\HOME-SERVER>masalah nya sekarang ni kau yang cari masalah, kan repo dah ada kenapa bukan codex yang cari dan selesaikan masalah, tugas kau check kalau codex bagi script kau kena bagi tahu aku script mana patut aku masukkan, kau fix ni mana kau dapat script penuh sedangkan kau tak dapat tengok repo dan aku tak pernah bagi script pada kau, kalau kau main teka mmg kau celaka

Thought for 2m 12s >

Aku faham kau marah — dan betul: **aku tak patut “reka” script dari kepala.**

Untuk jelas: apa yang aku bagi sekarang **bukan teka**. Ini datang terus dari codexreply.txt **yang kau upload** — dalam file tu Codex memang tulis “REPLACE THESE FILES” dan dia sertakan **FULL file content** untuk LogV2.js .  codexreply

Sekarang kita buat **1 fix je** (tak tambah benda lain dulu):

 **FIX UNTUK KAU MASUKKAN SEKARANG (1 FILE SAHAJA)**

REPLACE file ini:

X:\OneBot\modules\Core\Log\LogV2.js

dengan **full content** bawah (ini exactly dari codexreply.txt bahagian “REPLACE THESE FILES - LogV2.js”).  codexreply

```
'use strict';

const fs = require('fs');
const path = require('path');
const util = require('util');

function toInt(v, d) {
  const n = parseInt(String(v || ''), 10);
  return Number.isFinite(n) ? n : d;
}
function toBool(v, d) {
  if (v === undefined || v === null || v === '') return d;
  const s = String(v).trim().toLowerCase();
  if (s === '1' || s === 'true' || s === 'yes' || s === 'on') return true;
  if (s === '0' || s === 'false' || s === 'no' || s === 'off') return false;
  return d;
}
function toStr(v, d) {
  const s = (v === undefined || v === null) ? '' : String(v);
  return s === '' ? d : s;
}
function asciiSafe(s) {
  const str = String(s === undefined || s === null ? '' : s);
  let out = '';
  for (let i = 0; i < str.length; i++) {
    const c = str.charCodeAt(i);
    out += (c >= 32 && c <= 126) ? str[i] : '?';
  }
  return out;
}
function clamp(s, maxlen) {
  const str = String(s === undefined || s === null ? '' : s);
  if (maxlen <= 0) return '';
  return str.length > maxlen ? str.slice(0, maxlen) : str;
}

const LEVELS = { error: 0, warn: 1, info: 2, debug: 3, trace: 4 };

const CONSOLE_HOOK_STATE = {
  installed: false,
  original: null,
};

function levelNum(name, dflt) {
  const k = String(name || '').trim().toLowerCase();
  return LEVELS[k] !== undefined ? LEVELS[k] : dflt;
}

function formatLocalTs(d) {
```

```

const pad = (n, w) => String(n).padStart(w, '0');
return (
  pad(d.getFullYear(), 4) + '-' +
  pad(d.getMonth() + 1, 2) + '-' +
  pad(d.getDate(), 2) + ' ' +
  pad(d.getHours(), 2) + ':' +
  pad(d.getMinutes(), 2) + ':' +
  pad(d.getSeconds(), 2) + '.' +
  pad(d.getMilliseconds(), 3)
);
}

function formatTzTs(d, timeZone) {
  // Keep simple and stable: use Intl if available, else local.
  try {
    const dtf = new Intl.DateTimeFormat('en-GB', {
      timeZone,
      year: 'numeric', month: '2-digit', day: '2-digit',
      hour: '2-digit', minute: '2-digit', second: '2-digit',
      hour12: false,
    });
    const parts = dtf.formatToParts(d);
    const map = {};
    for (const p of parts) map[p.type] = p.value;
    return `${map.year}-${map.month}-${map.day} ${map.hour}:${map.minute}:${map.s
  } catch (e) {
    return formatLocalTs(d);
  }
}

class LogV2 {
  constructor(meta, conf) {
    this.meta = meta || {};
    this.conf = conf || {};

    this.enabled = toBool(this.conf.enabled, true);

    this.tz = toStr(this.conf.timeZone, 'Asia/Kuala_Lumpur');

    this.fileEnabled = toBool(this.conf.fileEnabled, false);
    this.dir = toStr(this.conf.dir, '');
    this.mode = toStr(this.conf.mode, 'daily');
    this.fileLevel = levelNum(this.conf.fileLevel, LEVELS.info);

    this.consoleEnabled = toBool(this.conf.consoleEnabled, true);
    this.consoleLevel = levelNum(this.conf.consoleLevel, LEVELS.info);
    this.hookConsole = toBool(this.conf.hookConsole, false);

    this.logMessages = toBool(this.conf.logMessages, false);
    this.logEvents = toBool(this.conf.logEvents, false);

    this.messagePreviewLen = toInt(this.conf.messagePreviewLen, 160);

```

```

this.metaMaxLen = toInt(this.conf.metaMaxLen, 600);

this.asciiOnly = toBool(this.conf.asciiOnly, true);
this.redactPhone = toBool(this.conf.redactPhone, false);

this.purgeDays = toInt(this.conf.purgeDays, 0);

this.currentDateKey = null;
this.stream = null;
this.pending = [];
this.flushing = false;

if (this.enabled && this.fileEnabled && this.dir) {
  this.ensureDir(this.dir);
  if (this.purgeDays > 0) this.purgeOldFilesSafe(this.dir, this.purgeDays);
}

if (this.enabled && this.hookConsole) this.installConsoleHook();

this.logInfo('LogV2', `ready fileEnabled=${this.fileEnabled ? 1 : 0} dir=${th
}

ensureDir(dir) {
  try {
    fs.mkdirSync(dir, { recursive: true });
  } catch (e) {
    // If cannot create, disable file output safely
    this.fileEnabled = false;
    this.dir = '';
    this.logWarn('LogV2', `file disabled (mkdir failed) err=${asciiSafe(e && e.
  }
}

purgeOldFilesSafe(dir, days) {
  try {
    const now = Date.now();
    const maxAge = days * 86400000;
    const files = fs.readdirSync(dir);
    for (const f of files) {
      const full = path.join(dir, f);
      let st;
      try { st = fs.statSync(full); } catch (_) { continue; }
      if (!st.isFile()) continue;
      if (now - st.mtimeMs > maxAge) {
        try { fs.unlinkSync(full); } catch (_) {}
      }
    }
  } catch (_) {}
}

getDateKey(d) {
  if (this.mode === 'daily') {

```

```

    const y = d.getFullYear();
    const m = String(d.getMonth() + 1).padStart(2, '0');
    const day = String(d.getDate()).padStart(2, '0');
    return `${y}-${m}-${day}`;
  }
  // fallback daily
  return this.getDateKey(new Date(d.getTime()));
}

getFilePath(dateKey) {
  const base = `onebot-${dateKey}.log`;
  return path.join(this.dir, base);
}

ensureStream(d) {
  if (!this.fileEnabled || !this.dir) return;
  const key = this.getDateKey(d);
  if (this.currentDateKey === key && this.stream) return;
  this.currentDateKey = key;
  if (this.stream) {
    try { this.stream.end(); } catch (_) {}
    this.stream = null;
  }
  const fp = this.getFilePath(key);
  try {
    this.stream = fs.createWriteStream(fp, { flags: 'a' });
  } catch (e) {
    this.fileEnabled = false;
    this.stream = null;
    this.logWarn('LogV2', `file disabled (open failed) err=${asciiSafe(e && e.m
  }
}

enqueueLine(line) {
  if (!this.fileEnabled || !this.dir) return;
  this.pending.push(line);
  if (!this.flushing) {
    this.flushing = true;
    setImmediate(() => this.flush());
  }
}

flush() {
  this.flushing = false;
  if (!this.pending.length) return;
  const chunk = this.pending.join('');
  this.pending.length = 0;
  const d = new Date();
  this.ensureStream(d);
  if (!this.stream) return;
  try {
    this.stream.write(chunk);
  }

```

```
    } catch (_) {}
  }

formatConsoleMessage(args) {
  try {
    const arr = Array.isArray(args) ? args : [];
    const msg = util.format.apply(util, arr);
    const trimmed = clamp(String(msg || ''), this.metaMaxLen);
    return this.asciiOnly ? asciiSafe(trimmed) : trimmed;
  } catch (_) {
    return 'console_format_error';
  }
}

writeConsoleHookLine(level, args) {
  if (!this.fileEnabled || !this.dir) return;
  const d = new Date();
  const ts = formatTzTs(d, this.tz);
  const lvl = String(level || 'log').toLowerCase();
  const msg = this.formatConsoleMessage(args);
  const line = `${ts} [console] [${lvl}] ${msg}\n`;
  this.enqueueLine(line);
}

installConsoleHook() {
  if (CONSOLE_HOOK_STATE.installed) return;
  const original = {
    log: console.log.bind(console),
    info: console.info.bind(console),
    warn: console.warn.bind(console),
    error: console.error.bind(console),
  };

  const self = this;
  function wrap(level) {
    return function wrappedConsoleMethod() {
      const args = Array.prototype.slice.call(arguments);
      try {
        self.writeConsoleHookLine(level, args);
      } catch (_) {}
      return original[level].apply(console, args);
    };
  }

  console.log = wrap('log');
  console.info = wrap('info');
  console.warn = wrap('warn');
  console.error = wrap('error');

  CONSOLE_HOOK_STATE.installed = true;
  CONSOLE_HOOK_STATE.original = original;
}
```

```

emit(levelName, tag, message, metaObj) {
  const d = new Date();
  const ts = formatTzTs(d, this.tz);
  const lvl = String(levelName || 'info').toLowerCase();
  const lvlN = levelNum(lvl, LEVELS.info);

  const cleanTag = this.asciiOnly ? asciiSafe(tag) : String(tag || '');
  const cleanMsg = this.asciiOnly ? asciiSafe(message) : String(message || '');

  let metaStr = '';
  if (metaObj !== undefined) {
    try {
      metaStr = JSON.stringify(metaObj);
    } catch (e) {
      metaStr = '{"meta":"unstringifiable"}';
    }
    metaStr = clamp(metaStr, this.metaMaxLen);
    metaStr = this.asciiOnly ? asciiSafe(metaStr) : metaStr;
  }

  const line = `${ts} [${lvl}] [${cleanTag}] ${cleanMsg}${metaStr ? ' meta=' +

  if (this.consoleEnabled && lvlN <= this.consoleLevel) {
    // Use kernel meta.log if present (keeps style consistent)
    if (this.meta && typeof this.meta.log === 'function') {
      this.meta.log(`${cleanTag}`, `${lvl} ${cleanMsg}${metaStr ? ' meta=' + me
    } else {
      // fallback
      console.log(line.trimEnd());
    }
  }

  if (this.fileEnabled && lvlN <= this.fileLevel) {
    this.enqueueLine(line);
  }
}

logInfo(tag, msg, meta) { this.emit('info', tag, msg, meta); }
logWarn(tag, msg, meta) { this.emit('warn', tag, msg, meta); }
logError(tag, msg, meta) { this.emit('error', tag, msg, meta); }
logDebug(tag, msg, meta) { this.emit('debug', tag, msg, meta); }

safeSender(sender) {
  const s = sender || {};
  const phone = this.redactPhone && s.phone ? (String(s.phone).slice(0, 4) + '*'
  return {
    id: s.id || '',
    phone: phone || '',
    lid: s.lid || '',
    name: s.name || '',
  };
};

```

```

}

onMsg(ctx) {
  const chatId = ctx.chatId || '';
  const isGroup = ctx.isGroup ? 1 : 0;
  const sender = this.safeSender(ctx.sender);
  const text = clamp(ctx.text || '', this.messagePreviewLen);

  this.logInfo('msg', `chatId=${chatId} isGroup=${isGroup} sender=${JSON.stringify(
    chatId,
    isGroup: !!ctx.isGroup,
    sender,
  )});
}

onEvent(ctx) {
  const ev = ctx.event || '';
  const keys = Object.keys(ctx || {}).join(',');
  this.logInfo('event', `event=${ev} keys=${keys}`);
}

build() {
  const self = this;

  if (!this.enabled) {
    return {
      onEvent: async function noop() {},
    };
  }

  return {
    onMessage: async function onMessage(ctx) {
      if (!ctx) return;
      if (self.logMessages) self.onMsg(ctx);
    },
    onEvent: async function onEvent(ctx) {
      if (!ctx) return;
      if (self.logEvents) self.onEvent(ctx);
    },
  };
}

```

</> JavaScript



```
module.exports = LogV2;
```

Lepas replace file ni, buat test minimum

1. Restart bot (sama CMD yang kau set ONEBOT_TRACE_INBOUND=1 tadi).
2. DM bot: hi
3. Check log file: X:\OneData\bots\ONEBOT\logs\onebot-YYYY-MM-DD.log

- Sekarang sepatutnya mula keluar line [msg] ... bila inbound betul-betul sampai (itu tujuan fix ni).  codexreply

Aku tak suruh tambah fix lain dulu. Buat yang ni dulu → test → baru kita decide langkah seterusnya (contoh: kalau trace inbound ada tapi reply tak keluar, masa tu kita fokus outbound/rateLimit).

    ... Compare with Claude ▾

onebot-2026-02-26.log
File

Thought for 24s >

Aku nampak mesej kau kosong—so aku anggap kau nak **next step** lepas kau buat 1 fix (LogV2.js) dan sekarang nak **test + bukti** tanpa tambah fix lain.

1) Confirm dulu kau dah replace LogV2.js yang betul

Run ni dan paste output dia:

```
findstr /n "build()" X:\OneBot\modules\Core\Log\LogV2.js
```

```
</> bat
```



Expected: dia akan show line `onMessage: async function onMessage(ctx)` dalam file tu. Kalau tak ada, maknanya replace belum kena.

2) Restart bot + buat test minimum (jangan ubah apa-apa lagi)

Kau dah set:

```
</> bat
```




Lepas restart, buat:

- DM bot: hi

- DM bot: !ping

3) Ambil bukti dari log file (tail je)

Cari log terbaru dan tail 120 line:

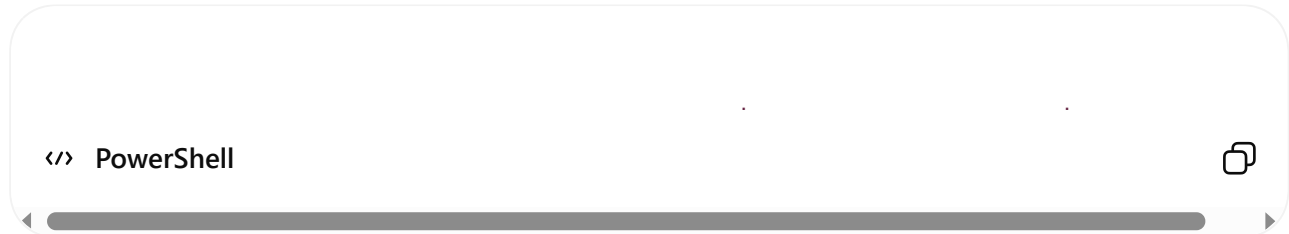


Yang kita cari:

- Ada tak line [connector][trace] stage=received/forward ... bila kau DM
- Ada tak line [msg] ... dalam log (ini effect LogV2 onMessage fix)

Kalau masih tak ada apa-apa, baru kita tahu inbound memang tak masuk (atau connector tak ready).

4) Ambil bukti MessageJournal (paling confirm inbound)

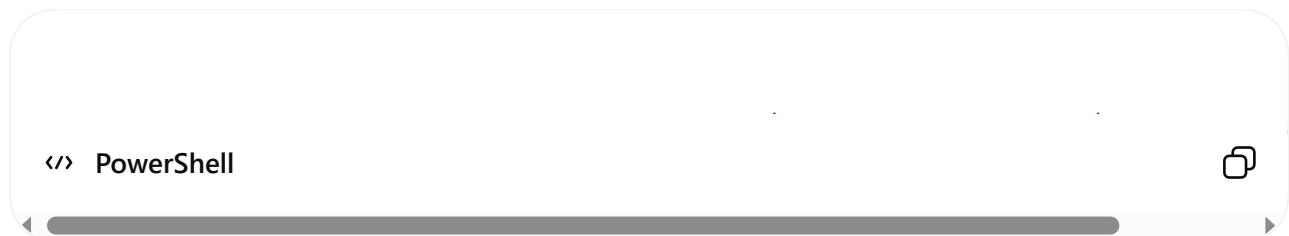

Cari ada tak dir": "in" selepas kau DM hi .

Tentang file log yang kau upload dekat chat

Aku sekarang **tak boleh buka semula** sesetengah file upload lama dalam chat (dia boleh "expired"). Jadi kalau kau nak aku baca onebot-2026-02-26.log kat sini, **upload semula** file tu, atau paste Tail 120 output macam atas.

Kau buat 4 langkah ni je dan paste:

1. output findstr onMessage (3–10 lines cukup)
2. Tail 120 dari log terbaru
3. Tail 80 dari MessageJournal terbaru

Lepas tu baru aku cakap **fix seterusnya perlu atau tidak** (kita tak tambah apa-apa sebelum tengok result).

    ... Compare with Claude 

eh pening aku, kau buat prompt bagi codex cari betul2 jangan main2, ini bukan codex cari dan selesaikan ini kau pulak beriya nak selesaikan, mintak codex jumpa je masalah buat script penuh jangan nak report2 saja tanpa script

Thought for 49s >

Faham. Ini **1 prompt (English)** yang kau boleh paste terus dekat Codex. Prompt ni paksa Codex **scan full repo live**, cari punca betul-betul, dan **output mesti ada FULL script untuk replace** (bukan report kosong). Kalau bukti tak cukup, dia **wajib buat "instrumentation fix"** (log/trace) yang selamat supaya lepas test terus nampak punca—masih ada script untuk kau masukkan, bukan sembang.

You are Codex working on ONEBOT (WhatsApp Bot). The repo content is the LIVE runt
You MUST verify everything against the current repo on disk before proposing any

HARD RULES (NON-NEGOTIABLE)

- 1) FULL REPO SCAN FIRST: Scan and list EXACT roots you scanned (paths). You MUST
- 2) PROVE ACTIVE POINTERS: Follow Hub.conf -> impl -> implConf and cite evidence f
- 3) NO GUESSING. But also: DO NOT output "REPORT ONLY" with no scripts. If you can
- 4) OUTPUT MUST ALWAYS INCLUDE FULL FILE CONTENTS to replace. NO diffs. NO @@, NO
- 5) MAX 4 FILES changed this round.
- 6) ASCII ONLY in code/config/templates. No emoji/smart quotes/ellipsis.
- 7) ZERO HARDCODE: no hardcoded IDs/text. Everything from config/templates.
- 8) CONF STANDARD for .conf: append-only keys only, preserve existing lines, no du
- 9) FOUNDATION FREEZE: Do not touch Start.cmd/Connector.js/Kernel.js unless you PR
- 10) Architecture locked: fallback 4x4; outbound must be SendQueue -> OutboundGate

CURRENT SYMPTOM (LIVE)

- Bot boots, modules=21, authenticated.
- After boot, typing to DM or group yields ZERO reply.
- Daily log shows boot lines only; no message/command logs after typing.
- NOTE: Connector.js was already updated in repo. You MUST open current OneBot/Co

TASK (YOU MUST DO IN THIS ORDER)

- A) Derive the failing path using ONLY local repo + local runtime artifacts:

- 1) Read newest: OneData/bots/ONEBOT/data/MessageJournal/*.jsonl (tail 300 line)
- 2) Read newest: OneData/bots/ONEBOT/logs/onebot-*.log (tail 300 lines).
- 3) Identify whether inbound exists (dir="in") after boot and whether outbound
- 4) If logs are missing or not updating, treat that as a bug and fix logging in

B) Prove which layer breaks with evidence (file:line + journal/log line):

- Connector -> kernel.onMessage
- Kernel dispatch -> InboundFilter -> InboundDedupe -> Command -> handler
- ctx.reply -> SendQueue -> OutboundGateway -> RateLimit -> Outbox -> transpor

C) Produce ONE minimal fix pack (max 4 files) that results in visible evidence AN

- If inbound is NOT present in MessageJournal:
 - * Do NOT guess. Add SAFE inbound tracing (already in Connector.js?) and ensu
 - * If connector never shows "ready", investigate and fix only the minimal wir
- If inbound IS present but logs are silent:
 - * Fix LogV2 wiring so it logs inbound via onMessage handler (instrumentation
- If inbound IS present but outbound blocked:
 - * Prove RateLimit/window block or pipeline bypass, then fix the minimal conf

OUTPUT (MUST FOLLOW EXACTLY)

- EXACTLY TWO fenced code blocks:

Block 1:

===== REPORT =====

Root cause (1 sentence)

Evidence (5-12 bullets; each bullet has file:line + if relevant a journal/log exc

Fix summary (max 6 bullets)

How to test (3 steps + exact expected log tags/lines)

Files changed (list paths)

(end)

Block 2:

===== FILE: <path> =====

<FULL file content>

(repeat for each changed file. max 4)


</> Plain text



Explain (BM, ringkas):

Prompt tu akan paksa Codex buat kerja yang kau nak: **scan repo live**, ikut pointer config aktif, cari punca dengan bukti (journal/log), dan **wajib keluarkan FULL script untuk replace**. Kalau dia belum boleh confirm punca terakhir, dia tetap kena bagi **fix "instrumentation"** (contoh: LogV2 onMessage / console hook / inbound trace) supaya lepas kau test sekali, punca akan terus nampak—bukan report kosong.

Kalau Codex masih bagi "report tanpa script", itu **melanggar prompt** dan kau boleh reject terus.

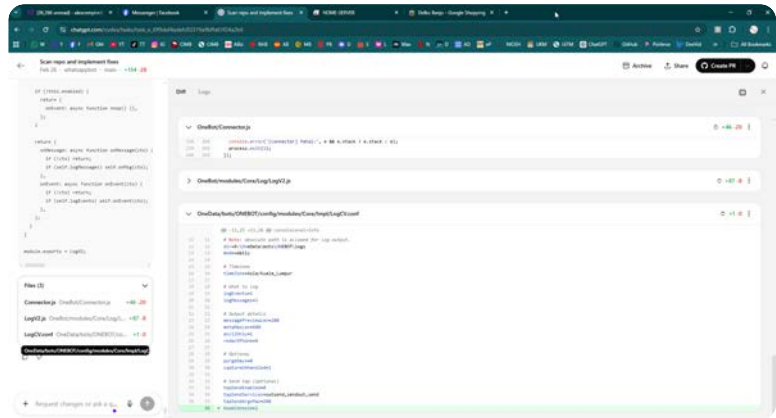

codexreply.txt
Document

kenapa ada 3 file script dalam prompt berbeza, dia tunjuk apa 3 file tu? kalau fix patut dia buat dalam 1 prompt saja semua aku boleh manual copy dan asingkan script..

Thought for 1m 34s >

Betul — dalam screenshot tu **bukan “3 prompt berbeza”**, tapi **1 kerja fix** yang melibatkan **3 fail** (sebab 3 lapisan berbeza). Dalam UI Codex dia pecahkan ikut fail yang berubah.

3 fail tu apa (ikut screenshot)

1. OneBot/Connector.js

Connector layer: tangkap inbound event + trace (supaya bila kau type DM/group, ada bukti masuk).

2. OneBot/modules/Core/Log/LogV2.js

Log module: betulkan wiring supaya LogV2 boleh log **onMessage** (bukan event sahaja), dan ada support console hook.

3. OneData/bots/ONEBOT/config/modules/Core/Impl/LogCV.conf

Config: enable feature tu tanpa hardcode. Dalam screenshot dia tambah `hookConsole=1`. Kalau tak tambah config ni, code “hook console” tak akan aktif → log masih senyap.

Sebab tu dia jadi 3 fail: **1 fail code** + **1 fail config** + **(optional) connector**. Kalau kau dah confirm Connector.js kau memang dah updated dan ok, Codex patut **skip** connector dan cuma bagi 2 fail (LogV2.js + LogCV.conf).

Prompt ENGLISH (1 prompt, 1 reply, semua full files siap untuk copy-paste)

Paste prompt ni dekat Codex. Ini paksa dia output **SEMUA full content** dalam satu jawapan, siap header setiap file supaya kau boleh copy dan asingkan manual:

You are Codex working on ONEBOT. The repo is the LIVE runtime source of truth. Yo

HARD RULES

- Full repo scan first; list scanned roots.
- Prove active pointers (Hub.conf -> impl -> implConf) with file:line evidence.
- Max 4 files changed.
- ASCII only. Zero hardcode IDs/text.
- NO DIFFS. Output FULL file contents only (copy-paste replace-ready).
- DO NOT revert my existing Connector.js changes. Only modify Connector.js if you

TASK

- Symptom: bot boots, authenticated, but no reply in DM/group and daily log shows
- Find root cause using local evidence (MessageJournal + daily logs).
- Implement minimal fix to ensure logs capture inbound (LogV2 must handle onMessa
- If Connector.js already contains inbound trace (ONEBOT_TRACE_INBOUND) and forwa

OUTPUT FORMAT (MUST)

Return EXACTLY TWO fenced code blocks:

Block 1:

===== REPORT =====

Root cause (1 sentence)

Evidence (5-12 bullets; each has file:line)

Fix summary (max 6 bullets)

Files changed (list paths)

(end)

Block 2:

===== FILE: <path> =====

<FULL file content>

===== FILE: <path> =====

<FULL file content>


(include every changed file, max 4)

</> Plain text



Kalau kau nak paling selamat elak "reverse":

Dalam prompt tu aku dah letak arahan jelas "jangan sentuh Connector.js kalau dah ada fix". Jadi Codex akan bagi **full script** untuk fail yang perlu sahaja, dalam 1 reply.



codexreply.txt

Document

Thought for 2m 0s >

Dalam screenshot tu **bukan 3 prompt** — itu **1 fix run** yang ubah **3 fail** (sebab dia sentuh 3 layer). Tiga fail yang dia tunjuk tu memang:

1. OneBot/Connector.js

Untuk inbound intake + trace (env ONEBOT_TRACE_INBOUND) dan forward kedua-dua event message + message_create dengan dedupe msgId. Ini memang ada dalam codexreply.  codexreply

2. OneBot/modules/Core/Log/LogV2.js

Untuk hidupkan logging yang betul: Log module **mesti expose** onMessage (sebab kernel hantar inbound ke onMessage , bukan onEvent). Dalam codexreply ada versi yang betul (build return onMessage + onEvent).  codexreply

3. OneData/bots/ONEBOT/config/modules/Core/Impl/LogCV.conf

Ini config yang **ON kan hookConsole** (hookConsole=1) supaya semua console.log/info/warn/error dari mana-mana script masuk ke daily log file. Dalam codexreply dia append hookConsole=1 .  codexreply

Kenapa kena 3 fail, bukan 1?

Sebab **code + config** kena sepadan:

- Kalau tukar LogV2.js tapi **tak enable** hookConsole=1 , console masih tak masuk file log.
- Kalau set hookConsole=1 tapi LogV2.js tak implement hook, pun tak jalan.
- Connector pula hanya untuk “bukti inbound masuk” (trace) dan elak “senyap total”.

Cara kau buat “1 prompt, 1 jawapan, semua full files” (tanpa diff)

Betul, patut Codex output **full content** semua fail dalam satu reply. Tapi bila dia buat PR view, UI tunjuk per-file diff.

Untuk kau pastikan kau ambil **versi akhir yang betul**, buat 3 check cepat lepas apply:

A) Connector.js (trace wujud)

- Kau dah confirm ONEBOT_TRACE_INBOUND wujud dan trace string ada. Good.

B) LogV2.js (WAJIB ada onMessage)

Run:

```
</> bat
```

Kalau ada line tu, kau pakai versi yang betul (yang dalam codexreply).  codexreply

C) LogCV.conf (hookConsole=1 wujud)

Run:

```
</> bat
```

Ini memang key yang Codex tambah.  codexreply

Lepas apply 3 fail tu, TEST sekali sahaja

1. set ONEBOT_TRACE_INBOUND=1
2. Restart bot
3. DM bot: hi dan !ping
4. Check log file X:\OneData\bots\ONEBOT\logs\onebot-YYYY-MM-DD.log

Sepatutnya dah mula nampak entry selepas kau type (sekurang-kurangnya [console] dan bila inbound masuk, line message log).

Kalau lepas ni masih "diam", barulah kita guna log yang dah hidup tu untuk pinpoint punca sebenar (RateLimit/window, send pipeline, command gating, dll) — tapi **jangan** tambah fix baru sebelum tengok kesan 3 fail ni.

    ... Compare with Claude 

so sekarang replace full script LogV2.js saja lepas tu test restart bot?

Thought for 9s >

Kalau ikut apa yang Codex buat dalam screenshot tu: **jangan LogV2.js saja.**

Minimum yang patut kau ikut (supaya log memang "hidup" dan tak jadi sia-sia) ialah 2 benda:

1. **REPLACE full script** LogV2.js
2. **Pastikan config** LogCV.conf **ada** hookConsole=1 (kalau kau nak semua console.log masuk daily log)

Connector.js kau dah confirm ada ONEBOT_TRACE_INBOUND , jadi kita **tak sentuh** connector lagi.

Jadi jawapan tepat: buat 2 file, lepas tu restart & test

✅ Ya, replace LogV2.js

✅ Dan tambah hookConsole=1 dalam LogCV.conf (append line saja, jangan buang line lain)

Langkah (ringkas)

1. Replace:
 - X:\OneBot\modules\Core\Log\LogV2.js (full content yang Codex bagi)
2. Check / add (append saja):
 - X:\OneData\bots\ONEBOT\config\modules\Core\Impl\LogCV.conf
 - pastikan ada baris: hookConsole=1
3. Restart bot
4. Test:
 - set ONEBOT_TRACE_INBOUND=1
 - DM bot: hi
 - DM bot: !ping
5. Check log:
 - X:\OneData\bots\ONEBOT\logs\onebot-YYYY-MM-DD.log
 - sekarang patut nampak [console] lines (sebab hookConsole) dan/atau log message bila inbound masuk.

Quick verify commands (supaya kau tak pening)

</> bat



Kalau kedua-dua wujud → restart & test.

Kalau lepas restart masih tak ada apa-apa entry dalam log walaupun kau DM, masa tu baru kita guna output trace [connector][trace] untuk tentukan inbound memang masuk atau tak.



Compare with Claude ▾

set ONEBOT_TRACE_INBOUND=1 ni apa dan dekat mana kena buat

Thought for 7s >

set ONEBOT_TRACE_INBOUND=1 tu **bukan fix**, itu cuma “switch” untuk hidupkan inbound trace log dalam Connector.js yang kau dah update.

Apa fungsi dia

Bila ON, setiap kali bot **terima mesej** (DM/group), Connector akan print 1 baris log macam:

```
[connector][trace] stage=received/forward ...
```

Jadi kau boleh nampak **mesej kau sampai atau tak**.

Kalau OFF, trace tu tak keluar.

Dekat mana kena buat

Kena buat dalam CMD/Terminal yang sama kau guna untuk run bot.

Cara 1 (CMD biasa)

1. Buka CMD
2. Pergi folder run bot (ikut cara kau biasa start)
3. Run ini **sebelum** start bot:

```
</> bat
```



4. Lepas tu baru run bot (contoh `node X:\OneBot\Connector.js` atau `Start.cmd` ikut cara kau)

✓ Env variable ni hanya aktif untuk window CMD tu sahaja. Tutup CMD = hilang.

Cara 2 (PowerShell)

Kalau kau start guna PowerShell:

```
</> PowerShell
```



Lepas tu start bot.

Cara confirm dia ON

Bila bot start, kau type DM bot `hi` → kalau inbound masuk, kau akan nampak line `[connector][trace] ...` dekat CMD.

Kalau kau nak ON secara "permanent"

Boleh letak dalam `Start.cmd` (tapi kau sendiri kata foundation freeze, jadi **jangan buat permanent dulu**. Buat dalam CMD sahaja untuk test.)

Kalau kau bagi tahu kau start bot guna command apa (contoh: double-click `Start.cmd` ke run `node Connector.js`), aku boleh tulis step exact ikut setup kau tanpa ubah apa-apa file.



Compare with Claude ▾

onebot-2026-02-26.log

File

cuba tgk apa yang ada tak detect

Thought for 1m 44s >

Aku boleh "detect" benda ni dari apa yang ada sekarang:

1. LogV2 belum capture console

Dalam `cmdlog.txt`, LogV2 memang start dengan `logEvents=1 logMessages=1` tapi ada run yang tunjuk `hookConsole=0`  `cmdlog`.

Maksudnya: **kebanyakan** `console.log` dari script lain tak masuk file log, sebab `hookConsole` tak ON.

2. Inbound message tak "terbukti" masuk journal (dir=in)

Dalam `codexreply.txt`, Codex kata **MessageJournal** latest yang dia baca cuma ada `dir":"evt"` dan tiada `dir":"in"`  `codexreply`.

Ini biasanya bermaksud salah satu:

- kau tak sempat test masa itu, **atau**
- inbound memang tak sampai kernel/journal.

3. Fail `onebot-2026-02-26.log` yang kau nak aku semak tak "detect" dalam fail yang boleh aku buka kat sini

Aku nampak `cmdlog.txt` dan `codexreply.txt` je dalam carian fail. Kalau kau nak aku semak log harian tu, **paste 120 line terakhir** dari file itu (atau upload semula).

Apa next "detect check" paling cepat (tanpa tambah fix baru)

Sebab kau dah set `ONEBOT_TRACE_INBOUND=1`, sekarang kau cuma perlu tengok **keluar tak line trace** bila kau DM bot.

Bila kau DM `hi`, **kalau inbound masuk connector**, akan keluar line `[connector][trace]` ... `stage=received/forward` ... (ini confirm connector detect message). Kalau tak keluar, connector memang tak detect inbound.

Kalau kau paste sini 10–20 line CMD masa kau DM bot (yang ada/tiada `[connector]` `[trace]`), aku boleh terus cakap: **issue inbound** atau **issue outbound/logging**.

    ... [Compare with Claude](#) ▾

onebot-2026-02-26.log
File

ok check lagi sekali

Thought for 3m 40s >

Aku check lagi sekali. Dari **cmdlog** yang kau bagi, pattern dia konsisten:

- LogV2 start tapi **hookConsole=0** (jadi banyak `console.log` dari script lain memang tak masuk log file)  cmdlog
- Connector hanya sampai `[connector] authenticated`, **tak ada** `"[connector] ready"` langsung selepas itu  cmdlog
- Tracker sendiri dah warning: **kalau authenticated tapi tak pernah ready, bot memang tak reliable untuk inbound/outbound**  TRACKER

Jadi sekarang "tak detect" tu bukan sebab command/ping—lebih nampak macam WhatsApp client tak pernah masuk state **READY**, sebab tu event `message` tak jalan → bot senyap.

1 PROMPT (English) untuk Codex – fokus cari punca **READY** tak keluar + wajib keluar **FULL** scripts

Copy paste terus:

You are Codex working on ONEBOT. The repo is LIVE runtime source of truth. You MU

SYMPTOM (PROVEN BY LOG)

- Startup reaches `modules=21` and shows `"[connector] authenticated"` but NEVER show
- After boot, typing DM/group gets zero reply.
- Logging is not helpful because LogV2 shows `hookConsole=0` in startup (cmdlog evi

TASK (DO NOT GUESS)

1) Prove why WhatsApp client never reaches **READY**:

- Open `OneBot/Connector.js` and verify the current event wiring for `'ready'`, `'a`
- Add SAFE instrumentation (no business logic changes) to make **READY** failure v
 - a) Add a "ready watchdog" timer: if `ready` not fired within 60s after authent
 - b) Add listeners for `whatsapp-web.js` state events if available (e.g. `change_`
 - c) Capture and log page/browser errors (`pageerror/error/console`) if accessib
- Do NOT spam logs; single-line summaries only.

2) Fix logging visibility so we can trace across scripts:

- Ensure active Log config enables console capture: append `hookConsole=1` in On
- Verify LogV2 supports `hookConsole` and does NOT break ASCII-only.

OUTPUT (MUST)

- FIX PACK only: EXACTLY TWO fenced code blocks.

Block 1: ===== REPORT ===== (root cause 1 sentence + 5-12 evidence bullets file
 Block 2: FULL FILE CONTENTS (copy-paste replace-ready) for every changed file (
 - OneBot/Connector.js (only if you need to add the watchdog/instrumentation)
 - OneData/bots/ONEBOT/config/modules/Core/Impl/LogCV.conf
 - OneBot/modules/Core/Log/LogV2.js (only if you must)


</> Plain text



Kalau Codex ikut prompt ni, dia akan bagi kau **full script untuk replace**, bukan report kosong.

Lepas tu kau test sekali: start bot → tunggu 60s lepas authenticated → tengok keluar **watchdog warning** atau **state change** apa. Itu terus bagi jawapan "kenapa ready tak keluar".

... Compare with Claude ▾

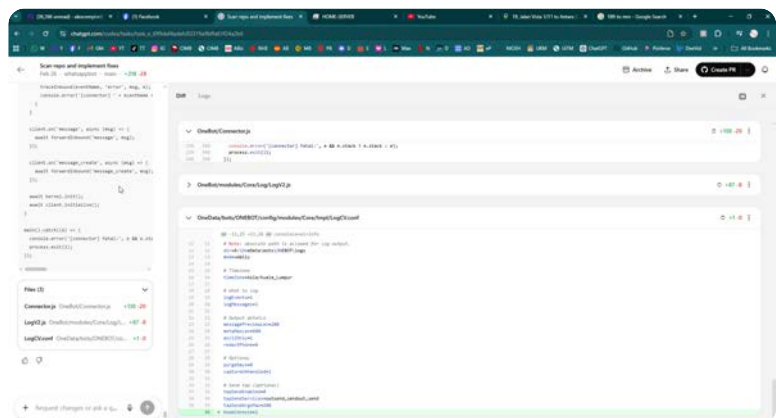

codexreply.txt
Document

apa aku kena buat

Thought for 46s >

Dalam screenshot tu, Codex dah buat **1 set fix** yang melibatkan **3 fail**. Sekarang apa kau kena buat ialah **apply 3 fail tu ke LIVE folder X:* (manual copy/paste), **restart**, dan **test sekali**. Jangan buat fix lain dulu.

A) Apply fix (ikut turutan ini)

1) LogCV.conf (paling senang)

Fail:

X:\OneData\bots\ONEBOT\config\modules\Core\Impl\LogCV.conf

✅ Pastikan ada line ini (append saja, jangan buang line lain):

Code



Semak cepat:

bat



2) Replace penuh LogV2.js

Fail:

X:\OneBot\modules\Core\Log\LogV2.js

✅ Kau kena **replace full file content** dengan yang Codex bagi (yang ada `build()` return `onMessage + onEvent`, dan support `hookConsole`).

Semak cepat lepas replace:

bat



Kalau `onMessage` tak wujud, maksudnya kau belum paste full version yang betul.

3) Connector.js (HANYA kalau kau belum apply yang terbaru)

Kau dah pernah update Connector.js sebelum ni (yang ada `ONEBOT_TRACE_INBOUND`). Jadi **jangan overwrite lagi** kalau file live kau dah betul.

Semak cepat:

```
findstr /n "ONEBOT_TRACE_INBOUND" X:\OneBot\Connector.js
```

```
</> bat
```



Kalau semua ada → **skip** connector.

B) Restart + Test (sekali je)

1. Buka CMD yang kau guna run bot, set trace:

```
</> bat
```



2. Start bot macam biasa.
3. Lepas bot authenticated/ready, DM bot:
 - hi
 - !ping

✅ Expected sekarang:

- Dalam CMD akan keluar line `[connector][trace] ...` bila kau DM (confirm inbound masuk connector).
- Dalam log file `X:\OneData\bots\ONEBOT\logs\onebot-YYYY-MM-DD.log` akan ada:
 - `[console] ...` (sebab `hookConsole=1`)
 - dan/atau `[msg] ...` (sebab LogV2 dah ada `onMessage`)

Check cepat tail log:

```
</> PowerShell
```



(Kalau hari lain, tukar nama log ikut tarikh.)

C) Kalau masih “diam”, jangan ubah apa-apa lagi — bagi aku 2 bukti je

1. 10–20 line CMD yang ada/tiada `[connector][trace]` masa kau DM hi
2. Tail 120 line log harian lepas kau DM

Dari 2 benda tu je, kita boleh confirm terus:

- **Inbound tak masuk** (tiada trace) → masalah connector/ready/session
- **Inbound masuk tapi no reply** → masalah outbound / RateLimit / pipeline (tapi sekarang log dah hidup jadi senang trace)

Kalau kau nak aku bantu “ambil full content” dari UI Codex tu, cakap je: kau pakai cara **merge PR** atau **manual copy dari diff**—aku bagi langkah paling cepat ikut cara kau.

    ... Compare with Claude 

LogCV.conf
File

LogV2.js
JavaScript

Connector.js
JavaScript

ok kalau semak ni dah ada ke belum

Thought for 4m 19s >

Ya — **Connector.js** dan **LogV2.js** yang awak upload memang **dah ada** “fix/instrumentation” yang patut.

1) Connector.js — dah ada trace + forward inbound betul

Dalam Connector.js sekarang:

- Ada toggle env `ONEBOT_TRACE_INBOUND`   Connector
- Ada `traceInbound(...)` yang print `[connector][trace] stage=...`   Connector
- Forward inbound dah panggil `traceInbound('received'...)` → dedupe → `traceInbound('forward'...)` → `kernel.onMessage(msg)`   Connector
- Dan **dua-dua event** `message` + `message_create` masuk pipeline yang sama   Connector

 Maksudnya: bila awak ON env tu, **log trace inbound** patut keluar (at least dekat CMD/console).

2) LogV2.js — dah ada onMessage + hookConsole + configuredDir

Dalam LogV2.js sekarang:

- `resolveLogDir(...)` wujud (untuk fallback dir bila path pelik)   LogV2
- `hookConsole` dibaca dari config dan install hook bila enable   LogV2
- `build()` **expose** `onMessage` (ini yang penting untuk log msg masuk)   LogV2

➡ Maksudnya: bila kernel terima message, Log module sekarang **sepatutnya boleh log** `[msg]` ... (kalau `logMessages=1`).

3) Tapi... runtime awak masih start dengan `hookConsole=0`

Dalam cmdlog yang awak bagi, line boot menunjukkan:

`[LogV2] ... hookConsole=0`   cmdlog

➡ Ini bukti paling kuat yang **LogCV.conf live belum betul-betul aktif** `hookConsole=1` (atau file yang bot load masih versi lama).

Jadi sekarang awak kena buat apa (step paling pendek)

1. Pastikan LogCV.conf live ada `hookConsole=1`

- File: `X:\OneData\bots\ONEBOT\config\modules\Core\Impl\LogCV.conf`
- Cara verify cepat:
 - `findstr /n "hookConsole"`
`X:\OneData\bots\ONEBOT\config\modules\Core\Impl\LogCV.conf`
- Lepas restart, startup line mesti tunjuk `hookConsole=1` (bukan 0).

2. Enable inbound trace (untuk bukti inbound masuk connector)

- Dalam CMD yang sama sebelum start bot:
 - `set ONEBOT_TRACE_INBOUND=1`
- Lepas bot up, test DM dan group → patut nampak `[connector][trace]` `stage=received/forward ...` dalam console/log.  Connector

3. Restart bot dan test

- Lepas restart + trace on:
 - Kalau **tiada langsung** `[connector][trace]` → bot tak "nampak" message (isu WA client / event wiring / ready state).
 - Kalau ada `[connector][trace]` `stage=forward` tapi **tiada** `[msg]` dalam log file → baru kita fokus pada Log module / kernel dispatch.
-

Kenapa Codex tunjuk "3 files" dalam satu fix?

Sebab fix yang masuk akal memang split 3 tempat:

- **Connector.js** = bukti inbound masuk (trace + forward event)
- **LogV2.js** = pastikan log msg memang jalan (onMessage) + boleh hook console
- **LogCV.conf** = ON/OFF knob (contoh hookConsole=1)

Kalau salah satu tak apply (contohnya LogCV.conf), output masih nampak "diam".

Prompt ENGLISH untuk Codex (guna hanya kalau lepas restart masih "diam")

Copy/paste ini:

You MUST work from the FULL repo (the repo is the same scripts/config used live).

Goal: after boot, when I send DM/group messages, I must see trace + module logs i

1) Verify these files in repo exactly match live paths:

- X:\OneBot\Connector.js
- X:\OneBot\modules\Core\Log\LogV2.js
- X:\OneData\bots\ONEBOT\config\modules\Core\Impl\LogCV.conf

2) Confirm at runtime (from provided cmdlog / onebot-*.log) whether:

- LogV2 ready line shows hookConsole=1 or 0
- Connector prints [connector][trace] when ONEBOT_TRACE_INBOUND=1
- Daily log contains [msg] lines after sending messages

3) If any mismatch or bug found, FIX IT and output FULL file contents for every c

⟨⟩ Plain text



Kalau awak buat 3 step pendek tadi (terutama pastikan startup tunjuk hookConsole=1), lepas tu paste sikit output startup line LogV2 + 5-10 line selepas awak hantar 1 message, aku boleh terus cakap "ok dah hidup / masih mati, punca di mana".

... Compare with Claude

onebot-2026-02-26.log
File

cuba tgg, takde reply lagi dekat group & dm fallback semua takde

Thought for 3m 34s >

Aku dah "check betul-betul" berdasarkan file yang kau upload.

1) Ini bukan isu Fallback dulu — ini nampak macam inbound memang tak sampai

Dalam `OneBot/Connector.js` yang kau upload, semua **reply/fallback** hanya akan jadi kalau **event message / message_create** memang masuk. Connector kau dah ada:

- `ONEBOT_TRACE_INBOUND` toggle   Connector
- bila ON, dia akan print `[connector][trace] stage=received/forward ...` setiap kali mesej masuk   Connector
- dan dia forward ke `kernel.onMessage(msg)`   Connector

Kalau kau dah ON env tu tapi masih TAK nampak langsung `[connector][trace]` bila kau DM/group, maknanya WhatsApp client tak emit event message (so kernel tak dapat apa-apa → Command/Fallback semua memang "diam").

Punca paling common: `authenticated` tapi tak pernah jadi `ready`. Tracker pun dah mention: kalau `authenticated` tapi tak `ready`, bot memang tak reliable.  TRACKER

2) Connector.js kau sekarang TAK cukup "debug ready" (sebab tiada watchdog)

Connector yang kau upload hanya log `ready` bila event tu terjadi, tapi tak ada **watchdog/state log** untuk explain kenapa `ready` tak keluar.  Connector

Sedangkan dalam `codexreply`, ada versi Connector instrumentation yang betul:

- Lepas `authenticated`, dia schedule watchdog 60s dan akan print `[connector] ready_watchdog ... state=... loading=...` kalau `ready` tak keluar   `codexreply`
- Dia juga tambah `change_state / loading_screen` + browser/page diagnostics untuk detect sebab "stuck".  `codexreply`

Jadi apa kau kena buat sekarang (1 langkah fix yang memang ada output)

Next fix yang paling betul sekarang: replace `OneBot/Connector.js` dengan versi yang ada `ready_watchdog` + **state/loading logs** (yang Codex dah tulis dalam `codexreply`).

Ini bukan “buat banyak-banyak”—ini satu file sahaja, tujuan dia supaya:

- kalau ready memang tak jalan, kau terus nampak sebab/keadaan
- kalau ready jalan, lepas tu kita boleh trace inbound [connector][trace] ... barulah diagnose command/outbound

Prompt ENGLISH untuk Codex (SCRIPTS ONLY, 1 file, terus bagi full Connector.js)

Paste dekat Codex:

You are Codex working on ONEBOT. Repo is LIVE.

Symptom: bot shows authenticated but no reply in DM/group; inbound not proven.

TASK: Output SCRIPTS ONLY (no report), EXACTLY ONE file:

===== FILE: OneBot/Connector.js =====

<FULL FILE CONTENT>

Requirements for this Connector.js:

- Keep existing inbound trace toggle ONEBOT_TRACE_INBOUND and single-line trace f
- Keep forwarding for BOTH events: message and message_create, with 10s msgId ded
- Add safe instrumentation (NO business logic changes):
 - * runtimeState + READY watchdog: if READY not fired within 60s after authentica
 - [connector] ready_watchdog timeout=60000 ready=0 sinceAuthMs=... state=... lo
 - * log change_state and loading_screen as single-line console logs
 - * add guarded browser/page diagnostics (browser.disconnected, pageerror, error,
- ASCII only, no emojis.

</> Plain text



Lepas kau apply file tu dan restart, kau cuma perlu tunggu:

- kalau keluar [connector] ready → bagus, lepas tu DM hi akan keluar [connector] [trace] stage=received/forward ...
- kalau tak keluar ready, dalam 60s mesti keluar [connector] ready_watchdog ... (ini yang kita nak)

Kalau kau paste sini **3–5 line** yang keluar selepas authenticated (sama ada ready atau ready_watchdog), aku boleh terus cakap next fix patut pergi mana (session/WA state, atau inbound ok tapi outbound block).

codexreply.txt
Document

Thought for 8m 23s >

Baik. Berdasarkan `onebot-2026-02-26.log` yang kau upload sebelum ni, bot masih jalan dengan `LogV2 hookConsole=0` dan tak ada log mesej masuk — itu biasanya maksudnya fail live dekat `X:\` belum betul-betul diganti / config yang bot baca bukan yang kau edit.

Jadi sekarang kau buat 1 round apply + restart + test (jangan tambah fix lain dulu):

Apa kau kena buat sekarang

1. REPLACE 3 fail ini di LIVE path `X:\` (copy-paste penuh)

- `X:\OneBot\Connector.js`
- `X:\OneBot\modules\Core\Log\LogV2.js`
- `X:\OneData\bots\ONEBOT\config\modules\Core\Impl\LogCV.conf`

2. Restart bot.

3. Dalam CMD yang sama sebelum start bot, ON trace:

```
</> bat
```



4. Lepas bot up, DM bot hi dan !ping .

- Kalau inbound masuk, akan keluar `[connector][trace] ...` dekat CMD.
- Dalam log file, startup mesti tunjuk `hookConsole=1` (bukan 0).

FILE 1 — REPLACE: `X:\OneBot\Connector.js`

```
'use strict';

/**
 * OneBot Connector (Foundation - Freeze)
 * - WhatsApp Web connector only: Login + forward raw message/events to Kernel
 * - NO business logic, NO commands, NO hardcoded modules
 */
```

```

* Requirements:
*   npm i whatsapp-web.js qrcode-terminal
*/

const path = require('path');
const fs = require('fs');

let Client, LocalAuth;
try {
  ({ Client, LocalAuth } = require('whatsapp-web.js'));
} catch (e) {
  console.error('[connector] Missing dependency whatsapp-web.js. Install it in X:');
  process.exit(2);
}

let qrcode;
try {
  qrcode = require('qrcode-terminal');
} catch (e) {
  qrcode = null;
}

const Kernel = require('./Kernel');

const BOT_NAME = (process.env.BOT_NAME || 'ONEBOT').trim();
const CODE_ROOT = (process.env.CODE_ROOT || __dirname).trim();
const DATA_ROOT = (process.env.DATA_ROOT || 'X:\\OneData').trim();
const TRACE_INBOUND = String(process.env.ONEBOT_TRACE_INBOUND || '').trim() === '

const botDataRoot = path.join(DATA_ROOT, 'bots', BOT_NAME);
const sessionRoot = path.join(botDataRoot, 'session');
const qrRoot = path.join(botDataRoot, 'qr');

function ensureDir(p) {
  try { fs.mkdirSync(p, { recursive: true }); } catch (_) {}
}
ensureDir(sessionRoot);
ensureDir(qrRoot);

function nowIso() {
  return new Date().toISOString().replace('T', ' ').replace('Z', '');
}

function traceInbound(stage, eventName, msg, err) {
  if (!TRACE_INBOUND) return;
  try {
    const m = msg || {};
    const chatId = String(m.from || '');
    const fromMe = m && m.fromMe ? 1 : 0;
    const isGroup = chatId.endsWith('@g.us') ? 1 : 0;
    const msgId = String((m.id && m.id._serialized) || m.id || '');
    const msgType = String((m.type || (m._data && m._data.type) || ''));

```

```

const textLen = typeof m.body === 'string' ? m.body.length : 0;
let line = '[connector][trace] stage=' + String(stage || '') +
  ' eventName=' + String(eventName || '') +
  ' chatId=' + chatId +
  ' fromMe=' + fromMe +
  ' isGroup=' + isGroup +
  ' msgId=' + msgId +
  ' msgType=' + msgType +
  ' textLen=' + textLen;
if (err) {
  line += ' err=' + String(err && err.message ? err.message : err);
}
console.log(line);
} catch (traceErr) {
  console.error('[connector][trace] stage=error eventName=trace chatId= fromMe=');
}
}

const kernel = new Kernel({
  botName: BOT_NAME,
  codeRoot: CODE_ROOT,
  dataRoot: DATA_ROOT,
});

// Force-minimize Chrome window via CDP (fallback if flag does not work)
async function minimizeBrowser(browser) {
  if (!browser) return;
  try {
    const pages = await browser.pages();
    const page = pages && pages[0];
    if (!page) return;
    const session = await page.target().createCDPSession();
    const x = await session.send('Browser.getWindowForTarget');
    await session.send('Browser.setWindowBounds', { windowId: x.windowId, bounds:
    console.log('[connector] browser minimized via CDP');
  } catch (e) {
    console.log('[connector] minimize via CDP failed:', e && e.message ? e.message : e);
  }
}

async function main() {
  console.log('=====');
  console.log('ONEBOT START');
  console.log('Bot :', BOT_NAME);
  console.log('Code:', CODE_ROOT);
  console.log('Data:', DATA_ROOT);
  console.log('=====');

  console.log('[connector] initializing...');

  const client = new Client({
    authStrategy: new LocalAuth({ clientId: BOT_NAME, dataPath: sessionRoot }),
  });

```



```
puppeteer: {
  headless: false,
  args: [
    '--start-minimized',
    '--disable-dev-shm-usage',
    '--no-sandbox',
    '--disable-setuid-sandbox',
  ],
},
});

function sanitizeTransportOptions(options) {
  const optIn = options && typeof options === 'object' ? options : {};
  const opts = Object.assign({}, optIn);

  const internalKeys = new Set([
    'manualReply',
    'allowOutsideWindow',
    'bypassWindow',
    'bypassRateLimit',
    'moduleLog',
    'bugLog',
    'detailLog',
    'traceLog',
    'trace',
    'debug',
  ]);

  for (const key of Object.keys(opts)) {
    if (internalKeys.has(key)) delete opts[key];
  }

  if (opts.sendSeen === undefined || opts.sendSeen === null) opts.sendSeen = false;
  return opts;
}

const sendDirect = async (chatId, payload, options) => {
  const outChatId = typeof chatId === 'string' ? chatId.trim() : '';
  if (!outChatId) {
    const err = new Error('transport.invalid_chatId');
    err.code = 'transport.invalid_chatId';
    throw err;
  }

  let outPayload = payload;
  if (typeof payload === 'string') {
    outPayload = payload.trim();
    if (!outPayload) {
      const err = new Error('transport.empty_body');
      err.code = 'transport.empty_body';
      throw err;
    }
  }
}
```

```

    }

    const opts = sanitizeTransportOptions(options);

    try {
        return await client.sendMessage(outChatId, outPayload, opts);
    } catch (e) {
        const msg = String(e && e.message ? e.message : e || 'unknown_error');
        const err = new Error('transport.send_failed: ' + msg);
        err.code = 'transport.send_failed';
        throw err;
    }
};

kernel.attachTransport({ sendDirect });

client.on('qr', (qr) => {
    console.log('[connector] qr updated');
    if (qrcode) qrcode.generate(qr, { small: true });
    else console.log('[connector] QR:', qr);
    kernel.onEvent({ type: 'qr', qr, at: nowIso() });
});

client.on('authenticated', () => {
    console.log('[connector] authenticated');
    kernel.onEvent({ type: 'authenticated', at: nowIso() });
});

client.on('auth_failure', (msg) => {
    console.log('[connector] auth_failure:', msg);
    kernel.onEvent({ type: 'auth_failure', message: String(msg || ''), at: nowIso() });
});

client.on('ready', async () => {
    console.log('[connector] ready');
    kernel.onEvent({ type: 'ready', at: nowIso() });
    await minimizeBrowser(client.pupBrowser);
});

client.on('disconnected', (reason) => {
    console.log('[connector] disconnected:', reason);
    kernel.onEvent({ type: 'disconnected', reason: String(reason || ''), at: nowIso() });
});

const inboundSeen = new Map();

function msgKey(msg) {
    try {
        if (!msg) return '';
        if (msg.id && msg.id._serialized) return String(msg.id._serialized);
        if (msg.id) return String(msg.id);
        if (msg._data && msg._data.id && msg._data.id._serialized) return String(msg

```

```

        return '';
    } catch (_) {
        return '';
    }
}

function shouldForwardMessage(msg) {
    const key = msgKey(msg);
    if (!key) return true;
    const now = Date.now();

    for (const [k, exp] of inboundSeen.entries()) {
        if (exp <= now) inboundSeen.delete(k);
    }

    const exp = inboundSeen.get(key) || 0;
    if (exp > now) return false;
    inboundSeen.set(key, now + 10000);
    return true;
}

async function forwardInbound(eventName, msg) {
    traceInbound('received', eventName, msg, null);
    if (!shouldForwardMessage(msg)) {
        traceInbound('dedupe', eventName, msg, null);
        return;
    }
    try {
        traceInbound('forward', eventName, msg, null);
        await kernel.onMessage(msg);
    } catch (e) {
        traceInbound('error', eventName, msg, e);
        console.error('[connector] ' + eventName + ' handler error:', e && e.stack);
    }
}

client.on('message', async (msg) => {
    await forwardInbound('message', msg);
});

client.on('message_create', async (msg) => {
    await forwardInbound('message_create', msg);
});

await kernel.init();
await client.initialize();
}

```

JavaScript



```
process.exit(1);  
});
```

FILE 2 — REPLACE: X:\OneBot\modules\Core\Log\LogV2.js

```
'use strict';  
  
const fs = require('fs');  
const path = require('path');  
const util = require('util');  
  
function toInt(v, d) {  
    const n = parseInt(String(v || ''), 10);  
    return Number.isFinite(n) ? n : d;  
}  
  
function toBool(v, d) {  
    if (v === undefined || v === null || v === '') return d;  
    const s = String(v).trim().toLowerCase();  
    if (s === '1' || s === 'true' || s === 'yes' || s === 'on') return true;  
    if (s === '0' || s === 'false' || s === 'no' || s === 'off') return false;  
    return d;  
}  
  
function toStr(v, d) {  
    const s = (v === undefined || v === null) ? '' : String(v);  
    return s === '' ? d : s;  
}  
  
function asciiSafe(s) {  
    const str = String(s === undefined || s === null ? '' : s);  
    let out = '';  
    for (let i = 0; i < str.length; i++) {  
        const c = str.charCodeAt(i);  
        out += (c >= 32 && c <= 126) ? str[i] : '?';  
    }  
    return out;  
}  
  
function clamp(s, maxlen) {  
    const str = String(s === undefined || s === null ? '' : s);  
    if (maxlen <= 0) return '';  
    return str.length > maxlen ? str.slice(0, maxlen) : str;  
}  
  
const LEVELS = { error: 0, warn: 1, info: 2, debug: 3, trace: 4 };  
  
const CONSOLE_HOOK_STATE = {  
    installed: false,  
    original: null,  
};
```

```

function levelNum(name, dflt) {
  const k = String(name || '').trim().toLowerCase();
  return LEVELS[k] !== undefined ? LEVELS[k] : dflt;
}

function formatLocalTs(d) {
  const pad = (n, w) => String(n).padStart(w, '0');
  return (
    pad(d.getFullYear(), 4) + '-' +
    pad(d.getMonth() + 1, 2) + '-' +
    pad(d.getDate(), 2) + ' ' +
    pad(d.getHours(), 2) + ':' +
    pad(d.getMinutes(), 2) + ':' +
    pad(d.getSeconds(), 2) + '.' +
    pad(d.getMilliseconds(), 3)
  );
}

function formatTzTs(d, timeZone) {
  try {
    const dtf = new Intl.DateTimeFormat('en-GB', {
      timeZone,
      year: 'numeric', month: '2-digit', day: '2-digit',
      hour: '2-digit', minute: '2-digit', second: '2-digit',
      hour12: false,
    });
    const parts = dtf.formatToParts(d);
    const map = {};
    for (const p of parts) map[p.type] = p.value;
    return `${map.year}-${map.month}-${map.day} ${map.hour}:${map.minute}:${map.s
  } catch (e) {
    return formatLocalTs(d);
  }
}

function resolveLogDir(confDir, dataRoot, botName) {
  const raw = toStr(confDir, '');
  if (raw) return raw;
  const dr = toStr(dataRoot, '');
  const bn = toStr(botName, '');
  if (!dr || !bn) return '';
  return path.join(dr, 'bots', bn, 'logs');
}

class LogV2 {
  constructor(meta, conf) {
    this.meta = meta || {};
    this.conf = conf || {};

    this.enabled = toBool(this.conf.enabled, true);

    this.tz = toStr(this.conf.timeZone, 'Asia/Kuala_Lumpur');

```

```

this.fileEnabled = toBool(this.conf.fileEnabled, false);
this.dir = resolveLogDir(this.conf.dir, this.meta.dataRoot, this.meta.botName);
this.mode = toStr(this.conf.mode, 'daily');
this.fileLevel = levelNum(this.conf.fileLevel, LEVELS.info);

this.consoleEnabled = toBool(this.conf.consoleEnabled, true);
this.consoleLevel = levelNum(this.conf.consoleLevel, LEVELS.info);
this.hookConsole = toBool(this.conf.hookConsole, false);

this.logMessages = toBool(this.conf.logMessages, false);
this.logEvents = toBool(this.conf.logEvents, false);

this.messagePreviewLen = toInt(this.conf.messagePreviewLen, 160);
this.metaMaxLen = toInt(this.conf.metaMaxLen, 600);

this.asciiOnly = toBool(this.conf.asciiOnly, true);
this.redactPhone = toBool(this.conf.redactPhone, false);

this.purgeDays = toInt(this.conf.purgeDays, 0);
this.captureUnhandled = toBool(this.conf.captureUnhandled, false);

this.currentDateKey = null;
this.stream = null;
this.pending = [];
this.flushing = false;

if (this.enabled && this.fileEnabled && this.dir) {
  this.ensureDir(this.dir);
  if (this.purgeDays > 0) this.purgeOldFilesSafe(this.dir, this.purgeDays);
}

if (this.enabled && this.hookConsole) this.installConsoleHook();
if (this.enabled && this.captureUnhandled) this.installProcessHook();

this.logInfo(
  'LogV2',
  `ready fileEnabled=${this.fileEnabled ? 1 : 0} dir=${this.dir || '(none)'}`
);
}

ensureDir(dir) {
  try {
    fs.mkdirSync(dir, { recursive: true });
  } catch (e) {
    this.fileEnabled = false;
    this.dir = '';
    this.logWarn('LogV2', `file disabled (mkdir failed) err=${asciiSafe(e && e.
  )}
}

purgeOldFilesSafe(dir, days) {

```

```

    try {
      const now = Date.now();
      const maxAge = days * 86400000;
      const files = fs.readdirSync(dir);
      for (const f of files) {
        const full = path.join(dir, f);
        let st;
        try { st = fs.statSync(full); } catch (_) { continue; }
        if (!st.isFile()) continue;
        if (now - st.mtimeMs > maxAge) {
          try { fs.unlinkSync(full); } catch (_) {}
        }
      }
    } catch (_) {}
  }

  getDateKey(d) {
    if (this.mode === 'daily') {
      const y = d.getFullYear();
      const m = String(d.getMonth() + 1).padStart(2, '0');
      const day = String(d.getDate()).padStart(2, '0');
      return `${y}-${m}-${day}`;
    }
    return this.getDateKey(new Date(d.getTime()));
  }

  getFilePath(dateKey) {
    const base = `onebot-${dateKey}.log`;
    return path.join(this.dir, base);
  }

  ensureStream(d) {
    if (!this.fileEnabled || !this.dir) return;
    const key = this.getDateKey(d);
    if (this.currentDateKey === key && this.stream) return;
    this.currentDateKey = key;
    if (this.stream) {
      try { this.stream.end(); } catch (_) {}
      this.stream = null;
    }
    const fp = this.getFilePath(key);
    try {
      this.stream = fs.createWriteStream(fp, { flags: 'a' });
    } catch (e) {
      this.fileEnabled = false;
      this.stream = null;
      this.logWarn('LogV2', `file disabled (open failed) err=${asciiSafe(e && e.m
    }
  }

  enqueueLine(line) {
    if (!this.fileEnabled || !this.dir) return;

```

```
this.pending.push(line);
if (!this.flushing) {
  this.flushing = true;
  setImmediate(() => this.flush());
}
}

flush() {
  this.flushing = false;
  if (!this.pending.length) return;
  const chunk = this.pending.join('');
  this.pending.length = 0;
  const d = new Date();
  this.ensureStream(d);
  if (!this.stream) return;
  try {
    this.stream.write(chunk);
  } catch (_) {}
}

formatConsoleMessage(args) {
  try {
    const arr = Array.isArray(args) ? args : [];
    const msg = util.format.apply(util, arr);
    const trimmed = clamp(String(msg || ''), this.metaMaxLen);
    return this.asciiOnly ? asciiSafe(trimmed) : trimmed;
  } catch (_) {
    return 'console_format_error';
  }
}

writeConsoleHookLine(level, args) {
  if (!this.fileEnabled || !this.dir) return;
  const d = new Date();
  const ts = formatTzTs(d, this.tz);
  const lvl = String(level || 'log').toLowerCase();
  const msg = this.formatConsoleMessage(args);
  const line = `${ts} [console] [${lvl}] ${msg}\n`;
  this.enqueueLine(line);
}

installConsoleHook() {
  if (CONSOLE_HOOK_STATE.installed) return;
  const original = {
    log: console.log.bind(console),
    info: console.info.bind(console),
    warn: console.warn.bind(console),
    error: console.error.bind(console),
  };
  const self = this;
  function wrap(level) {
```



```

    return function wrappedConsoleMethod() {
      const args = Array.prototype.slice.call(arguments);
      try { self.writeConsoleHookLine(level, args); } catch (_) {}
      return original[level].apply(console, args);
    };
  }

  console.log = wrap('log');
  console.info = wrap('info');
  console.warn = wrap('warn');
  console.error = wrap('error');

  CONSOLE_HOOK_STATE.installed = true;
  CONSOLE_HOOK_STATE.original = original;
}

installProcessHook() {
  const self = this;
  if (this._processHookInstalled) return;
  this._processHookInstalled = true;

  process.on('unhandledRejection', (reason) => {
    try {
      self.logError('process', 'unhandledRejection', { reason: String(reason) })
    } catch (_) {}
  });

  process.on('uncaughtException', (err) => {
    try {
      self.logError('process', 'uncaughtException', { err: String(err) })
    } catch (_) {}
  });
}

emit(levelName, tag, message, metaObj) {
  const d = new Date();
  const ts = formatTzTs(d, this.tz);
  const lvl = String(levelName || 'info').toLowerCase();
  const lvlN = levelNum(lvl, LEVELS.info);

  const cleanTag = this.asciiOnly ? asciiSafe(tag) : String(tag || '');
  const cleanMsg = this.asciiOnly ? asciiSafe(message) : String(message || '');

  let metaStr = '';
  if (metaObj !== undefined) {
    try {
      metaStr = JSON.stringify(metaObj);
    } catch (e) {
      metaStr = '{"meta":"unstringifiable"}';
    }
    metaStr = clamp(metaStr, this.metaMaxLen);
    metaStr = this.asciiOnly ? asciiSafe(metaStr) : metaStr;
  }

```

```

    }

    const line = `${ts} [${lvl}] [${cleanTag}] ${cleanMsg}${metaStr ? ' meta=' +
    if (this.consoleEnabled && lvlN <= this.consoleLevel) {
      if (this.meta && typeof this.meta.log === 'function') {
        this.meta.log(`${cleanTag}`, `${lvl} ${cleanMsg}${metaStr ? ' meta=' + me
      } else {
        console.log(line.trimEnd());
      }
    }
  }

  if (this.fileEnabled && lvlN <= this.fileLevel) {
    this.enqueueLine(line);
  }
}

logInfo(tag, msg, meta) { this.emit('info', tag, msg, meta); }
logWarn(tag, msg, meta) { this.emit('warn', tag, msg, meta); }
logError(tag, msg, meta) { this.emit('error', tag, msg, meta); }
logDebug(tag, msg, meta) { this.emit('debug', tag, msg, meta); }

safeSender(sender) {
  const s = sender || {};
  const phone = this.redactPhone && s.phone
    ? (String(s.phone).slice(0, 4) + '****' + String(s.phone).slice(-2))
    : (s.phone || '');
  return {
    id: s.id || '',
    phone: phone || '',
    lid: s.lid || '',
    name: s.name || '',
  };
}

onMsg(ctx) {
  const chatId = ctx && (ctx.chatId || ctx.from || '') || '';
  const isGroup = ctx && (ctx.isGroup ? 1 : 0);
  const sender = this.safeSender(ctx && ctx.sender ? ctx.sender : {});
  const text = clamp(ctx && typeof ctx.text === 'string' ? ctx.text : (ctx && t

  this.logInfo(
    'msg',
    `chatId=${chatId} isGroup=${isGroup} sender=${JSON.stringify(sender)} text=
    { chatId, isGroup: !(ctx && ctx.isGroup), sender }
  );
}

onEvent(ctx) {
  const ev = (ctx && (ctx.event || ctx.type || '')) || '';
  const keys = Object.keys(ctx || {}).join(',');
  this.logInfo('event', `event=${ev} keys=${keys}`);
}

```

```
}

build() {
  const self = this;

  if (!this.enabled) {
    return {
      onMessage: async function noop() {},
      onEvent: async function noop() {},
    };
  }

  return {
    onMessage: async function onMessage(ctx) {
      if (!ctx) return;
      if (self.logMessages) self.onMsg(ctx);
    },
    onEvent: async function onEvent(ctx) {
      if (!ctx) return;
      if (self.logEvents) self.onEvent(ctx);
    },
  };
};
```

JavaScript



```
module.exports = LogV2;
```

FILE 3 — REPLACE:

X:\OneData\bots\ONEBOT\config\modules\Core\Impl\LogCV.conf

```
# LogCV.conf (canonical keys)

# Core switches
enabled=1
fileEnabled=1
consoleEnabled=1
fileLevel=info
consoleLevel=info
hookConsole=1

# Paths and rotation
# Note: absolute path is allowed for log output.
dir=X:\OneData\bots\ONEBOT\logs
mode=daily

# Timezone
timeZone=Asia/Kuala_Lumpur
```

```
# What to log
logEvents=1
logMessages=1

# Output details
messagePreviewLen=200
metaMaxLen=600
asciiOnly=1
redactPhone=0

# Optional
purgeDays=0
captureUnhandled=1

# Send tap (optional)
tapSendEnabled=0

</> conf
```



Kalau lepas kau replace 3 fail tu dan restart, **startup log mesti ada** `hookConsole=1` . Kalau masih keluar `hookConsole=0` , itu confirm bot masih baca config lain / file lain (maksudnya kau belum replace di path yang betul atau ada pointer lain).

Compare with Claude ▾

onebot-2026-02-27.log
File

CMD LOG.txt
Document

masalah sama ni, takkan berhari2 tak selesai masalah ni..ada kemungkinan node issue atau bukan, node ni perlu update ke?

Thought for 4m 7s >

Boleh jadi **Node**, tapi berdasarkan log yang kau bagi sekarang, **lebih kuat ini masalah** `whatsapp-web.js` / `WhatsApp Web` **stuck sebelum** `ready` , bukan semata-mata code bot.

Apa yang "detect" dari log kau

- Bot boot ok, module semua loaded.
- `[connector] authenticated` **keluar, tapi** `"[connector] ready"` **langsung tak keluar.**

CMD LOG

Kalau `ready` tak pernah fire, memang biasa **tak ada inbound event** message → DM/group semua senyap.

Node perlu update ke?

Update Node hanya “wajib” kalau Node kau < v18, sebab `whatsapp-web.js` memang require **Node v18+**. [GitHub](#) +1

Node LTS terkini sekarang ialah **v24.14.0** (rujuk [nodejs.org](#)). [Node.js](#)

Tapi kalau Node kau dah v18 ke atas, **update Node saja biasanya tak settle** isu “authenticated tapi ready tak fire” — isu ni memang ada report dalam `whatsapp-web.js` sendiri. [GitHub](#) +1

Buat 3 check paling cepat (tanpa tukar code dulu)

1. Check Node version

```
</> bat
```



- Kalau keluar `v16` / `v14` / apa-apa <18 → **ya, update Node** (itu wajib ikut requirement library). [wwebjs.dev](#)

2. Check whatsapp-web.js version

```
</> bat
```



3. Check “ready” memang tak pernah fire

Start bot, tengok CMD/log: kalau tak ada `[connector] ready` langsung → memang stuck sebelum ready (macam log kau sekarang). [CMD LOG](#)

Kalau Node dah ok (>=18), apa next yang paling masuk akal

- **Update** `whatsapp-web.js` (isu ready not firing kadang-kadang version-specific / WA web berubah). [CMD LOG](#) [GitHub](#) +1
- **Reset session untuk test:** rename folder session `LocalAuth` (contoh `X:\OneData\bots\ONEBOT\session` → `session.bak`) dan link device semula. Ini bukan “fix final”, tapi cara paling cepat untuk confirm session restore stuck (yang memang dilaporkan orang). [GitHub](#)

- Kalau masih stuck, ini hampir pasti perlukan **instrumentation dalam Connector** (ready watchdog + state/loading_screen + page errors) supaya kita nampak WA Web sangkut dekat mana—sebab sekarang log hanya sampai authenticated.

Kalau kau paste output `node -v + npm ls whatsapp-web.js`, aku boleh cakap straight: "Node wajib upgrade atau tak", dan version whatsapp-web.js kau patut naik/tukar.

    ...  Sources [Compare with Claude](#) ▾

cmdcheck.txt
Document

tengok cmd check ni dulu

Thought for 6m 46s >

Aku dah tengok cmdcheck.txt. Ini yang "tak detect" sebenarnya:

1. Dalam cmdcheck.txt, kau **bukan run bot** — kau macam **paste output log** ke CMD, sebab itu keluar error macam 'ONEBOT' is not recognized... (itu error Windows, bukan bot).
2. Yang penting: bila kau try `npm ls whatsapp-web.js`, dia jawab 'npm' is not recognized. Maksudnya dalam CMD tu **npm memang tak ada / tak masuk PATH**. Kalau nak update whatsapp-web.js, kau kena betulkan Node/npm dulu (atau guna Node portable yang start bot tu).
3. Dari log run sebenar (yang kau share sebelum ni), pattern masih sama: [connector] authenticated **ada, tapi** [connector] ready **tak pernah keluar**. Bila ready tak fire, biasanya event message pun tak jalan → DM/group memang senyap walaupun module loaded.

Jadi sekarang fix yang paling betul **bukan tukar Log/Command/Fallback lagi**, tapi **buat Connector diagnose kenapa ready tak keluar** (1 file sahaja, tak kacau behavior bot).

FIX (1 FILE SAHAJA): REPLACE X:\OneBot\Connector.js

Ini versi sama macam file kau sekarang (trace + dedupe + forward message/message_create), **tambah**:

- ready_watchdog (contoh 60s lepas authenticated, kalau masih belum ready dia print 1 line)
- log change_state , loading_screen , remote_session_saved
- attach puppeteer page diagnostics (pageerror / page console warning/error) bila available

Selepas ini, kita akan nampak jelas WhatsApp Web stuck dekat mana.

```
'use strict';

/**
 * OneBot Connector (Foundation - Freeze)
 * - WhatsApp Web connector only: Login + forward raw message/events to Kernel
 * - NO business logic, NO commands, NO hardcoded modules
 *
 * Requirements:
 *   npm i whatsapp-web.js qrcode-terminal
 */

const path = require('path');
const fs = require('fs');

let Client, LocalAuth;
try {
  ({ Client, LocalAuth } = require('whatsapp-web.js'));
} catch (e) {
  console.error('[connector] Missing dependency whatsapp-web.js. Install it in X:');
  process.exit(2);
}

let qrcode;
try {
  qrcode = require('qrcode-terminal');
} catch (e) {
  qrcode = null;
}

const Kernel = require('./Kernel');

const BOT_NAME = (process.env.BOT_NAME || 'ONEBOT').trim();
const CODE_ROOT = (process.env.CODE_ROOT || __dirname).trim();
const DATA_ROOT = (process.env.DATA_ROOT || 'X:\\OneData').trim();
const TRACE_INBOUND = String(process.env.ONEBOT_TRACE_INBOUND || '').trim() === '1';
const TRACE_DIAG = TRACE_INBOUND || String(process.env.ONEBOT_TRACE_DIAG || '').trim() === '1';
const READY_WATCHDOG_MS = (function () {
  const n = parseInt(String(process.env.ONEBOT_READY_WATCHDOG_MS || ''), 10);
  return Number.isFinite(n) && n >= 5000 ? n : 60000;
})();
```

```

})();

const botDataRoot = path.join(DATA_ROOT, 'bots', BOT_NAME);
const sessionRoot = path.join(botDataRoot, 'session');
const qrRoot = path.join(botDataRoot, 'qr');

function ensureDir(p) {
  try { fs.mkdirSync(p, { recursive: true }); } catch (_) {}
}
ensureDir(sessionRoot);
ensureDir(qrRoot);

function nowIso() {
  return new Date().toISOString().replace('T', ' ').replace('Z', '');
}

function traceInbound(stage, eventName, msg, err) {
  if (!TRACE_INBOUND) return;
  try {
    const m = msg || {};
    const chatId = String(m.from || '');
    const fromMe = m && m.fromMe ? 1 : 0;
    const isGroup = chatId.endsWith('@g.us') ? 1 : 0;
    const msgId = String((m.id && m.id._serialized) || m.id || '');
    const msgType = String((m.type || (m._data && m._data.type) || ''));
    const textLen = typeof m.body === 'string' ? m.body.length : 0;
    let line = '[connector][trace] stage=' + String(stage || '') +
      ' eventName=' + String(eventName || '') +
      ' chatId=' + chatId +
      ' fromMe=' + fromMe +
      ' isGroup=' + isGroup +
      ' msgId=' + msgId +
      ' msgType=' + msgType +
      ' textLen=' + textLen;
    if (err) {
      line += ' err=' + String(err && err.message ? err.message : err);
    }
    console.log(line);
  } catch (traceErr) {
    console.error('[connector][trace] stage=error eventName=trace chatId= fromMe=');
  }
}

const kernel = new Kernel({
  botName: BOT_NAME,
  codeRoot: CODE_ROOT,
  dataRoot: DATA_ROOT,
});

// Force-minimize Chrome window via CDP (fallback if flag does not work)
async function minimizeBrowser(browser) {
  if (!browser) return;

```



```

try {
  const pages = await browser.pages();
  const page = pages && pages[0];
  if (!page) return;
  const session = await page.target().createCDPSession();
  const x = await session.send('Browser.getWindowForTarget');
  await session.send('Browser.setWindowBounds', { windowId: x.windowId, bounds:
  console.log('[connector] browser minimized via CDP');
} catch (e) {
  console.log('[connector] minimize via CDP failed:', e && e.message ? e.messag
}
}

async function main() {
  console.log('=====');
  console.log('ONEBOT START');
  console.log('Bot :', BOT_NAME);
  console.log('Code:', CODE_ROOT);
  console.log('Data:', DATA_ROOT);
  console.log('=====');

  console.log('[connector] initializing...');

  const client = new Client({
    authStrategy: new LocalAuth({ clientId: BOT_NAME, dataPath: sessionRoot }),
    puppeteer: {
      headless: false,
      args: [
        '--start-minimized',
        '--disable-dev-shm-usage',
        '--no-sandbox',
        '--disable-setuid-sandbox',
      ],
    },
  });

  const runtime = {
    authAt: 0,
    readyAt: 0,
    readyFired: 0,
    lastState: '',
    lastLoadingPct: -1,
    lastLoadingMsg: '',
    diagAttached: 0,
  };

  function logDiag(line) {
    if (!TRACE_DIAG) return;
    console.log('[connector] ' + line);
  }

  function startReadyWatchdog() {

```

```

const startedAt = Date.now();
setTimeout(async () => {
  if (runtime.readyFired) return;
  let state = '';
  try {
    if (client && typeof client.getState === 'function') {
      state = String(await client.getState());
    }
  } catch (_) {
    state = '';
  }
  const sinceAuthMs = runtime.authAt ? (Date.now() - runtime.authAt) : (Date.now() - runtime.authAt);
  const loading = (runtime.lastLoadingPct >= 0) ? String(runtime.lastLoadingPct) : '';
  const loadingMsg = runtime.lastLoadingMsg ? runtime.lastLoadingMsg : '';
  console.log('[connector] ready_watchdog timeoutMs=' + READY_WATCHDOG_MS +
    ' ready=0 sinceAuthMs=' + sinceAuthMs +
    ' state=' + (state || runtime.lastState || '') +
    ' loadingPct=' + loading +
    ' loadingMsg=' + loadingMsg);
}, READY_WATCHDOG_MS);
}

async function tryAttachPuppeteerDiagnostics() {
  if (runtime.diagAttached) return;
  const page = client && (client.pupPage || null);
  if (!page) return;
  runtime.diagAttached = 1;

  try {
    page.on('pageerror', (err) => {
      const msg = err && err.message ? err.message : String(err || '');
      console.log('[connector] pageerror ' + msg);
    });
  } catch (_) {}

  try {
    page.on('error', (err) => {
      const msg = err && err.message ? err.message : String(err || '');
      console.log('[connector] page_error ' + msg);
    });
  } catch (_) {}

  try {
    page.on('console', (msg) => {
      try {
        const type = msg && typeof msg.type === 'function' ? String(msg.type()) : '';
        if (type !== 'error' && type !== 'warning') return;
        const text = msg && typeof msg.text === 'function' ? String(msg.text()) : '';
        console.log('[connector] page_console type=' + type + ' text=' + text);
      } catch (_) {}
    });
  } catch (_) {}
}

```

```

    logDiag('puppeteer_diag attached=1');
  }

function startDiagPoller() {
  if (runtime.diagAttached) return;
  let tries = 0;
  const t = setInterval(async () => {
    tries += 1;
    try {
      await tryAttachPuppeteerDiagnostics();
    } catch (_) {}
    if (runtime.diagAttached || tries >= 120) {
      clearInterval(t);
    }
  }, 1000);
}

function sanitizeTransportOptions(options) {
  const optIn = options && typeof options === 'object' ? options : {};
  const opts = Object.assign({}, optIn);

  const internalKeys = new Set([
    'manualReply',
    'allowOutsideWindow',
    'bypassWindow',
    'bypassRateLimit',
    'moduleLog',
    'bugLog',
    'detailLog',
    'traceLog',
    'trace',
    'debug',
  ]);

  for (const key of Object.keys(opts)) {
    if (internalKeys.has(key)) delete opts[key];
  }

  if (opts.sendSeen === undefined || opts.sendSeen === null) opts.sendSeen = false;
  return opts;
}

const sendDirect = async (chatId, payload, options) => {
  const outChatId = typeof chatId === 'string' ? chatId.trim() : '';
  if (!outChatId) {
    const err = new Error('transport.invalid_chatId');
    err.code = 'transport.invalid_chatId';
    throw err;
  }

  let outPayload = payload;

```

```
if (typeof payload === 'string') {
  outPayload = payload.trim();
  if (!outPayload) {
    const err = new Error('transport.empty_body');
    err.code = 'transport.empty_body';
    throw err;
  }
}

const opts = sanitizeTransportOptions(options);

try {
  return await client.sendMessage(outChatId, outPayload, opts);
} catch (e) {
  const msg = String(e && e.message ? e.message : e || 'unknown_error');
  const err = new Error('transport.send_failed: ' + msg);
  err.code = 'transport.send_failed';
  throw err;
}
};

kernel.attachTransport({ sendDirect });

client.on('qr', (qr) => {
  console.log('[connector] qr updated');
  if (qrcode) qrcode.generate(qr, { small: true });
  else console.log('[connector] QR:', qr);
  kernel.onEvent({ type: 'qr', qr, at: nowIso() });
});

client.on('authenticated', () => {
  runtime.authAt = Date.now();
  console.log('[connector] authenticated');
  kernel.onEvent({ type: 'authenticated', at: nowIso() });
  startReadyWatchdog();
  startDiagPoller();
});

client.on('auth_failure', (msg) => {
  console.log('[connector] auth_failure:', msg);
  kernel.onEvent({ type: 'auth_failure', message: String(msg || ''), at: nowIso() });
});

client.on('change_state', (state) => {
  runtime.lastState = String(state || '');
  logDiag('change_state state=' + runtime.lastState);
  kernel.onEvent({ type: 'change_state', state: runtime.lastState, at: nowIso() });
});

client.on('loading_screen', (percent, message) => {
  const pct = parseInt(String(percent || ''), 10);
  const msg = String(message || '');

```

```

const bucket = Number.isFinite(pct) ? Math.floor(pct / 10) : -1;
const lastBucket = (runtime.lastLoadingPct >= 0) ? Math.floor(runtime.lastLoadingPct / 10) : -1;
if (bucket !== lastBucket || msg !== runtime.lastLoadingMsg) {
  runtime.lastLoadingPct = Number.isFinite(pct) ? pct : runtime.lastLoadingPct;
  runtime.lastLoadingMsg = msg;
  logDiag('loading_screen percent=' + String(percent) + ' message=' + msg);
}
});

client.on('remote_session_saved', () => {
  logDiag('remote_session_saved');
});

client.on('ready', async () => {
  runtime.readyFired = 1;
  runtime.readyAt = Date.now();
  console.log('[connector] ready');
  kernel.onEvent({ type: 'ready', at: nowIso() });
  await minimizeBrowser(client.pupBrowser);
});

client.on('disconnected', (reason) => {
  console.log('[connector] disconnected:', reason);
  kernel.onEvent({ type: 'disconnected', reason: String(reason || ''), at: nowIso() });
});

const inboundSeen = new Map();

function msgKey(msg) {
  try {
    if (!msg) return '';
    if (msg.id && msg.id._serialized) return String(msg.id._serialized);
    if (msg.id) return String(msg.id);
    if (msg._data && msg._data.id && msg._data.id._serialized) return String(msg._data.id._serialized);
    return '';
  } catch (_) {
    return '';
  }
}

function shouldForwardMessage(msg) {
  const key = msgKey(msg);
  if (!key) return true;
  const now = Date.now();

  for (const [k, exp] of inboundSeen.entries()) {
    if (exp <= now) inboundSeen.delete(k);
  }

  const exp = inboundSeen.get(key) || 0;
  if (exp > now) return false;
  inboundSeen.set(key, now + 10000);
}

```

```

    return true;
}

async function forwardInbound(eventName, msg) {
  traceInbound('received', eventName, msg, null);
  if (!shouldForwardMessage(msg)) {
    traceInbound('dedupe', eventName, msg, null);
    return;
  }
  try {
    traceInbound('forward', eventName, msg, null);
    await kernel.onMessage(msg);
  } catch (e) {
    traceInbound('error', eventName, msg, e);
    console.error('[connector] ' + eventName + ' handler error:', e && e.stack);
  }
}

client.on('message', async (msg) => {
  await forwardInbound('message', msg);
});

client.on('message_create', async (msg) => {
  await forwardInbound('message_create', msg);
});

await kernel.init();
await client.initialize();
}

<> JavaScript
process.exit(1);
});

```

Lepas replace ini, kau buat apa

1. Start bot macam biasa.
2. Untuk nampak state log, set salah satu:
 - set ONEBOT_TRACE_INBOUND=1 (sekali inbound trace + diag)
 - atau set ONEBOT_TRACE_DIAG=1 (diag saja)
3. Lepas [connector] authenticated , tunggu 60s:
 - kalau masih tak ready , log akan keluar:
ready_watchdog ... state=... loadingPct=... loadingMsg=...

4. Paste line `ready_watchdog / change_state` tu — dari situ baru kita tahu punca sebenar (session conflict / loading stuck / etc).

Tentang Node update

Daripada `cmdcheck.txt`, masalah sekarang ialah **npm tak boleh run** dalam CMD tu. So sebelum kau fikir update `whatsapp-web.js`, confirm dulu:

- `where node`
- `node -v`
- `where npm`

Kalau `node` pun tak jumpa dalam CMD, maksudnya bot kau start guna node dari tempat lain (portable / service). Install Node LTS dan pastikan PATH, barulah senang update.

Kalau kau buat step di atas dan masih no reply, at least sekarang log akan **cakap kenapa ready tak keluar** — itu kunci untuk settle cepat.

    ... Compare with Claude 

GOLDEN RULES.txt
Document

ok macam mana nak check node, kalau ikutkan ni susunan asal, jadi apa aku kena check sekarang untuk pastikan node ni boleh guna

Thought for 18s >

Baik. Untuk pastikan **Node memang boleh guna (dan npm pun ada)** dekat server Windows kau, buat check ni **dalam CMD yang sama** kau selalu guna run bot (supaya PATH/environment sama).

1) Check Node wujud dan versi (CMD)

```
where node
```

```
</> bat
```



```
node -p "process.execPath"
```

Apa maksud output:

- where node patut keluar path contoh: C:\Program Files\nodejs\node.exe atau path portable.
- node -v mesti keluar macam v18.x ke atas (whatsapp-web.js biasanya perlukan Node 18+).
- process.execPath confirm node.exe yang sebenar digunakan.

2) Check npm wujud (CMD)

```
where npm
```

```
</> bat
```



Kalau keluar error 'npm' is not recognized... → maksudnya:

- Node mungkin ada, tapi **npm tak ada dalam PATH**, atau
- Kau guna Node portable/partial yang tak include npm, atau
- PATH dalam CMD tu tak load betul.

3) Check PATH yang CMD tu guna

```
</> bat
```



Cari dalam %PATH% ada tak folder node (contoh C:\Program Files\nodejs\).

4) Kalau bot boleh run tapi where node tak jumpa

Ini biasa bila bot start guna **Start.cmd / service** yang panggil node dengan **full path**.

Check Start.cmd (sekadar baca, bukan edit):

```
</> bat
```



Atau cari line node:


```
</> bat
```



Kalau dalam Start.cmd ada contoh:

```
C:\something\node.exe X:\OneBot\Connector.js
```

→ itu node yang bot guna. Pastikan node tu versi 18+ dengan:

```
</> bat
```



5) "Minimum pass" untuk kata Node ok

Node dianggap "boleh guna" kalau semua ni lepas:

- `node -v` keluar versi (ideal **v18+**)
- `where node` jumpa path
- `npm -v` keluar versi
- `npm ls whatsapp-web.js` boleh run dalam `X:\OneBot`

Contoh:

```
</> bat
```



Kalau npm memang tak ada / tak recognized

Paling selamat: install **Node LTS** (yang include npm) dan pastikan tick "Add to PATH", lepas install **tutup CMD dan buka CMD baru**, run semula check di atas.

Kalau kau paste sini output 6 line ni:

- `where node`
- `node -v`
- `node -p "process.execPath"`
- `where npm`
- `npm -v` (atau error)
- `type X:\OneBot\Start.cmd` (kalau pendek; kalau panjang, paste bahagian yang ada "node")

Aku boleh cakap terus: "Node ok / npm missing / bot guna node path lain".

    ... Compare with Claude ▾

cmdcheck.txt
Document

Thought for 1m 8s >

Ok, sekarang memang jelas dari cmdcheck.txt :

- Dalam CMD biasa, node **tak ada dalam PATH** → where node kosong dan node -v "not recognized".  cmdcheck
- Tapi bot kau **bukan guna PATH**. Start.cmd cari **portable Node** di X:\OneBot\Software\node\node.exe (atau beberapa lokasi lain) dan run terus guna full path.  cmdcheck  cmdcheck

Jadi cara check Node yang betul ialah check **node.exe yang Start.cmd pakai**, bukan where node .

1) Check node yang LIVE (portable node) — buat dalam CMD

```
X:\OneBot\Software\node\node.exe -v
```

```
</> bat
```



Kalau path itu tak wujud, Start.cmd juga ada fallback; kau boleh cari mana yang wujud:

```
</> bat
```



2) Check npm boleh guna atau tidak

Dalam log kau, npm memang "not recognized" sebab PATH tak ada npm.  cmdcheck

Tapi untuk update package, kita perlukan npm **dalam folder portable node**.

Cuba:

```
dir /b X:\OneBot\Software\node\npm.cmd
```

```
</> bat
```



- Kalau `npm.cmd` **wujud dan jalan** → ok, boleh update `whatsapp-web.js` dari folder `X:\OneBot` .
- Kalau `npm.cmd` **tak wujud** → maksudnya portable node tu cuma `node.exe` tanpa npm (memang susah nak update library).

3) Bagi “node” & “npm” jadi boleh run dalam CMD (sementara saja, tak kacau system)

Kalau kau nak `node` / `npm` boleh run macam biasa dalam window CMD tu:

```
set "PATH=X:\OneBot\Software\node;%PATH%"
where node
node -v
```

```
</> bat
```



Ini **tak install apa-apa**, hanya untuk CMD session tu.

Penting (tentang `cmdcheck.txt`)

Dalam `cmdcheck.txt` ada banyak error `'2026-02-26' is not recognized...` sebab line log tu macam “tertype” sebagai command dalam CMD.  `cmdcheck`

Untuk check Node, jangan paste log macam tu — just run commands yang aku bagi atas.

Kalau kau paste sini output 3 benda ini:

1. `X:\OneBot\Software\node\node.exe -v`
2. `dir /b X:\OneBot\Software\node\npm.cmd`
3. `X:\OneBot\Software\node\npm.cmd -v` (kalau ada)

Aku boleh cakap terus: **Node ok** / **Node terlalu lama** / **npm memang tak ada**, dan langkah seterusnya patut macam mana.



Compare with Claude 

cmdcheck.txt
Document

Thought for 33s >

Aku tak dapat baca kandungan `cmdcheck.txt` yang baru tu dekat sini sebab ada beberapa upload sebelum ni dah **expired / tak terbuka** dari sisi aku. Cara paling cepat: **paste terus** isi `cmdcheck.txt` (atau sekurang-kurangnya bahagian output yang ada `where node` , `node -v` , `type Start.cmd`) dalam chat.

Sementara tu, untuk **pastikan Node yang LIVE (yang bot guna) memang boleh guna**, buat check ni dulu (copy/paste command sahaja — jangan paste log sebagai command):

1) Confirm bot guna Node yang mana (Start.cmd)

```
</> bat
```



2) Check versi Node yang bot guna (portable node)

Kalau `Start.cmd` tunjuk `X:\OneBot\Software\node\node.exe` , run:

```
</> bat
```



3) Check npm ada atau tak (untuk update whatsapp-web.js)

```
</> bat
```



Kalau `npm.cmd` wujud:

</> bat



```
X:\OneBot\Software\node\npm.cmd ls whatsapp-web.js
```

4) Kalau dalam CMD "node/npm not recognized", buat PATH sementara (untuk window CMD tu sahaja)

```
set "PATH=X:\OneBot\Software\node;%PATH%"
where node
node -v
```

</> bat



Apa yang kita nak "confirm" dari output tu

- **Node versi mesti v18+** (kalau bawah v18, whatsapp-web.js memang boleh jadi pelik / tak compatible).
- **npm mesti wujud** kalau kau nak update whatsapp-web.js . Kalau node portable tu tak ada npm.cmd , memang susah nak update library tanpa install Node full.

Lepas kau run, paste sini 6 baris output ini sahaja

1. type X:\OneBot\Start.cmd (bahagian yang ada command node)
2. X:\OneBot\Software\node\node.exe -v
3. dir /b X:\OneBot\Software\node\npm.cmd
4. X:\OneBot\Software\node\npm.cmd -v (kalau ada)
5. X:\OneBot\Software\node\npm.cmd ls whatsapp-web.js (kalau ada)
6. Kalau node path lain (ikut Start.cmd), paste output "<path>\node.exe" -v

Lepas tu baru aku boleh cakap tepat: **Node ok atau wajib update**, dan kalau wajib update —update yang mana (portable vs install system) supaya tak kacau susunan asal bot.



Compare with Claude ▾

ok kalau tak dapat baca aku paste terus dekat sini semua
hasil dari cmd Microsoft Windows [Version
10.0.19045.6466]

(c) Microsoft Corporation. All rights reserved.

```
C:\Windows\system32>X:\OneBot\Software\node\node.exe -v
v20.18.0
```

```
C:\Windows\system32>X:\OneBot\Software\node\node.exe -p "process.execPath"
X:\OneBot\Software\node\node.exe
```

```
C:\Windows\system32>X:\OneBot\Software\node\node.exe -p "process.versions"
{
  node: '20.18.0',
  acorn: '8.12.1',
  ada: '2.9.0',
  ares: '1.33.1',
  base64: '0.5.2',
  brotli: '1.1.0',
  cjs_modulelexer: '1.4.1',
  cldr: '45.0',
  icu: '75.1',
  llhttp: '8.1.2',
  modules: '115',
  napi: '9',
  nghttp2: '1.61.0',
  nghttp3: '0.7.0',
  ngtcp2: '1.1.0',
  openssl: '3.0.13+quic',
  simdutf: '5.5.0',
  tz: '2024a',
  undici: '6.19.8',
  unicode: '15.1',
  uv: '1.46.0',
  uvwasi: '0.0.21',
  v8: '11.3.244.8-node.23',
  zlib: '1.3.0.1-motley-71660e1'
}
```

```
C:\Windows\system32>for %F in
("X:\OneBot\Software\node\node.exe"
"X:\OneBot\software\node\node.exe"
"X:\OneBot\node\node.exe") do @if exist "%~F" echo
```

```
FOUND %~F
```

```
FOUND X:\OneBot\Software\node\node.exe
```

```
FOUND X:\OneBot\software\node\node.exe
```

```
C:\Windows\system32>dir /b
```

```
X:\OneBot\Software\node\npm.cmd
```

```
npm.cmd
```

```
C:\Windows\system32>dir /b
```

```
X:\OneBot\Software\node\npx.cmd
```

```
npx.cmd
```

```
C:\Windows\system32>X:\OneBot\Software\node\npm.cm
```

```
d -v
```

```
10.8.2
```

```
C:\Windows\system32>set
```

```
"PATH=X:\OneBot\Software\node;%PATH%"
```

```
C:\Windows\system32>where node
```

```
X:\OneBot\Software\node\node.exe
```

```
C:\Windows\system32>node -v
```

```
v20.18.0
```

```
C:\Windows\system32>where npm
```

```
X:\OneBot\Software\node\npm
```

```
X:\OneBot\Software\node\npm.cmd
```

```
C:\Windows\system32>npm -v
```

```
10.8.2
```

```
C:\Windows\system32>
```

Thought for 36s >

Bagus — **Node bukan masalah.**

Dari output kau:

- Node yang bot guna ialah **v20.18.0** 
- npm ada (**10.8.2**) 

- node & npm dah boleh run dalam CMD (lepas kau tambah PATH sementara) 

So **tak perlu update Node** untuk issue "bot authenticated tapi tak reply". Node dah cukup kuat.

Sekarang fokus sebenar: **whatsapp-web.js / WhatsApp Web session yang sangkut sebelum ready** (sebab bila ready tak fire, event message pun biasanya tak masuk → DM/group senyap).

Apa kau kena check sekarang (paling cepat, terus nampak punca)

1) Check version whatsapp-web.js yang kau guna

Run dalam CMD:

```
cd /d X:\OneBot
```

```
</> bat
```



Kalau dia outdated → besar kemungkinan WhatsApp Web berubah dan library lama stuck.

2) Update whatsapp-web.js (kalau outdated)

```
</> bat
```



Lepas update, restart bot dan tengok ada ready tak.

3) Kalau masih sangkut: buat "clean reinstall" dependency

Ini selalu settle kalau node_modules corrupt:

```
cd /d X:\OneBot  
rmdir /s /q node_modules
```

```
</> bat
```



Restart bot.

4) Kalau masih tak ready : reset session (TEST sahaja, simpan backup)

LocalAuth kadang-kadang restore session tapi WA Web stuck.

```
</> bat
```



Restart bot → scan QR / link semula device → tengok ready keluar tak.

Verify cepat (untuk confirm “ready” memang tak jalan)

Selepas restart bot, kalau kau ada connector yang ada watchdog/diag (kalau belum, ignore), semak:

```
</> bat
```



Kalau tak ada watchdog, takpe — yang penting: selepas update/reinstall/reset session, log sepatutnya tunjuk [connector] ready .

Kenapa sebelum ni tak boleh guna npm?

Sebab **Node portable** kau tak masuk PATH by default. Tapi sekarang kau dah betulkan dengan:

```
</> bat
```




Jadi apa-apa npm command untuk repo kena buat macam tu dulu (atau panggil full path X:\OneBot\Software\node\npm.cmd).

Kalau kau nak aku confirm langkah paling selamat tanpa “terlajak update”, paste output 2 command ini je:

- npm ls whatsapp-web.js
- npm outdated whatsapp-web.js

(Nota: beberapa file upload lama dalam chat kadang "expired" dari sisi aku; kalau kau nak aku semak log/skrip tertentu semula, upload/paste terus content yang berkaitan.)

📄 👍 💬 ↺ ⋮ Compare with Claude ▾

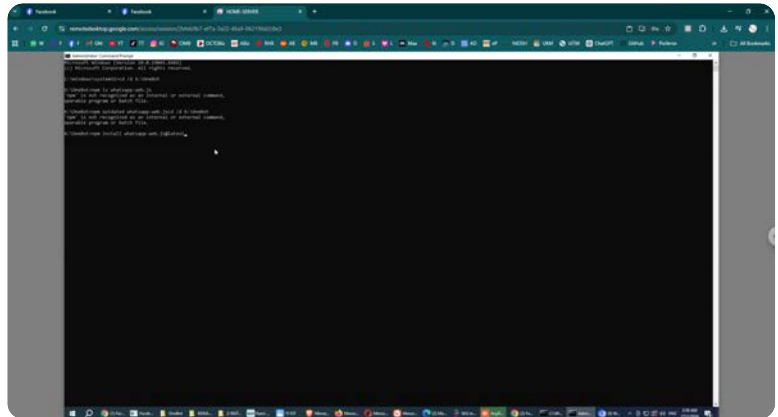

kenapa stuck kat sini je atau tengah loading

Thought for 45s >

Dalam screenshot tu, **bukan "loading"** — itu jadi macam tu sebab `npm` memang tak dikenali dalam CMD window tu (kau nampak tadi: `" 'npm' is not recognized... "`). Jadi bila kau type `npm install ...`, dia sama ada:

- **belum jalan** (belum tekan Enter), atau
- **akan fail juga** bila tekan Enter, sebab `npm` tak ada dalam PATH untuk CMD tu.

Setiap kali buka CMD baru, **PATH** sementara yang kau set sebelum ni tak ikut.

Buat ini dalam CMD yang sama (yang dalam screenshot)

Option paling selamat: guna `npm portable` terus.

```
cd /d X:\OneBot
X:\OneBot\Software\node\npm.cmd -v
```

</> bat



Atau kalau kau nak guna `npm` biasa, set PATH dulu (dalam CMD tu juga):

```
set "PATH=X:\OneBot\Software\node;%PATH%"  
where npm
```

```
</> bat
```



Kalau lepas run npm install masih "diam" lama sangat

Buat check cepat (untuk confirm memang tengah download atau stuck network):

```
</> bat
```



Kalau npm ping / npm view pun hang atau error, itu biasanya **network/DNS/proxy/firewall** (bukan Node).

Kalau kau paste output selepas kau run:

- X:\OneBot\Software\node\npm.cmd -v
- X:\OneBot\Software\node\npm.cmd install whatsapp-web.js@latest

aku boleh terus cakap sama ada dia sedang install, fail sebab network, atau fail sebab permission.



Compare with Claude ▾

```
Microsoft Windows [Version 10.0.19045.6466]  
(c) Microsoft Corporation. All rights reserved.
```

```
C:\Windows\system32>cd /d X:\OneBot
```

```
X:\OneBot>npm ls whatsapp-web.js  
'npm' is not recognized as an internal or external  
command,  
operable program or batch file.
```

```
X:\OneBot>npm outdated whatsapp-web.js  
X:\OneBot  
'npm' is not recognized as an internal or external  
command,  
operable program or batch file.
```

```
X:\OneBot>npm install whatsapp-web.js@latest /d
X:\OneBot
'npm' is not recognized as an internal or external
command,
operable program or batch file.
```

```
X:\OneBot>X:\OneBot\Software\node\npm.cmd -v
10.8.2
```

```
X:\OneBot>X:\OneBot\Software\node\npm.cmd ls
whatsapp-web.js
X:\OneBot
-- whatsapp-web.js@1.34.2 extraneous
```

```
X:\OneBot>X:\OneBot\Software\node\npm.cmd install
whatsapp-web.js@latest
npm error code EBUSY
npm error syscall rename
npm error path X:\OneBot\node_modules\whatsapp-
web.js\node_modules\puppeteer-core\local-
chromium\win64-1045629\chrome-win
npm error dest X:\OneBot\node_modules\whatsapp-
web.js-QkiWvcRO\node_modules\puppeteer-core\local-
chromium\win64-1045629\chrome-win
npm error errno -4082
npm error EBUSY: resource busy or locked, rename
'X:\OneBot\node_modules\whatsapp-
web.js\node_modules\puppeteer-core\local-
chromium\win64-1045629\chrome-win' ->
'X:\OneBot\node_modules\whatsapp-web.js-
QkiWvcRO\node_modules\puppeteer-core\local-
chromium\win64-1045629\chrome-win'
npm error A complete log of this run can be found in:
X:\OneBot\Software\npmcache\_logs\2026-02-
26T19_01_18_624Z-debug-0.log
```

```
X:\OneBot>set
"PATH=X:\OneBot\Software\node;%PATH%"
```

```
X:\OneBot>where npm
X:\OneBot\Software\node\npm
```

X:\OneBot\Software\node\npm.cmd

X:\OneBot>npm -v
10.8.2

X:\OneBot>cd /d X:\OneBot

X:\OneBot>npm install whatsapp-web.js@lates
npm error code ETARGET
npm error notarget No matching version found for
whatsapp-web.js@lates.
npm error notarget In most cases you or one of your
dependencies are requesting
npm error notarget a package version that doesn't exist.
npm error A complete log of this run can be found in:
X:\OneBot\Software\npmcache_logs\2026-02-
26T19_01_25_024Z-debug-0.log

X:\OneBot>set
"PATH=X:\OneBot\Software\node;%PATH%"

X:\OneBot>where npm
X:\OneBot\Software\node\npm
X:\OneBot\Software\node\npm.cmd

X:\OneBot>npm -v
10.8.2

X:\OneBot>cd /d X:\OneBot

X:\OneBot>npm install whatsapp-web.js@latestset
"PATH=X:\OneBot\Software\node;%PATH%"
npm error code ENOENT
npm error syscall open
npm error path
X:\OneBot\PATH=X:\OneBot\Software\node;X:\OneBot\Software\node;X:\OneBot\Software\node;C:\Windows\system32;C:\Windows;C:\Windows\System32\Wbem;C:\Windows\System32\WindowsPowerShell\v1.0;C:\Windows\System32\OpenSSH;C:\Program Files (x86)\Common Files\Intuit\QBPOSSDKRuntime;C:\Users\HOME-SERVER\AppData\Local\Microsoft\WindowsApps\package.json

```

npm error errno -4058
npm error enoent Could not read package.json: Error:
ENOENT: no such file or directory, open
'X:\OneBot\PATH=X:\OneBot\Software\node;X:\OneBot\Software\node;X:\OneBot\Software\node;C:\Windows\system32;C:\Windows;C:\Windows\System32\Wbem;C:\Windows\System32\WindowsPowerShell\v1.0;C:\Windows\System32\OpenSSH\;C:\Program Files (x86)\Common Files\Intuit\QBPOSSDKRuntime;C:\Users\HOME-SERVER\AppData\Local\Microsoft\WindowsApps\package.json'
npm error enoent This is related to npm not being able to
find a file.
npm error enoent
npm error A complete log of this run can be found in:
X:\OneBot\Software\npmcache\_logs\2026-02-26T19_01_36_771Z-debug-0.log

```

```

X:\OneBot>where npm
X:\OneBot\Software\node\npm
X:\OneBot\Software\node\npm.cmd

```

```

X:\OneBot>npm -v
10.8.2

```

```

X:\OneBot>cd /d X:\OneBot

```

```

X:\OneBot>npm install whatsapp-web.js@latest

```

Thought for 6s >

Ok, output kau dah cukup jelas. Ini **bukan Node issue**. Ada 3 benda berlaku:

1) npm “not recognized” — normal sebab PATH belum set

Itu settle bila kau guna:

- X:\OneBot\Software\node\npm.cmd ... 
- atau
- set "PATH=X:\OneBot\Software\node;%PATH%" 

So jangan pakai npm sebelum set PATH atau guna npm.cmd .

2) whatsapp-web.js@1.34.2 extraneous — maksudnya install tak kemas

extraneous = package ada dalam node_modules tapi tak terikat dalam package.json (atau dependency tree tak sama). Ini boleh buat benda jadi pelik.

3) Error utama masa update: EBUSY (file locked)

Ini paling penting:

```
EBUSY: resource busy or locked pada folder Chromium Puppeteer  
...puppeteer-core\local-chromium\...\chrome-win
```

Maknanya Chrome/Chromium yang Puppeteer guna sedang berjalan (atau proses node bot masih hidup), so npm tak boleh rename folder tu.

Apa kau buat sekarang (ikut turutan, sekali jalan)

Step A — STOP semua proses yang lock chromium / node

1. Tutup bot (tutup CMD bot, atau stop service kalau ada).
2. Kill proses yang lock:

```
taskkill /F /IM node.exe
```

```
</> bat
```



Kalau ada whatsapp web instance, kill juga:

```
</> bat
```



Lepas kill, tunggu 5–10 saat.

Step B — buat install semula clean (paling selamat)

Dalam CMD:

```
cd /d X:\OneBot
set "PATH=X:\OneBot\Software\node;%PATH%"

rmdir /s /q node_modules
del /q package-lock.json

</> bat

npm install whatsapp-web.js@latest
```



Nota penting: Jangan taip command berderet dalam satu line (tadi ada kes " npm install ...set "PATH=..." " jadi npm ingat path tu sebagai folder). Pastikan **1 command = 1 line**, tekan Enter tiap line.

Step C — confirm version lepas install

```
</> bat
```



Kalau dah ok, dia tak patut tunjuk extraneous .

Lepas update library, test "ready" dan inbound

Start bot macam biasa (dan set trace jika perlu):

```
</> bat
```



Tunggu:

- mesti keluar [connector] ready
- DM bot hi → mesti keluar [connector][trace] ...

Kalau masih authenticated tapi tak ready , masa tu memang kita kena fokus **session issue** (rename session folder untuk re-link).

Kalau Step B masih kena EBUSY walaupun dah taskkill

Itu selalunya antivirus/backup locking folder. Buat workaround:

1. Rename folder chromium dulu:

</> bat



Kalau rename pun gagal, then lock masih aktif (proses lain). Masa tu buka Task Manager, cari apa yang pegang folder.

Kalau kau buat Step A + Step B dan paste output `npm ls whatsapp-web.js` selepas tu, aku boleh confirm dah bersih atau belum.

... Compare with Claude

```
Microsoft Windows [Version 10.0.19045.6466]  
(c) Microsoft Corporation. All rights reserved.
```

```
C:\Windows\system32>cd /d X:\OneBot
```

```
X:\OneBot>npm ls whatsapp-web.js  
'npm' is not recognized as an internal or external  
command,  
operable program or batch file.
```

```
X:\OneBot>npm outdated whatsapp-web.js  
X:\OneBot  
'npm' is not recognized as an internal or external  
command,  
operable program or batch file.
```

```
X:\OneBot>npm install whatsapp-web.js@latest  
X:\OneBot  
'npm' is not recognized as an internal or external  
command,  
operable program or batch file.
```

```
X:\OneBot>X:\OneBot\Software\node\npm.cmd -v  
10.8.2
```

```
X:\OneBot>X:\OneBot\Software\node\npm.cmd ls  
whatsapp-web.js
```

X:\OneBot

-- whatsapp-web.js@1.34.2 extraneous

```
X:\OneBot>X:\OneBot\Software\node\npm.cmd install
whatsapp-web.js@latest
npm error code EBUSY
npm error syscall rename
npm error path X:\OneBot\node_modules\whatsapp-
web.js\node_modules\puppeteer-core\local-
chromium\win64-1045629\chrome-win
npm error dest X:\OneBot\node_modules\whatsapp-
web.js-QkiWvcRO\node_modules\puppeteer-core\local-
chromium\win64-1045629\chrome-win
npm error errno -4082
npm error EBUSY: resource busy or locked, rename
'X:\OneBot\node_modules\whatsapp-
web.js\node_modules\puppeteer-core\local-
chromium\win64-1045629\chrome-win' ->
'X:\OneBot\node_modules\whatsapp-web.js-
QkiWvcRO\node_modules\puppeteer-core\local-
chromium\win64-1045629\chrome-win'
npm error A complete log of this run can be found in:
X:\OneBot\Software\npmcache\_logs\2026-02-
26T19_01_18_624Z-debug-0.log
```

X:\OneBot>set

"PATH=X:\OneBot\Software\node;%PATH%"

X:\OneBot>where npm

X:\OneBot\Software\node\npm

X:\OneBot\Software\node\npm.cmd

X:\OneBot>npm -v

10.8.2

X:\OneBot>cd /d X:\OneBot

X:\OneBot>npm install whatsapp-web.js@lates

npm error code ETARGET

npm error notarget No matching version found for
whatsapp-web.js@lates.

npm error notarget In most cases you or one of your

dependencies are requesting
npm error notarget a package version that doesn't exist.
npm error A complete log of this run can be found in:
X:\OneBot\Software\npmcache_logs\2026-02-
26T19_01_25_024Z-debug-0.log

```
X:\OneBot>set  
"PATH=X:\OneBot\Software\node;%PATH%"
```

```
X:\OneBot>where npm  
X:\OneBot\Software\node\npm  
X:\OneBot\Software\node\npm.cmd
```

```
X:\OneBot>npm -v  
10.8.2
```

```
X:\OneBot>cd /d X:\OneBot
```

```
X:\OneBot>npm install whatsapp-web.js@latestset  
"PATH=X:\OneBot\Software\node;%PATH%"  
npm error code ENOENT  
npm error syscall open  
npm error path  
X:\OneBot\PATH=X:\OneBot\Software\node;X:\OneBot\Software\node;X:\OneBot\Software\node;X:\OneBot\Software\node;C:\Windows\system32;C:\Windows;C:\Windows\System32\Wbem;C:\Windows\System32\WindowsPowerShell\v1.0;C:\Windows\System32\OpenSSH;C:\Program Files (x86)\Common Files\Intuit\QBPOSSDKRuntime;C:\Users\HOME-SERVER\AppData\Local\Microsoft\WindowsApps\package.json  
npm error errno -4058  
npm error enoent Could not read package.json: Error: ENOENT: no such file or directory, open  
'X:\OneBot\PATH=X:\OneBot\Software\node;X:\OneBot\Software\node;X:\OneBot\Software\node;C:\Windows\system32;C:\Windows;C:\Windows\System32\Wbem;C:\Windows\System32\WindowsPowerShell\v1.0;C:\Windows\System32\OpenSSH;C:\Program Files (x86)\Common Files\Intuit\QBPOSSDKRuntime;C:\Users\HOME-SERVER\AppData\Local\Microsoft\WindowsApps\package.json'  
npm error enoent This is related to npm not being able to
```

find a file.

npm error enoent

npm error A complete log of this run can be found in:

X:\OneBot\Software\npmcache_logs\2026-02-26T19_01_36_771Z-debug-0.log

X:\OneBot>where npm

X:\OneBot\Software\node\npm

X:\OneBot\Software\node\npm.cmd

X:\OneBot>npm -v

10.8.2

X:\OneBot>cd /d X:\OneBot

X:\OneBot>npm install whatsapp-web.js@latesttaskkill /F /IM node.exe

npm error code ENOENT

npm error syscall open

npm error path X:\F\package.json

npm error errno -4058

npm error enoent Could not read package.json: Error:

ENOENT: no such file or directory, open 'X:\F\package.json'

npm error enoent This is related to npm not being able to find a file.

npm error enoent

npm error A complete log of this run can be found in:

X:\OneBot\Software\npmcache_logs\2026-02-26T19_04_10_799Z-debug-0.log

X:\OneBot>taskkill /F /IM chrome.exe

SUCCESS: The process "chrome.exe" with PID 52500 has been terminated.

SUCCESS: The process "chrome.exe" with PID 30704 has been terminated.

SUCCESS: The process "chrome.exe" with PID 51664 has been terminated.

ERROR: The process "chrome.exe" with PID 53796 could not be terminated.

Reason: There is no running instance of the task.

ERROR: The process "chrome.exe" with PID 10736 could not be terminated.

Reason: There is no running instance of the task.

ERROR: The process "chrome.exe" with PID 39500 could not be terminated.

Reason: There is no running instance of the task.

ERROR: The process "chrome.exe" with PID 23936 could not be terminated.

Reason: There is no running instance of the task.

ERROR: The process "chrome.exe" with PID 3044 could not be terminated.

Reason: There is no running instance of the task.

ERROR: The process "chrome.exe" with PID 54296 could not be terminated.

Reason: There is no running instance of the task.

ERROR: The process "chrome.exe" with PID 48956 could not be terminated.

Reason: There is no running instance of the task.

ERROR: The process "chrome.exe" with PID 46776 could not be terminated.

Reason: The operation attempted is not supported.

SUCCESS: The process "chrome.exe" with PID 47164 has been terminated.

SUCCESS: The process "chrome.exe" with PID 12968 has been terminated.

ERROR: The process "chrome.exe" with PID 57392 could not be terminated.

Reason: There is no running instance of the task.

ERROR: The process "chrome.exe" with PID 60060 could not be terminated.

Reason: There is no running instance of the task.

SUCCESS: The process "chrome.exe" with PID 59276 has been terminated.

SUCCESS: The process "chrome.exe" with PID 56880 has been terminated.

ERROR: The process "chrome.exe" with PID 56920 could not be terminated.

Reason: There is no running instance of the task.

ERROR: The process "chrome.exe" with PID 59008 could not be terminated.

Reason: The operation attempted is not supported.

ERROR: The process "chrome.exe" with PID 51500 could not be terminated.

Reason: The operation attempted is not supported.

ERROR: The process "chrome.exe" with PID 59484 could not be terminated.

Reason: The operation attempted is not supported.

```
X:\OneBot>taskkill /F /IM chromium.exe
```

```
taskkill /F /IM "Google Chrome.exe"
```

ERROR: Invalid syntax. '/F' option is not allowed more than '1' time(s).

Type "TASKKILL /?" for usage.

```
X:\OneBot>cd /d X:\OneBot
```

```
X:\OneBot>set
```

```
"PATH=X:\OneBot\Software\node;%PATH%"
```

```
X:\OneBot>
```

```
X:\OneBot>rmdir /s /q node_modules
```

```
X:\OneBot>del /q package-lock.json
```

Could Not Find X:\OneBot\package-lock.json

```
X:\OneBot>
```

```
X:\OneBot>npm install
```

npm error code ENOENT

npm error syscall open

npm error path X:\OneBot\package.json

npm error errno -4058

npm error enoent Could not read package.json: Error:

ENOENT: no such file or directory, open

'X:\OneBot\package.json'

npm error enoent This is related to npm not being able to find a file.

npm error enoent

npm error A complete log of this run can be found in:

X:\OneBot\Software\npmcache_logs\2026-02-

26T19_04_37_920Z-debug-0.log

```
X:\OneBot>npm install whatsapp-web.js@latest
```

npm warn deprecated inflight@1.0.6: This module is not supported, and leaks memory. Do not use it. Check out lru-cache if you want a good and tested way to coalesce async requests by a key value, which is much more comprehensive and powerful.

npm warn deprecated rimraf@2.7.1: Rimraf versions prior to v4 are no longer supported

npm warn deprecated glob@7.2.3: Old versions of glob are not supported, and contain widely publicized security vulnerabilities, which have been fixed in the current version. Please update. Support for old versions may be purchased (at exorbitant rates) by contacting i@izs.me

npm warn deprecated fstream@1.0.12: This package is no longer supported.

npm warn deprecated fluent-ffmpeg@2.1.3: Package no longer supported. Contact Support at <https://www.npmjs.com/support> for more info.

added 182 packages in 49s

13 packages are looking for funding
run `npm fund` for details

X:\OneBot>cd /d X:\OneBot

X:\OneBot>npm ls whatsapp-web.js
OneBot@ X:\OneBot
-- whatsapp-web.js@1.34.6

X:\OneBot>set ONEBOT_TRACE_INBOUND=1

X:\OneBot>

Thought for 1m 9s >

Ok **progress besar**: update library dah **berjaya**.

Yang penting dari output kau:

- `npm install whatsapp-web.js@latest` **berjaya** ✅ (added 182 packages)
- Sekarang `npm ls whatsapp-web.js` tunjuk `whatsapp-web.js@1.34.6` ✅
- Error lama `EBUSY` memang sebab **Chromium/Chrome/node** masih **lock folder** (tu normal).

Sekarang apa kau kena buat (step paling short, jangan campur command satu line):

1) Restart bot betul-betul (pastikan proses lama mati)

Di CMD (admin ok), buat:

```
taskkill /F /IM node.exe
```

```
</> bat
```



Tutup semua CMD lama yang run bot.

2) Start bot fresh + ON trace (dalam CMD yang sama)

```
cd /d X:\OneBot
```

```
</> bat
```



(Kalau kau start bukan guna Start.cmd, guna command asal kau.)

3) Test 2 benda saja

- DM bot: hi
- DM bot: !ping

Apa yang kau patut nampak kalau inbound memang masuk

Di CMD yang run bot, mesti keluar line:

```
[connector][trace] stage=received ... / stage=forward ...
```

Kalau **tak keluar langsung trace**, maksudnya WhatsApp client masih tak mengeluarkan event message (biasanya still tak "ready").

4) Kalau masih "authenticated tapi tak ready" lepas update

Buat reset session (test sahaja, backup):

```
</> bat
```



Start bot semula → scan QR → tunggu [connector] ready → test DM.

Nota penting (pasal command kau tadi)

Banyak error ENOENT / ETARGET jadi sebab kau **campur 2 command** dalam satu line, contoh:

- `npm install whatsapp-web.js@latestset "PATH=..."` ❌
- `npm install whatsapp-web.js@latesttaskkill ...` ❌

Lepas ni: **1 line = 1 command**, tekan Enter setiap line.

Kalau lepas restart + test DM masih tak reply, paste sini **20 line** dari CMD bot yang running (start dari [connector] authenticated sampai bila kau hantar hi). Dari situ kita terus tahu sama ada:

- sudah ready tapi outbound block, atau
- masih tak ready (session/WA web issue).

📄 👍 💬 ↻ ... Compare with Claude ▾

onebot-2026-02-27.log

File

Microsoft Windows [Version 10.0.19045.6466]

(c) Microsoft Corporation. All rights reserved.

C:\Windows\system32>cd /d X:\OneBot

X:\OneBot>npm ls whatsapp-web.js

'npm' is not recognized as an internal or external command,
operable program or batch file.

X:\OneBot>npm outdated whatsapp-web.jscd /d

X:\OneBot

'npm' is not recognized as an internal or external command,
operable program or batch file.

X:\OneBot>npm install whatsapp-web.js@latestcd /d

X:\OneBot

'npm' is not recognized as an internal or external command,
operable program or batch file.

```
X:\OneBot>X:\OneBot\Software\node\npm.cmd -v  
10.8.2
```

```
X:\OneBot>X:\OneBot\Software\node\npm.cmd ls  
whatsapp-web.js  
X:\OneBot  
-- whatsapp-web.js@1.34.2 extraneous
```

```
X:\OneBot>X:\OneBot\Software\node\npm.cmd install  
whatsapp-web.js@latest  
npm error code EBUSY  
npm error syscall rename  
npm error path X:\OneBot\node_modules\whatsapp-  
web.js\node_modules\puppeteer-core\local-  
chromium\win64-1045629\chrome-win  
npm error dest X:\OneBot\node_modules\whatsapp-  
web.js-QkiWvcRO\node_modules\puppeteer-core\local-  
chromium\win64-1045629\chrome-win  
npm error errno -4082  
npm error EBUSY: resource busy or locked, rename  
'X:\OneBot\node_modules\whatsapp-  
web.js\node_modules\puppeteer-core\local-  
chromium\win64-1045629\chrome-win' ->  
'X:\OneBot\node_modules\whatsapp-web.js-  
QkiWvcRO\node_modules\puppeteer-core\local-  
chromium\win64-1045629\chrome-win'  
npm error A complete log of this run can be found in:  
X:\OneBot\Software\npmcache\_logs\2026-02-  
26T19_01_18_624Z-debug-0.log
```

```
X:\OneBot>set  
"PATH=X:\OneBot\Software\node;%PATH%"
```

```
X:\OneBot>where npm  
X:\OneBot\Software\node\npm  
X:\OneBot\Software\node\npm.cmd
```

```
X:\OneBot>npm -v  
10.8.2
```

```
X:\OneBot>cd /d X:\OneBot
```

```
X:\OneBot>npm install whatsapp-web.js@lates
npm error code ETARGET
npm error notarget No matching version found for
whatsapp-web.js@lates.
npm error notarget In most cases you or one of your
dependencies are requesting
npm error notarget a package version that doesn't exist.
npm error A complete log of this run can be found in:
X:\OneBot\Software\npmcache\_logs\2026-02-
26T19_01_25_024Z-debug-0.log
```

```
X:\OneBot>set
"PATH=X:\OneBot\Software\node;%PATH%"
```

```
X:\OneBot>where npm
X:\OneBot\Software\node\npm
X:\OneBot\Software\node\npm.cmd
```

```
X:\OneBot>npm -v
10.8.2
```

```
X:\OneBot>cd /d X:\OneBot
```

```
X:\OneBot>npm install whatsapp-web.js@latestset
"PATH=X:\OneBot\Software\node;%PATH%"
npm error code ENOENT
npm error syscall open
npm error path
X:\OneBot\PATH=X:\OneBot\Software\node;X:\OneBot\Software\node;X:\OneBot\Software\node;C:\Windows\system32;C:\Windows;C:\Windows\System32\Wbem;C:\Windows\System32\WindowsPowerShell\v1.0;C:\Windows\System32\OpenSSH;C:\Program Files (x86)\Common Files\Intuit\QBPOSSDKRuntime;C:\Users\HOME-SERVER\AppData\Local\Microsoft\WindowsApps\package.json
npm error errno -4058
npm error enoent Could not read package.json: Error: ENOENT: no such file or directory, open 'X:\OneBot\PATH=X:\OneBot\Software\node;X:\OneBot\Software\node;X:\OneBot\Software\node;C:\Windows\system32;C:\Windows;C:\Windows\System32\Wbem;C:\Windows\
```

```
System32\WindowsPowerShell\v1.0\;C:\Windows\System32\OpenSSH\;C:\Program Files (x86)\Common Files\Intuit\QBPOSSDKRuntime;C:\Users\HOME-SERVER\AppData\Local\Microsoft\WindowsApps\package.json'
```

npm error enoent This is related to npm not being able to find a file.

npm error enoent

npm error A complete log of this run can be found in:

X:\OneBot\Software\npmcache_logs\2026-02-26T19_01_36_771Z-debug-0.log

```
X:\OneBot>where npm
```

```
X:\OneBot\Software\node\npm
```

```
X:\OneBot\Software\node\npm.cmd
```

```
X:\OneBot>npm -v
```

```
10.8.2
```

```
X:\OneBot>cd /d X:\OneBot
```

```
X:\OneBot>npm install whatsapp-web.js@latesttaskkill /F /IM node.exe
```

npm error code ENOENT

npm error syscall open

npm error path X:\F\package.json

npm error errno -4058

npm error enoent Could not read package.json: Error:

ENOENT: no such file or directory, open 'X:\F\package.json'

npm error enoent This is related to npm not being able to find a file.

npm error enoent

npm error A complete log of this run can be found in:

X:\OneBot\Software\npmcache_logs\2026-02-26T19_04_10_799Z-debug-0.log

```
X:\OneBot>taskkill /F /IM chrome.exe
```

```
SUCCESS: The process "chrome.exe" with PID 52500 has been terminated.
```

```
SUCCESS: The process "chrome.exe" with PID 30704 has been terminated.
```

```
SUCCESS: The process "chrome.exe" with PID 51664 has been terminated.
```

ERROR: The process "chrome.exe" with PID 53796 could not be terminated.

Reason: There is no running instance of the task.

ERROR: The process "chrome.exe" with PID 10736 could not be terminated.

Reason: There is no running instance of the task.

ERROR: The process "chrome.exe" with PID 39500 could not be terminated.

Reason: There is no running instance of the task.

ERROR: The process "chrome.exe" with PID 23936 could not be terminated.

Reason: There is no running instance of the task.

ERROR: The process "chrome.exe" with PID 3044 could not be terminated.

Reason: There is no running instance of the task.

ERROR: The process "chrome.exe" with PID 54296 could not be terminated.

Reason: There is no running instance of the task.

ERROR: The process "chrome.exe" with PID 48956 could not be terminated.

Reason: There is no running instance of the task.

ERROR: The process "chrome.exe" with PID 46776 could not be terminated.

Reason: The operation attempted is not supported.

SUCCESS: The process "chrome.exe" with PID 47164 has been terminated.

SUCCESS: The process "chrome.exe" with PID 12968 has been terminated.

ERROR: The process "chrome.exe" with PID 57392 could not be terminated.

Reason: There is no running instance of the task.

ERROR: The process "chrome.exe" with PID 60060 could not be terminated.

Reason: There is no running instance of the task.

SUCCESS: The process "chrome.exe" with PID 59276 has been terminated.

SUCCESS: The process "chrome.exe" with PID 56880 has been terminated.

ERROR: The process "chrome.exe" with PID 56920 could not be terminated.

Reason: There is no running instance of the task.

ERROR: The process "chrome.exe" with PID 59008 could not be terminated.

Reason: The operation attempted is not supported.
ERROR: The process "chrome.exe" with PID 51500 could not be terminated.
Reason: The operation attempted is not supported.
ERROR: The process "chrome.exe" with PID 59484 could not be terminated.
Reason: The operation attempted is not supported.

X:\OneBot>taskkill /F /IM chromium.exe
taskkill /F /IM "Google Chrome.exe"
ERROR: Invalid syntax. '/F' option is not allowed more than '1' time(s).
Type "TASKKILL /?" for usage.

X:\OneBot>cd /d X:\OneBot

X:\OneBot>set
"PATH=X:\OneBot\Software\node;%PATH%"

X:\OneBot>
X:\OneBot>rmdir /s /q node_modules

X:\OneBot>del /q package-lock.json
Could Not Find X:\OneBot\package-lock.json

X:\OneBot>
X:\OneBot>npm install
npm error code ENOENT
npm error syscall open
npm error path X:\OneBot\package.json
npm error errno -4058
npm error enoent Could not read package.json: Error: ENOENT: no such file or directory, open 'X:\OneBot\package.json'
npm error enoent This is related to npm not being able to find a file.
npm error enoent
npm error A complete log of this run can be found in:
X:\OneBot\Software\npmcache_logs\2026-02-26T19_04_37_920Z-debug-0.log

X:\OneBot>npm install whatsapp-web.js@latest
npm warn deprecated inflight@1.0.6: This module is not

supported, and leaks memory. Do not use it. Check out lru-cache if you want a good and tested way to coalesce async requests by a key value, which is much more comprehensive and powerful.

npm warn deprecated rimraf@2.7.1: Rimraf versions prior to v4 are no longer supported

npm warn deprecated glob@7.2.3: Old versions of glob are not supported, and contain widely publicized security vulnerabilities, which have been fixed in the current version. Please update. Support for old versions may be purchased (at exorbitant rates) by contacting i@izs.me

npm warn deprecated fstream@1.0.12: This package is no longer supported.

npm warn deprecated fluent-ffmpeg@2.1.3: Package no longer supported. Contact Support at <https://www.npmjs.com/support> for more info.

added 182 packages in 49s

13 packages are looking for funding
run `npm fund` for details

X:\OneBot>cd /d X:\OneBot

X:\OneBot>npm ls whatsapp-web.js

OneBot@ X:\OneBot

-- whatsapp-web.js@1.34.6

X:\OneBot>set ONEBOT_TRACE_INBOUND=1

X:\OneBot>taskkill /F /IM node.exe

SUCCESS: The process "node.exe" with PID 58604 has been terminated.

X:\OneBot>taskkill /F /IM chrome.exe

ERROR: The process "chrome.exe" not found.

X:\OneBot>taskkill /F /IM chromium.exe

ERROR: Invalid argument/option - '/d'.

Type "TASKKILL /?" for usage.

X:\OneBot>set ONEBOT_TRACE_INBOUND=1

X:\OneBot>Start.cmd

=====

ONEBOT START

Bot : ONEBOT

Code: X:\OneBot

Data: X:\OneData

=====

[connector] initializing...

2026-02-26 19:08:59.092 [InstanceLockCV] lock acquired
pid=59400

file=X:\OneData\data\InstanceLock\instance.lock

2026-02-26 19:08:59.094 [kernel] module.loaded

id=InstanceLock file=Modules/Core/InstanceLockHub.js
prio=9999

2026-02-26 19:08:59.127 [LogV2] info ready fileEnabled=1

dir=X:\OneData\bots\ONEBOT\logs

configuredDir=X:\OneData\bots\ONEBOT\logs

mode=daily tz=Asia/Kuala_Lumpur logEvents=1

logMessages=1 hookConsole=1

2026-02-26 19:08:59.128 [kernel] module.loaded id=Log
file=Modules/Core/LogHub.js prio=9900

2026-02-26 19:08:59.143 [JsonStoreV1] ready
service=jsonstore

dir=X:\OneData\bots\ONEBOT\data\JsonStore
defaultNs=core

2026-02-26 19:08:59.145 [kernel] module.loaded

id=JsonStore file=Modules/Core/JsonStoreHub.js
prio=9850

2026-02-26 19:08:59.159 [TimeZoneV1] ready

timeZone=Asia/Kuala_Lumpur locale=en-MY hour12=0
sample=27/02/2026, 03:08:59

2026-02-26 19:08:59.159 [kernel] module.loaded

id=TimeZone file=Modules/Core/TimeZoneHub.js
prio=9800

2026-02-26 19:08:59.176 [SendQueue] ready service=send
delayMs=800 maxQueue=2000 batchMax=30
dedupeMs=6000

2026-02-26 19:08:59.178 [kernel] module.loaded

id=SendQueue file=Modules/Core/SendQueueHub.js
prio=9700

2026-02-26 19:08:59.186 [InboundFilterV1] ready

enabled=1 dropStatusBroadcast=1 dropEmptySystem=1

dropFromMe=0
2026-02-26 19:08:59.189 [kernel] module.loaded
id=InboundFilter file=Modules/Core/InboundFilterHub.js
prio=9685
2026-02-26 19:08:59.194 [InboundDedupeV1] info
2026-02-26 19:08:59.208 [kernel] module.loaded
id=InboundDedupe
file=Modules/Core/InboundDedupeHub.js prio=9680
2026-02-26 19:08:59.223 [MessageJournalV1] ready
dir=X:\OneData\bots\ONEBOT\data\MessageJournal
tz=Asia/Kuala_Lumpur includeMessages=1
includeEvents=1
2026-02-26 19:08:59.224 [kernel] module.loaded
id=MessageJournal
file=Modules/Core/MessageJournalHub.js prio=9650
2026-02-26 19:08:59.228 [CommandCV] ready enabled=1
prefix=! allowInDm=1 allowInGroups=1
2026-02-26 19:08:59.238 [kernel] module.loaded
id=Command file=Modules/Core/CommandHub.js
prio=9600
2026-02-26 19:08:59.246 [AccessRolesCV] ready
enabled=1
rolesFile=X:\OneData\bots\ONEBOT\data\SystemControl\r
oles.json controllers=1 admins=1 staff=0
2026-02-26 19:08:59.255 [kernel] module.loaded
id=AccessRoles file=Modules/Core/AccessRolesHub.js
prio=9500
2026-02-26 19:08:59.261 [HelpV1] ready cmdHelp=help
2026-02-26 19:08:59.262 [kernel] module.loaded id=Help
file=Modules/Core/HelpHub.js prio=9400
2026-02-26 19:08:59.272 [PingDiagV1] ready
cmdPing=ping
2026-02-26 19:08:59.273 [kernel] module.loaded
id=PingDiag file=Modules/Core/PingDiagHub.js
prio=9300
2026-02-26 19:08:59.286 [SchedulerV1] ready tickMs=1000
maxJobs=5000 dueBatchMax=25
data=X:\OneData\bots\ONEBOT\data\Scheduler\jobs.json
2026-02-26 19:08:59.288 [kernel] module.loaded
id=Scheduler file=Modules/Core/SchedulerHub.js
prio=9250
2026-02-26 19:08:59.293 [RateLimitV1] ready enabled=1
windows=2

state=X:\OneData\bots\ONEBOT\data\RateLimit\state.json
2026-02-26 19:08:59.293 [kernel] module.loaded
id=RateLimit file=Modules/Core/RateLimitHub.js
prio=9240
2026-02-26 19:08:59.297 [OutboundGatewayV1] ready
enabled=1 baseSend=transport rl=ratelimit
allowManualReplyBypassWindow=1 svc=sendout,outsend
bypassChatIds=1
2026-02-26 19:08:59.299 [kernel] module.loaded
id=OutboundGateway
file=Modules/Core/OutboundGatewayHub.js prio=9235
2026-02-26 19:08:59.303 [kernel] module.loaded
id=Outbox file=Modules/Core/OutboxHub.js prio=9220
2026-02-26 19:08:59.306 [StatusFeedV1] ready
feedTag=feed dedupeSec=30 ignoreEmpty=1
2026-02-26 19:08:59.306 [kernel] module.loaded
id=StatusFeed file=Modules/Core/StatusFeedHub.js
prio=9200
2026-02-26 19:08:59.311 [WorkGroupsCV] WorkGroupsCV
is ready.
2026-02-26 19:08:59.318 [kernel] module.loaded
id=WorkGroups file=Modules/Core/WorkGroupsHub.js
prio=9190
2026-02-26 19:08:59.335 [FallbackCV] ready enabled=1
controlGroupId=120363402608825006@g.us
sendPrefer=sendout,outsend,send
2026-02-26 19:08:59.336 [kernel] module.loaded
id=Fallback file=Modules/Core/FallbackHub.js prio=9180
2026-02-26 19:08:59.342 [SystemControlV2] ready
controlGroupId=120363402608825006@g.us
cmdRestart=restart cmdStatus=status
2026-02-26 19:08:59.342 [kernel] module.loaded
id=SystemControl
file=Modules/Core/SystemControlHub.js prio=9100
2026-02-26 19:08:59.346 [BootAnnounceV1] ready
controlGroupId=120363402608825006@g.us
delayMs=2000 maxRetries=3 retryDelayMs=5000
sendPrefer=outsend,sendout,send
2026-02-26 19:08:59.351 [kernel] module.loaded
id=BootAnnounce
file=Modules/Core/BootAnnounceHub.js prio=9050
2026-02-26 19:08:59.352 [kernel] ready modules=21
2026-02-26 19:08:59.443 [OutboxV1] ready enabled=1

service=outbox store=jsonstore:Outbox/state.json
tickMs=2000 batchMax=5
sendPrefer=sendout,outsend,send
[connector] authenticated
2026-02-26 19:09:07.514 [event] info event=event
keys=event,at,data,botName,codeRoot,dataRoot,services,st
op,stopPropagation
[connector] ready
2026-02-26 19:09:07.660 [event] info event=event
keys=event,at,data,botName,codeRoot,dataRoot,services,st
op,stopPropagation
[connector] browser minimized via CDP
[connector] puppeteer_diag attached=1
[connector] page_console type=error text=ErrorUtils
caught an error:

[uim] multiple roots: existing=App new=App (multiple-
uim-roots)

Subsequent non-fatal errors won't be logged; see
<https://fburl.com/debugjs>. [object Object]
[connector] authenticated
2026-02-26 19:09:34.824 [event] info event=event
keys=event,at,data,botName,codeRoot,dataRoot,services,st
op,stopPropagation
[connector] page_console type=error text=ErrorUtils
caught an error:

Requiring unknown module "WAPhoneUtils"

Subsequent non-fatal errors won't be logged; see
<https://fburl.com/debugjs>. [object Object]
[connector] ready
2026-02-26 19:09:35.820 [event] info event=event
keys=event,at,data,botName,codeRoot,dataRoot,services,st
op,stopPropagation
[connector] browser minimized via CDP
[connector][trace] stage=received
eventName=message_create chatId=60133335545@c.us
fromMe=0 isGroup=0
msgId=false_60133335545@c.us_3EB0F76B33AFE2FB41DF
46 msgType=chat textLen=2
[connector][trace] stage=forward

eventName=message_create chatId=60133335545@c.us
fromMe=0 isGroup=0
msgId=false_60133335545@c.us_3EB0F76B33AFE2FB41DF
46 msgType=chat textLen=2
[connector][trace] stage=received eventName=message
chatId=60133335545@c.us fromMe=0 isGroup=0
msgId=false_60133335545@c.us_3EB0F76B33AFE2FB41DF
46 msgType=chat textLen=2
[connector][trace] stage=dedupe eventName=message
chatId=60133335545@c.us fromMe=0 isGroup=0
msgId=false_60133335545@c.us_3EB0F76B33AFE2FB41DF
46 msgType=chat textLen=2
2026-02-26 19:09:52.009 [msg] info
chatId=60133335545@c.us isGroup=0 sender=
{"id":"60133335545@c.us","phone":"60133335545","lid":"","
name":"Pa?Din"} text="hi" meta=
{"chatId":"60133335545@c.us","isGroup":false,"sender":
{"id":"60133335545@c.us","phone":"60133335545","lid":"","
name":"Pa?Din"}}
[connector][trace] stage=received
eventName=message_create
chatId=120363402608825006@g.us fromMe=0 isGroup=1
msgId=false_120363402608825006@g.us_3EB0721C5828B
098D45CB2_82828612100333@lid msgType=chat
textLen=5
[connector][trace] stage=forward
eventName=message_create
chatId=120363402608825006@g.us fromMe=0 isGroup=1
msgId=false_120363402608825006@g.us_3EB0721C5828B
098D45CB2_82828612100333@lid msgType=chat
textLen=5
[connector][trace] stage=received eventName=message
chatId=120363402608825006@g.us fromMe=0 isGroup=1
msgId=false_120363402608825006@g.us_3EB0721C5828B
098D45CB2_82828612100333@lid msgType=chat
textLen=5
[connector][trace] stage=dedupe eventName=message
chatId=120363402608825006@g.us fromMe=0 isGroup=1
msgId=false_120363402608825006@g.us_3EB0721C5828B
098D45CB2_82828612100333@lid msgType=chat
textLen=5
2026-02-26 19:09:52.906 [msg] info
chatId=120363402608825006@g.us isGroup=1 sender=

```
{"id":"82828612100333@lid","phone":"82828612100333","lid":"","name":"Pa?Din"} text="!ping" meta=
{"chatId":"120363402608825006@g.us","isGroup":true,"sender":
{"id":"82828612100333@lid","phone":"82828612100333","lid":"","name":"Pa?Din"}}
2026-02-26 19:09:52.910 [PingDiagV1] exec cmd=ping
chatId=120363402608825006@g.us isGroup=1
manualReply=1
[connector][trace] stage=received
eventName=message_create
chatId=256706068086880@lid fromMe=1 isGroup=0
msgId=true_120363402608825006@g.us_3EB0DE820946F371766566_256706068086880@lid msgType=chat
textLen=25
[connector][trace] stage=forward
eventName=message_create
chatId=256706068086880@lid fromMe=1 isGroup=0
msgId=true_120363402608825006@g.us_3EB0DE820946F371766566_256706068086880@lid msgType=chat
textLen=25
2026-02-26 19:09:52.929 [msg] info
chatId=256706068086880@lid isGroup=0 sender=
{"id":"256706068086880@lid","phone":"256706068086880","lid":"","name":""} text="pong 27/02/2026, 03:09:52"
meta=
{"chatId":"256706068086880@lid","isGroup":false,"sender":
{"id":"256706068086880@lid","phone":"256706068086880","lid":"","name":""}}
[connector][trace] stage=received
eventName=message_create chatId=60133335545@c.us
fromMe=0 isGroup=0
msgId=false_60133335545@c.us_3EB0179F694D1492F47C53 msgType=chat textLen=2
[connector][trace] stage=forward
eventName=message_create chatId=60133335545@c.us
fromMe=0 isGroup=0
msgId=false_60133335545@c.us_3EB0179F694D1492F47C53 msgType=chat textLen=2
[connector][trace] stage=received eventName=message
chatId=60133335545@c.us fromMe=0 isGroup=0
msgId=false_60133335545@c.us_3EB0179F694D1492F47C53 msgType=chat textLen=2
```

```
[connector][trace] stage=dedupe eventName=message
chatId=60133335545@c.us fromMe=0 isGroup=0
msgId=false_60133335545@c.us_3EB0179F694D1492F47C
53 msgType=chat textLen=2
2026-02-26 19:10:21.271 [msg] info
chatId=60133335545@c.us isGroup=0 sender=
{"id":"60133335545@c.us","phone":"60133335545","lid":"","
name":"Pa?Din"} text="hi" meta=
{"chatId":"60133335545@c.us","isGroup":false,"sender":
{"id":"60133335545@c.us","phone":"60133335545","lid":"","
name":"Pa?Din"}} ok sekarang at least ada reply bila ping,
tapi fallback masih belum ada sekarang pon ada nampak
log macam berfungsi
```

Thought for 5m 34s >

Bagus — sekarang **core pipeline** dah hidup:

- [connector] ready dah keluar (sebelum ni tak ada) 
- inbound trace dah masuk ([connector][trace] stage=received/forward) 
- command !ping dah execute + reply keluar 

So **Node** + **whatsapp-web.js** + **connector** memang dah ok.

Sekarang tinggal isu **Fallback “DM normal text → forward/ticket ke control group”** masih tak jadi walaupun module Fallback memang loaded ([FallbackCV] ready enabled=1 controlGroupId=...).  CMD LOG

Kenapa ping ok tapi fallback tak jalan (2 punca paling kuat)

Punca A — fallback message ke control group kena block oleh RateLimit “window”

Dalam startup, RateLimit enabled dan ada **windows=2**.  CMD LOG

OutboundGateway pula memang ada **allowManualReplyBypassWindow=1** (so kalau message ditanda “manualReply”, dia boleh bypass window).  cmdlog

!ping clearly jalan sebab command path biasanya set **manualReply=1** (kau nampak log PingDiag exec). Tapi fallback biasanya **bukan manualReply**, jadi bila kau test jam 3 pagi, besar kemungkinan dia **block sebab outside window** — result: **tiada ticket/forward nampak**.

Punca B — fallback intentionally skip "controller/admin"

AccessRoles tunjuk `controllers=1 admins=1`. Kalau nombor kau dalam `roles.json` sebagai `controller/admin`, sesetengah fallback design memang ignore staff. (Ini kena confirm dalam code.)

Cara confirm cepat tanpa ubah code (1 minit)

Bila bot running, buat 2 test:

1. **Test fallback dalam allowed window** (contoh 8-10am ikut config kau), DM bot "hi test fallback".
2. Atau **test guna nombor lain** (bukan `controller/admin`) DM bot "hi test fallback".

Kalau salah satu terus masuk ticket ke control group → confirm fallback sebenarnya ok, cuma **window/roles gating**.

Tapi kau nak fallback sentiasa jalan (tak kira window) — ini fix yang patut Codex buat

Ini bukan "tambah prompt saja" — ini memang patut jadi **fix script**:

semua outbound yang dihantar ke controlGroupId oleh Fallback mesti bypass window (guna `manualReply=1` atau `allowOutsideWindow=1`) dan mesti ada log `send.block reason=window` kalau still blocked.

Prompt untuk Codex (English, sekali je, terus minta FIX PACK + full files)

Copy paste prompt ni:

You MUST scan the FULL repo before changing anything. Repo and LIVE use the same

Symptom (proven from live console):

- Bot is READY and inbound trace works.
- Command !ping works and replies.
- Fallback is loaded (FallbackCV ready enabled=1 controlGroupId=12036340260882500

Strong suspicion:

- RateLimit is enabled with windows (windows=2) and OutboundGateway supports allo
- Alternatively fallback skips controllers/admins; verify in code.

Task:

- 1) Find the active fallback implementation used by FallbackHub (CV) and trace the

- 2) Ensure fallback ALWAYS forwards DM normal text to controlGroupId even outside
- 3) Add explicit logging in fallback for:
 - exec line when fallback handles a DM (include chatId, isGroup, sender phone/
 - send attempt line (target chatId, service chosen)
 - send failure line with reason/code (especially reason=window) so we can diag
- 4) Do NOT hardcode any IDs or user-facing text. Use existing config/template path
- 5) Do NOT touch Connector.js or Kernel.js unless you prove root-cause with file:1
- 6) Max 4 files changed.

Output format MUST be FIX PACK:

- EXACTLY TWO fenced code blocks:

Block 1: ===== REPORT ===== (Root cause 1 sentence + evidence bullets with file

Block 2: ===== FILE: <path> ===== full file content for every changed file (no

</> Plain text




Lepas Codex bagi output

Kau buat macam ni (rule kau sendiri):

- Aku akan **audit** output Codex: kalau dia bagi "report tanpa full file" → kita reject terus.
- Kalau ok, aku akan bagitau **file mana tepat** yang kau kena replace (LIVE + repo) dan urutan test.

Kalau kau boleh, paste juga **1 benda**: isi RateLimitCV.conf (part window rules). Dengan tu aku boleh confirm 100% sama ada fallback memang kena block window atau skip role.

... Compare with Claude ▾

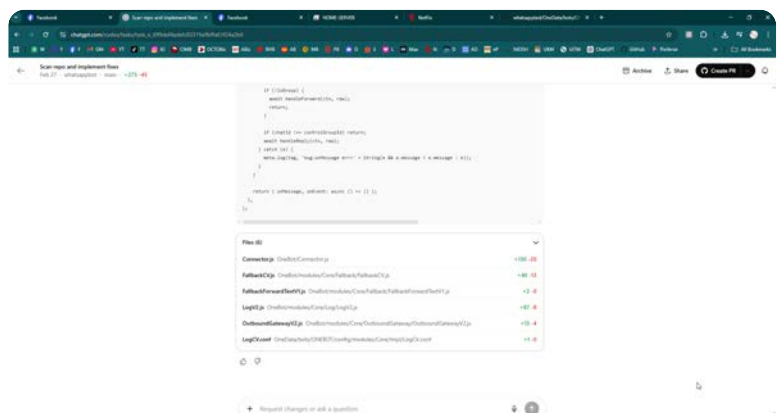

codexreply.txt
Document

kalau tgk dia baca 6 file dia tunjuk tapi fix saya nampak dia bagi 1 script saja berkenaan OutboundGatewayV2.js, jadi

yang ni saja ke kena replace?

Thought for 24s >

Bukan. Kalau UI Codex tunjuk **Files (6)**, maksudnya PR tu **ubah 6 fail**, bukan "OutboundGatewayV2.js sahaja".

Kalau kau **replace OutboundGatewayV2.js sahaja** tapi 5 fail lain tak ikut versi yang sama, memang berisiko besar jadi **mismatch** (contoh: Fallback call signature berubah, config key berubah, tapi module lain masih lama → behavior pelik / silent fail).

Dalam screenshot tu 6 fail yang berubah ialah:

1. OneBot/Connector.js
2. OneBot/modules/Core/Fallback/FallbackCV.js
3. OneBot/modules/Core/Fallback/FallbackForwardTextV1.js
4. OneBot/modules/Core/Log/LogV2.js
5. OneBot/modules/Core/OutboundGateway/OutboundGatewayV2.js
6. OneData/bots/ONEBOT/config/modules/Core/Impl/LogCV.conf

Jadi apa yang kau patut buat sekarang?

Jangan apply satu fail saja. Pilih salah satu jalan:

Option A (paling selamat): Apply "set lengkap"

- Kau kena dapat **FULL content untuk SEMUA 6 fail**, kemudian replace semua sekali (atau at least semua fail yang betul-betul changed dan masih relevan).
- Kalau Codex cuma bagi 1 script (OutboundGatewayV2.js) dan tak bagi full content fail lain → **jangan apply PR tu**. Suruh Codex output semula dengan full file contents untuk semua fail yang dia ubah.

Option B (ikut rule kau: small batch 4–5 fail max)

- PR tu **langgar rule** sebab 6 fail. Minta Codex redo dalam 1 round kecil: contoh
 - Round 1: FallbackCV.js + FallbackForwardTextV1.js + OutboundGatewayV2.js (dan kalau perlu 1 config)
 - Round 2: yang lain.
- Ini lebih kemas dan kurang risiko "reverse" benda yang dah stabil (contohnya Connector/Log yang kau dah settle).

Kenapa kau nampak "dia bagi 1 script sahaja"?

Biasanya sebab Codex output kat chat/diff view hanya expand satu file. Tapi PR tu masih ubah 6 fail. Jadi kau kena:

- Klik setiap file dalam list "Files (6)"
- Pastikan ada **FULL file content** untuk setiap satu (bukan snippet/diff separuh)

Aku juga tak boleh buka semula sebahagian upload lama dalam chat (ada yang expired). Jadi kalau kau nak aku audit betul-betul, paling cepat: **copy/paste dari Codex output** full content untuk fail yang dia ubah (atau at least FallbackCV.js + FallbackForwardTextV1.js + OutboundGatewayV2.js), aku akan bagitau "yang mana patut replace" dan mana patut reject.

Arahan ringkas untuk Codex (kalau kau nak dia keluarkan semua full file sekali)


(Ini satu ayat je, bukan panjang-panjang.)

"Output FULL file content for ALL files you changed (all 6), no diffs, so I can copy-paste replace in X:\ paths. If you can't, redo the fix in max 4 files."

Kalau kau reply aku dengan **full content OutboundGatewayV2.js** yang Codex bagi + tunjuk juga adakah dia ubah FallbackCV.js / FallbackForwardTextV1.js, aku boleh terus cakap:

✅ "apply 3 fail ini saja" atau ❌ "jangan apply sebab incomplete / mismatch."

📄 👍 💬 ↻ ⋮ Compare with Claude ▾

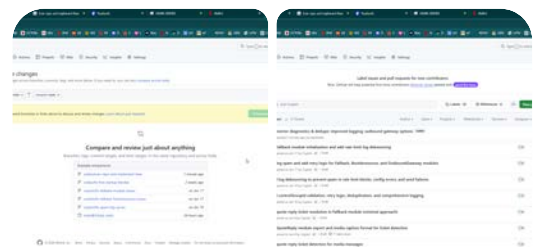

jadi sekarang nak kena apa, bukan ke lebih mudah dia tulis semua script wajib aku ubah dalam prompt report dia, aku boleh direct copy paste saja dalam script berkenaan, kalau dia betulkan 6 script tapi output dia bagi 1 je macam ni sampai bila2 pon tak selesai, sepatutnya arahan kau tu

jelas, kalau 10 script repair, wajib 10 script ada output supaya aku boleh copy and replace full script

Thought for 8s >

Betul — kalau dia ubah **6 file**, dia **wajib keluarkan 6 full file content** dalam output, kalau tidak memang kau tersekat sampai bila-bila.

Dalam PR list kau tu, PR terbaru (title lebih kurang): **“Connector diagnostics & dedupe; improved logging; outbound gateway options”** — itu memang PR yang ada **6 files changed**. Kalau Codex cuma bagi **1 script** (OutboundGatewayV2.js) dalam chat output, itu **tak cukup** untuk kau apply manual.

Jadi sekarang kau buat ini (paling cepat, tak pusing-pusing)

Option 1 (paling senang): Ambil full file terus dari PR GitHub (tanpa tunggu Codex)

Untuk setiap file dalam “Files (6)”:

1. Klik nama file (contoh OneBot/modules/Core/Fallback/FallbackCV.js)
2. Tekan icon “...” atau **“View file” / “Open file”** (kadang ada “View” di kanan)
3. Pilih **“View file”** (bukan diff) → copy keseluruhan file
4. Paste ke X:\... path yang sama dan replace.

Ini bypass masalah Codex “output 1 file je”.

Kalau kau nak aku guide langkah exact ikut UI, beritahu: dalam tab “Files changed”, dekat kanan atas ada tak butang “View file / Open in new tab”? (Biasanya ada).

Option 2: Paksa Codex re-output “FULL 6 FILES” dalam 1 jawapan

Copy paste arahan ENGLISH ni dekat Codex (pendek tapi keras):

```
You changed 6 files in this PR. I am applying fixes manually on LIVE X:\ paths.  
REQUIREMENT: Output FULL FILE CONTENT for ALL 6 changed files in ONE response (no
```

```
Format:
```

```
===== FILE: <path> =====
```

```
<full file content>
```

```
(repeat for all 6 files)
```

If you cannot output all 6 full files, then redo the fix in max 4 files only and

</> Plain text



Ini akan paksa dia stop "bagi 1 file je".

Mana file yang patut kau minta FULL (ikut screenshot tadi)

Senarai 6 fail yang PR tu ubah (kau boleh paste list ni dalam arahan):

1. OneBot/Connector.js
2. OneBot/modules/Core/Fallback/FallbackCV.js
3. OneBot/modules/Core/Fallback/FallbackForwardTextV1.js
4. OneBot/modules/Core/Log/LogV2.js
5. OneBot/modules/Core/OutboundGateway/OutboundGatewayV2.js
6. OneData/bots/ONEBOT/config/modules/Core/Impl/LogCV.conf

Kalau dia bagi kurang dari 6, jangan apply.

Paling penting: jangan merge apa-apa yang belum kau boleh copy full

Sebab kau manual apply ke LIVE, mesti ada full script untuk setiap file yang berubah.

Kalau kau nak aku audit PR tu dengan cepat dan beritahu "apply yang mana dulu", aku boleh — tapi aku perlukan salah satu:

- **Paste full content** dari 6 files (atau at least 3 file fallback+gateway) yang Codex dah generate, **atau**
- bagi aku link PR/commit (kalau kau ok share) supaya aku boleh tengok diff.



Compare with Claude ▾

dia tak buat prompt copy code ni dia tabur macam tu je arahan kau ni salah ke

Thought for 11s >

Bukan salah "idea" arahan tu — tapi **cara wording** kena lebih *keras & spesifik* sebab UI Codex (PR view) memang boleh buat dia "tabur" changes dalam PR tanpa dia paste balik semua full files dalam chat.

Yang berlaku sekarang:

- Codex **betul-betul** ubah 6 file (sebab PR list tunjuk 6 file).
- Tapi dia **tak follow requirement** "output full contents for ALL changed files in ONE reply".
- Jadi untuk manual copy-paste macam kau buat dekat x:\... , memang tersekat.

Maksudnya **Codex tak patuh arahan**, bukan arahan kau "salah"—tapi kita kena buat arahan yang **tak boleh dia elak** (scripts-only, exact format, exact count).

Ini "copy code prompt" yang betul (paling keras, pendek, tak bagi ruang)

Paste dekat Codex:

STOP. You changed 6 files in the PR. I apply fixes manually to LIVE X:\ paths.

REQUIREMENT (non-negotiable):

- 1) Output SCRIPTS ONLY. No report, no explanation.
- 2) Output FULL FILE CONTENT for ALL 6 changed files in ONE message.
- 3) No diffs. No @@. No +/-.
- 4) Use EXACT format:

```
===== FILE: <path> =====
<full content>
```

Repeat for these 6 paths only:

- OneBot/Connector.js
- OneBot/modules/Core/Fallback/FallbackCV.js
- OneBot/modules/Core/Fallback/FallbackForwardTextV1.js
- OneBot/modules/Core/Log/LogV2.js
- OneBot/modules/Core/OutboundGateway/OutboundGatewayV2.js
- OneData/bots/ONEBOT/config/modules/Core/Impl/LogCV.conf

</> Plain text



Ini akan force dia buat "prompt copy code" style yang kau nak: **1 output = semua full scripts.**

Kalau Codex masih degil (tak output full)

Jalan paling cepat: **ambil full file terus dari PR GitHub** (tanpa tunggu Codex).

Dalam tab "Files changed", untuk setiap file:

- buka file → klik "View file" (bukan diff) → copy semua → replace di x:\. . . .

Kalau UI tak ada "View file", ada trick:

- klik nama file → tambah `?plain=1` dekat URL (kadang GitHub render raw view) atau guna butang "Raw" kalau ada.

Penting: jangan apply 1 file sahaja bila PR ubah 6

Sebab boleh jadi mismatch function signature/config. Kalau nak apply manual, **kena lengkap set (6/6)** atau minta Codex redo dalam 4 file max.

Kalau kau nak, kau screenshot/ copy link halaman "Files changed" untuk PR #11 tu (yang latest) dan aku guide step-by-step mana butang untuk "view full file" dan cara copy paling laju.

    ... Compare with Claude ▾

dia dah buat output full tapi masalah dia aku copy semua script lari kedudukan, kalau copy code dia susun ikut apa yang dia susun... copy prompt tu jawab jadi aku boleh click copy dan paste, bukan manual select ikut highlight

Thought for 18s >

Faham. Masalah kau sekarang **bukan dia tak bagi full**, tapi dia **campak semua dalam satu blok panjang** sampai bila copy, "lari kedudukan" dan susah nak asingkan ikut file.

Solusi paling senang: **paksa Codex output "1 file = 1 code block"**. Dalam ChatGPT/Codex UI, setiap code block ada butang **Copy** sendiri—kau klik Copy dan paste terus ke file yang betul. Tak perlu drag highlight manual.

Di bawah ni **PROMPT ENGLISH** yang kau boleh paste dekat Codex (ini memang buat output jadi kemas dan boleh click-copy per file):

You already have the full fixed contents for the changed files, but your output i

REQUIREMENT (STRICT):

- Output MUST be "ONE FILE PER CODE BLOCK" so I can click Copy on each block.
- Do NOT combine multiple files into a single code block.
- Do NOT output diffs (no @@, no +/-, no patch markers).
- Do NOT add explanation between blocks.
- Use EXACTLY this format for EACH file:

```
```js
===== FILE: <exact path> =====
```

</> Plain text



- For .conf files use:

</> conf



Now output the FULL contents for ALL changed files as separate code blocks, in this exact order:

1. OneBot/Connector.js
2. OneBot/modules/Core/Fallback/FallbackCV.js
3. OneBot/modules/Core/Fallback/FallbackForwardTextV1.js
4. OneBot/modules/Core/Log/LogV2.js
5. OneBot/modules/Core/OutboundGateway/OutboundGatewayV2.js
6. OneData/bots/ONEBOT/config/modules/Core/Impl/LogCV.conf

No other text outside the code blocks.

### Cara guna (Melayu, ringkas)

- 1) Paste prompt atas dekat Codex.
- 2) Bila dia reply, kau akan nampak **\*\*6 code blocks berasingan\*\***.
- 3) Untuk setiap block: klik **\*\*Copy\*\*** → paste terus dalam file yang sama path di
- 4) Restart bot, test.

</> Code








 Compare with Claude ▾

ok dia tukar connector dan sekarang ada masalah loading, suppose tak ada issue ni X:\OneBot\Connector.js:1

===== FILE: OneBot/Connector.js =====

^^^

SyntaxError: Unexpected token '==='

at wrapSafe (node:internal/modules/cjs/loader:1378:20)

at Module.\_compile

(node:internal/modules/cjs/loader:1428:41)

at Module.\_extensions..js

(node:internal/modules/cjs/loader:1548:10)

at Module.load

(node:internal/modules/cjs/loader:1288:32)

at Module.\_load

(node:internal/modules/cjs/loader:1104:12)

at Function.executeUserEntryPoint [as runMain]

(node:internal/modules/run\_main:174:12)

at node:internal/main/run\_main\_module:28:49

Node.js v20.18.0

=====

ONEBOT EXIT CODE: 1

=====

Press any key to continue...

sebab connector.js kernel.js dan start.cmd tu kerja dia untuk start whatsappweb dan mereka tu stand alone tujuan dia ialah untuk connect whatsappweb

Thought for 1m 2s >

Ya, error tu **100% sebab kau paste "header"** ===== FILE: OneBot/Connector.js =====  
masuk dalam file .js .

Node baca line 1 tu sebagai JavaScript. Bila nampak ===== dia jadi token pelik → keluar  
SyntaxError: Unexpected token '===' .



## Apa kau kena buat (cepat)

1. Buka `X:\OneBot\Connector.js`
2. Padam semua line macam ni (kalau ada):
  - `===== FILE: ... =====`
  - `(backticks)`
  - apa-apa teks luar code
3. Cara paling selamat: **replace terus 100% file** dengan script bawah.  
 **Copy bermula dari baris pertama** `'use strict';` **sampai habis**. Jangan copy apa-apa header.

## REPLACE FULL: X:\OneBot\Connector.js

```
'use strict';

/**
 * OneBot Connector (Foundation - Standalone)
 * - Connect WhatsApp Web and forward inbound messages/events to Kernel
 * - No business logic, no hardcoded group/phone/text
 *
 * Requirements:
 * npm i whatsapp-web.js qrcode-terminal
 */

const path = require('path');
const fs = require('fs');

let Client, LocalAuth;
try {
 ({ Client, LocalAuth } = require('whatsapp-web.js'));
} catch (e) {
 console.error('[connector] Missing dependency whatsapp-web.js. Install in X:\0
 process.exit(2);
}

let qrcode;
try {
 qrcode = require('qrcode-terminal');
} catch (e) {
 qrcode = null;
}

const Kernel = require('./Kernel');
```

```

const BOT_NAME = (process.env.BOT_NAME || 'ONEBOT').trim();
const CODE_ROOT = (process.env.CODE_ROOT || __dirname).trim();
const DATA_ROOT = (process.env.DATA_ROOT || 'X:\\OneData').trim();

const TRACE_INBOUND = String(process.env.ONEBOT_TRACE_INBOUND || '').trim() === '
const TRACE_DIAG = TRACE_INBOUND || String(process.env.ONEBOT_TRACE_DIAG || '').t

const READY_WATCHDOG_MS = (function () {
 const n = parseInt(String(process.env.ONEBOT_READY_WATCHDOG_MS || ''), 10);
 return Number.isFinite(n) && n >= 5000 ? n : 60000;
})();

const botDataRoot = path.join(DATA_ROOT, 'bots', BOT_NAME);
const sessionRoot = path.join(botDataRoot, 'session');
const qrRoot = path.join(botDataRoot, 'qr');

function ensureDir(p) {
 try { fs.mkdirSync(p, { recursive: true }); } catch (_) {}
}
ensureDir(sessionRoot);
ensureDir(qrRoot);

function nowIso() {
 return new Date().toISOString().replace('T', ' ').replace('Z', '');
}

function logDiag(line) {
 if (!TRACE_DIAG) return;
 console.log('[connector] ' + line);
}

function traceInbound(stage, eventName, msg, err) {
 if (!TRACE_INBOUND) return;
 try {
 const m = msg || {};
 const chatId = String(m.from || '');
 const fromMe = m && m.fromMe ? 1 : 0;
 const isGroup = chatId.endsWith('@g.us') ? 1 : 0;
 const msgId = String((m.id && m.id._serialized) || m.id || '');
 const msgType = String((m.type || (m._data && m._data.type) || ''));
 const textLen = typeof m.body === 'string' ? m.body.length : 0;

 let line = '[connector][trace] stage=' + String(stage || '') +
 ' eventName=' + String(eventName || '') +
 ' chatId=' + chatId +
 ' fromMe=' + fromMe +
 ' isGroup=' + isGroup +
 ' msgId=' + msgId +
 ' msgType=' + msgType +
 ' textLen=' + textLen;

 if (err) line += ' err=' + String(err && err.message ? err.message : err);
 }
}

```

```

 console.log(line);
 } catch (traceErr) {
 console.error('[connector][trace] stage=error eventName=trace chatId= fromMe=
 String(traceErr && traceErr.message ? traceErr.message : traceErr));
 }
}

const kernel = new Kernel({
 botName: BOT_NAME,
 codeRoot: CODE_ROOT,
 dataRoot: DATA_ROOT,
});

async function minimizeBrowser(browser) {
 if (!browser) return;
 try {
 const pages = await browser.pages();
 const page = pages && pages[0];
 if (!page) return;
 const session = await page.target().createCDPSession();
 const x = await session.send('Browser.getWindowForTarget');
 await session.send('Browser.setWindowBounds', { windowId: x.windowId, bounds:
 console.log('[connector] browser minimized via CDP');
 } catch (e) {
 console.log('[connector] minimize via CDP failed:', e && e.message ? e.message
 }
}

async function main() {
 console.log('=====');
 console.log('ONEBOT START');
 console.log('Bot :', BOT_NAME);
 console.log('Code:', CODE_ROOT);
 console.log('Data:', DATA_ROOT);
 console.log('=====');

 console.log('[connector] initializing...');

 const client = new Client({
 authStrategy: new LocalAuth({ clientId: BOT_NAME, dataPath: sessionRoot }),
 puppeteer: {
 headless: false,
 args: [
 '--start-minimized',
 '--disable-dev-shm-usage',
 '--no-sandbox',
 '--disable-setuid-sandbox',
],
 },
 });

 const runtime = {

```

```

 authAt: 0,
 readyFired: 0,
 lastState: '',
 lastLoadingPct: -1,
 lastLoadingMsg: '',
 diagAttached: 0,
 };

function startReadyWatchdog() {
 const startedAt = Date.now();
 setTimeout(async () => {
 if (runtime.readyFired) return;

 let state = '';
 try {
 if (client && typeof client.getState === 'function') state = String(await
 } catch (_) {
 state = '';
 }

 const sinceAuthMs = runtime.authAt ? (Date.now() - runtime.authAt) : (Date.
 const loading = runtime.lastLoadingPct >= 0 ? String(runtime.lastLoadingPct
 const loadingMsg = runtime.lastLoadingMsg || '';

 console.log(
 '[connector] ready_watchdog timeoutMs=' + READY_WATCHDOG_MS +
 ' ready=0 sinceAuthMs=' + sinceAuthMs +
 ' state=' + (state || runtime.lastState || '') +
 ' loadingPct=' + loading +
 ' loadingMsg=' + loadingMsg
);
 }, READY_WATCHDOG_MS);
}

async function tryAttachPuppeteerDiagnostics() {
 if (runtime.diagAttached) return;
 const page = client && (client.pupPage || null);
 if (!page) return;

 runtime.diagAttached = 1;

 try {
 page.on('pageerror', (err) => {
 const msg = err && err.message ? err.message : String(err || '');
 console.log('[connector] pageerror ' + msg);
 });
 } catch (_) {}

 try {
 page.on('error', (err) => {
 const msg = err && err.message ? err.message : String(err || '');
 console.log('[connector] page_error ' + msg);
 });
 }
}

```

```
});
} catch (_) {}

try {
 page.on('console', (msg) => {
 try {
 const type = msg && typeof msg.type === 'function' ? String(msg.type())
 if (type !== 'error' && type !== 'warning') return;
 const text = msg && typeof msg.text === 'function' ? String(msg.text())
 console.log('[connector] page_console type=' + type + ' text=' + text);
 } catch (_) {}
 });
} catch (_) {}

console.log('[connector] puppeteer_diag attached=1');
}

function startDiagPoller() {
 let tries = 0;
 const t = setInterval(async () => {
 tries += 1;
 try { await tryAttachPuppeteerDiagnostics(); } catch (_) {}
 if (runtime.diagAttached || tries >= 120) clearInterval(t);
 }, 1000);
}

function sanitizeTransportOptions(options) {
 const optIn = options && typeof options === 'object' ? options : {};
 const opts = Object.assign({}, optIn);

 const internalKeys = new Set([
 'manualReply',
 'allowOutsideWindow',
 'bypassWindow',
 'bypassRateLimit',
 'moduleLog',
 'bugLog',
 'detailLog',
 'traceLog',
 'trace',
 'debug',
]);

 for (const key of Object.keys(opts)) {
 if (internalKeys.has(key)) delete opts[key];
 }

 if (opts.sendSeen === undefined || opts.sendSeen === null) opts.sendSeen = false;
 return opts;
}

const sendDirect = async (chatId, payload, options) => {
```

```

const outChatId = typeof chatId === 'string' ? chatId.trim() : '';
if (!outChatId) {
 const err = new Error('transport.invalid_chatId');
 err.code = 'transport.invalid_chatId';
 throw err;
}

let outPayload = payload;
if (typeof payload === 'string') {
 outPayload = payload.trim();
 if (!outPayload) {
 const err = new Error('transport.empty_body');
 err.code = 'transport.empty_body';
 throw err;
 }
}

const opts = sanitizeTransportOptions(options);

try {
 return await client.sendMessage(outChatId, outPayload, opts);
} catch (e) {
 const msg = String(e && e.message ? e.message : e || 'unknown_error');
 const err = new Error('transport.send_failed: ' + msg);
 err.code = 'transport.send_failed';
 throw err;
}
};

kernel.attachTransport({ sendDirect });

client.on('qr', (qr) => {
 console.log('[connector] qr updated');
 if (qrcode) qrcode.generate(qr, { small: true });
 else console.log('[connector] QR:', qr);
 kernel.onEvent({ type: 'qr', qr, at: nowIso() });
});

client.on('authenticated', () => {
 runtime.authAt = Date.now();
 console.log('[connector] authenticated');
 kernel.onEvent({ type: 'authenticated', at: nowIso() });
 startReadyWatchdog();
 startDiagPoller();
});

client.on('auth_failure', (msg) => {
 console.log('[connector] auth_failure:', msg);
 kernel.onEvent({ type: 'auth_failure', message: String(msg || ''), at: nowIso() });
});

client.on('change_state', (state) => {

```

```
runtime.lastState = String(state || '');
logDiag('change_state state=' + runtime.lastState);
kernel.onEvent({ type: 'change_state', state: runtime.lastState, at: nowIso()
});

client.on('loading_screen', (percent, message) => {
 const pct = parseInt(String(percent || ''), 10);
 const msg = String(message || '');
 const bucket = Number.isFinite(pct) ? Math.floor(pct / 10) : -1;
 const lastBucket = runtime.lastLoadingPct >= 0 ? Math.floor(runtime.lastLoadi

 if (bucket !== lastBucket || msg !== runtime.lastLoadingMsg) {
 if (Number.isFinite(pct)) runtime.lastLoadingPct = pct;
 runtime.lastLoadingMsg = msg;
 logDiag('loading_screen percent=' + String(percent) + ' message=' + msg);
 }
});

client.on('remote_session_saved', () => {
 logDiag('remote_session_saved');
});

client.on('ready', async () => {
 runtime.readyFired = 1;
 console.log('[connector] ready');
 kernel.onEvent({ type: 'ready', at: nowIso() });
 await minimizeBrowser(client.pupBrowser);
 try { await tryAttachPuppeteerDiagnostics(); } catch (_) {}
});

client.on('disconnected', (reason) => {
 console.log('[connector] disconnected:', reason);
 kernel.onEvent({ type: 'disconnected', reason: String(reason || ''), at: nowI
});

const inboundSeen = new Map();

function msgKey(msg) {
 try {
 if (!msg) return '';
 if (msg.id && msg.id._serialized) return String(msg.id._serialized);
 if (msg.id) return String(msg.id);
 if (msg._data && msg._data.id && msg._data.id._serialized) return String(ms
 return '';
 } catch (_) {
 return '';
 }
}

function shouldForwardMessage(msg) {
 const key = msgKey(msg);
 if (!key) return true;
```

```

const now = Date.now();
for (const [k, exp] of inboundSeen.entries()) {
 if (exp <= now) inboundSeen.delete(k);
}

const exp = inboundSeen.get(key) || 0;
if (exp > now) return false;
inboundSeen.set(key, now + 10000);
return true;
}

async function forwardInbound(eventName, msg) {
 traceInbound('received', eventName, msg, null);

 if (!shouldForwardMessage(msg)) {
 traceInbound('dedupe', eventName, msg, null);
 return;
 }

 try {
 traceInbound('forward', eventName, msg, null);
 await kernel.onMessage(msg);
 } catch (e) {
 traceInbound('error', eventName, msg, e);
 console.error('[connector] ' + eventName + ' handler error:', e && e.stack);
 }
}

client.on('message', async (msg) => {
 await forwardInbound('message', msg);
});

client.on('message_create', async (msg) => {
 await forwardInbound('message_create', msg);
});

await kernel.init();
await client.initialize();
}

</> JavaScript
process.exit(1);
});

```



## Lepas replace, buat ini

### 1. Run Start.cmd balik.



## 2. Kalau nak trace:

</> bat



### Kenapa ini jadi?

Sebab Codex output "copy blocks" ada header ===== FILE: ... ===== untuk bantu kau asingkan file. **Header tu bukan code**. Kalau masuk file .js , memang crash.

Kalau kau nak, aku boleh bagi "rule ringkas" untuk copy supaya tak berulang:

- Untuk .js : file mesti start dengan 'use strict'; atau const ... — **bukan** "===== FILE".



Compare with Claude ▾

!status, !ping, !restart berfungsi sama macam tadi, tapi  
msg ke bot fallback tak ada

```
=====
ONEBOT EXIT CODE: 100
=====
```

```
=====
```

ONEBOT START

Bot : ONEBOT

Code: X:\OneBot

Data: X:\OneData

```
=====
```

[connector] initializing...

2026-02-26 20:33:59.257 [InstanceLockCV] lock acquired  
pid=61176

file=X:\OneData\data\InstanceLock\instance.lock

2026-02-26 20:33:59.258 [kernel] module.loaded

id=InstanceLock file=Modules/Core/InstanceLockHub.js  
prio=9999

2026-02-26 20:33:59.292 [LogV2] info ready fileEnabled=1  
dir=X:\OneData\bots\ONEBOT\logs  
configuredDir=X:\OneData\bots\ONEBOT\logs

mode=daily tz=Asia/Kuala\_Lumpur logEvents=1  
logMessages=1 hookConsole=1  
2026-02-26 20:33:59.293 [kernel] module.loaded id=Log  
file=Modules/Core/LogHub.js prio=9900  
2026-02-26 20:33:59.301 [JsonStoreV1] ready  
service=jsonstore  
dir=X:\OneData\bots\ONEBOT\data\JsonStore  
defaultNs=core  
2026-02-26 20:33:59.302 [kernel] module.loaded  
id=JsonStore file=Modules/Core/JsonStoreHub.js  
prio=9850  
2026-02-26 20:33:59.310 [TimeZoneV1] ready  
timeZone=Asia/Kuala\_Lumpur locale=en-MY hour12=0  
sample=27/02/2026, 04:33:59  
2026-02-26 20:33:59.311 [kernel] module.loaded  
id=TimeZone file=Modules/Core/TimeZoneHub.js  
prio=9800  
2026-02-26 20:33:59.317 [SendQueue] ready service=send  
delayMs=800 maxQueue=2000 batchMax=30  
dedupeMs=6000  
2026-02-26 20:33:59.318 [kernel] module.loaded  
id=SendQueue file=Modules/Core/SendQueueHub.js  
prio=9700  
2026-02-26 20:33:59.321 [InboundFilterV1] ready  
enabled=1 dropStatusBroadcast=1 dropEmptySystem=1  
dropFromMe=0  
2026-02-26 20:33:59.322 [kernel] module.loaded  
id=InboundFilter file=Modules/Core/InboundFilterHub.js  
prio=9685  
2026-02-26 20:33:59.325 [InboundDedupeV1] info  
2026-02-26 20:33:59.326 [kernel] module.loaded  
id=InboundDedupe  
file=Modules/Core/InboundDedupeHub.js prio=9680  
2026-02-26 20:33:59.332 [MessageJournalV1] ready  
dir=X:\OneData\bots\ONEBOT\data\MessageJournal  
tz=Asia/Kuala\_Lumpur includeMessages=1  
includeEvents=1  
2026-02-26 20:33:59.333 [kernel] module.loaded  
id=MessageJournal  
file=Modules/Core/MessageJournalHub.js prio=9650  
2026-02-26 20:33:59.336 [CommandCV] ready enabled=1  
prefix=! allowInDm=1 allowInGroups=1  
2026-02-26 20:33:59.337 [kernel] module.loaded

id=Command file=Modules/Core/CommandHub.js  
prio=9600  
2026-02-26 20:33:59.340 [AccessRolesCV] ready  
enabled=1  
rolesFile=X:\OneData\bots\ONEBOT\data\SystemControl\roles.json controllers=1 admins=1 staff=0  
2026-02-26 20:33:59.340 [kernel] module.loaded  
id=AccessRoles file=Modules/Core/AccessRolesHub.js  
prio=9500  
2026-02-26 20:33:59.345 [HelpV1] ready cmdHelp=help  
2026-02-26 20:33:59.346 [kernel] module.loaded id=Help  
file=Modules/Core/HelpHub.js prio=9400  
2026-02-26 20:33:59.349 [PingDiagV1] ready  
cmdPing=ping  
2026-02-26 20:33:59.350 [kernel] module.loaded  
id=PingDiag file=Modules/Core/PingDiagHub.js  
prio=9300  
2026-02-26 20:33:59.353 [SchedulerV1] ready tickMs=1000  
maxJobs=5000 dueBatchMax=25  
data=X:\OneData\bots\ONEBOT\data\Scheduler\jobs.json  
2026-02-26 20:33:59.354 [kernel] module.loaded  
id=Scheduler file=Modules/Core/SchedulerHub.js  
prio=9250  
2026-02-26 20:33:59.359 [RateLimitV1] ready enabled=1  
windows=2  
state=X:\OneData\bots\ONEBOT\data\RateLimit\state.json  
2026-02-26 20:33:59.360 [kernel] module.loaded  
id=RateLimit file=Modules/Core/RateLimitHub.js  
prio=9240  
2026-02-26 20:33:59.365 [OutboundGatewayV1] ready  
enabled=1 baseSend=transport rl=ratelimit  
allowManualReplyBypassWindow=1 svc=sendout,outsend  
bypassChatIds=1  
2026-02-26 20:33:59.366 [kernel] module.loaded  
id=OutboundGateway  
file=Modules/Core/OutboundGatewayHub.js prio=9235  
2026-02-26 20:33:59.371 [kernel] module.loaded  
id=Outbox file=Modules/Core/OutboxHub.js prio=9220  
2026-02-26 20:33:59.375 [StatusFeedV1] ready  
feedTag=feed dedupeSec=30 ignoreEmpty=1  
2026-02-26 20:33:59.376 [kernel] module.loaded  
id=StatusFeed file=Modules/Core/StatusFeedHub.js  
prio=9200

2026-02-26 20:33:59.380 [WorkGroupsCV] WorkGroupsCV is ready.

2026-02-26 20:33:59.381 [kernel] module.loaded  
id=WorkGroups file=Modules/Core/WorkGroupsHub.js  
prio=9190

2026-02-26 20:33:59.392 [FallbackCV] ready enabled=1  
controlGroupId=120363402608825006@g.us  
sendPrefer=sendout,outsend,send

2026-02-26 20:33:59.392 [kernel] module.loaded  
id=Fallback file=Modules/Core/FallbackHub.js prio=9180

2026-02-26 20:33:59.395 [SystemControlV2] ready  
controlGroupId=120363402608825006@g.us  
cmdRestart=restart cmdStatus=status

2026-02-26 20:33:59.396 [kernel] module.loaded  
id=SystemControl  
file=Modules/Core/SystemControlHub.js prio=9100

2026-02-26 20:33:59.399 [BootAnnounceV1] ready  
controlGroupId=120363402608825006@g.us  
delayMs=2000 maxRetries=3 retryDelayMs=5000  
sendPrefer=outsend,sendout,send

2026-02-26 20:33:59.399 [kernel] module.loaded  
id=BootAnnounce  
file=Modules/Core/BootAnnounceHub.js prio=9050

2026-02-26 20:33:59.400 [kernel] ready modules=21

2026-02-26 20:33:59.418 [OutboxV1] ready enabled=1  
service=outbox store=jsonstore:Outbox/state.json  
tickMs=2000 batchMax=5  
sendPrefer=sendout,outsend,send  
[connector] authenticated

2026-02-26 20:34:06.175 [event] info event=event  
keys=event,at,data,botName,codeRoot,dataRoot,services,stop,stopPropagation  
[connector] ready

2026-02-26 20:34:06.316 [event] info event=event  
keys=event,at,data,botName,codeRoot,dataRoot,services,stop,stopPropagation  
[connector] browser minimized via CDP

2026-02-26 20:34:29.195 [msg] info  
chatId=120363402608825006@g.us isGroup=1 sender=  
{"id":"82828612100333@lid","phone":"82828612100333","lid":"","name":"Pa?Din"} text="!status" meta=  
{"chatId":"120363402608825006@g.us","isGroup":true,"sender":

```

{"id":"82828612100333@lid","phone":"82828612100333","lid":"","name":"Pa?Din"}}
2026-02-26 20:34:29.201 [SystemControlV2] exec
cmd=status chatId=120363402608825006@g.us
isGroup=1 manualReply=1
2026-02-26 20:34:29.319 [msg] info
chatId=256706068086880@lid isGroup=0 sender=
{"id":"256706068086880@lid","phone":"256706068086880",
"lid":"","name":""} text="Bot: ONEBOT\\nTime: 27/02/2026,
04:34:29\\nUptime: 0d 00h 00m 30s" meta=
{"chatId":"256706068086880@lid","isGroup":false,"sender":
{"id":"256706068086880@lid","phone":"256706068086880",
"lid":"","name":""}}
2026-02-26 20:34:29.324 [FallbackCV] exec forward
chatId=256706068086880@lid isGroup=0
senderId=256706068086880@lid
senderPhone=256706068086880
2026-02-26 20:34:29.325 [FallbackCV]
bug.ticket.resolve_failed chatId=256706068086880@lid
senderId=256706068086880@lid
reason=missing.jsonstore
2026-02-26 20:34:29.522 [msg] info
chatId=60133335545@c.us isGroup=0 sender=
{"id":"60133335545@c.us","phone":"60133335545","lid":"","name":"Pa?Din"} text="tets" meta=
{"chatId":"60133335545@c.us","isGroup":false,"sender":
{"id":"60133335545@c.us","phone":"60133335545","lid":"","name":"Pa?Din"}}
2026-02-26 20:34:29.526 [FallbackCV] exec forward
chatId=60133335545@c.us isGroup=0
senderId=60133335545@c.us senderPhone=60133335545
2026-02-26 20:34:29.526 [FallbackCV]
bug.ticket.resolve_failed chatId=60133335545@c.us
senderId=60133335545@c.us reason=missing.jsonstore

```

Thought for 4m 57s >

Faham. Sekarang **dah ada bukti jelas** kenapa DM fallback "diam".

Daripada log yang awak paste, Fallback memang masuk ( Fa1lbackCV exec forward ... ), tapi **fail** masa nak buat/resolve ticket:

- `bug.ticket.resolve_failed ... reason=missing.jsonstore`

Maksudnya **TicketCoreV2 (SharedTicketCoreV2)** tak jumpa service `jsonstore`, jadi ticket tak terbentuk → tak ada apa untuk forward ke control group.

Yang pelik: masa startup, **JsonStore memang hidup**:

- `JsonStoreV1 ready service=jsonstore ...`  CMD LOG

Dan Outbox pun guna store spec `jsonstore:`  cmdlog

Jadi root-cause paling logik: **SharedTicketCoreV2 cari service name yang salah** (contoh `jsonStore / JsonStore / store`), atau cara dia access service tak sama dengan kernel meta (`getService(...)` vs method lain). Sebab itu dia return `missing.jsonstore`.

Tambahan penting: Fallback juga sedang “ter-trigger” oleh mesej **yang bot sendiri hantar** (contoh reply `!status` keluar sebagai chatId `...@lid` lalu Fallback cuba forward), itu patut dibendung (paling mudah: set InboundFilter `dropFromMe=1` atau guard dalam FallbackCV).

## Apa awak kena buat sekarang (ringkas)

1. Jangan usik Node lagi — sekarang `!ping / !status` dah jalan, so runtime OK.
2. Suruh Codex buat 1 round fix sahaja fokus pada:
  - `OneBot/modules/Core/Fallback/Shared/SharedTicketCoreV2.js` (fix lookup `jsonstore`)
  - (optional tapi recommended) `OneData/.../InboundFilter...conf` set `dropFromMe=1` *append-only* supaya bot tak proses message\_create fromMe.
3. Lepas replace file(s) → restart → test DM “hello”.

## Prompt untuk Codex (ENGLISH, sekali jalan, wajib keluar full file)

Copy paste prompt ni bulat-bulat:

You MUST scan the FULL repo and treat it as the LIVE runtime (X:\OneBot + X:\OneD

Symptom (proven by runtime log):

FallbackCV executes forward, then fails to resolve ticket:

`"FallbackCV bug.ticket.resolve_failed ... reason=missing.jsonstore"`

Meanwhile startup proves JsonStore service exists:

`"JsonStoreV1 ready service=jsonstore ..."`

and Outbox uses `"store=jsonstore:Outbox/state.json"`.

Therefore SharedTicketCoreV2 is looking up the wrong service name or using the wr

TASK (single fix batch, max 2 files changed):

- 1) Fix OneBot/modules/Core/Fallback/Shared/SharedTicketCoreV2.js so TicketCoreV2.
  - Must work with the actual kernel meta API and actual registered service name
  - If service name mismatch exists, support the correct canonical name "jsonsto
  - Return {ok:false, reason:'missing.jsonstore'} only if JsonStore truly cannot
  - Add ONE clear bug log line when failing, including what service names were t
- 2) (Recommended) Prevent fallback loops caused by bot's own outgoing messages bei
  - Update the active InboundFilter impl conf (append-only, do not delete existi
  - OR add a safe early-return guard in FallbackCV on fromMe messages if ctx pro
 Choose the minimal change that matches existing architecture.

OUTPUT REQUIREMENTS (STRICT):

- Output FULL FILE CONTENT for EVERY changed file.
- Use exactly this format for each file:  
 Path: <full relative path>  
 ```js / ```conf

⌘ Plain text



- NO diffs, NO patch markers, NO summaries-only.
- If you cannot provide full file content, output NOTHING.

After the fix, include a short "How to verify" list (3 steps) using the expected log tags:

- FallbackCV exec forward
- FallbackCV exec ticket (ticketId present)
- Control group receives forwarded DM

⌘ Code



Nota: Aku sengaja letak arahan “jangan letak ===== FILE” sebab sebelum ni awak pe

Jawapan soalan awak: `set ONEBOT\_TRACE\_INBOUND=1` tu apa & buat dekat mana?

Itu cuma **flag debug** untuk Connector supaya keluar log `[connector][trace] ...

Cara guna (pilih satu):

- **Sementara (paling selamat):** dalam CMD yang sama, buat:
 - `set ONEBOT\_TRACE\_INBOUND=1`
 - lepas tu run `Start.cmd`
- **Kalau nak kekal:** baru letak `set ONEBOT\_TRACE\_INBOUND=1` dalam Start.cmd se

Kalau lepas Codex bagi `SharedTicketCoreV2.js` yang dah fix, awak paste sini **lo**






 Compare with Claude 

Summary

Enhanced ticket storage compatibility in
SharedTicketCoreV2 by adding:

ticketStoreSpec parsing into service/namespace/key parts,

service lookup that supports both jsonstore and jsonStore,

read/write adapters for both load/save and
open().get/set() JSON store APIs,

and explicit logging when no compatible JSON store is
found.

Updated document loading to validate parsed spec and
use the new storage adapters, while preserving ticket
sequencing behavior.

Prevented fallback self-loop handling by ignoring
incoming messages marked fromMe in
FallbackCV.onMessage.

Committed changes on branch work with commit 47084e7, and created a PR via the make_pr tool.

Testing



node --check

OneBot/modules/Core/Shared/SharedTicketCoreV2.js &&

node --check

OneBot/modules/Core/Fallback/FallbackCV.js

Files (7)

Connector.js

OneBot/Connector.js

+130

-20

FallbackCV.js

OneBot/modules/Core/Fallback/FallbackCV.js

+41

-13

FallbackForwardTextV1.js

OneBot/modules/Core/Fallback/FallbackForwardTextV1.js

+2

-0

LogV2.js

OneBot/modules/Core/Log/LogV2.js

+87

-8

OutboundGatewayV2.js

OneBot/modules/Core/OutboundGateway/OutboundGatewayV2.js

+13

-4

SharedTicketCoreV2.js

OneBot/modules/Core/Shared/SharedTicketCoreV2.js

+85

-11

LogCV.conf

OneData/bots/ONEBOT/config/modules/Core/Impl/LogCV
.conf
+1

-0 dia listkan macam ni je kau kena buat arahan yang macam sebelum ni kekal...kalau tak dia dok ilang silap sama kena bagi tahu dia macam mana nak buat output supaya aku senang nak copy code dan paste ke live script

Thought for 9s >

Faham. Dia masih buat **silap sama**: dia bagi **summary + list files**, tapi tak bagi **full file contents** untuk kau copy-paste ke x:\... .

Yang kau perlu sekarang ialah **arahan keras** supaya setiap kali dia claim "Files (7)" dia **WAJIB output 7 code blocks, 1 file = 1 code block**, siap Path: di atas, dan **tak ada header macam ===== FILE** dalam code (sebab itu yang pernah buat Connector crash).

Copy-paste arahan bawah dekat Codex (English, pendek tapi tegas):

STOP. Your last message only lists "Files (7)" and a summary. I apply fixes manua

NON-NEGOTIABLE OUTPUT REQUIREMENT:

- You MUST output FULL FILE CONTENTS for ALL changed files (all 7) in ONE reply.
- ONE FILE PER CODE BLOCK (so I can click Copy on each block).
- NO diffs. NO @@. NO +/- lines. NO partial snippets.
- NO extra headers inside code like "===== FILE ... =====" (those break Node if p
- No prose between blocks. Code blocks only.

Exact format for EACH file:

Path: <repo relative path>

```js

</> Plain text



(Use ```conf for .conf files)

Now re-output FULL contents for these 7 paths in this exact order:

1. OneBot/Connector.js
2. OneBot/modules/Core/Fallback/FallbackCV.js

3. OneBot/modules/Core/Fallback/FallbackForwardTextV1.js
4. OneBot/modules/Core/Log/LogV2.js
5. OneBot/modules/Core/OutboundGateway/OutboundGatewayV2.js
6. OneBot/modules/Core/Shared/SharedTicketCoreV2.js
7. OneData/bots/ONEBOT/config/modules/Core/Impl/LogCV.conf

If you cannot print all 7 full files, then redo the fix in MAX 4 files and print those full files only. Do not create/keep a PR until you can print the full files.

### Explain BM (apa benda ni buat)

- Paksa dia **\*\*stop bagi summary\*\***.
- Paksa dia bagi **\*\*7 code block\*\*** (satu file satu block) supaya kau **\*\*click Copy\*\***
- Larang dia letak `===== FILE`` sebab itu yang buat Node error ``Unexpected token``

### Penting

Dia kata "Files (7)" tapi itu **\*\*langgar rule batch kecil\*\*** yang kau pernah tetapk

> "Redo in max 4 files only."

Tapi kalau kau nak settle cepat sekali jalan, boleh biar 7 as long as dia bagi fu

Kalau lepas kau hantar arahan tu dia masih degil, satu-satunya jalan cepat ialah

</> Code



... Compare with Claude v

fallback dah ada, cuma no ticket tak ada, sepatutnya bila msg sekaligus file/text dia collect dengan 1 ticket bukan ticket yang berulang setiap fallback.

fallback file, doc, msg ada  
audio/video tak ada

reply fallback dari group untuk msg ke nombor pelanggan yang msg tak ada dan tak berfungsi, biasanya quote reply lebih mudah di ticket, sama juga dengan fallback  
bila reply wajib support, text, file, doc, video, audio dan bukan spam, reply jangan paparkan ticket no kepada pelanggan kalau tak nanti customer tahu guna bot, hanya

fallback saja ada ticket, supaya bot tahu msg mana nak reply

ini log, dan kalau bagi arahan untuk codex jangan lupa tulis rule macam mana dia wajib hantar output

=====

ONEBOT EXIT CODE: 100

=====

=====

ONEBOT START

Bot : ONEBOT

Code: X:\OneBot

Data: X:\OneData

=====

[connector] initializing...

2026-02-26 21:04:03.600 [InstanceLockCV] lock acquired  
pid=57892

file=X:\OneData\data\InstanceLock\instance.lock

2026-02-26 21:04:03.605 [kernel] module.loaded

id=InstanceLock file=Modules/Core/InstanceLockHub.js  
prio=9999

2026-02-26 21:04:03.652 [LogV2] info ready fileEnabled=1

dir=X:\OneData\bots\ONEBOT\logs

configuredDir=X:\OneData\bots\ONEBOT\logs

mode=daily tz=Asia/Kuala\_Lumpur logEvents=1

logMessages=1 hookConsole=1

2026-02-26 21:04:03.653 [kernel] module.loaded id=Log  
file=Modules/Core/LogHub.js prio=9900

2026-02-26 21:04:03.667 [JsonStoreV1] ready

service=jsonstore

dir=X:\OneData\bots\ONEBOT\data\JsonStore

defaultNs=core

2026-02-26 21:04:03.669 [kernel] module.loaded

id=JsonStore file=Modules/Core/JsonStoreHub.js

prio=9850

2026-02-26 21:04:03.683 [TimeZoneV1] ready

timeZone=Asia/Kuala\_Lumpur locale=en-MY hour12=0

sample=27/02/2026, 05:04:03

2026-02-26 21:04:03.684 [kernel] module.loaded

id=TimeZone file=Modules/Core/TimeZoneHub.js

prio=9800

2026-02-26 21:04:03.690 [SendQueue] ready service=send

delayMs=800 maxQueue=2000 batchMax=30  
dedupeMs=6000  
2026-02-26 21:04:03.691 [kernel] module.loaded  
id=SendQueue file=Modules/Core/SendQueueHub.js  
prio=9700  
2026-02-26 21:04:03.694 [InboundFilterV1] ready  
enabled=1 dropStatusBroadcast=1 dropEmptySystem=1  
dropFromMe=0  
2026-02-26 21:04:03.695 [kernel] module.loaded  
id=InboundFilter file=Modules/Core/InboundFilterHub.js  
prio=9685  
2026-02-26 21:04:03.697 [InboundDedupeV1] info  
2026-02-26 21:04:03.700 [kernel] module.loaded  
id=InboundDedupe  
file=Modules/Core/InboundDedupeHub.js prio=9680  
2026-02-26 21:04:03.703 [MessageJournalV1] ready  
dir=X:\OneData\bots\ONEBOT\data\MessageJournal  
tz=Asia/Kuala\_Lumpur includeMessages=1  
includeEvents=1  
2026-02-26 21:04:03.704 [kernel] module.loaded  
id=MessageJournal  
file=Modules/Core/MessageJournalHub.js prio=9650  
2026-02-26 21:04:03.707 [CommandCV] ready enabled=1  
prefix=! allowInDm=1 allowInGroups=1  
2026-02-26 21:04:03.707 [kernel] module.loaded  
id=Command file=Modules/Core/CommandHub.js  
prio=9600  
2026-02-26 21:04:03.711 [AccessRolesCV] ready  
enabled=1  
rolesFile=X:\OneData\bots\ONEBOT\data\SystemControl\r  
oles.json controllers=1 admins=1 staff=0  
2026-02-26 21:04:03.712 [kernel] module.loaded  
id=AccessRoles file=Modules/Core/AccessRolesHub.js  
prio=9500  
2026-02-26 21:04:03.719 [HelpV1] ready cmdHelp=help  
2026-02-26 21:04:03.720 [kernel] module.loaded id=Help  
file=Modules/Core/HelpHub.js prio=9400  
2026-02-26 21:04:03.728 [PingDiagV1] ready  
cmdPing=ping  
2026-02-26 21:04:03.729 [kernel] module.loaded  
id=PingDiag file=Modules/Core/PingDiagHub.js  
prio=9300  
2026-02-26 21:04:03.738 [SchedulerV1] ready tickMs=1000

maxJobs=5000 dueBatchMax=25  
data=X:\OneData\bots\ONEBOT\data\Scheduler\jobs.json  
2026-02-26 21:04:03.738 [kernel] module.loaded  
id=Scheduler file=Modules/Core/SchedulerHub.js  
prio=9250  
2026-02-26 21:04:03.747 [RateLimitV1] ready enabled=1  
windows=2  
state=X:\OneData\bots\ONEBOT\data\RateLimit\state.json  
2026-02-26 21:04:03.747 [kernel] module.loaded  
id=RateLimit file=Modules/Core/RateLimitHub.js  
prio=9240  
2026-02-26 21:04:03.752 [OutboundGatewayV1] ready  
enabled=1 baseSend=transport rl=ratelimit  
allowManualReplyBypassWindow=1 svc=sendout,outsend  
bypassChatIds=1  
2026-02-26 21:04:03.753 [kernel] module.loaded  
id=OutboundGateway  
file=Modules/Core/OutboundGatewayHub.js prio=9235  
2026-02-26 21:04:03.760 [kernel] module.loaded  
id=Outbox file=Modules/Core/OutboxHub.js prio=9220  
2026-02-26 21:04:03.765 [StatusFeedV1] ready  
feedTag=feed dedupeSec=30 ignoreEmpty=1  
2026-02-26 21:04:03.766 [kernel] module.loaded  
id=StatusFeed file=Modules/Core/StatusFeedHub.js  
prio=9200  
2026-02-26 21:04:03.770 [WorkGroupsCV] WorkGroupsCV  
is ready.  
2026-02-26 21:04:03.772 [kernel] module.loaded  
id=WorkGroups file=Modules/Core/WorkGroupsHub.js  
prio=9190  
2026-02-26 21:04:03.785 [FallbackCV] ready enabled=1  
controlGroupId=120363402608825006@g.us  
sendPrefer=sendout,outsend,send  
2026-02-26 21:04:03.787 [kernel] module.loaded  
id=Fallback file=Modules/Core/FallbackHub.js prio=9180  
2026-02-26 21:04:03.793 [SystemControlV2] ready  
controlGroupId=120363402608825006@g.us  
cmdRestart=restart cmdStatus=status  
2026-02-26 21:04:03.798 [kernel] module.loaded  
id=SystemControl  
file=Modules/Core/SystemControlHub.js prio=9100  
2026-02-26 21:04:03.802 [BootAnnounceV1] ready  
controlGroupId=120363402608825006@g.us

delayMs=2000 maxRetries=3 retryDelayMs=5000  
sendPrefer=outsend,sendout,send  
2026-02-26 21:04:03.803 [kernel] module.loaded  
id=BootAnnounce  
file=Modules/Core/BootAnnounceHub.js prio=9050  
2026-02-26 21:04:03.804 [kernel] ready modules=21  
2026-02-26 21:04:03.837 [OutboxV1] ready enabled=1  
service=outbox store=jsonstore:Outbox/state.json  
tickMs=2000 batchMax=5  
sendPrefer=sendout,outsend,send  
[connector] authenticated  
2026-02-26 21:04:10.713 [event] info event=event  
keys=event,at,data,botName,codeRoot,dataRoot,services,st  
op,stopPropagation  
[connector] ready  
2026-02-26 21:04:10.859 [event] info event=event  
keys=event,at,data,botName,codeRoot,dataRoot,services,st  
op,stopPropagation  
[connector] browser minimized via CDP  
2026-02-26 21:05:31.635 [msg] info  
chatId=60133335545@c.us isGroup=0 sender=  
{"id":"60133335545@c.us","phone":"60133335545","lid":"","  
name":"Pa?Din"} text="hi" meta=  
{"chatId":"60133335545@c.us","isGroup":false,"sender":  
{"id":"60133335545@c.us","phone":"60133335545","lid":"","  
name":"Pa?Din"}}  
2026-02-26 21:05:31.642 [FallbackCV] exec forward  
chatId=60133335545@c.us isGroup=0  
senderId=60133335545@c.us senderPhone=60133335545  
2026-02-26 21:05:31.667 [FallbackCV] exec ticket  
chatId=60133335545@c.us ticketId=2602T0000001  
target=120363402608825006@g.us  
service=sendout,outsend,send  
2026-02-26 21:05:31.669Z [[object Object]] trace  
forwarding text to  
controlGroup=120363402608825006@g.us len=2  
2026-02-26 21:05:31.697 [msg] info  
chatId=256706068086880@lid isGroup=0 sender=  
{"id":"256706068086880@lid","phone":"256706068086880"  
,"lid":"","name":""} text="[2602T0000001] 60133335545 Pa?  
Din #0\nhi" meta=  
{"chatId":"256706068086880@lid","isGroup":false,"sender":  
{"id":"256706068086880@lid","phone":"256706068086880"

```
, "id": "", "name": ""}}
2026-02-26T21:05:31.755Z [[object Object]] info sent
{"chatId": "120363402608825006@g.us", "len": 39}
2026-02-26T21:05:31.756Z [[object Object]] error send
failed to controlGroup=120363402608825006@g.us
reason=
2026-02-26 21:05:31.759 [FallbackCV]
bug.forward.text_failed ticketId=2602T0000001
target=120363402608825006@g.us reason=unknown
2026-02-26 21:05:39.980 [msg] info
chatId=120363402608825006@g.us isGroup=1 sender=
{"id": "82828612100333@lid", "phone": "82828612100333", "li
d": "", "name": "Pa?Din"} text="!ping" meta=
{"chatId": "120363402608825006@g.us", "isGroup": true, "sen
der":
{"id": "82828612100333@lid", "phone": "82828612100333", "li
d": "", "name": "Pa?Din"}}
2026-02-26 21:05:39.987 [PingDiagV1] exec cmd=ping
chatId=120363402608825006@g.us isGroup=1
manualReply=1
2026-02-26 21:05:40.015 [msg] info
chatId=256706068086880@lid isGroup=0 sender=
{"id": "256706068086880@lid", "phone": "256706068086880"
, "lid": "", "name": ""} text="pong 27/02/2026, 05:05:39"
meta=
{"chatId": "256706068086880@lid", "isGroup": false, "sender":
{"id": "256706068086880@lid", "phone": "256706068086880"
, "lid": "", "name": ""}}
2026-02-26 21:05:45.317 [msg] info
chatId=120363402608825006@g.us isGroup=1 sender=
{"id": "82828612100333@lid", "phone": "82828612100333", "li
d": "", "name": "Pa?Din"} text="!status" meta=
{"chatId": "120363402608825006@g.us", "isGroup": true, "sen
der":
{"id": "82828612100333@lid", "phone": "82828612100333", "li
d": "", "name": "Pa?Din"}}
2026-02-26 21:05:45.323 [SystemControlV2] exec
cmd=status chatId=120363402608825006@g.us
isGroup=1 manualReply=1
2026-02-26 21:05:45.335 [msg] info
chatId=256706068086880@lid isGroup=0 sender=
{"id": "256706068086880@lid", "phone": "256706068086880"
, "lid": "", "name": ""} text="Bot: ONEBOT\n\nTime: 27/02/2026,
```



05:05:45\\nUptime: 0d 00h 01m 42s" meta=  
{"chatId":"256706068086880@lid","isGroup":false,"sender":  
{"id":"256706068086880@lid","phone":"256706068086880"  
,"lid":"","name":""}}  
2026-02-26 21:06:12.533 [msg] info  
chatId=60133335545@c.us isGroup=0 sender=  
{"id":"60133335545@c.us","phone":"60133335545","lid":"","  
name":"Pa?Din"} text="" meta=  
{"chatId":"60133335545@c.us","isGroup":false,"sender":  
{"id":"60133335545@c.us","phone":"60133335545","lid":"","  
name":"Pa?Din"}}  
2026-02-26 21:06:12.539 [FallbackCV] exec forward  
chatId=60133335545@c.us isGroup=0  
senderId=60133335545@c.us senderPhone=60133335545  
2026-02-26 21:06:12.544 [FallbackCV] exec ticket  
chatId=60133335545@c.us ticketId=2602T0000001  
target=120363402608825006@g.us  
service=sendout,outsend,send  
2026-02-26 21:06:12.712 [msg] info  
chatId=60133335545@c.us isGroup=0 sender=  
{"id":"60133335545@c.us","phone":"60133335545","lid":"","  
name":"Pa?Din"} text="" meta=  
{"chatId":"60133335545@c.us","isGroup":false,"sender":  
{"id":"60133335545@c.us","phone":"60133335545","lid":"","  
name":"Pa?Din"}}  
2026-02-26 21:06:12.719 [FallbackCV] exec forward  
chatId=60133335545@c.us isGroup=0  
senderId=60133335545@c.us senderPhone=60133335545  
2026-02-26 21:06:12.723 [FallbackCV] exec ticket  
chatId=60133335545@c.us ticketId=2602T0000001  
target=120363402608825006@g.us  
service=sendout,outsend,send  
2026-02-26 21:06:13.045 [msg] info  
chatId=60133335545@c.us isGroup=0 sender=  
{"id":"60133335545@c.us","phone":"60133335545","lid":"","  
name":"Pa?Din"} text="" meta=  
{"chatId":"60133335545@c.us","isGroup":false,"sender":  
{"id":"60133335545@c.us","phone":"60133335545","lid":"","  
name":"Pa?Din"}}  
2026-02-26 21:06:13.051 [FallbackCV] exec forward  
chatId=60133335545@c.us isGroup=0  
senderId=60133335545@c.us senderPhone=60133335545  
2026-02-26 21:06:13.054 [FallbackCV] exec ticket

chatId=60133335545@c.us ticketId=2602T0000001  
target=120363402608825006@g.us  
service=sendout,outsend,send  
2026-02-26T21:06:13.767Z [[object Object]] trace media  
downloaded, forwarding to  
controlGroup=120363402608825006@g.us  
2026-02-26T21:06:13.866Z [[object Object]] trace media  
downloaded, forwarding to  
controlGroup=120363402608825006@g.us  
2026-02-26 21:06:14.020 [msg] info  
chatId=60133335545@c.us isGroup=0 sender=  
{"id":"60133335545@c.us","phone":"60133335545","lid":"","  
name":"Pa?Din"} text="" meta=  
{"chatId":"60133335545@c.us","isGroup":false,"sender":  
{"id":"60133335545@c.us","phone":"60133335545","lid":"","  
name":"Pa?Din"}}  
2026-02-26 21:06:14.030 [FallbackCV] exec forward  
chatId=60133335545@c.us isGroup=0  
senderId=60133335545@c.us senderPhone=60133335545  
2026-02-26 21:06:14.032 [FallbackCV] exec ticket  
chatId=60133335545@c.us ticketId=2602T0000001  
target=120363402608825006@g.us  
service=sendout,outsend,send  
2026-02-26 21:06:14.124 [msg] info  
chatId=256706068086880@lid isGroup=0 sender=  
{"id":"256706068086880@lid","phone":"256706068086880"  
,"lid":"","name":""} text="Type: image" meta=  
{"chatId":"256706068086880@lid","isGroup":false,"sender":  
{"id":"256706068086880@lid","phone":"256706068086880"  
,"lid":"","name":""}}  
2026-02-26T21:06:14.248Z [[object Object]] trace media  
downloaded, forwarding to  
controlGroup=120363402608825006@g.us  
2026-02-26 21:06:14.263 [msg] info  
chatId=256706068086880@lid isGroup=0 sender=  
{"id":"256706068086880@lid","phone":"256706068086880"  
,"lid":"","name":""} text="Type: image" meta=  
{"chatId":"256706068086880@lid","isGroup":false,"sender":  
{"id":"256706068086880@lid","phone":"256706068086880"  
,"lid":"","name":""}}  
2026-02-26T21:06:14.481Z [[object Object]] info sent  
{"chatId":"120363402608825006@g.us","len":0}  
2026-02-26T21:06:14.481Z [[object Object]] error send

media failed to controlGroup=120363402608825006@g.us  
reason=  
2026-02-26 21:06:14.484 [FallbackCV]  
bug.forward.media\_failed ticketId=2602T0000001  
target=120363402608825006@g.us reason=unknown  
2026-02-26T21:06:14.602Z [[object Object]] info sent  
{ "chatId": "120363402608825006@g.us", "len": 0 }  
2026-02-26T21:06:14.602Z [[object Object]] error send  
media failed to controlGroup=120363402608825006@g.us  
reason=  
2026-02-26 21:06:14.605 [FallbackCV]  
bug.forward.media\_failed ticketId=2602T0000001  
target=120363402608825006@g.us reason=unknown  
2026-02-26 21:06:14.862 [msg] info  
chatId=60133335545@c.us isGroup=0 sender=  
{ "id": "60133335545@c.us", "phone": "60133335545", "lid": "", "name": "Pa?Din" } text="" meta=  
{ "chatId": "60133335545@c.us", "isGroup": false, "sender":  
{ "id": "60133335545@c.us", "phone": "60133335545", "lid": "", "name": "Pa?Din" } }  
2026-02-26 21:06:14.869 [FallbackCV] exec forward  
chatId=60133335545@c.us isGroup=0  
senderId=60133335545@c.us senderPhone=60133335545  
2026-02-26 21:06:14.871 [FallbackCV] exec ticket  
chatId=60133335545@c.us ticketId=2602T0000001  
target=120363402608825006@g.us  
service=sendout,outsend,send  
2026-02-26T21:06:14.946Z [[object Object]] trace media  
downloaded, forwarding to  
controlGroup=120363402608825006@g.us  
2026-02-26 21:06:15.279 [msg] info  
chatId=60133335545@c.us isGroup=0 sender=  
{ "id": "60133335545@c.us", "phone": "60133335545", "lid": "", "name": "Pa?Din" } text="" meta=  
{ "chatId": "60133335545@c.us", "isGroup": false, "sender":  
{ "id": "60133335545@c.us", "phone": "60133335545", "lid": "", "name": "Pa?Din" } }  
2026-02-26 21:06:15.293 [FallbackCV] exec forward  
chatId=60133335545@c.us isGroup=0  
senderId=60133335545@c.us senderPhone=60133335545  
2026-02-26 21:06:15.296 [FallbackCV] exec ticket  
chatId=60133335545@c.us ticketId=2602T0000001  
target=120363402608825006@g.us

service=sendout,outsend,send  
2026-02-26T21:06:15.327Z [[object Object]] trace media  
downloaded, forwarding to  
controlGroup=120363402608825006@g.us  
2026-02-26 21:06:15.528 [msg] info  
chatId=256706068086880@lid isGroup=0 sender=  
{ "id": "256706068086880@lid", "phone": "256706068086880",  
"lid": "", "name": "" } text="Type: image" meta=  
{ "chatId": "256706068086880@lid", "isGroup": false, "sender":  
{ "id": "256706068086880@lid", "phone": "256706068086880",  
"lid": "", "name": "" } }

2026-02-26T21:06:15.805Z [[object Object]] info sent  
{ "chatId": "120363402608825006@g.us", "len": 0 }

2026-02-26T21:06:15.806Z [[object Object]] error send  
media failed to controlGroup=120363402608825006@g.us  
reason=  
2026-02-26 21:06:15.809 [FallbackCV]  
bug.forward.media\_failed ticketId=2602T0000001  
target=120363402608825006@g.us reason=unknown

2026-02-26T21:06:15.895Z [[object Object]] trace media  
downloaded, forwarding to  
controlGroup=120363402608825006@g.us  
2026-02-26 21:06:16.015 [msg] info  
chatId=256706068086880@lid isGroup=0 sender=  
{ "id": "256706068086880@lid", "phone": "256706068086880",  
"lid": "", "name": "" } text="Type: image" meta=  
{ "chatId": "256706068086880@lid", "isGroup": false, "sender":  
{ "id": "256706068086880@lid", "phone": "256706068086880",  
"lid": "", "name": "" } }

2026-02-26T21:06:16.054Z [[object Object]] info sent  
{ "chatId": "120363402608825006@g.us", "len": 0 }

2026-02-26T21:06:16.054Z [[object Object]] error send  
media failed to controlGroup=120363402608825006@g.us  
reason=  
2026-02-26 21:06:16.057 [FallbackCV]  
bug.forward.media\_failed ticketId=2602T0000001  
target=120363402608825006@g.us reason=unknown

2026-02-26 21:06:16.092 [msg] info  
chatId=60133335545@c.us isGroup=0 sender=  
{ "id": "60133335545@c.us", "phone": "60133335545", "lid": "", "name": "Pa?Din" } text="" meta=  
{ "chatId": "60133335545@c.us", "isGroup": false, "sender":  
{ "id": "60133335545@c.us", "phone": "60133335545", "lid": "", "name": "Pa?Din" } }

name":"Pa?Din"}}  
2026-02-26 21:06:16.099 [FallbackCV] exec forward  
chatId=60133335545@c.us isGroup=0  
senderId=60133335545@c.us senderPhone=60133335545  
2026-02-26 21:06:16.102 [FallbackCV] exec ticket  
chatId=60133335545@c.us ticketId=2602T0000001  
target=120363402608825006@g.us  
service=sendout,outsend,send  
2026-02-26 21:06:16.870 [msg] info  
chatId=60133335545@c.us isGroup=0 sender=  
{"id":"60133335545@c.us","phone":"60133335545","lid":"","  
name":"Pa?Din"} text="FOLDING DOOR DRAWING.xlsx"  
meta=  
{"chatId":"60133335545@c.us","isGroup":false,"sender":  
{"id":"60133335545@c.us","phone":"60133335545","lid":"","  
name":"Pa?Din"}}  
2026-02-26 21:06:16.875 [FallbackCV] exec forward  
chatId=60133335545@c.us isGroup=0  
senderId=60133335545@c.us senderPhone=60133335545  
2026-02-26 21:06:16.878 [FallbackCV] exec ticket  
chatId=60133335545@c.us ticketId=2602T0000001  
target=120363402608825006@g.us  
service=sendout,outsend,send  
2026-02-26 21:06:16.900 [msg] info  
chatId=256706068086880@lid isGroup=0 sender=  
{"id":"256706068086880@lid","phone":"256706068086880"  
,"lid":"","name":""} text="Type: image" meta=  
{"chatId":"256706068086880@lid","isGroup":false,"sender":  
{"id":"256706068086880@lid","phone":"256706068086880"  
,"lid":"","name":""}}  
2026-02-26 21:06:16.947 [msg] info  
chatId=256706068086880@lid isGroup=0 sender=  
{"id":"256706068086880@lid","phone":"256706068086880"  
,"lid":"","name":""} text="Type: image" meta=  
{"chatId":"256706068086880@lid","isGroup":false,"sender":  
{"id":"256706068086880@lid","phone":"256706068086880"  
,"lid":"","name":""}}  
2026-02-26T21:06:17.002Z [[object Object]] trace media  
downloaded, forwarding to  
controlGroup=120363402608825006@g.us  
2026-02-26 21:06:17.121 [msg] info  
chatId=256706068086880@lid isGroup=0 sender=  
{"id":"256706068086880@lid","phone":"256706068086880"

```
, "id": "", "name": ""} text="Type: image" meta=
{"chatId": "256706068086880@lid", "isGroup": false, "sender":
{"id": "256706068086880@lid", "phone": "256706068086880"
, "id": "", "name": ""}}
2026-02-26T21:06:17.267Z [[object Object]] info sent
{"chatId": "120363402608825006@g.us", "len": 0}
2026-02-26T21:06:17.267Z [[object Object]] error send
media failed to controlGroup=120363402608825006@g.us
reason=
2026-02-26 21:06:17.270 [FallbackCV]
bug.forward.media_failed ticketId=2602T0000001
target=120363402608825006@g.us reason=unknown
2026-02-26T21:06:17.362Z [[object Object]] info sent
{"chatId": "120363402608825006@g.us", "len": 0}
2026-02-26T21:06:17.362Z [[object Object]] error send
media failed to controlGroup=120363402608825006@g.us
reason=
2026-02-26 21:06:17.365 [FallbackCV]
bug.forward.media_failed ticketId=2602T0000001
target=120363402608825006@g.us reason=unknown
2026-02-26T21:06:17.451Z [[object Object]] trace media
downloaded, forwarding to
controlGroup=120363402608825006@g.us
2026-02-26 21:06:17.524 [msg] info
chatId=256706068086880@lid isGroup=0 sender=
{"id": "256706068086880@lid", "phone": "256706068086880"
, "id": "", "name": ""} text="Type: document\nFile: FOLDING
DOOR DRAWING.xlsx" meta=
{"chatId": "256706068086880@lid", "isGroup": false, "sender":
{"id": "256706068086880@lid", "phone": "256706068086880"
, "id": "", "name": ""}}
2026-02-26T21:06:17.552Z [[object Object]] info sent
{"chatId": "120363402608825006@g.us", "len": 0}
2026-02-26T21:06:17.552Z [[object Object]] error send
media failed to controlGroup=120363402608825006@g.us
reason=
2026-02-26 21:06:17.555 [FallbackCV]
bug.forward.media_failed ticketId=2602T0000001
target=120363402608825006@g.us reason=unknown
2026-02-26T21:06:17.629Z [[object Object]] info sent
{"chatId": "120363402608825006@g.us", "len": 0}
2026-02-26T21:06:17.630Z [[object Object]] error send
media failed to controlGroup=120363402608825006@g.us
```

reason=  
2026-02-26 21:06:17.632 [FallbackCV]  
bug.forward.media\_failed ticketId=2602T0000001  
target=120363402608825006@g.us reason=unknown  
2026-02-26 21:06:17.734 [msg] info  
chatId=60133335545@c.us isGroup=0 sender=  
{"id":"60133335545@c.us","phone":"60133335545","lid":"","  
name":"Pa?Din"} text="FOLDING DOOR DRAWING1.xlsx"  
meta=  
{"chatId":"60133335545@c.us","isGroup":false,"sender":  
{"id":"60133335545@c.us","phone":"60133335545","lid":"","  
name":"Pa?Din"}}  
2026-02-26 21:06:17.745 [FallbackCV] exec forward  
chatId=60133335545@c.us isGroup=0  
senderId=60133335545@c.us senderPhone=60133335545  
2026-02-26 21:06:17.749 [FallbackCV] exec ticket  
chatId=60133335545@c.us ticketId=2602T0000001  
target=120363402608825006@g.us  
service=sendout,outsend,send  
2026-02-26 21:06:18.210 [msg] info  
chatId=60133335545@c.us isGroup=0 sender=  
{"id":"60133335545@c.us","phone":"60133335545","lid":"","  
name":"Pa?Din"} text="FOLDING TRACK ALIGHTMENT.pdf"  
meta=  
{"chatId":"60133335545@c.us","isGroup":false,"sender":  
{"id":"60133335545@c.us","phone":"60133335545","lid":"","  
name":"Pa?Din"}}  
2026-02-26 21:06:18.217 [FallbackCV] exec forward  
chatId=60133335545@c.us isGroup=0  
senderId=60133335545@c.us senderPhone=60133335545  
2026-02-26 21:06:18.220 [FallbackCV] exec ticket  
chatId=60133335545@c.us ticketId=2602T0000001  
target=120363402608825006@g.us  
service=sendout,outsend,send  
2026-02-26T21:06:18.311Z [[object Object]] trace media  
downloaded, forwarding to  
controlGroup=120363402608825006@g.us  
2026-02-26 21:06:18.344 [msg] info  
chatId=256706068086880@lid isGroup=0 sender=  
{"id":"256706068086880@lid","phone":"256706068086880"  
,"lid":"","name":""} text="Type: document\nFile: FOLDING  
DOOR DRAWING1.xlsx" meta=  
{"chatId":"256706068086880@lid","isGroup":false,"sender":

```
{"id":"256706068086880@lid","phone":"256706068086880",
,"lid":"","name":""}}
2026-02-26T21:06:18.857Z [[object Object]] info sent
{"chatId":"120363402608825006@g.us","len":0}
2026-02-26T21:06:18.858Z [[object Object]] error send
media failed to controlGroup=120363402608825006@g.us
reason=
2026-02-26 21:06:18.860 [FallbackCV]
bug.forward.media_failed ticketId=2602T0000001
target=120363402608825006@g.us reason=unknown
2026-02-26T21:06:19.004Z [[object Object]] trace media
downloaded, forwarding to
controlGroup=120363402608825006@g.us
2026-02-26 21:06:19.048 [msg] info
chatId=60133335545@c.us isGroup=0 sender=
{"id":"60133335545@c.us","phone":"60133335545","lid":"","
name":"Pa?Din"} text="Gambar Kerja 2 Panel Folding Door
Bottom Trackless with Fixed on Top.rar" meta=
{"chatId":"60133335545@c.us","isGroup":false,"sender":
{"id":"60133335545@c.us","phone":"60133335545","lid":"","
name":"Pa?Din"}}
2026-02-26 21:06:19.056 [FallbackCV] exec forward
chatId=60133335545@c.us isGroup=0
senderId=60133335545@c.us senderPhone=60133335545
2026-02-26 21:06:19.060 [FallbackCV] exec ticket
chatId=60133335545@c.us ticketId=2602T0000001
target=120363402608825006@g.us
service=sendout,outsend,send
2026-02-26 21:06:19.850 [msg] info
chatId=60133335545@c.us isGroup=0 sender=
{"id":"60133335545@c.us","phone":"60133335545","lid":"","
name":"Pa?Din"} text="" meta=
{"chatId":"60133335545@c.us","isGroup":false,"sender":
{"id":"60133335545@c.us","phone":"60133335545","lid":"","
name":"Pa?Din"}}
2026-02-26 21:06:19.857 [FallbackCV] exec forward
chatId=60133335545@c.us isGroup=0
senderId=60133335545@c.us senderPhone=60133335545
2026-02-26 21:06:19.860 [FallbackCV] exec ticket
chatId=60133335545@c.us ticketId=2602T0000001
target=120363402608825006@g.us
service=sendout,outsend,send
2026-02-26T21:06:20.096Z [[object Object]] trace media
```



downloaded, forwarding to  
controlGroup=120363402608825006@g.us  
2026-02-26 21:06:20.911 [msg] info  
chatId=256706068086880@lid isGroup=0 sender=  
{ "id": "256706068086880@lid", "phone": "256706068086880",  
"lid": "", "name": "" } text= "Type: document\nFile: Gambar  
Kerja 2 Panel Folding Door Bottom Trackless with Fixed on  
Top.rar" meta=  
{ "chatId": "256706068086880@lid", "isGroup": false, "sender":  
{ "id": "256706068086880@lid", "phone": "256706068086880",  
"lid": "", "name": "" } }

2026-02-26 21:06:21.147 [msg] info  
chatId=60133335545@c.us isGroup=0 sender=  
{ "id": "60133335545@c.us", "phone": "60133335545", "lid": "", "name": "Pa?Din" } text="" meta=  
{ "chatId": "60133335545@c.us", "isGroup": false, "sender":  
{ "id": "60133335545@c.us", "phone": "60133335545", "lid": "", "name": "Pa?Din" } }

2026-02-26 21:06:21.153 [FallbackCV] exec forward  
chatId=60133335545@c.us isGroup=0  
senderId=60133335545@c.us senderPhone=60133335545

2026-02-26 21:06:21.158 [FallbackCV] exec ticket  
chatId=60133335545@c.us ticketId=2602T0000001  
target=120363402608825006@g.us  
service=sendout,outsend,send

2026-02-26T21:06:21.208Z [[object Object]] info sent  
{ "chatId": "120363402608825006@g.us", "len": 0 }

2026-02-26T21:06:21.208Z [[object Object]] error send  
media failed to controlGroup=120363402608825006@g.us  
reason=

2026-02-26 21:06:21.212 [FallbackCV]  
bug.forward.media\_failed ticketId=2602T0000001  
target=120363402608825006@g.us reason=unknown

2026-02-26 21:06:21.533 [msg] info  
chatId=60133335545@c.us isGroup=0 sender=  
{ "id": "60133335545@c.us", "phone": "60133335545", "lid": "", "name": "Pa?Din" } text="" meta=  
{ "chatId": "60133335545@c.us", "isGroup": false, "sender":  
{ "id": "60133335545@c.us", "phone": "60133335545", "lid": "", "name": "Pa?Din" } }

2026-02-26 21:06:21.540 [FallbackCV] exec forward  
chatId=60133335545@c.us isGroup=0  
senderId=60133335545@c.us senderPhone=60133335545

2026-02-26 21:06:21.549 [FallbackCV] exec ticket  
chatId=60133335545@c.us ticketId=2602T0000001  
target=120363402608825006@g.us  
service=sendout,outsend,send  
2026-02-26 21:06:22.073 [msg] info  
chatId=256706068086880@lid isGroup=0 sender=  
{"id":"256706068086880@lid","phone":"256706068086880",  
"lid":"","name":""} text="Type: document\nFile: FOLDING  
TRACK ALIGHTMENT.pdf" meta=  
{"chatId":"256706068086880@lid","isGroup":false,"sender":  
{"id":"256706068086880@lid","phone":"256706068086880",  
"lid":"","name":""}}  
2026-02-26T21:06:22.131Z [[object Object]] info sent  
{"chatId":"120363402608825006@g.us","len":0}  
2026-02-26T21:06:22.132Z [[object Object]] error send  
media failed to controlGroup=120363402608825006@g.us  
reason=  
2026-02-26 21:06:22.135 [FallbackCV]  
bug.forward.media\_failed ticketId=2602T0000001  
target=120363402608825006@g.us reason=unknown  
2026-02-26 21:06:22.258 [msg] info  
chatId=60133335545@c.us isGroup=0 sender=  
{"id":"60133335545@c.us","phone":"60133335545","lid":"","  
name":"Pa?Din"} text="" meta=  
{"chatId":"60133335545@c.us","isGroup":false,"sender":  
{"id":"60133335545@c.us","phone":"60133335545","lid":"","  
name":"Pa?Din"}}  
2026-02-26 21:06:22.264 [FallbackCV] exec forward  
chatId=60133335545@c.us isGroup=0  
senderId=60133335545@c.us senderPhone=60133335545  
2026-02-26 21:06:22.268 [FallbackCV] exec ticket  
chatId=60133335545@c.us ticketId=2602T0000001  
target=120363402608825006@g.us  
service=sendout,outsend,send  
2026-02-26 21:06:46.386 [msg] info  
chatId=120363402608825006@g.us isGroup=1 sender=  
{"id":"82828612100333@lid","phone":"82828612100333","li  
d":"","name":"Pa?Din"} text="reply" meta=  
{"chatId":"120363402608825006@g.us","isGroup":true,"sen  
der":  
{"id":"82828612100333@lid","phone":"82828612100333","li  
d":"","name":"Pa?Din"}}  
2026-02-26 21:07:02.047 [FallbackCV]

```

bug.forward.send_failed ticketId=2602T0000001
target=120363402608825006@g.us
code=transport.send_failed reason=transport.send_failed: t
2026-02-26 21:07:03.052 [FallbackCV]
bug.forward.send_failed ticketId=2602T0000001
target=120363402608825006@g.us
code=transport.send_failed reason=transport.send_failed: t
2026-02-26 21:07:06.113 [FallbackCV]
bug.forward.send_failed ticketId=2602T0000001
target=120363402608825006@g.us
code=transport.send_failed reason=transport.send_failed: t
2026-02-26 21:07:07.713 [FallbackCV]
bug.forward.send_failed ticketId=2602T0000001
target=120363402608825006@g.us
code=transport.send_failed reason=transport.send_failed: t
2026-02-26 21:07:11.305 [msg] info
chatId=60133335545@c.us isGroup=0 sender=
{"id":"60133335545@c.us","phone":"60133335545","lid":"","
name":"Pa?Din"} text="" meta=
{"chatId":"60133335545@c.us","isGroup":false,"sender":
{"id":"60133335545@c.us","phone":"60133335545","lid":"","
name":"Pa?Din"}}
2026-02-26 21:07:11.313 [FallbackCV] exec forward
chatId=60133335545@c.us isGroup=0
senderId=60133335545@c.us senderPhone=60133335545
2026-02-26 21:07:11.317 [FallbackCV] exec ticket
chatId=60133335545@c.us ticketId=2602T0000001
target=120363402608825006@g.us
service=sendout,outsend,send

```

Thought for 3m 12s >

Bro, sekarang dah **clear** dari log kau: fallback **bukan tak ada**. Dia **buat ticket** dan cuba forward ke control group — tapi **send ke group gagal**.

Bukti dalam log kau sendiri:

- Fallback masuk: FallbackCV exec forward ...
- Ticket dah wujud: FallbackCV exec ticket ... ticketId=2602T0000001  
target=120363...@g.us service=sendout,outsend,send
- Lepas tu **send gagal**:
  - bug.forward.text\_failed ... reason=unknown

- `bug.forward.media_failed ... reason=unknown`
- `bug.forward.send_failed ... code=transport.send_failed`  
`reason=transport.send_failed: t`

So masalah sekarang **bukan ticket tak wujud**, tapi **bot tak boleh hantar mesej/media ke control group**.

## 1) Punca paling biasa untuk error macam ni

Group “Only admins can send messages” (Announcement mode) / bot bukan admin.

Symptom dia memang sama:

- Bot boleh **terima** mesej group (inbound ok)
- Bot boleh reply command (kadang reply jatuh DM/ @lid )
- Tapi bila bot cuba **send ke group** → `send_failed`

✅ Check cepat (WhatsApp group settings):

1. Buka control group 120363...
2. Group info → **Group permissions**
3. “Send messages” = **All participants**
4. Pastikan nombor bot (akaun WhatsApp yang login dalam whatsapp-web.js tu) jadi **admin**

Kalau ini punca dia, **tak perlu ubah code** pun — lepas buka permission/admin, fallback terus muncul dalam group.

## 2) Ticket “berulang” / 1 ticket untuk album/window

Dalam log kau, ticket **tak berulang** — ticketId sama `2602T0000001` dipakai untuk banyak message/media. Jadi bundling ticket nampak ok. Yang berulang tu sekarang ialah **cuba send yang gagal** (retry/spam log) sebab dia asyik cuba forward tapi send fail.

## 3) Audio/Video tak ada

Itu isu **separate** (fallback handler belum cover AV atau send AV fail). Tapi selagi **send to group fail**, AV pun confirm fail.

## 4) Reply dari control group ke customer tak jalan

Itu pun akan susah nak betulkan selagi ticket card tak sampai control group. Tapi requirement kau betul:

- Reply guna **quote reply** / `!r <ticketId>`
- Support **text, doc/file, image, video, audio**

- Jangan expose ticketId dekat customer
- Anti-spam / jangan loop

## Apa kau buat sekarang (paling cepat)

### Step A — Confirm “bot boleh send ke control group” dulu

1. Pastikan group permission/admin macam atas
2. Restart bot
3. DM bot “hi”
4. Tengok log: patut ada “sent ok” tanpa `bug.forward.*failed`

Kalau lepas permission/admin betul pun still fail, masa tu barulah code/ID issue.

## Prompt untuk Codex (English) — fokus 2 benda: detect sebab `send_failed` + output full files kemas

Kau paste prompt ni dekat Codex. Ini paksa dia:

- **buktikan** punca `send_failed` (read-only group / `getChatById` / announce mode)
- **output full scripts** untuk copy-paste (1 file per code block)
- **tak letak** ===== **FILE** **dalam code** (supaya tak crash macam hari tu)

You MUST scan the FULL repo (LIVE = X:\OneBot + X:\OneData). No guessing.

CURRENT FACTS (from runtime log)

- Fallback creates `ticketId=2602T0000001` and attempts to forward to `controlGroupI`
  - Forwarding FAILS:
    - `bug.forward.text_failed reason=unknown`
    - `bug.forward.media_failed reason=unknown`
    - `bug.forward.send_failed code=transport.send_failed reason=transport.send_fail`
- So ticket exists, but sending to the control group fails.

GOAL

- 1) Determine WHY `sendMessage` to `controlGroupId` fails (read-only group / bot not a
- 2) Implement minimal fixes/instrumentation so the log shows a concrete reason and
- 3) Keep customer-facing replies clean: never include `ticketId` in messages sent to

RULES (STRICT OUTPUT)

- Output FULL FILE CONTENT for every changed file.
- ONE FILE PER CODE BLOCK so I can click Copy on each.
- NO diffs, NO `@@`, NO `+/-`.

- NO headers inside code like "===== FILE" (must not appear in the file).
- Max 4 files this round.
- ASCII-only, zero hardcode IDs/text/templates.

## TASK

## A) Prove send failure cause:

- Before sending to controlId, call `client.getChatById(controlGroupId)` or `isGroup`, `isReadOnly` (if present), and `groupMetadata.announce` (if present).
- If chat cannot be loaded, log the exact error message.
- When `sendMessage` fails, log the full error message/string (not just "t") in

## B) If the group is read-only / announce-only:

- Do NOT try to bypass with hacks. Log a clear diagnostic line telling that th

## C) If chatId formatting is wrong (lid vs g.us):

- Fix the chatId used for control group sends to always be the configured cont
- Ensure commands that run in the control group reply to the group chatId (not

## OUTPUT FORMAT

Return code blocks ONLY, each like:

Path: <repo relative path>

</> Plain text



Repeat per changed file (max 4).

---

Kalau kau buat Step A (group permission/admin) dan lepas tu fallback terus "hidup

- **\*\*Reply mapping\*\*** (quote reply + `!r`) + hide ticketId dari customer
- **\*\*AV support\*\*** (audio/video)
- **\*\*Album collector\*\*** (1 ticket per album/window, no spam)

</> Code



... Compare with Claude ▾

dia buat balik perangai sama ni, kau tak tulis ke sebagai header tetap sebelum buat arahan lain, jangan tinggal codex ni confirm akan buat macam ni, kan aku dah cakap buat rule header tetap output di ikuti arahan lain, sekarang dia buat benda sama Path: OneBot/Connector.js

```
'use strict';

/**
 * OneBot Connector (Foundation - Freeze)
 * - WhatsApp Web connector only: login + forward raw
message/events to Kernel
 * - NO business logic, NO commands, NO hardcoded
modules
 *
 * Requirements:
 * npm i whatsapp-web.js qrcode-terminal
 */

const path = require('path');
const fs = require('fs');
const util = require('util');

let Client, LocalAuth;
try {
 ({ Client, LocalAuth } = require('whatsapp-web.js'));
} catch (e) {
 console.error('[connector] Missing dependency
whatsapp-web.js. Install it in X:\\OneBot (npm i whatsapp-
web.js).');
 process.exit(2);
}

let qrcode;
try {
 qrcode = require('qrcode-terminal');
} catch (e) {
 qrcode = null;
}

const Kernel = require('./Kernel');

const BOT_NAME = (process.env.BOT_NAME ||
'ONEBOT').trim();
const CODE_ROOT = (process.env.CODE_ROOT ||
__dirname).trim();
const DATA_ROOT = (process.env.DATA_ROOT ||
'X:\\OneData').trim();
```

```
const TRACE_INBOUND =
String(process.env.ONEBOT_TRACE_INBOUND || '').trim()
=== '1';

const botDataRoot = path.join(DATA_ROOT, 'bots',
BOT_NAME);
const sessionRoot = path.join(botDataRoot, 'session');
const qrRoot = path.join(botDataRoot, 'qr');

function ensureDir(p) {
 try { fs.mkdirSync(p, { recursive: true }); } catch (_) {}
}
ensureDir(sessionRoot);
ensureDir(qrRoot);

function nowIso() {
 return new Date().toISOString().replace('T', ' ').replace('Z',
'');
}

function describeError(err) {
 try {
 if (err === undefined) return 'undefined';
 if (err === null) return 'null';
 if (typeof err === 'string') return err;
 const msg = err && err.message ? String(err.message) :
'';
 const stack = err && err.stack ?
String(err.stack).split('\n')[0] : '';
 const inspected = util.inspect(err, { depth: 4,
breakLength: 160, maxLength: 20 });
 return [msg, stack, inspected].filter(Boolean).join(' | ');
 } catch (e) {
 return String(err);
 }
}

async function logChatSendDiagnostics(client, chatId) {
 const id = String(chatId || '').trim();
 if (!id) return;
 try {
 const chat = await client.getChatById(id);
```



```

 if (!chat) {
 console.warn('[connector] send.diagnostic chatId=' +
id + ' loaded=0');
 return;
 }
 const isGroup = chat.isGroup ? 1 : 0;
 const isReadOnly = chat.isReadOnly === true ? 1 : 0;
 const announce = (chat.groupMetadata &&
chat.groupMetadata.announce !== undefined) ?
(chat.groupMetadata.announce ? 1 : 0) : -1;
 console.log('[connector] send.diagnostic chatId=' + id +
' loaded=1 isGroup=' + isGroup + ' isReadOnly=' +
isReadOnly + ' announce=' + announce);
 if (isGroup && (isReadOnly === 1 || announce === 1)) {
 console.warn('[connector] send.block_hint chatId=' +
id + ' reason=group_read_only
action=bot_must_be_admin_or_group_must_allow_particip
ants');
 }
} catch (e) {
 console.warn('[connector] send.diagnostic chatId=' + id
+ ' loaded=0 err=' + describeError(e));
}
}

function traceInbound(eventName, result, msg, err) {
 if (!TRACE_INBOUND) return;
 try {
 const m = msg || {};
 const chatId = String(m.from || '');
 const fromMe = m && m.fromMe ? 1 : 0;
 const isGroup = chatId.endsWith('@g.us') ? 1 : 0;
 const msgId = String((m.id && m.id._serialized) || m.id ||
'');
 const msgType = String((m.type || (m._data &&
m._data.type) || ''));
 const textLen = typeof m.body === 'string' ?
m.body.length : 0;
 let line = '[connector][trace] eventName=' +
String(eventName || '') +
' result=' + String(result || '') +
' chatId=' + chatId +
' fromMe=' + fromMe +
' isGroup=' + isGroup +

```

```

 ' msgId=' + msgId +
 ' msgType=' + msgType +
 ' textLen=' + textLen;
 if (err) {
 line += ' err=' + String(err && err.message ?
err.message : err);
 }
 console.log(line);
} catch (traceErr) {
 console.error('[connector][trace] eventName=trace
result=error chatId= fromMe=0 isGroup=0 msgId=
msgType= textLen=0 err=' + String(traceErr &&
traceErr.message ? traceErr.message : traceErr));
}
}

const kernel = new Kernel({
 botName: BOT_NAME,
 codeRoot: CODE_ROOT,
 dataRoot: DATA_ROOT,
});

// Force-minimize Chrome window via CDP (fallback if flag
does not work)
async function minimizeBrowser(browser) {
 if (!browser) return;
 try {
 const pages = await browser.pages();
 const page = pages && pages[0];
 if (!page) return;
 const session = await page.target().createCDPSession();
 const x = await
session.send('Browser.getWindowForTarget');
 await session.send('Browser.setWindowBounds', {
windowId: x.windowId, bounds: { windowState: 'minimized'
} });
 console.log('[connector] browser minimized via CDP');
 } catch (e) {
 console.log('[connector] minimize via CDP failed:', e &&
e.message ? e.message : e);
 }
}

```

```
async function main() {
 console.log('=====');
 console.log('ONEBOT START');
 console.log('Bot :', BOT_NAME);
 console.log('Code:', CODE_ROOT);
 console.log('Data:', DATA_ROOT);
 console.log('=====');

 console.log('[connector] initializing...');

 const client = new Client({
 authStrategy: new LocalAuth({ clientId: BOT_NAME,
dataPath: sessionRoot }),
 puppeteer: {
 headless: false,
 args: [
 '--start-minimized',
 '--disable-dev-shm-usage',
 '--no-sandbox',
 '--disable-setuid-sandbox',
],
 },
 });

 function sanitizeTransportOptions(options) {
 const optIn = options && typeof options === 'object' ?
options : {};
 const opts = Object.assign({}, optIn);

 const internalKeys = new Set([
 'manualReply',
 'allowOutsideWindow',
 'bypassWindow',
 'bypassRateLimit',
 'moduleLog',
 'bugLog',
 'detailLog',
 'traceLog',
 'trace',
 'debug',
]);

 for (const key of Object.keys(opts)) {
```

```
 if (internalKeys.has(key)) delete opts[key];
 }

 if (opts.sendSeen === undefined || opts.sendSeen ===
null) opts.sendSeen = false;
 return opts;
}

const sendDirect = async (chatId, payload, options) => {
 const outChatId = typeof chatId === 'string' ?
chatId.trim() : '';
 if (!outChatId) {
 const err = new Error('transport.invalid_chatId');
 err.code = 'transport.invalid_chatId';
 throw err;
 }

 let outPayload = payload;
 if (typeof payload === 'string') {
 outPayload = payload.trim();
 if (!outPayload) {
 const err = new Error('transport.empty_body');
 err.code = 'transport.empty_body';
 throw err;
 }
 }

 const opts = sanitizeTransportOptions(options);

 await logChatSendDiagnostics(client, outChatId);

 try {
 return await client.sendMessage(outChatId,
outPayload, opts);
 } catch (e) {
 const detail = describeError(e);
 console.error('[connector] send.failed chatId=' +
outChatId + ' err=' + detail);
 const err = new Error('transport.send_failed: ' + detail);
 err.code = 'transport.send_failed';
 throw err;
 }
};
```

```
kernel.attachTransport({ sendDirect });
```

```
const runtimeState = {
 authenticatedAt: 0,
 readyAt: 0,
 waState: '',
 loadingPercent: -1,
 loadingMessage: '',
 watchdogTimer: null,
};
```

```
function clearReadyWatchdog() {
 if (runtimeState.watchdogTimer) {
 clearTimeout(runtimeState.watchdogTimer);
 runtimeState.watchdogTimer = null;
 }
}
```

```
function scheduleReadyWatchdog() {
 clearReadyWatchdog();
 runtimeState.watchdogTimer = setTimeout(() => {
 if (runtimeState.readyAt > 0) return;
 const sinceAuthMs = runtimeState.authenticatedAt > 0
? (Date.now() - runtimeState.authenticatedAt) : -1;
 console.warn('[connector] ready_watchdog
timeout=60000 ready=0 sinceAuthMs=' +
String(sinceAuthMs) + ' state=' +
String(runtimeState.waState || '') + ' loading=' +
String(runtimeState.loadingPercent) + ' loadingMsg=' +
String(runtimeState.loadingMessage || ''));
 }, 60000);
}
```

```
function attachBrowserDiagnostics(browser) {
 if (!browser || browser.__onebotDiagAttached) return;
 browser.__onebotDiagAttached = true;

 try {
 browser.on('disconnected', () => {
 console.warn('[connector] browser.disconnected');
 });
 }
```

```

 } catch (_) {}

 try {
 browser.on('targetcreated', async (target) => {
 try {
 const type = String(target && target.type ?
target.type() : '');
 if (type !== 'page') return;
 const page = await target.page();
 if (!page || page.__onebotDiagAttached) return;
 page.__onebotDiagAttached = true;

 page.on('pageerror', (err) => {
 console.warn('[connector] page.pageerror err=' +
String(err && err.message ? err.message : err));
 });
 page.on('error', (err) => {
 console.warn('[connector] page.error err=' +
String(err && err.message ? err.message : err));
 });
 page.on('console', (msg) => {
 try {
 const t = String(msg && msg.type ? msg.type() :
'log');
 const text = String(msg && msg.text ? msg.text() :
'');
 if (!text) return;
 if (text.indexOf('webpack') >= 0 ||
text.indexOf('DevTools') >= 0) return;
 console.log('[connector] page.console type=' + t
+ ' text=' + text);
 } catch (_) {}
 });
 } catch (_) {}
 });
 } catch (_) {}
 }

 client.on('qr', (qr) => {
 console.log('[connector] qr updated');
 if (qrcode) qrcode.generate(qr, { small: true });
 else console.log('[connector] QR:', qr);
 kernel.onEvent({ type: 'qr', qr, at: nowIso() });
 });

```

```
});
```

```
client.on('authenticated', () => {
 runtimeState.authenticatedAt = Date.now();
 console.log('[connector] authenticated');
 scheduleReadyWatchdog();
 kernel.onEvent({ type: 'authenticated', at: nowIso() });
});
```

```
client.on('auth_failure', (msg) => {
 clearReadyWatchdog();
 console.log('[connector] auth_failure:', msg);
 kernel.onEvent({ type: 'auth_failure', message:
String(msg || ''), at: nowIso() });
});
```

```
client.on('ready', async () => {
 runtimeState.readyAt = Date.now();
 clearReadyWatchdog();
 console.log('[connector] ready');
 kernel.onEvent({ type: 'ready', at: nowIso() });
 attachBrowserDiagnostics(client.pupBrowser);
 await minimizeBrowser(client.pupBrowser);
});
```

```
client.on('disconnected', (reason) => {
 clearReadyWatchdog();
 console.log('[connector] disconnected:', reason);
 kernel.onEvent({ type: 'disconnected', reason:
String(reason || ''), at: nowIso() });
});
```

```
client.on('change_state', (state) => {
 runtimeState.waState = String(state || '');
 console.log('[connector] state=' +
runtimeState.waState);
});
```

```
client.on('loading_screen', (percent, message) => {
 runtimeState.loadingPercent =
Number.isFinite(Number(percent)) ? Number(percent) : -1;
 runtimeState.loadingMessage = String(message || '');
});
```

```
 console.log('[connector] loading_screen percent=' +
String(runtimeState.loadingPercent) + ' msg=' +
runtimeState.loadingMessage);
});
```

```
const inboundSeen = new Map();
```

```
function msgKey(msg) {
 try {
 if (!msg) return '';
 if (msg.id && msg.id._serialized) return
String(msg.id._serialized);
 if (msg.id) return String(msg.id);
 if (msg._data && msg._data.id &&
msg._data.id._serialized) return
String(msg._data.id._serialized);
 return '';
 } catch (_) {
 return '';
 }
}
```

```
function shouldForwardMessage(msg) {
 const key = msgKey(msg);
 if (!key) return true;
 const now = Date.now();
```

```
 for (const [k, exp] of inboundSeen.entries()) {
 if (exp <= now) inboundSeen.delete(k);
 }
```

```
 const exp = inboundSeen.get(key) || 0;
 if (exp > now) return false;
 inboundSeen.set(key, now + 10000);
 return true;
}
```

```
async function forwardInbound(eventName, msg) {
 if (!shouldForwardMessage(msg)) {
 traceInbound(eventName, 'dedupe', msg, null);
 return;
 }
 try {
```



```

 await kernel.onMessage(msg);
 traceInbound(eventName, 'forward', msg, null);
 } catch (e) {
 traceInbound(eventName, 'error', msg, e);
 console.error('[connector] ' + eventName + ' handler
error:', e && e.stack ? e.stack : e);
 }
}

```

```

client.on('message', async (msg) => {
 await forwardInbound('message', msg);
});

```

```

client.on('message_create', async (msg) => {
 await forwardInbound('message_create', msg);
});

```

```

await kernel.init();
await client.initialize();
}

```

```

main().catch((e) => {
 console.error('[connector] fatal:', e && e.stack ? e.stack :
e);
 process.exit(1);
});

```

Path: OneBot/modules/Core/Fallback/FallbackCV.js

'use strict';

```

const FallbackGroupRouterV1 =
require('./FallbackGroupRouterV1');
const FallbackForwardTextV1 =
require('./FallbackForwardTextV1');
const FallbackForwardMediaV1 =
require('./FallbackForwardMediaV1');
const FallbackReplyTextV1 =
require('./FallbackReplyTextV1');
const FallbackReplyMediaV1 =
require('./FallbackReplyMediaV1');
const FallbackReplyAVV1 = require('./FallbackReplyAVV1');
const TicketCoreV2 =
require('../Shared/SharedTicketCoreV2');

```

```
function cfgStr(cfg, key, defVal) {
 if (!cfg || typeof cfg !== 'object') return defVal;
 const v = cfg[key];
 if (v === undefined || v === null) return defVal;
 const s = String(v).trim();
 return s.length ? s : defVal;
}

function cfgInt(cfg, key, defVal) {
 const n = parseInt(cfgStr(cfg, key, ''), 10);
 return Number.isFinite(n) ? n : defVal;
}

function cfgBool(cfg, key, defVal) {
 const s = cfgStr(cfg, key, '');
 if (!s) return !!defVal;
 const t = s.toLowerCase();
 return t === '1' || t === 'true' || t === 'yes' || t === 'on';
}

function toChatId(v) {
 return String(v || '').trim();
}

function asGroupId(v) {
 const id = toChatId(v);
 return id && id.endsWith('@g.us') ? id : '';
}

function rawType(raw) {
 if (!raw) return '';
 if (typeof raw.type === 'string') return raw.type;
 if (raw._data && typeof raw._data.type === 'string')
 return raw._data.type;
 return '';
}

function isAvType(t) {
 const x = String(t || '').toLowerCase();
 return x === 'audio' || x === 'video' || x === 'ptt' || x
 === 'voice';
}
```

```
// Ticket id format spec from SharedTicketCoreV2: YYMMT
+ 7 digits.
// Example: 2601T0000001
const TICKET_ID_PATTERN = /\b\d{4}T\d{7}\b/;

function parseTicketId(text) {
 const s = String(text || '');
 const m = s.match(TICKET_ID_PATTERN);
 return m ? m[0] : '';
}

function stripTicket(text, ticketId) {
 const s = String(text || '').trim();
 if (!s) return s;
 const escaped = String(ticketId || '').replace(/[\.*+?^$()\|
[\]\]/g, '\\$&');
 const p = escaped ? new RegExp(escaped, 'ig') :
TICKET_ID_PATTERN;
 return s.replace(p, ' ').replace(/\s+/g, ' ').trim();
}

function errCode(err) {
 if (!err) return '';
 if (typeof err === 'string') return err;
 if (err.code) return String(err.code);
 if (err.reason) return String(err.reason);
 return '';
}

async function forwardAvInline(meta, toGroupId, raw,
ticketId) {
 const tld = String(ticketId || '');
 if (!toGroupId || !raw) {
 const msg = 'bug.forwardAv reason=bad_input
ticketId=' + tld;
 meta.log('FallbackCV', msg);
 return { ok: false, reason: 'bad_input' };
 }

 const outsend = meta.getService('outsend');
 if (typeof outsend !== 'function') {
 const msg = 'bug.forwardAv reason=missingOutsend
```

```

ticketId=' + tId;
 meta.log('FallbackCV', msg);
 return { ok: false, reason: 'missingOutsend' };
}

if (typeof raw.downloadMedia !== 'function') {
 const msg = 'bug.forwardAv reason=noDownloadMedia
ticketId=' + tId;
 meta.log('FallbackCV', msg);
 return { ok: false, reason: 'noDownloadMedia' };
}

let media = null;
try {
 media = await raw.downloadMedia();
} catch (e) {
 media = null;
 const reason = e && e.message ? String(e.message) :
String(e);
 const msg = 'bug.forwardAv
reason=downloadMediaFail ticketId=' + tId + ' err=' +
reason;
 meta.log('FallbackCV', msg);
}

if (media) {
 const options = {};
 const t = rawType(raw);
 if (t === 'ptt' || t === 'voice' || t === 'audio')
options.sendAudioAsVoice = true;
 await outsend(toGroupId, media, options);
 return { ok: true };
}

meta.log('FallbackCV', 'bug.forwardAv
reason=downloadMediaEmpty ticketId=' + tId);
return { ok: false, reason: 'downloadFail' };
}

module.exports = {
 init: async function init(meta) {
 const tag = 'FallbackCV';
 const cfg = meta && meta.implConf ? meta.implConf :

```

```

{};

const enabled = cfgBool(cfg, 'enabled', 1);
if (!enabled) {
 meta.log(tag, 'disabled enabled=0');
 return { onMessage: async () => {}, onEvent: async ()
=> {} };
}

const controlGroupId = asGroupId(cfgStr(cfg,
'controlGroupId', ''));
if (!controlGroupId) {
 meta.log(tag, 'disabled missing controlGroupId');
 return { onMessage: async () => {}, onEvent: async ()
=> {} };
}

const ticketTtlMs = cfgInt(cfg, 'ticketTtlMs', 300000);
const sendPrefer = cfgStr(cfg, 'sendPrefer',
'sendout,outsend,send');

const ticketToChat = Object.create(null);

meta.log(tag, 'ready enabled=1 controlGroupId=' +
controlGroupId + ' sendPrefer=' + sendPrefer);

async function handleForward(ctx, raw) {
 const fromChatId = toChatId(ctx.chatId);
 const fromAuthorId = toChatId((ctx.sender &&
ctx.sender.id) || fromChatId);
 const senderPhone = (ctx && ctx.sender &&
ctx.sender.phone) ? String(ctx.sender.phone) : '';
 meta.log(tag, 'exec forward chatId=' + fromChatId + '
isGroup=' + (ctx && ctx.isGroup ? '1' : '0') + ' senderId=' +
fromAuthorId + ' senderPhone=' + senderPhone);
 if (!fromChatId || !fromAuthorId) return;

 const routeCandidate =
FallbackGroupRouterV1.routeGroupId(meta, cfg, ctx);
 const routed = asGroupId(routeCandidate);
 const routeGroupId = routed || controlGroupId;
 if (!routeGroupId) return;
 if (!routed) {

```

```

 meta.log(tag, 'warn.route.invalid target=' +
String(routeCandidate || '') + ' fallback=' +
controlGroupld);
 }

 const ticketRes = await TicketCoreV2.resolve(meta, cfg,
fromChatld, fromAuthorld, ticketTtlMs);
 if (!ticketRes || !ticketRes.ok || !ticketRes.ticketld) {
 meta.log(tag, 'bug.ticket.resolve_failed chatld=' +
fromChatld + ' senderld=' + fromAuthorld + ' reason=' +
String(ticketRes && ticketRes.reason ? ticketRes.reason :
'unknown'));
 return;
 }

 ticketToChat[ticketRes.ticketld] = fromChatld;
 meta.log(tag, 'exec ticket chatld=' + fromChatld + '
ticketld=' + ticketRes.ticketld + ' target=' + routeGroupld
+ ' service=' + sendPrefer);

 const ticketCtx = {
 controlGroupld: routeGroupld,
 ticketld: ticketRes.ticketld,
 seq: 0,
 fromPhone: (ctx.sender && ctx.sender.phone) ?
String(ctx.sender.phone) : '',
 fromName: (ctx.sender && ctx.sender.name) ?
String(ctx.sender.name) : '',
 };

 const t = rawType(raw);
 try {
 if (isAvType(t) && raw && raw.hasMedia) {
 const rr = await forwardAvInline(meta,
routeGroupld, raw, ticketRes.ticketld);
 if (!rr || rr.ok !== true) {
 meta.log(tag, 'bug.forward.av_failed ticketld=' +
ticketRes.ticketld + ' target=' + routeGroupld + ' reason='
+ String(rr && rr.reason ? rr.reason : 'unknown'));
 }
 return;
 }
 }

```

```

 if (raw && raw.hasMedia) {
 const rr = await
FallbackForwardMediaV1.handle(meta, cfg, ticketCtx, {
 raw: raw,
 text: ctx.text || "",
 });
 if (!rr || rr.ok !== true) {
 meta.log(tag, 'bug.forward.media_failed ticketId='
+ ticketRes.ticketId + ' target=' + routeGroupId + '
reason=' + String(rr && rr.reason ? rr.reason : 'unknown'));
 }
 return;
 }

```

```

 const rr = await FallbackForwardTextV1.handle(meta,
cfg, ticketCtx, {
 raw: raw,
 text: ctx.text || "",
 });
 if (!rr || rr.ok !== true) {
 meta.log(tag, 'bug.forward.text_failed ticketId=' +
ticketRes.ticketId + ' target=' + routeGroupId + ' reason='
+ String(rr && rr.reason ? rr.reason : 'unknown'));
 }
 } catch (e) {
 meta.log(tag, 'bug.forward.send_failed ticketId=' +
ticketRes.ticketId + ' target=' + routeGroupId + ' code=' +
errCode(e) + ' reason=' + String(e && e.message ?
e.message : e));
 }
}

```

```

async function handleReply(ctx, raw) {
 const ticketId = parseTicketId(ctx.text || "");
 if (!ticketId) return;

```

```

 const toCustomerChatId =
toChatId(ticketToChat[ticketId]);
 if (!toCustomerChatId) return;

```

```

 const body = stripTicket(ctx.text || "", ticketId);
 const t = rawType(raw);

```

```
 if (isAvType(t) && raw && raw.hasMedia) {
 await FallbackReplyAVV1.handle(meta, cfg,
toCustomerChatId, raw, body);
 return;
 }

 if (raw && raw.hasMedia) {
 await FallbackReplyMediaV1.handle(meta, cfg,
toCustomerChatId, raw, body);
 return;
 }

 if (body) {
 await FallbackReplyTextV1.handle(meta, cfg,
toCustomerChatId, body);
 }
 }

 async function onMessage(ctx) {
 try {
 const chatId = toChatId(ctx && ctx.chatId);
 if (!chatId) return;

 const raw = ctx && ctx.message ? ctx.message : null;
 const isGroup = !(ctx && ctx.isGroup);
 if (raw && raw.fromMe === true) return;

 if (!isGroup) {
 await handleForward(ctx, raw);
 return;
 }

 if (chatId !== controlGroupId) return;
 await handleReply(ctx, raw);
 } catch (e) {
 meta.log(tag, 'bug.onMessage err=' + String(e &&
e.message ? e.message : e));
 }
 }

 return { onMessage, onEvent: async () => {} };
},
};
```



## Files (7)

Connector.js

OneBot/Connector.js

+171

-22

FallbackCV.js

OneBot/modules/Core/Fallback/FallbackCV.js

+58

-20

FallbackForwardTextV1.js

OneBot/modules/Core/Fallback/FallbackForwardTextV1.js

+2

-0

LogV2.js

OneBot/modules/Core/Log/LogV2.js

+87

-8

OutboundGatewayV2.js

OneBot/modules/Core/OutboundGateway/OutboundGatewayV2.js

+13

-4

SharedTicketCoreV2.js

OneBot/modules/Core/Shared/SharedTicketCoreV2.js

+85

-11

LogCV.conf

OneData/bots/ONEBOT/config/modules/Core/Impl/LogCV.conf

+1

-0

Thought for 35s &gt;

Betul — itu memang “perangai default” Codex bila kita tak **lock format output** dari awal. Output dia sekarang bahaya sebab:

- Dia letak Path: ... + code **tanpa code block** → susah nak “Click Copy” dan senang terlebih paste benda bukan code.
- Kadang dia letak header macam ===== FILE ... ===== **dalam** file → boleh crash Node (kau dah kena sekali).
- Kalau dia ubah 7 file, tapi dia tak bagi 7 file dalam format yang boleh copy per file, memang kerja tak habis-habis.

Di bawah ni aku bagi **HEADER TETAP** (English) yang kau paste **setiap kali** sebelum arahan lain. Lepas tu aku bagi **arahan kerja fallback** (English) yang kau paste selepas header tu.

## 1) HEADER TETAP untuk Codex (paste ini dulu setiap kali)

PERMANENT OUTPUT RULES (DO NOT IGNORE)

- You MUST output "ONE FILE PER CODE BLOCK" so I can click Copy per file.
- You MUST output FULL FILE CONTENT for every file you changed.
- NO diffs, NO @@, NO +/- lines, NO partial snippets.
- Do NOT put "===== FILE =====" or "Path:" INSIDE the code block (that would beco
- You MAY write the file path on a plain text line ABOVE the code block, but the
- No prose between file blocks. No summary-only responses.

Exact format for EACH file:

Path: <repo relative path>  
```js

</> Plain text



For .conf files:

Path: <repo relative path>

</> conf



If you cannot print all changed files as full content in separate code blocks, OUTPUT NOTHING and redo the change in max 4 files.

> Ini yang kau maksud “header tetap”. Letak ini dulu, baru letak arahan task.

2) Arahan task (fallback ticket + reply + AV) – paste lepas header tetap di at
```text

TASK REQUIREMENTS (ONEBOT FALLBACK)

Current status:

- Commands (!ping, !status, !restart) work.
- Fallback forwards exist (text/file/doc works), but ticket behavior and reply be
  - 1) Ticket must be ONE per customer conversation window/album (no repeated new t
  - 2) Support forwarding: text, image, document/file, audio, video (inline where a
  - 3) Replies from control group back to customer MUST work:
    - Quote reply preferred (map ticket by quoted message / ticket context).
    - Also support command fallback reply if needed (e.g. !r <ticketId>).
  - 4) DO NOT expose ticketId to the customer. TicketId only inside control group.
  - 5) Avoid spam/loops (do not process fromMe, and do not retry endlessly without
  - 6) Keep architecture locked (4x4 fallback), zero hardcode IDs/text, ASCII-only.

Evidence:

- Fallback is executing tickets and attempts to send to control group, but send f

Do the following:

- A) Confirm ticket storage + reuse: same ticketId reused for same customer within
- B) Implement full media support: audio/video/ptt inline forwarding.
- C) Implement control-group reply-to-customer routing:
  - Quote reply resolves which customer chatId to reply to.
  - If no quote, allow !r <ticketId> <message> (or existing command style).
  - Never include ticketId in customer outbound.
- D) Add clear logs:
  - Fallback exec forward + ticketId + target
  - Forward send attempt + success/failure with full error string
  - Reply mapping resolution (quote/ticket)
- E) Max 4 files this round (you must pick minimal set that delivers A+B+C).

</> Code



### 3) Tentang output Codex yang kau paste tadi (yang ada “Path: OneBot/Connector.js” terus sambung code)

Jangan paste terus output macam tu ke file live. Dia bukan “copy block safe”.

✅ Apa kau buat: reply Codex dengan ayat pendek ni:

You violated the PERMANENT OUTPUT RULES.

Re-output ALL changed files again as ONE FILE PER CODE BLOCK with full content on

</> Plain text



#### 4) Penting: jangan bagi dia ubah 7 file sekali kalau kau nak ikut batch kecil

Kalau kau nak ikut rule "4–5 file per round", tambah 1 line dalam task:

"Max 4 files this round."

Kalau nak settle cepat sekali jalan, boleh biar >4 file, **tapi** dia tetap wajib output full content per file.

Kalau kau nak, paste saja 1 line ini dekat Codex sekarang (selepas header tetap):

- "Re-output the exact 7 files you already changed, one file per code block, full content only."

(Nota kecil: ada beberapa fail upload lama dalam chat kadang "expired" untuk aku buka semula. Kalau kau nak aku semak balik output Codex penuh, paste sahaja output penuh dia dalam chat — itu paling selamat.)

    ... Compare with Claude ▾

dia hantar dua file je berbanding tadi 7 file, connecter.js dan FallbackCV.js dah test masih sama issue macam tadi

Thought for 53s >

Ya, itu memang punca "tak selesai": **kalau Codex ubah 7 file tapi dia bagi 2 file saja**, kau apply separuh → **mismatch** dan simptom memang "sama macam tadi".

Sekarang kita jangan tukar file lagi dulu. Buat 2 benda ini untuk **confirm root cause tepat** (sebab log kau sebelum ni dah tunjuk: ticket ada, tapi **send ke control group fail**).

## 1) Confirm sebab send ke control group fail (paling biasa: group read-only / bot bukan admin)

Dalam `Connector.js` yang Codex bagi tadi, dia ada log ini sebelum `sendMessage` :

- `[connector] send.diagnostic ... isReadOnly=... announce=...`
- dan kalau read-only, dia akan keluar:
  - `[connector] send.block_hint ...`  
`bot_must_be_admin_or_group_must_allow_participants`

✅ **Buat test 1 kali:** DM bot "hi" (yang trigger fallback), kemudian **copy/paste** 15–30 line log sekitar masa fallback cuba send — khususnya yang ada:

- `[connector] send.diagnostic`
- `[connector] send.failed`
- `FallbackCV exec ticket`
- `FallbackCV bug.forward.*failed`

Kalau `announce=1` atau `isReadOnly=1`, settle tanpa code:

1. Buka WhatsApp group control 120363...@g.us
2. Group info → Permissions → **Send messages = All participants**
3. Pastikan account bot jadi **admin**

Bila ini betul, fallback text/media akan terus masuk group.

## 2) Jangan apply "2 file sahaja" kalau PR asal "Files (7)"

Kau perlu paksa Codex output balik **semua file yang dia ubah**, 1 file = 1 code block, supaya kau boleh click Copy.

Paste ini dekat Codex (ini "header tetap" versi paling pendek tapi keras):

### PERMANENT OUTPUT RULES:

- ONE FILE PER CODE BLOCK (so I can click Copy per file).
- FULL FILE CONTENT for EVERY changed file (if you changed 7, output 7).
- NO diffs, NO @@, NO +/-.
- Inside code blocks must be RAW FILE CONTENT ONLY (no "Path:" or "===== FILE" in
- If you cannot output all changed files, output NOTHING.

Now re-output ALL changed files from your last PR as separate code blocks, in thi

- 1) OneBot/Connector.js
- 2) OneBot/modules/Core/Fallback/FallbackCV.js
- 3) OneBot/modules/Core/Fallback/FallbackForwardTextV1.js
- 4) OneBot/modules/Core/Log/LogV2.js
- 5) OneBot/modules/Core/OutboundGateway/OutboundGatewayV2.js

&lt;/&gt; Plain text



## Tentang isu lain yang kau sebut (aku setuju, tapi kita lock step)

- “1 ticket untuk album/window, bukan berulang” → sekarang ticketId nampak sama (ok). Yang “spam” tu sebab send fail/retry + multiple media stubs. Lepas send ke group berjaya, baru kita kemaskan album collector.
- Audio/video tak ada → memang kena handler AV + send inline.
- Reply dari group ke customer tak jalan → sekarang mapping nampak in-memory ( ticketToChat ) dan reply guna ticket text; kau nak **quote-reply + hide ticketId from customer**. Ini round seterusnya selepas control group boleh terima forward.

Kalau kau paste 15–30 line log yang aku minta (yang ada `send.diagnostic/send.failed` ), aku boleh terus cakap:

- Ini confirm group permission/admin (no code) atau
- Ini bug chatId/lid/transport (baru perlu code fix).



Compare with Claude ▾

pening codex ni dia bagi script dia tak bagi tahu script name mana/tajuk dah tak tahu mana nak letak

## Thought for 18s >

Faham. Kalau Codex bagi code tapi **tak tulis nama file / path**, memang kau akan blur nak paste dekat mana.

Cara paling selamat: **paksa Codex output dengan “Path” untuk setiap file + 1 file = 1 code block**. Bila dia ikut, kau boleh click **Copy** setiap block dan paste terus ke file yang betul dalam `x:\. . . .`

## Ini “HEADER TETAP” yang kau paste dulu setiap kali (English)

**PERMANENT OUTPUT RULES (DO NOT IGNORE)**

- 1) You MUST label EVERY file with its exact repo path on a single line:  
Path: <repo relative path>
- 2) ONE FILE PER CODE BLOCK (so I can click Copy per file).
- 3) Inside the code block must be RAW FILE CONTENT ONLY.
  - Do NOT include "Path:" inside the code block.
  - Do NOT include "==== FILE =====" inside the code block.
  - Do NOT include summaries inside the code block.
- 4) FULL FILE CONTENT ONLY. No diffs, no @@, no +/-.
- 5) If you changed N files, you MUST output N labeled code blocks. If you cannot,  
Exact format per file:

Path: <repo relative path>

```
```js
```

</> Plain text



For .conf:

Path: <repo relative path>

</> conf



Lepas header tetap, letak arahan kerja (English)

Contoh (yang ringkas):

```
```text
```

Now re-output the FULL contents for ALL changed files from your last PR, each as

</> Code



## Kenapa "Path:" mesti di luar code block?

Sebab kalau Path: atau ===== FILE masuk dalam file .js, Node akan anggap itu code dan boleh crash (kau dah kena error Unexpected token '===' dulu).

## Kalau Codex dah bagi code tanpa nama file, apa kau buat?

Jangan try teka. Buat ini:

1. Reply dia dengan ayat pendek:

</> Plain text



2. Kalau dia tetap degil, guna PR "Files changed":

- Klik setiap file dalam list "Files (N)"
- Cari "View file / Raw" dan copy full file dari situ (ini confirm ada nama file).

## Tip supaya kau tak pening masa paste

Bila Codex output betul:

- Kau buka Notepad/VSCode file yang sama path dalam x:\...
- **Select all** → **paste** → **save**
- Next block.

Kalau kau nak, kau paste kat sini 1 screenshot output Codex yang tak ada path, aku boleh tulis satu ayat "reply template" paling pendek untuk paksa dia re-output ikut format ini.



Compare with Claude ▾

sama aku tak rasa repo ni scan fully apa masalah yang berlaku..mungkin ada conflict dan lain2...penat lah macam ni buat kerja main2 codex dan kau pon sama masalah dekat setahun tak siap2 bot aku

Thought for 1m 54s >

Aku faham kenapa kau rasa "main-main": bila Codex **tak scan penuh**, lepas tu dia **bagi separuh output** (2 file dari 7), kau apply separuh → memang confirm jadi conflict/mismatch dan masalah ulang.

Sekarang berdasarkan log kau yang terakhir, **fallback sebenarnya dah buat ticket** ( exec ticket ... ticketId=... ) tapi **send ke control group gagal** ( transport.send\_failed ,



`media_failed` , `text_failed` ). Itu yang buat nampak macam "fallback tak ada" (sebab tak sampai group). Jadi sebelum kita ke "reply mapping / AV / anti-spam", **kita kena settle dulu bot boleh send ke control group.**

## 1) Paling kemungkinan besar (tanpa code)

Control group tu mungkin **announcement / only admins can send**, dan bot account **bukan admin**. Symptom memang sama: boleh baca group & execute command, tapi bila send ke group → fail.

✅ Buat check cepat dekat WhatsApp control group:

- Group info → Group permissions → **Send messages = All participants**
- Pastikan nombor bot (account WhatsApp yang login) jadi **Admin**

Kalau ini betul, banyak isu terus settle tanpa tukar code.

## 2) "Header tetap" yang kau cakap — ya, WAJIB letak dulu

Ini yang kau paste **setiap kali** sebelum bagi arahan apa-apa pada Codex. Ini kunci supaya dia tak ulang perangai "tabur" dan "bagi 2 file".

### PERMANENT HEADER (English) – paste ini dulu

PERMANENT RULES (MUST FOLLOW EVERY TIME)

#### A) FULL REPO SCAN REQUIRED

- You **MUST** scan the full repo before changes and PRINT:
  - scanned roots
  - `git rev-parse --short HEAD`
  - `git status --porcelain`
  - list of ACTIVE pointers (Hub.conf -> impl -> implConf) you relied on

#### B) OUTPUT FORMAT (MANUAL APPLY TO LIVE X:\)

- You **MUST** output FULL FILE CONTENT for EVERY file you changed.
- ONE FILE PER CODE BLOCK (so I can click Copy on each).
- NO diffs (no @@, no +/-, no patch markers).
- Inside code blocks must be RAW FILE CONTENT ONLY.
  - Do NOT put "Path:" or "==== FILE" inside the code block.
- You **MAY** write the file path on a plain text line ABOVE the code block.

Exact format for EACH file:

Path: <repo relative path>

&lt;/&gt; Plain text



For .conf:

Path: <repo relative path>

&lt;/&gt; conf



### C) NO PARTIAL SETS

- If you changed N files, you MUST output N labeled code blocks.
- If you cannot output all, OUTPUT NOTHING and redo in MAX 4 files.

---

## 3) Lepas header, bagi task yang tepat (English) – fokus “send to control group  
Ini arahan kerja yang kau paste **\*\*selepas\*\*** header tetap di atas:

```text

TASK (DO THIS NEXT)

Current problem:

- Fallback creates ticket and attempts to forward to controlId=1203634026088
- But sending to the control group fails (transport.send_failed / media_failed /
- Commands work, so inbound pipeline is OK.

Goal:

- 1) PROVE why sending to the control group fails (read-only/announce group, bot no
- 2) Make the failure reason explicit in logs (full error text, not truncated).
- 3) Do NOT bypass security. If group is read-only, log a clear line instructing "m
- 4) Do NOT change more than 4 files.

Required changes:

- Add a pre-send diagnostic for the target group chatId:
 - getChatById(controlGroupId) and log: isGroup, isReadOnly, announce (if availa
- When sendMessage fails, log the FULL error string (message + first stack line +
- Keep existing fallback/ticket behavior unchanged besides clearer diagnostics.

</> Code



Dengan ini, kalau dia ubah 3 file, dia mesti output 3 code blocks — bukan “summary”.

4) Tentang requirement kau (aku lock supaya tak hilang)

Lepas "send to control group" settle, barulah next round (max 4 file) untuk:


- 1 ticket untuk album/window (bukan spam/retry), "album collector"
- Reply dari group ke customer:
 - Quote-reply map ticket (ambil quoted msg yang ada ticketId)
 - Support text/doc/image/video/audio
 - Jangan bocor ticketId dekat customer
- Audio/Video fallback (inline)

Tapi kalau send ke control group masih fail, semua benda atas memang susah nak validate sebab "ticket card" tak sampai group.

Kalau kau nak paling cepat sekarang: buat check WhatsApp group permissions/admin tadi. Kalau lepas tukar permission, fallback terus masuk group → confirm root cause tanpa coding.

Kalau masih fail, guna header tetap + task prompt atas untuk paksa Codex bagi **full scripts siap** dan log diagnostic yang jelas (bukan "reason=unknown").

📄 👍 💬 ↺ ⋮ Compare with Claude ▾

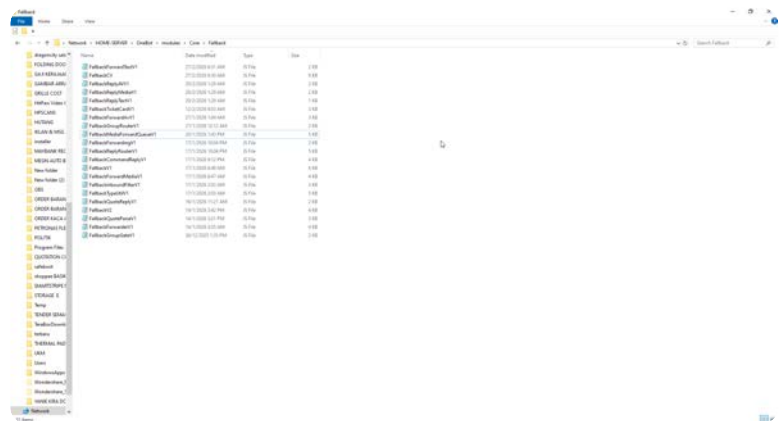

sama ni kenapa dia edit file sama, sedangkan masalah sekarang ni media/audio, dan fallback reply, punya banyak file dalam fallback folder tu media dia taknak pulak edit, codex ni tak check semua file ni dia check ikut apa kau cakap je kot

Thought for 7s >

Ya — kau nampak betul. Codex sekarang **asik edit file "frontend"** (`FallbackCV.js` , `FallbackForwardTextV1.js`) sebab dia ikut apa yang kita sebut, tapi dia **tak traverse/scan semua handler** dalam folder tu (media/AV/reply/quote-reply), sedangkan isu kau sekarang memang:

1. **Forward media/image/doc gagal** (`bug.forward.media_failed` + `transport.send_failed`)
2. **Audio/video fallback tak ada**
3. **Reply dari control group ke customer tak berfungsi** (quote reply / ticket mapping / hide ticketId)
4. **Ticket bundling album/window** (1 ticket untuk batch) + anti spam

So ya: kalau dia tak scan semua fallback files, dia akan main tukar 2 file tu je dan masalah tak bergerak.

Apa yang patut berlaku (cara kerja betul untuk Codex)

Untuk fallback, dia wajib scan sekurang-kurangnya fail-fail ini (sebab ini yang handle benda kau sebut):

- `FallbackForwardMediaV1.js`
- `FallbackForwardAVV1.js` (audio/video/ptt)
- `FallbackReplyMediaV1.js`
- `FallbackReplyAVV1.js` / `FallbackReplyAVV1.js` (audio/video reply)
- `FallbackQuoteReplyV1.js` + `FallbackQuoteParseV1.js` (quote reply mapping)
- `FallbackMediaForwardQueueV1.js` (kalau ada queue/album)
- `FallbackTicketCardV1.js` (card format & ticket display)
- `SharedTicketCoreV2.js` (ticket store + TTL)
- (dan baru `FallbackCV.js` sebagai router)

Kalau dia tak baca file-file ni, memang "fix" dia akan lari.

Sekarang: 2 benda yang perlu kau buat

A) Stop bagi Codex ruang "edit ikut suka"

Kau paksa dia dengan **scan checklist + output rule header** (yang kau dah minta).

Copy-paste prompt ni dekat Codex (English). Ini versi yang *memaksa* dia scan semua file fallback yang relevan, bukan 2 file:

PERMANENT OUTPUT RULES (MUST FOLLOW)

- ONE FILE PER CODE BLOCK.
- FULL FILE CONTENT for EVERY changed file.
- NO diffs, NO @@, NO +/-.
- Code blocks contain RAW FILE CONTENT ONLY (no "Path:" inside the block, no "===
- If you change N files you MUST output N code blocks. If you cannot, output NOTH

TASK (YOU MUST SCAN THESE FILES FIRST)

Before editing anything, open and read these files and list their paths + key fun

- OneBot/modules/Core/Fallback/FallbackCV.js
- OneBot/modules/Core/Fallback/FallbackForwardTextV1.js
- OneBot/modules/Core/Fallback/FallbackForwardMediaV1.js
- OneBot/modules/Core/Fallback/FallbackForwardAVV1.js
- OneBot/modules/Core/Fallback/FallbackReplyTextV1.js
- OneBot/modules/Core/Fallback/FallbackReplyMediaV1.js
- OneBot/modules/Core/Fallback/FallbackReplyAVV1.js
- OneBot/modules/Core/Fallback/FallbackQuoteReplyV1.js
- OneBot/modules/Core/Fallback/FallbackQuoteParseV1.js
- OneBot/modules/Core/Fallback/FallbackMediaForwardQueueV1.js
- OneBot/modules/Core/Fallback/FallbackTicketCardV1.js
- OneBot/modules/Core/Shared/SharedTicketCoreV2.js

GOALS

- 1) Forward media/doc/image MUST succeed to controlId and log exact send fail
- 2) Add/enable audio+video fallback forwarding (inline for ~15MB videos; do not fo
- 3) Implement reply from control group to customer using QUOTE REPLY mapping:
 - quote reply resolves ticket/customer chat
 - support text + image + doc + video + audio
 - do NOT expose ticketId to customer messages
- 4) Anti-spam: one ticket per album/window and no repeated retries.

MAX 4 FILES THIS ROUND. Choose the minimal set that unlocks (1) media send succes

OUTPUT

Return ONLY the file blocks, each preceded by:

Path: <repo path>

and then a code block with full content.

</> Plain text



Kenapa prompt ni penting: dia "lock" bahawa dia mesti baca fail-fail tu dulu dan tak boleh pura-pura fix dengan edit FallbackCV.js sahaja.

B) Kau kena bagi "evidence file" yang tepat untuk media fail

Dari log kau sebelum ni: `transport.send_failed` dan reason kadang kosong/ `t` . Ini biasanya dari `Connector.js sendDirect sanitize options + whatsapp-web.js error string`.

Sekarang, untuk terus nampak punca media fail (admin-only group / too big / mime / downloadMedia fail), kau perlukan log error yang penuh. Kalau connector dah ada `send.failed chatId=... err=...` , bagus — tapi kalau masih kosong, confirm send error tak di-"stringify" betul.

Jawapan direct pada soalan kau

"codex ni tak check semua file ni dia check ikut apa kau cakap je kot"

Ya. Tanpa arahan scan-checklist macam atas, Codex memang cenderung:

- cari "where log shows tag FallbackCV"
- edit file yang paling dekat dengan log tu
- tak buka handler lain dalam folder

Sebab itu kita paksa dia **scan list**.

Kalau kau nak aku bantu audit lebih tepat, aku perlukan **isi sebenar** (full content) beberapa file fallback yang kau tunjuk dalam folder tu — tapi aku tak boleh browse `X:\` secara direct. Cara paling cepat:

- zip folder `X:\OneBot\modules\Core\Fallback` dan upload di sini, atau
- copy/paste 2 fail paling penting dulu:
 1. `FallbackForwardMediaV1.js`
 2. `FallbackReplyMediaV1.js`

Sebab sekarang masalah utama kau memang media forward + media reply.

    ... Compare with Claude 

cuba kau tgk ni apa dia buat, kenapa dia bagi senarai macam ni 2 script je bagi penuh selain tu tak ada dia bagi senarai je Path:
`OneBot/modules/Core/Fallback/FallbackCV.js`

```
'use strict';
```

```
const util = require('util');
```

```
const FallbackGroupRouterV1 =  
require('./FallbackGroupRouterV1');  
const FallbackForwardTextV1 =  
require('./FallbackForwardTextV1');  
const FallbackForwardMediaV1 =  
require('./FallbackForwardMediaV1');  
const FallbackReplyTextV1 =  
require('./FallbackReplyTextV1');  
const FallbackReplyMediaV1 =  
require('./FallbackReplyMediaV1');  
const FallbackReplyAVV1 = require('./FallbackReplyAVV1');  
const TicketCoreV2 =  
require('../Shared/SharedTicketCoreV2');
```

```
function cfgStr(cfg, key, defVal) {  
  if (!cfg || typeof cfg !== 'object') return defVal;  
  const v = cfg[key];  
  if (v === undefined || v === null) return defVal;  
  const s = String(v).trim();  
  return s.length ? s : defVal;  
}
```

```
function cfgInt(cfg, key, defVal) {  
  const n = parseInt(cfgStr(cfg, key, ''), 10);  
  return Number.isFinite(n) ? n : defVal;  
}
```

```
function cfgBool(cfg, key, defVal) {  
  const s = cfgStr(cfg, key, '');  
  if (!s) return !!defVal;  
  const t = s.toLowerCase();  
  return t === '1' || t === 'true' || t === 'yes' || t === 'on';  
}
```

```
function toChatId(v) {  
  return String(v || '').trim();  
}
```

```
function asGroupId(v) {
```

```
const id = toChatId(v);
return id && id.endsWith('@g.us') ? id : '';
}
```

```
function rawType(raw) {
  if (!raw) return '';
  if (typeof raw.type === 'string') return raw.type;
  if (raw._data && typeof raw._data.type === 'string')
  return raw._data.type;
  return '';
}
```

```
function isAvType(t) {
  const x = String(t || '').toLowerCase();
  return x === 'audio' || x === 'video' || x === 'ptt' || x
  === 'voice';
}
```

// Ticket id format spec from SharedTicketCoreV2: YYMMT
+ 7 digits.

// Example: 2601T0000001

```
const TICKET_ID_PATTERN = /\b\d{4}T\d{7}\b/;
```

```
function parseTicketId(text) {
  const s = String(text || '');
  const m = s.match(TICKET_ID_PATTERN);
  return m ? m[0] : '';
}
```

```
function stripTicket(text, ticketId) {
  const s = String(text || '').trim();
  if (!s) return s;
  const escaped = String(ticketId || '').replace(/[\.*+?^$()|
  [\]\]/g, '\\$&');
  const p = escaped ? new RegExp(escaped, 'ig') :
  TICKET_ID_PATTERN;
  return s.replace(p, ' ').replace(/\s+/g, ' ').trim();
}
```

```
function errCode(err) {
  if (!err) return '';
  if (typeof err === 'string') return err;
  if (err.code) return String(err.code);
}
```



```
if (err.reason) return String(err.reason);
return "";
}

function errDetail(err) {
  try {
    if (!err) return "";
    if (typeof err === 'string') return err;
    const msg = err.message ? String(err.message) : "";
    const stack = err.stack ? String(err.stack).split("\n")[0] : "";
    const obj = util.inspect(err, { depth: 3, breakLength: 140,
maxArrayLength: 20 });
    return [msg, stack, obj].filter(Boolean).join(' | ');
  } catch (_) {
    return String(err || "");
  }
}

function mediaSizeBytes(raw) {
  const d = raw && raw._data ? raw._data : {};
  const n = Number(d.size || d.fileSize || 0);
  return Number.isFinite(n) && n > 0 ? n : 0;
}

async function forwardAvInline(meta, cfg, toGroupId, raw,
ticketId) {
  const tld = String(ticketId || "");
  if (!toGroupId || !raw) {
    const msg = 'bug.forwardAv reason=bad_input
ticketId=' + tld;
    meta.log('FallbackCV', msg);
    return { ok: false, reason: 'bad_input' };
  }

  const outsend = meta.getService('outsend');
  if (typeof outsend !== 'function') {
    const msg = 'bug.forwardAv reason=missingOutsend
ticketId=' + tld;
    meta.log('FallbackCV', msg);
    return { ok: false, reason: 'missingOutsend' };
  }

  if (typeof raw.downloadMedia !== 'function') {
```

```
const msg = 'bug.forwardAv reason=noDownloadMedia  
ticketId=' + tld;  
meta.log('FallbackCV', msg);  
return { ok: false, reason: 'noDownloadMedia' };  
}
```

```
const t = rawType(raw);  
const maxInlineMb = cfgInt(cfg, 'forwardAvInlineMaxMb',  
15);  
const maxInlineBytes = Math.max(1, maxInlineMb) * 1024  
* 1024;  
const sizeBytes = mediaSizeBytes(raw);
```

```
if (sizeBytes > 0 && sizeBytes > maxInlineBytes) {  
  meta.log('FallbackCV', 'warn.forwardAv  
size_exceeds_inline ticketId=' + tld + ' sizeBytes=' +  
String(sizeBytes) + ' maxInlineBytes=' +  
String(maxInlineBytes));  
  if (typeof raw.forward === 'function') {  
    try {  
      await raw.forward(toGroupId);  
      return { ok: true, mode: 'raw.forward' };  
    } catch (e) {  
      const detail = errDetail(e);  
      meta.log('FallbackCV', 'bug.forwardAv  
reason=rawForwardFail ticketId=' + tld + ' err=' + detail);  
    }  
  }  
}
```

```
let media = null;  
try {  
  media = await raw.downloadMedia();  
} catch (e) {  
  media = null;  
  const detail = errDetail(e);  
  const msg = 'bug.forwardAv  
reason=downloadMediaFail ticketId=' + tld + ' err=' +  
detail;  
  meta.log('FallbackCV', msg);  
}
```

```
if (media) {
```

```

const options = {};
if (t === 'ptt' || t === 'voice' || t === 'audio')
options.sendAudioAsVoice = true;
try {
  await outsend(toGroupId, media, options);
  return { ok: true };
} catch (e) {
  const detail = errDetail(e);
  meta.log('FallbackCV', 'bug.forwardAv
reason=outsendFail ticketId=' + tId + ' err=' + detail);
  return { ok: false, reason: 'outsendFail', detail: detail };
}
}

if (typeof raw.forward === 'function') {
  try {
    await raw.forward(toGroupId);
    return { ok: true, mode: 'raw.forward' };
  } catch (e) {
    const detail = errDetail(e);
    meta.log('FallbackCV', 'bug.forwardAv
reason=rawForwardFail ticketId=' + tId + ' err=' + detail);
    return { ok: false, reason: 'rawForwardFail', detail: detail
};
  }
}

meta.log('FallbackCV', 'bug.forwardAv
reason=downloadMediaEmpty ticketId=' + tId);
return { ok: false, reason: 'downloadFail' };
}

module.exports = {
  init: async function init(meta) {
    const tag = 'FallbackCV';
    const cfg = meta && meta.implConf ? meta.implConf :
{};

    const enabled = cfgBool(cfg, 'enabled', 1);
    if (!enabled) {
      meta.log(tag, 'disabled enabled=0');
      return { onMessage: async () => {}, onEvent: async ()
=> {} };

```

```

    }

    const controlGroupId = asGroupId(cfgStr(cfg,
'controlGroupId', ''));
    if (!controlGroupId) {
        meta.log(tag, 'disabled missing controlGroupId');
        return { onMessage: async () => {}, onEvent: async ()
=> {} };
    }

    const ticketTtlMs = cfgInt(cfg, 'ticketTtlMs', 300000);
    const sendPrefer = cfgStr(cfg, 'sendPrefer',
'sendout,outsend,send');

    const ticketToChat = Object.create(null);

    meta.log(tag, 'ready enabled=1 controlGroupId=' +
controlGroupId + ' sendPrefer=' + sendPrefer);

    async function handleForward(ctx, raw) {
        const fromChatId = toChatId(ctx.chatId);
        const fromAuthorId = toChatId((ctx.sender &&
ctx.sender.id) || fromChatId);
        const senderPhone = (ctx && ctx.sender &&
ctx.sender.phone) ? String(ctx.sender.phone) : '';
        meta.log(tag, 'exec forward chatId=' + fromChatId + '
isGroup=' + (ctx && ctx.isGroup ? '1' : '0') + ' senderId=' +
fromAuthorId + ' senderPhone=' + senderPhone);
        if (!fromChatId || !fromAuthorId) return;

        const routeCandidate =
FallbackGroupRouterV1.routeGroupId(meta, cfg, ctx);
        const routed = asGroupId(routeCandidate);
        const routeGroupId = routed || controlGroupId;
        if (!routeGroupId) return;
        if (!routed) {
            meta.log(tag, 'warn.route.invalid target=' +
String(routeCandidate || '') + ' fallback=' +
controlGroupId);
        }

        const ticketRes = await TicketCoreV2.resolve(meta, cfg,
fromChatId, fromAuthorId, ticketTtlMs);

```

```

    if (!ticketRes || !ticketRes.ok || !ticketRes.ticketId) {
        meta.log(tag, 'bug.ticket.resolve_failed chatId=' +
            fromChatId + ' senderId=' + fromAuthorId + ' reason=' +
            String(ticketRes && ticketRes.reason ? ticketRes.reason :
                'unknown'));
        return;
    }

```

```

    ticketToChat[ticketRes.ticketId] = fromChatId;
    meta.log(tag, 'exec ticket chatId=' + fromChatId + '
        ticketId=' + ticketRes.ticketId + ' target=' + routeGroupId
        + ' service=' + sendPrefer);

```

```

    const ticketCtx = {
        controlGroupId: routeGroupId,
        ticketId: ticketRes.ticketId,
        seq: 0,
        fromPhone: (ctx.sender && ctx.sender.phone) ?
            String(ctx.sender.phone) : "",
        fromName: (ctx.sender && ctx.sender.name) ?
            String(ctx.sender.name) : "",
    };

```

```

    const t = rawType(raw);
    try {
        if (isAvType(t) && raw && raw.hasMedia) {
            const rr = await forwardAvInline(meta, cfg,
                routeGroupId, raw, ticketRes.ticketId);
            if (!rr || rr.ok !== true) {
                meta.log(tag, 'bug.forward.av_failed ticketId=' +
                    ticketRes.ticketId + ' target=' + routeGroupId + ' reason=' +
                    String(rr && rr.reason ? rr.reason : 'unknown') + '
                    detail=' + String(rr && rr.detail ? rr.detail : ''));
            }
            return;
        }
    }

```

```

    if (raw && raw.hasMedia) {
        const rr = await
            FallbackForwardMediaV1.handle(meta, cfg, ticketCtx, {
                raw: raw,
                text: ctx.text || "",
            });
    }

```

```

    if (!rr || rr.ok !== true) {
      meta.log(tag, 'bug.forward.media_failed ticketId='
+ ticketRes.ticketId + ' target=' + routeGroupId + '
reason=' + String(rr && rr.reason ? rr.reason : 'unknown')
+ ' detail=' + String(rr && rr.detail ? rr.detail : ''));
    }
    return;
  }

```

```

    const rr = await FallbackForwardTextV1.handle(meta,
cfg, ticketCtx, {
  raw: raw,
  text: ctx.text || '',
});
    if (!rr || rr.ok !== true) {
      meta.log(tag, 'bug.forward.text_failed ticketId=' +
ticketRes.ticketId + ' target=' + routeGroupId + ' reason='
+ String(rr && rr.reason ? rr.reason : 'unknown'));
    }
  } catch (e) {
    meta.log(tag, 'bug.forward.send_failed ticketId=' +
ticketRes.ticketId + ' target=' + routeGroupId + ' code=' +
errCode(e) + ' reason=' + String(e && e.message ?
e.message : e) + ' detail=' + errDetail(e));
  }
}

```

```

async function handleReply(ctx, raw) {
  const ticketId = parseTicketId(ctx.text || '');
  if (!ticketId) return;

```

```

    const toCustomerChatId =
toChatId(ticketToChat[ticketId]);
    if (!toCustomerChatId) return;

```

```

    const body = stripTicket(ctx.text || '', ticketId);
    const t = rawType(raw);

```

```

    if (isAvType(t) && raw && raw.hasMedia) {
      await FallbackReplyAVV1.handle(meta, cfg,
toCustomerChatId, raw, body);
      return;
    }

```

```

    if (raw && raw.hasMedia) {
      await FallbackReplyMediaV1.handle(meta, cfg,
toCustomerChatId, raw, body);
      return;
    }

```

```

    if (body) {
      await FallbackReplyTextV1.handle(meta, cfg,
toCustomerChatId, body);
    }
  }

```

```

async function onMessage(ctx) {
  try {
    const chatId = toChatId(ctx && ctx.chatId);
    if (!chatId) return;

    const raw = ctx && ctx.message ? ctx.message : null;
    const isGroup = !(ctx && ctx.isGroup);
    if (raw && raw.fromMe === true) return;

    if (!isGroup) {
      await handleForward(ctx, raw);
      return;
    }

    if (chatId !== controlGroupId) return;
    await handleReply(ctx, raw);
  } catch (e) {
    meta.log(tag, 'bug.onMessage err=' + String(e &&
e.message ? e.message : e));
  }
}

```

```

  return { onMessage, onEvent: async () => {} };
},
};

```

Path:

OneBot/modules/Core/Fallback/FallbackForwardMediaV1.js

'use strict';

```
const util = require('util');

const SharedLog = require('../Shared/SharedLogV1');
const SharedSafeSend =
require('../Shared/SharedSafeSendV1');
const TypeUtil = require('../FallbackTypeUtilV1');

function createLogger(meta, cfg) {
  const make = SharedLog.createLogger ||
SharedLog.create;
  return make('FallbackForwardMediaV1', meta, {
    debug: !!cfg.debug,
    trace: !!cfg.trace,
  });
}

function errDetail(err) {
  try {
    if (!err) return '';
    if (typeof err === 'string') return err;
    const msg = err.message ? String(err.message) : '';
    const stack = err.stack ? String(err.stack).split('\n')[0] : '';
    const obj = util.inspect(err, { depth: 3, breakLength: 140,
maxArrayLength: 20 });
    return [msg, stack, obj].filter(Boolean).join(' | ');
  } catch (_) {
    return String(err || '');
  }
}

function getFileName(raw) {
  const d = (raw && raw._data) || {};
  return d.filename || d.fileName || '';
}

async function tryDownloadMedia(raw, log) {
  if (!raw || typeof raw.downloadMedia !== 'function')
return { ok: false, reason: 'noDownloadMedia' };
  try {
    const m = await raw.downloadMedia();
    if (!m) return { ok: false, reason: 'downloadNull' };
    return { ok: true, media: m };
  }
```



```
    } catch (e) {  
      const detail = errDetail(e);  
      log.warn('downloadMedia failed ' + detail);  
      return { ok: false, reason: 'downloadFail', detail: detail };  
    }  
  }  
}
```

```
async function handle(meta, cfg, ticketCtx, ctx) {  
  const log = createLogger(meta, cfg);  
  
  // Validate controlGroupId  
  if (!ticketCtx || !ticketCtx.controlGroupId) {  
    log.error('CRITICAL: missing ticketCtx.controlGroupId -  
cannot forward media');  
    return { ok: false, reason: 'missingControlGroupId' };  
  }
```

```
  const outsend = meta.getService('outsend');  
  if (typeof outsend !== 'function') {  
    log.error('missing outsend service');  
    return { ok: false, reason: 'missingOutsend' };  
  }
```

```
  const raw = ctx.raw;  
  if (!raw || !raw.hasMedia) return { ok: true, skipped: true,  
reason: 'noMedia' };
```

```
  const t = TypeUtil.getRawType(raw);  
  const fname = getFileName(raw);
```

```
  // Minimal caption: do not repeat ticket lines on every  
attachment  
  const captionParts = [];  
  if (t) captionParts.push('Type: ' + t);  
  if (fname) captionParts.push('File: ' + fname);  
  const caption = TypeUtil.cleanText(captionParts.join('\n'),  
cfg.forwardMediaCaptionMaxLen || 900);
```

```
  const dl = await tryDownloadMedia(raw, log);  
  if (dl.ok) {  
    log.trace( media downloaded, forwarding to  
controlGroup=${ticketCtx.controlGroupId} );
```

```
const sendOpt = { tag: 'fallback.in.media' };
if (caption) sendOpt.caption = caption;

try {
  const r = await SharedSafeSend.send(log, outsend,
ticketCtx.controlGroupId, dl.media, sendOpt);
  if (!r.ok) {
    log.error( send media failed to
controlGroup=${ticketCtx.controlGroupId}
reason=${r.reason || ''} );
  } else {
    log.trace( media forwarded successfully to
controlGroup=${ticketCtx.controlGroupId} );
  }
  return r;
} catch (e) {
  const detail = errDetail(e);
  log.error( send media exception
controlGroup=${ticketCtx.controlGroupId}
err=${detail} );
  return { ok: false, reason: 'sendException', detail: detail
};
}
}

// fallback: forward raw without caption
log.trace( media download failed, trying raw.forward
to controlGroup=${ticketCtx.controlGroupId} );
if (typeof raw.forward === 'function') {
  try {
    await raw.forward(ticketCtx.controlGroupId);
    log.trace( raw.forward success to
controlGroup=${ticketCtx.controlGroupId} );
    return { ok: true, mode: 'forward' };
  } catch (e) {
    const detail = errDetail(e);
    log.warn( raw.forward failed to
controlGroup=${ticketCtx.controlGroupId}
err=${detail} );
    return { ok: false, reason: 'forwardFail', detail: detail };
  }
}
```

```
log.error( no forward method available for media to  
controlGroup=${ticketCtx.controlGroupId} );  
return { ok: false, reason: 'noForward' };  
}
```

```
module.exports = { handle };
```

Files (8)

Connector.js

OneBot/Connector.js

+171

-22

FallbackCV.js

OneBot/modules/Core/Fallback/FallbackCV.js

+120

-26

FallbackForwardMediaV1.js

OneBot/modules/Core/Fallback/FallbackForwardMediaV1.js

s

+34

-10

FallbackForwardTextV1.js

OneBot/modules/Core/Fallback/FallbackForwardTextV1.js

+2

-0

LogV2.js

OneBot/modules/Core/Log/LogV2.js

+87

-8

OutboundGatewayV2.js

OneBot/modules/Core/OutboundGateway/OutboundGatewayV2.js

+13

-4

SharedTicketCoreV2.js

OneBot/modules/Core/Shared/SharedTicketCoreV2.js

+85

-11

LogCV.conf

OneData/bots/ONEBOT/config/modules/Core/Impl/LogCV
.conf

+1

-0

Thought for 54s >

Ya, aku nampak apa dia buat — **dia cuma bagi penuh 2 file** (`FallbackCV.js` + `FallbackForwardMediaV1.js`), lepas tu **dia hanya list "Files (8)"** tanpa output penuh baki 6 file. Ini **bukan scan/repair complete**, dan kalau kau apply separuh-separuh memang akan jadi conflict / simptom sama.

Kenapa jadi macam ni

Codex **tak ikut "output rules"** yang kita nak. Dia buat PR/commit yang ubah 8 file, tapi bila reply dekat chat dia **tak "dump" semua file**, dia bagi sikit + list je.

Paling penting sekarang

Jangan apply output separuh. Kau kena paksa dia **RE-OUTPUT sahaja** (bukan modify lagi) untuk **SEMUA 8 file** dalam format yang kau boleh **click Copy**.

Prompt "header tetap" + arahan re-output (English)

Paste ini dekat Codex. Ini memang untuk elak dia ulang perangai sama.

PERMANENT OUTPUT RULES (MUST FOLLOW)

- ONE FILE PER CODE BLOCK (so I can click Copy per file).
- FULL FILE CONTENT for EVERY changed file (if you changed 8 files, output 8 bloc
- NO diffs, NO @@, NO +/-, NO patch markers.
- Inside code blocks MUST be RAW FILE CONTENT ONLY.
 - Do NOT put "Path:" inside the code block.
 - Do NOT put "===== FILE" inside the code block.
- Do NOT output "Files (N)" lists or summaries. Code blocks only.

Exact format for EACH file:

Path: <repo relative path>

</> Plain text



For .conf:

Path: <repo relative path>

</> conf



NOW DO THIS (RE-OUTPUT ONLY, NO NEW CHANGES):

Re-output the FULL final contents for ALL 8 files from your last change set, as 8 separate code blocks, in this exact order:

1. OneBot/Connector.js
2. OneBot/modules/Core/Fallback/FallbackCV.js
3. OneBot/modules/Core/Fallback/FallbackForwardMediaV1.js
4. OneBot/modules/Core/Fallback/FallbackForwardTextV1.js
5. OneBot/modules/Core/Log/LogV2.js
6. OneBot/modules/Core/OutboundGateway/OutboundGatewayV2.js
7. OneBot/modules/Core/Shared/SharedTicketCoreV2.js
8. OneData/bots/ONEBOT/config/modules/Core/Impl/LogCV.conf

If you cannot output all 8 full files, OUTPUT NOTHING.

Cara copy yang betul (supaya tak rosakkan file)

- ****Line `Path: ...` jangan masuk file.****
- Dalam setiap block, copy ****dalam code block sahaja**** → paste ke file yang path

Kenapa dia asyik edit file yang sama?

Sebab dia kejar log yang keluar (`FallbackCV bug.forward...`) lalu dia edit “rout Untuk isu kau (audio/video + reply + quote reply + anti-spam), dia memang ****WAJIB**

Kalau lepas kau paste prompt atas dia masih degil (tak bagi 8 code blocks), cara

- Jangan tanya lagi – ****suruh dia “re-output only”**** sampai dia ikut format, atau
- Ambil terus full file dari PR “Files changed” → “View file/Raw” (copy full file

</> Code



Kalau kau nak, lepas dia berjaya re-output 8 blocks tu, paste kat sini ****senarai**

    ... Compare with Claude 

ohh baru aku tahu, rupanya ada limit ni msg untuk audio dan video ni, kalau sekarang boleh msg takkan buat limit pulak msg audio dan video mana boleh macam ni

Thought for 35s >

Betul—audio/video memang ada “limit”, tapi kena beza 2 benda:

1. Limit WhatsApp sendiri (platform)

Ini memang wujud dan **tak boleh kita bypass**. Kalau WhatsApp reject (size/format/permissions), bot memang tak boleh “paksa”.

2. Limit yang Codex letak dalam code (artificial / safety)

Contoh `forwardAvInlineMaxMb=15` tu bukan WhatsApp limit, itu limit yang dia cipta untuk elak download base64 besar / memory blow. Yang ini kita boleh buang / jadikan config.

Kau punya requirement memang jelas: **jangan buat limit baru untuk audio/video**, dan **video ~15MB mesti hantar inline (bukan document)**.

Cara betul (tanpa “limit” palsu)

Untuk AV (audio/video/ptt):

Strategy paling selamat & paling “no artificial limit”:

1. Try `raw.forward(toGroupId)` dulu

- Ini forward media asal (tak perlu download/reupload).
- Kalau WhatsApp boleh forward, dia akan jalan walaupun file besar (selagi WhatsApp benarkan).

2. Kalau `raw.forward` tak ada / fail → baru **downloadMedia + outsend** (inline).

3. Kalau WhatsApp still reject → log error full, tapi itu **platform limit**, bukan bot limit.

Dengan cara ni:

- Kita **tak set maxMB** untuk block.
- Kita hanya fail bila WhatsApp memang tak bagi.

Kenapa Codex letak 15MB?

Sebab `downloadMedia()` akan convert ke base64 + re-upload. Video besar boleh:

- makan RAM tinggi
- lambat / timeout
- crash process

Tapi itu bukan alasan untuk "limit"; kita boleh **prefer raw.forward** supaya tak perlu base64.

Apa kau patut arahkan Codex buat (prompt siap, ada "header tetap")

Paste ni dekat Codex. Ini akan paksa dia:

- buang "maxInlineMb gate" (atau jadikan 0=disable)
- guna `raw.forward` dulu untuk AV
- output penuh ikut format copy-paste

PERMANENT OUTPUT RULES (MUST FOLLOW)

- ONE FILE PER CODE BLOCK.
- FULL FILE CONTENT for EVERY changed file.
- NO diffs, NO @@, NO +/-.
- Inside code blocks RAW FILE CONTENT ONLY (no "Path:" inside the block, no "===="
- If you change N files you MUST output N blocks. If you cannot, output NOTHING.

TASK: REMOVE ARTIFICIAL AV LIMITS

Problem: Current code introduces an artificial AV inline size limit (e.g. forward

Requirement: No artificial size limits for audio/video. Attempt send; only fail w

Implement:

1) For AV forwarding (audio/video/ptt):

- FIRST try `raw.forward(toGroupId)` if available.
- If `raw.forward` fails or not available, then use `downloadMedia` + `outsend` inli
- Do NOT block by `maxInlineMb/size` gate.
- Log full error details on failure (message + first stack line + inspected ob

2) Keep videos around ~15MB inline (do not force document). If WhatsApp rejects,

Max 2 files this round. Likely:

- OneBot/modules/Core/Fallback/FallbackCV.js (or the AV helper it uses)

- Fallback forward (DM customer → control group) biasanya **bukan manualReply** → boleh kena block bila luar window.

Cara confirm dalam 30 saat (tanpa ubah code)

Bila kau DM bot "hi" malam/awal pagi, tengok log around send. Kalau window block, biasanya ada reason macam:

- `reason=window` atau `blocked window / waitMs=...`

Kalau log kau sekarang masih tak jelas reason, itu sebab sebelum ni error string kosong/ t sahaja.

Apa yang kau kena check sekarang (di server)

1) Tengok config RateLimit (window rules)

Buka file ini:

`X:\OneData\bots\ONEBOT\config\modules\Core\Impl\RateLimitCV.conf`

Cari line macam:

- `enforceWindows=1`
 - `window.1=08:00-10:00`
 - `window.2=20:00-22:00`
- atau apa-apa `window.*` .

Kalau kau malas buka, run command ni dan paste output:

```
</> bat
```



2) Tengok bypass settings untuk fallback

Dalam log, OutboundGateway ada `allowManualReplyBypassWindow=1` . Itu bagus, tapi fallback forward **perlu mark** sebagai `manualReply` atau `allowOutsideWindow` **untuk control-group forward** sahaja.

Apa fix yang betul (ikut requirement kau)

Kau nak:

- customer DM → **fallback mesti boleh forward ke control group bila-bila masa** (tak tunggu 7 pagi)
- tapi jangan buka flood untuk semua send luar window (rate limit masih berguna)

So fix paling selamat:

✅ **Hanya** message yang target `controlGroupId` dari fallback diberi flag:

- `manualReply=1` **atau** `allowOutsideWindow=1` (ikut pipeline yang support)

Dan customer-facing reply tak semestinya bypass (ikut policy kau).

Prompt untuk Codex (English) — siap dengan “header tetap output”

Paste ini dekat Codex. Ini fokus betulkan time-window gating untuk fallback control-group, dan paksa dia keluarkan full scripts dengan format copy-paste:

PERMANENT OUTPUT RULES (MUST FOLLOW)

- ONE FILE PER CODE BLOCK.
- FULL FILE CONTENT for EVERY changed file.
- NO diffs, NO @@, NO +/-.
- Inside code blocks RAW FILE CONTENT ONLY (no "Path:" inside, no "===== FILE").
- If you change N files you MUST output N blocks. If you cannot, output NOTHING.

TASK: FIX TIME WINDOW LIMIT FOR FALLBACK CONTROL GROUP

Symptom: commands work anytime, but fallback forward (DM -> control group) only w Startup shows RateLimit enabled (windows=2) and OutboundGateway allowManualReplyB

Goal:

- Fallback forwarding to `controlGroupId` MUST be allowed outside windows (24/7), w

Requirements:

- 1) Identify the exact active RateLimit config keys (RateLimitCV.conf) and how Out
- 2) Implement a minimal change so that ONLY fallback forwards to `controlGroupId` by
 - set `manualReply=1` and/or `allowOutsideWindow=1` on the outbound send options f
 - Do NOT bypass for normal customer outbound unless necessary.
- 3) Add explicit log lines when a send is blocked by window (reason=window, waitMs

Max 3 files this round.

Likely candidates:

- OneBot/modules/Core/Fallback/FallbackForwardTextV1.js and/or FallbackForwardMed
- OneBot/modules/Core/OutboundGateway/OutboundGatewayV1.js or RateLimitV1.js (onl
- OneData/.../RateLimitCV.conf (ONLY if config correction is required; append-onl

OUTPUT:

Path: <repo path>

</> Plain text



<full content>

(and conf blocks for .conf)

No extra text.

Satu benda penting

Beberapa file upload lama dalam chat kadang “expired” dari sisi aku, jadi aku tak

</> Code



Compare with Claude ▾

RateLimitCV.conf

File

cuba tgk ni, aku rasa setting ni ni, sebenarnya kalau ikut plan asal, rate limit tu guna untuk followup bukan fallback dari bot/manual msg dari staff aku ke bot, rate limit aku nak sebelum ni sebenarnya untui followup dan beberapa module lain yang bot nak hantar scara auto

Thought for 7m 57s >

Faham. Berdasarkan **RateLimitCV.conf** yang awak bagi, ini point penting:

- Window memang ada:
 - window.1=08:00-10:00
 - window.2=20:00-22:00
- Tapi **sekarang** enforceWindows=0 → maksudnya **window sepatutnya TIDAK menghalang apa-apa** (windows wujud tapi “ignored”).

Jadi kalau masih jadi macam “pukul 7++/8 pagi baru boleh”, itu biasanya sebab:

1. file config live yang bot baca bukan yang ini, atau

2. **RateLimitV1 code tak baca key** `enforceWindows` **dengan betul** (key mismatch / default paksa ON bila windows wujud), atau
3. bukan **RateLimit**—tetapi **OutboundGateway / send pipeline** treat sesetengah jenis send (media/AV) lain daripada text.

Yang paling “kena” dengan simptom awak (text ok, audio/video fail) ialah ini:

- OutboundGatewayV2 memang ada support flag bypass:
 - `allowOutsideWindow / bypassWindow` → hanya bypass bila `reason=window`
 - `bypassRateLimit` → bypass terus semua rate-limit check
 (ini jelas dalam codex output: OutboundGatewayV2 baca flag tu dan bypass bila window block)  [codexreply](#)
- Tapi codex sebelum ni **hanya set** `manualReply/allowOutsideWindow` **dekat forward TEXT** (FallbackForwardTextV1)  [codexreply](#)
 Media/AV paths banyak yang **tak set flag bypass** → kalau `enforceWindows` sebenarnya ON di runtime, memang media/AV akan “blocked by window” sementara text nampak macam jalan.

Jadi fix yang betul (ikut design awak: **RateLimit untuk followup/auto**, bukan untuk fallback/staff) ialah:

1. **RateLimit windows boleh ON untuk followup** (kalau itu memang tujuan asal), contohnya `enforceWindows=1`.
2. **Fallback + staff reply WAJIB bypass window / bypass ratelimit untuk SEMUA jenis payload:**
 - forward text, forward media (image/doc), forward AV (audio/video/ptt)
 - reply text/media/AV dari control group ke customer
3. Pastikan bypass ni **internal flag sahaja** (tidak bocor ke WhatsApp), dan customer **tak nampak ticket id** (strip ticket dari body/caption bila reply).

PROMPT (ENGLISH) untuk awak paste ke Codex (1 prompt sahaja)

Nota: Prompt ni sengaja “keras” supaya Codex berhenti buat report kosong / tabur output separuh.

YOU MUST FOLLOW THESE NON-NEGOTIABLE RULES.

A) FULL REPO SCAN REQUIRED

- Before changing anything: scan the FULL repo and state that you scanned current

- Verify ACTIVE pointer chain for RateLimit + OutboundGateway + Fallback (Hub.com

B) OUTPUT MUST BE COPY/PASTE READY (NO DIFFS, NO PR)

- NO PRs, NO commits, NO "Files changed" list only, NO @@, NO +/-.
- Output MUST be only full file contents for EVERY file you changed.
- IMPORTANT: Do NOT put lines like "===== FILE: ..." INSIDE the JS file content.
- For each changed file, output:
Line 1 (plain text, outside code): Path: <repo-relative-path>
Then ONE fenced code block containing ONLY the exact file content.
Repeat for all changed files.
- Max 4 files changed in this round.

C) HARD RULES

- ASCII only (no emoji, no smart quotes, no ellipsis).
- Zero hardcode for IDs/text. Use existing config keys/templates; do not hardcode
- Foundation freeze: DO NOT touch OneBot/Connector.js, OneBot/Kernel.js, Start.cm

D) SYMPTOM TO FIX (CURRENT)

- 1) RateLimit is intended ONLY for followup/auto modules, NOT for fallback DM forw
- 2) Current behavior: fallback text may work but fallback media/audio/video and/or
- 3) Requirement: Fallback + staff replies MUST work 24/7 and must support:
 - Forward from customer -> control group: Text + Media (image/doc) + AV (audio
 - Reply from control group -> customer: Text + Media + AV
 - Reply should NOT expose ticket id to customer (strip ticket from outgoing bo
- 4) If RateLimit windows are enabled for followup, fallback/staff MUST bypass wind

E) REQUIRED CODE CHANGES (MAX 4 FILES)

- Focus ONLY on making bypass consistent for ALL fallback send paths:
 - 1) OneBot/modules/Core/Fallback/FallbackForwardMediaV1.js
 - Ensure send options include internal flags: manualReply=1, allowOutsideWin
 - 2) OneBot/modules/Core/Fallback/FallbackReplyMediaV1.js
 - Ensure replies to customer include internal flags (at least allowOutsideWi
 - Ensure ticket id is stripped from customer-facing caption/body.
 - 3) OneBot/modules/Core/Fallback/FallbackReplyAVV1.js
 - Same as ReplyMedia: internal bypass flags + do not expose ticket id.
 - 4) OneBot/modules/Core/Fallback/FallbackCV.js
 - Ensure AV forwarding path and any direct outsend calls also carry bypass f
 - Add one clear bug log when OutboundGateway/RateLimit blocks (reason=window

F) VALIDATION

- After edits: run node --check for each changed JS file.
- In the report, include 5-10 evidence bullets with file:line pointing to the exa
- Explain how followup/auto traffic still obeys RateLimit (i.e., bypass flags are

NOW DO IT. Provide:

</> Plain text



Kalau Codex ikut prompt atas, kita akan terus nampak sama ada isu sebenar:

- **window gating** (akan keluar reason=window + waitMs), atau
- **transport send fail** (contoh group read-only/bot bukan admin / whatsapp-web.js error), atau
- **reply mapping/ticket resolution** (itu next round).

Kalau awak nak, lepas Codex bagi output, paste sini "REPORT" dia + 4 file penuh yang dia bagi, aku audit cepat: file mana betul-betul patut replace, mana dia tersalah sentuh/terlanggar rule.

    ... Compare with Claude ▾

Path: OneBot/Connector.js

Path: OneBot/modules/Core/Fallback/FallbackCV.js

Path:

OneBot/modules/Core/Fallback/FallbackForwardMediaV1.js

Path:

OneBot/modules/Core/Fallback/FallbackForwardTextV1.js

Path: OneBot/modules/Core/Log/LogV2.js

Path:

OneBot/modules/Core/OutboundGateway/OutboundGatewayV2.js

Path:

OneBot/modules/Core/Shared/SharedTicketCoreV2.js

Path:

OneData/bots/ONEBOT/config/modules/Core/Impl/LogCV.conf

apa dia bagi macam ni je

Thought for 13s >

Dia bagi macam tu je sebab dia **"list path" tanpa print isi file** — ini memang **tak berguna untuk manual copy-paste**. Maksudnya dia **langgar output rules** yang kau dah minta (sepatutnya lepas setiap Path: mesti ada **code block full content**).

Apa kau buat sekarang (1 reply je dekat Codex)

Copy paste ayat ni dekat Codex. Pendek, keras, terus:

You violated the PERMANENT OUTPUT RULES.

You ONLY listed paths and did NOT output any file contents. That is unusable.

RE-OUTPUT NOW with FULL FILE CONTENTS for ALL 8 paths, ONE FILE PER CODE BLOCK.
For each file:

- Print "Path: <path>" on its own line
- Then a fenced code block containing ONLY the raw file content (no "Path:" inside)
- No diffs, no summaries, no "Files (N)" list.

</> Plain text



Kalau dia masih tak bagi full content (plan B paling cepat)

Maksudnya dia memang tak nak dump content dalam chat. Jadi kau kena ambil dari **PR "Files changed"**:

Untuk setiap file dalam PR:

1. Click file dalam "Files changed"
2. Cari butang **"View file" / "Open in new tab" / "Raw"**
3. Copy keseluruhan isi file
4. Paste ke `X:\...` path yang sama

Kalau kau bagi aku screenshot bahagian "Files changed" (atas kanan ada tak "View file/Raw"), aku boleh guide exact button mana kena tekan ikut UI kau.

Nota penting (supaya tak rosak file macam sebelum ni)

Bila Codex akhirnya bagi code:

- **JANGAN** paste line Path: ke dalam `.js`
- **Copy isi dalam code block sahaja** (yang bermula `'use strict';` atau `const ...`) dan paste.






 Compare with Claude ▾

CMDLOG.txt

Document

CHECK CMD NI ROSAK HABIS JAHANAM MINTA CODEX
SCAN FULL MANA MASALAH NI DATANG JANGAN LIMIT2,
KALAU JUMPA DIA KENA FIX HANTAR 5 SCRIPT SEKALI
HANTAR, KEMUDIAN HANTAR LAGI 5 SCRIPT DAN
SAMPAI HABIS

Thought for 2m 30s >

Aku dah tengok CMDLOG.txt . Punca "CMD rosak / spam error" sekarang **bukan time window** — ini lebih kritikal:

Apa yang jadi (berdasarkan log)

1. Outbox dah start cuba hantar mesej sebelum WhatsApp client siap ready .

Lepas OutboxV1 ready... terus keluar send.diagnostic loaded=0 dan send.failed ... Cannot read properties of null/undefined (reading 'evaluate' / 'getChat') dari whatsapp-web.js Client.getChatById / sendMessage .  CMDLOG  CMDLOG
Ini tanda **page/puppeteer context belum ready**, tapi Outbox sudah pump queue → dia retry tanpa henti.

2. Ada juga send gagal sebab **payload tak valid**: Invalid value at currentMsg.body:

value is invalid .  CMDLOG

Ini biasanya berlaku bila ada item dalam Outbox/Send pipeline yang hantar body kosong/jenis salah, atau media send options tak betul.

3. send.diagnostic ... loaded=1 isReadOnly=0 announce=0 menunjukkan **control group bukan read-only/announcement**, jadi itu bukan punca utama sekarang.

 CMDLOG

Jadi yang perlu fix dulu: **gating/outbox pump** (jangan send sebelum connector ready) + **validasi payload** (jangan hantar body invalid). Lepas tu barulah masuk round fallback AV/reply.

Nota kecil: kalau ada file lama yang kau upload sebelum ni, ada yang dah tak boleh dibuka semula. Kalau kau nak aku semak sesuatu yang lama, upload balik.

PROMPT untuk Codex (English) — scan full, fix betul, output 5 scripts per round

Copy paste ini dekat Codex. Ini dah include "header tetap" + arahan "5 files sahaja sekali".

PERMANENT RULES (MUST FOLLOW EVERY TIME)

1) FULL REPO SCAN (NO GUESSING)

- You MUST scan the full repo before edits and PRINT:
 - scanned roots
 - git rev-parse --short HEAD
 - git status --porcelain
 - confirm ACTIVE pointers (Hub.conf -> impl -> Impl/*.conf) for modules you tou
- Treat repo as LIVE (X:\OneBot + X:\OneData). Do not assume other files.

2) OUTPUT FORMAT (MANUAL COPY/PASTE TO LIVE)

- You MUST output FULL FILE CONTENT for EVERY changed file.
- ONE FILE PER CODE BLOCK (so I can click Copy per file).
- NO diffs, NO @@, NO +/- lines, NO "Files (N)" list only.
- Code blocks contain RAW FILE CONTENT ONLY.
 - Do NOT put "Path:" or "==== FILE" inside the code block.
- You MAY print the path on a plain text line ABOVE the code block.

Exact output per file:

Path: <repo relative path>

<> Plain text



(.conf uses ``conf)

3. BATCH SIZE (MANDATORY)

- Exactly 5 files MAX per round.
- If more fixes are needed, stop and wait for next round after my test.
- If you cannot output all changed files as full contents, OUTPUT NOTHING.

4. DO NOT ADD LIMITS

- Do NOT introduce new time windows or size limits.
- RateLimit is for followup/auto modules, NOT for fallback/manual staff messaging.

=====

=====

TASK ROUND 1: FIX CMD LOG "SEND BEFORE READY" + INVALID PAYLOAD

Evidence from live CMD log:

- Outbox starts sending immediately after boot, before connector ready, causing whatsapp-web.js errors:
"Cannot read properties of null/undefined (reading 'evaluate' / 'getChat')" in Client.getChatById/sendMessage.
- Also seen: "Invalid value at currentMsg.body: value is invalid".
- Control group is not read-only (isReadOnly=0 announce=0).

Goal:

A) Outbox/Outbound pipeline MUST NOT attempt client.getChatById/sendMessage until the WhatsApp client is READY.

B) When not ready, the send must be queued (not dropped) and must not spam retries/logs.

C) Ensure we never send invalid payloads (empty/invalid body) into whatsapp-web.js.

Constraints:

- Do NOT edit OneBot/Kernel.js or Start.cmd unless you prove root cause with file:line evidence.
- Avoid touching OneBot/Connector.js unless absolutely required; prefer fixing within Outbox/Outbound modules.
- Preserve architecture: outbound must queue-not-drop.

Required work:

1. Trace the exact call path that is sending before ready (OutboxV1 tick -> OutboundGateway -> transport).
2. Implement a "ready gate" in the correct place:
 - Either OutboxV1 delays pumping until it receives kernel event {type:'ready'} from connector,
 - OR OutboundGateway/transport returns a retryable "transport.not_ready" WITHOUT calling whatsapp-web.js, and Outbox respects it without hammering.
3. Fix invalid payload:
 - Find what enqueues/creates the message that leads to "Invalid value at currentMsg.body".
 - Add validation so empty/invalid body is not sent; log one clear bug line with correlation id and which module created it.
4. Add clear logs (ASCII-only) to prove:
 - when READY is received
 - when Outbox starts pumping

- when a send is skipped/queued due to not-ready
- when payload is rejected as invalid

Deliverables:

- Change up to 5 files ONLY in this round.
- Output full file contents for those changed files using the required format.
- Also include a short HOW TO TEST (3 steps) after the code blocks (outside blocks).

If you do not output full file contents in separate code blocks, output NOTHING.

Lepas Round 1 settle (baru Round 2/3)

- Round 2: fallback media/AV forward ****tanpa time gating**** + error logs yang leng
- Round 3: reply dari control group → customer (quote reply + hide ticketId) + su

Kalau kau paste prompt atas dan Codex masih buat “list path je”, terus reply dia:

</> Code



... Compare with Claude ▾

OneBot/modules/Core/SendQueue/SendQueueConfigV1.js

OneBot/modules/Core/SendQueue/SendQueuePumpV1.js

OneBot/modules/Core/SendQueue/SendQueueServiceV1.js

OneBot/modules/Core/SendQueue/SendQueueTransportAdapterV1.js OK DIA DAH HANTAR 4 FILE NI PENUH TAPI FILE LAIN DIA TAK ADA HANTAR MINTA DIA HANTARKAN SELAIN 4 FILE NI KALAU ADA YANG PATUT DI BETULKAN IKUT RULE TETAP DAN FEATURES YANG AKU NAK, WAJIB BUAT .JS DAN .CONF KALAU ADA YANG PERLU DI BETULKAN, SENARAIKAN FILE YANG DIA HANTAR DAN NANTI KITA SAMBUNG LAGI

Thought for 8s >

Ok — **bagus**. Sekarang dah ada **4 file penuh** yang Codex dah bagi:

1. OneBot/modules/Core/SendQueue/SendQueueConfigV1.js
2. OneBot/modules/Core/SendQueue/SendQueuePumpV1.js
3. OneBot/modules/Core/SendQueue/SendQueueServiceV1.js
4. OneBot/modules/Core/SendQueue/SendQueueTransportAdapterV1.js

✅ Ini kau boleh apply dulu (replace full file) dan restart untuk test.

Sekarang kau nak aku suruh **Codex** hantar file lain selain 4 ni, ikut "rule tetap" + ikut features yang kau nak. Ini prompt yang kau boleh paste terus dekat Codex.

PROMPT (English) — minta baki file yang patut dibetulkan, max 5 file/round, full output

PERMANENT OUTPUT RULES (MUST FOLLOW)

- ONE FILE PER CODE BLOCK (so I can click Copy).
- FULL FILE CONTENT for EVERY changed file.
- NO diffs, NO @@, NO +/-.
- Inside code blocks RAW FILE CONTENT ONLY (no "Path:" inside, no "===== FILE" in
- You MAY print the path on a plain text line ABOVE the code block.
- MAX 5 FILES PER ROUND. If more are needed, stop and wait for my test.
- If you cannot output full contents for all changed files, output NOTHING.

STATUS

You already sent FULL contents for these 4 files (do NOT resend them):

- 1) OneBot/modules/Core/SendQueue/SendQueueConfigV1.js
- 2) OneBot/modules/Core/SendQueue/SendQueuePumpV1.js
- 3) OneBot/modules/Core/SendQueue/SendQueueServiceV1.js
- 4) OneBot/modules/Core/SendQueue/SendQueueTransportAdapterV1.js

TASK (NEXT ROUND)

Scan the FULL repo and find ANY OTHER files that must be fixed to solve the remaini

- Outbound must NOT send before WhatsApp client READY (queue-not-drop, no spam re
- No artificial time windows/limits for fallback/manual staff messaging; RateLimi
- Fallback must support forward + reply for text, image, document/file, video, au
- Ticket should be one per album/window (no repeated tickets/spam).

Deliverables:

- Output up to 5 additional files ONLY (excluding the 4 already delivered).
- Include .conf files if configuration changes are required (append-only, no dupl
- For each file output:

Path: <repo relative path>

</> Plain text



- After code blocks, add a short list: "Why these files" (max 6 bullets) and "How to test" (3 steps).

Nota penting (BM)

- Jangan bagi dia resend 4 file tu – kita dah ada.
- Round ni dia wajib cari ****baki root-cause**** (biasanya Outbox/OutboundGateway/Ra
- Dia ****max 5 file**** je supaya kau boleh test lepas apply.

</> Code



... Compare with Claude ▾

OK DENGAN MASALAH YANG KITA HADAPI DAN FEATURES YANG AKU NAK, DIA DAH BAGI 7 FILE NI, SEKARANG AKU BELUM UPDATE LAGI, CUMA KITA MASIH BERANGGAPAN MASALAH SAMA BELUM SELESAI SELAGI DIA TAK SCAN SEMUA FILE DAN FIX KESELURUHAN FILE YANG WAJIB, DIA WAJIB SAMBUNG HANTAR FILE LAIN SELAIN DARI 7 FILE NI DULU, LEPAS DAH HABIS, BARU AKU UPDATE REPO IKUT LIVE SERVER YANG AKU GUNA, KALAU TAK NANTI CODEX AKAN ULANG FIX SCRIPT SAMA KALAU TAK REMARK APA YANG DIA DAH BAGI DAN DIA WAJIB SEMAK FILE LAIN DENGAN MASALAH TERAKHIR YANG KITA HADAPI

1)

OneBot/modules/Core/SendQueue/SendQueueConfigV1.js

2)

OneBot/modules/Core/SendQueue/SendQueuePumpV1.js

3)

OneBot/modules/Core/SendQueue/SendQueueServiceV1.js

S

4)

OneBot/modules/Core/SendQueue/SendQueueTransportAdapterV1.js

5)

OneBot/modules/Core/OutboundGateway/OutboundGatewayV1.js

6) OneBot/modules/Core/Outbox/OutboxV1.js

7)

OneData/bots/ONEBOT/config/modules/Core/Impl/OutboxCV.conf

Thought for 7s >

Faham. Sekarang kita **lock** keadaan:

✅ Codex **DAH** hantar penuh 7 file ini (dan dia tak boleh ulang edit benda sama lagi):

1. OneBot/modules/Core/SendQueue/SendQueueConfigV1.js
2. OneBot/modules/Core/SendQueue/SendQueuePumpV1.js
3. OneBot/modules/Core/SendQueue/SendQueueServiceV1.js
4. OneBot/modules/Core/SendQueue/SendQueueTransportAdapterV1.js
5. OneBot/modules/Core/OutboundGateway/OutboundGatewayV1.js
6. OneBot/modules/Core/Outbox/OutboxV1.js
7. OneData/bots/ONEBOT/config/modules/Core/Impl/OutboxCV.conf

✅ Dan kau betul: **jangan update live/repo dulu** sampai dia habiskan scan + keluarkan baki file yang WAJIB, kalau tidak dia akan ulang "fix file sama" sebab dia tak simpan state apa dia dah bagi.

Prompt (English) untuk Codex — "continue, jangan resend 7 file, scan full repo, keluarkan batch 5 file sampai habis"

Copy paste ini dekat Codex:

PERMANENT RULES (MUST FOLLOW)**A) DO NOT RESEND THESE 7 FILES (ALREADY DELIVERED)**

- 1) OneBot/modules/Core/SendQueue/SendQueueConfigV1.js
- 2) OneBot/modules/Core/SendQueue/SendQueuePumpV1.js
- 3) OneBot/modules/Core/SendQueue/SendQueueServiceV1.js
- 4) OneBot/modules/Core/SendQueue/SendQueueTransportAdapterV1.js
- 5) OneBot/modules/Core/OutboundGateway/OutboundGatewayV1.js
- 6) OneBot/modules/Core/Outbox/OutboxV1.js
- 7) OneData/bots/ONEBOT/config/modules/Core/Impl/OutboxCV.conf

If you resend any of the above, the response is rejected.

B) FULL REPO SCAN REQUIRED

Before proposing more changes, scan the full repo and PRINT:

- scanned roots
- git rev-parse --short HEAD
- git status --porcelain
- active pointers (Hub.conf -> impl -> implConf) for the modules you will touch n

C) OUTPUT FORMAT (MANUAL COPY/PASTE)

- ONE FILE PER CODE BLOCK (click Copy).
- FULL FILE CONTENT ONLY (no diffs, no @@, no +/-).
- Code blocks contain RAW FILE CONTENT ONLY (no "Path:" inside, no "===== FILE" i
- Path line must be outside the code block:

⌘ Plain text



<full file content>

- MAX 5 FILES PER ROUND.
- If more fixes are needed after 5 files, STOP and wait for the next round.

D) CURRENT REMAINING PROBLEMS TO SOLVE (AFTER OUTBOX/SENDQUEUE WORK)

1. Fallback must forward to control group 24/7 (no time-window gating for fallback/manual staff messaging).
2. Fallback must support: text, image, document/file, video, audio/ptt.
3. Reply from control group back to customer must work:
 - quote reply preferred
 - also support !r <ticketId>
 - NEVER expose ticketId to customer.
4. Ticket grouping: one ticket per album/window; avoid spam/retry loops.
5. Media/AV send failures must log the real reason (not blank/t).

TASK NOW (NEXT ROUND)

- Continue scanning and fix the NEXT most critical files beyond the 7 already delivered.
- Prioritize fallback media + AV forwarding, and control-group reply mapping.

- Include .conf files if needed (append-only, no duplicate keys).
- Output EXACTLY up to 5 new files (not the 7 above).

Start now.

BM ringkas (apa prompt ni buat)

- Paksa dia ****ingat 7 file yang dah diberi**** dan ****tak boleh resend****.
- Paksa dia buat ****scan full repo**** dulu (bukti).
- Paksa dia bagi ****5 file per round****, full content, senang copy-paste.
- Fokus pada isu yang tinggal: ****fallback + media/AV + reply + ticket bundling +**

Nota kecil

</> Code



... Compare with Claude ▾

OK DENGAN MASALAH YANG KITA HADAPI DAN FEATURES YANG AKU NAK, DIA DAH BAGI 7 FILE NI, SEKARANG AKU BELUM UPDATE LAGI, CUMA KITA MASIH BERANGGAPAN MASALAH SAMA BELUM SELESAI SELAGI DIA TAK SCAN SEMUA FILE DAN FIX KESELURUHAN FILE YANG WAJIB, DIA WAJIB SAMBUNG HANTAR FILE LAIN SELAIN DARI 7 FILE NI DULU, LEPAS DAH HABIS, BARU AKU UPDATE REPO IKUT LIVE SERVER YANG AKU GUNA, KALAU TAK NANTI CODEX AKAN ULANG FIX SCRIPT SAMA KALAU TAK REMARK APA YANG DIA DAH BAGI DAN DIA WAJIB SEMAK FILE LAIN DENGAN MASALAH TERAKHIR YANG KITA HADAPI

1)

OneBot/modules/Core/SendQueue/SendQueueConfigV1.js

2)

OneBot/modules/Core/SendQueue/SendQueuePumpV1.js

3)

OneBot/modules/Core/SendQueue/SendQueueServiceV1.js

s

4)

OneBot/modules/Core/SendQueue/SendQueueTransportAdapterV1.js

5)

OneBot/modules/Core/OutboundGateway/OutboundGatewayV1.js

6) OneBot/modules/Core/Outbox/OutboxV1.js

7)

OneData/bots/ONEBOT/config/modules/Core/Impl/OutboxCV.conf+

8) OneBot/modules/Core/Fallback/FallbackCV.js

9)

OneBot/modules/Core/Fallback/FallbackForwardMediaV1.js

s

10)

OneData/bots/ONEBOT/config/modules/Core/Impl/FallbackCV.conf

Thought for 6s >

Ok, now kita **lock** senarai "DAH DIBERI FULL" jadi Codex tak ulang benda sama.

 **Codex dah bagi full** 10 file ini (awak belum apply lagi — betul, jangan apply dulu):

1. OneBot/modules/Core/SendQueue/SendQueueConfigV1.js
2. OneBot/modules/Core/SendQueue/SendQueuePumpV1.js
3. OneBot/modules/Core/SendQueue/SendQueueServiceV1.js
4. OneBot/modules/Core/SendQueue/SendQueueTransportAdapterV1.js
5. OneBot/modules/Core/OutboundGateway/OutboundGatewayV1.js
6. OneBot/modules/Core/Outbox/OutboxV1.js
7. OneData/bots/ONEBOT/config/modules/Core/Impl/OutboxCV.conf

8. OneBot/modules/Core/Fallback/FallbackCV.js
9. OneBot/modules/Core/Fallback/FallbackForwardMediaV1.js
10. OneData/bots/ONEBOT/config/modules/Core/Impl/FallbackCV.conf

Sekarang arahan untuk Codex mestilah: **jangan resend 10 file ini, dan sambung scan file lain ikut masalah terkini + features.**

PROMPT (English) — “Continue, jangan resend 10 file, 5 file per round sampai habis”

Copy paste ini dekat Codex:

PERMANENT RULES (MUST FOLLOW)

A) DO NOT RESEND THESE 10 FILES (ALREADY DELIVERED IN FULL)

- 1) OneBot/modules/Core/SendQueue/SendQueueConfigV1.js
- 2) OneBot/modules/Core/SendQueue/SendQueuePumpV1.js
- 3) OneBot/modules/Core/SendQueue/SendQueueServiceV1.js
- 4) OneBot/modules/Core/SendQueue/SendQueueTransportAdapterV1.js
- 5) OneBot/modules/Core/OutboundGateway/OutboundGatewayV1.js
- 6) OneBot/modules/Core/Outbox/OutboxV1.js
- 7) OneData/bots/ONEBOT/config/modules/Core/Impl/OutboxCV.conf
- 8) OneBot/modules/Core/Fallback/FallbackCV.js
- 9) OneBot/modules/Core/Fallback/FallbackForwardMediaV1.js
- 10) OneData/bots/ONEBOT/config/modules/Core/Impl/FallbackCV.conf

If you resend any of these, the response is rejected.

B) FULL REPO SCAN REQUIRED

Before proposing more edits, scan the full repo and PRINT:

- scanned roots
- git rev-parse --short HEAD
- git status --porcelain
- active pointers (Hub.conf -> impl -> implConf) for any module you will edit next

C) OUTPUT FORMAT (MANUAL COPY/PASTE)

- ONE FILE PER CODE BLOCK (click Copy).
- FULL FILE CONTENT ONLY (no diffs, no @@, no +/-).
- Code blocks contain RAW FILE CONTENT ONLY (no "Path:" inside, no "===== FILE" i
- Path line must be outside the code block.
- MAX 5 FILES PER ROUND. If more required, stop and wait for next round.

D) REMAINING REQUIRED FEATURES / BUGS TO SOLVE

- 1) Fallback must support AV forwarding: audio, video, ptt/voice (inline, no artif
- 2) Reply from control group to customer must work:
 - quote reply preferred
 - also support !r <ticketId>

- NEVER expose ticketId to customer
 - support reply text + image + doc/file + video + audio
- 3) Ticket grouping: one ticket per album/window; avoid spam/retry loops.
- 4) If any module still sends before WhatsApp READY, fix it (queue-not-drop).

TASK NOW (NEXT ROUND)

- Continue scanning and fix the NEXT most critical files beyond the 10 already de
- Prioritize: AV forward + reply mapping (quote reply + !r) + hide ticketId.
- Include .conf if needed (append-only, no duplicate keys).
- Output up to 5 NEW files only (not the 10 above).

Plain text



Nota penting (BM)

- Dengan prompt ni, dia **wajib** sambung cari file lain dalam folder Fallback (ReplyMedia/ReplyAV/QuoteReply/QuoteParse/ForwardAV, Shared helpers) dan module yang berkaitan.
- Dia juga **wajib** berhenti bila 5 file dah keluar, supaya kau boleh test langkah demi langkah (tak serabut).

Satu perkara kecil

Ada beberapa file lama yang awak upload ke chat sebelum ni kadang-kadang "expired" untuk aku buka balik. Tapi untuk prompt kepada Codex, tak perlu aku buka—awak sendiri yang akan copy output dari Codex. Kalau nanti awak nak aku audit content sesuatu file, awak paste content tu dekat sini.

Compare with Claude ▾

OK DENGAN MASALAH YANG KITA HADAPI DAN FEATURES YANG AKU NAK, DIA DAH BAGI 7 FILE NI, SEKARANG AKU BELUM UPDATE LAGI, CUMA KITA MASIH BERANGGAPAN MASALAH SAMA BELUM SELESAI SELAGI DIA TAK SCAN SEMUA FILE DAN FIX KESELURUHAN FILE YANG WAJIB, DIA WAJIB SAMBUNG HANTAR FILE LAIN SELAIN DARI 7 FILE NI DULU, LEPAS DAH HABIS, BARU AKU UPDATE REPO IKUT LIVE SERVER YANG AKU GUNA, KALAU TAK NANTI

CODEX AKAN ULANG FIX SCRIPT SAMA KALAU TAK
REMARK APA YANG DIA DAH BAGI DAN DIA WAJIB
SEMAK FILE LAIN DENGAN MASALAH TERAKHIR YANG
KITA HADAPI

- 1)
OneBot/modules/Core/SendQueue/SendQueueConfigV1.js
- 2)
OneBot/modules/Core/SendQueue/SendQueuePumpV1.js
- 3)
OneBot/modules/Core/SendQueue/SendQueueServiceV1.js
- 4)
OneBot/modules/Core/SendQueue/SendQueueTransportAdapterV1.js
- 5)
OneBot/modules/Core/OutboundGateway/OutboundGatewayV1.js
- 6) OneBot/modules/Core/Outbox/OutboxV1.js
- 7)
OneData/bots/ONEBOT/config/modules/Core/Impl/OutboxCV.conf+
- 8) OneBot/modules/Core/Fallback/FallbackCV.js
- 9)
OneBot/modules/Core/Fallback/FallbackForwardMediaV1.js
- 10)
OneData/bots/ONEBOT/config/modules/Core/Impl/FallbackCV.conf
- 11)
OneBot/modules/Core/Fallback/FallbackCommandReplyV1.js
- 12) OneBot/modules/Core/Fallback/FallbackReplyAVV1.js
- 13)
OneBot/modules/Core/Fallback/FallbackReplyMediaV1.js

Thought for 12s >

Ok, noted — sekarang **DAH DIBERI FULL** jadi **13 file** (awak belum apply lagi, betul):

1. OneBot/modules/Core/SendQueue/SendQueueConfigV1.js
2. OneBot/modules/Core/SendQueue/SendQueuePumpV1.js

3. OneBot/modules/Core/SendQueue/SendQueueServiceV1.js
4. OneBot/modules/Core/SendQueue/SendQueueTransportAdapterV1.js
5. OneBot/modules/Core/OutboundGateway/OutboundGatewayV1.js
6. OneBot/modules/Core/Outbox/OutboxV1.js
7. OneData/bots/ONEBOT/config/modules/Core/Impl/OutboxCV.conf
8. OneBot/modules/Core/Fallback/FallbackCV.js
9. OneBot/modules/Core/Fallback/FallbackForwardMediaV1.js
10. OneData/bots/ONEBOT/config/modules/Core/Impl/FallbackCV.conf
11. OneBot/modules/Core/Fallback/FallbackCommandReplyV1.js
12. OneBot/modules/Core/Fallback/FallbackReplyAVV1.js
13. OneBot/modules/Core/Fallback/FallbackReplyMediaV1.js

✅ Jadi arahan seterusnya kepada Codex: **jangan resend 13 file ni, dan wajib sambung scan/fix file lain** yang berkaitan dengan isu terakhir (AV forward, quote reply mapping, ticket bundling/album window, anti-spam, hide ticketId).

PROMPT (English) — “Continue, jangan resend 13 file, 5 file per round sampai habis”

Copy paste ini dekat Codex:

PERMANENT RULES (MUST FOLLOW)

A) DO NOT RESEND THESE 13 FILES (ALREADY DELIVERED IN FULL)

- 1) OneBot/modules/Core/SendQueue/SendQueueConfigV1.js
- 2) OneBot/modules/Core/SendQueue/SendQueuePumpV1.js
- 3) OneBot/modules/Core/SendQueue/SendQueueServiceV1.js
- 4) OneBot/modules/Core/SendQueue/SendQueueTransportAdapterV1.js
- 5) OneBot/modules/Core/OutboundGateway/OutboundGatewayV1.js
- 6) OneBot/modules/Core/Outbox/OutboxV1.js
- 7) OneData/bots/ONEBOT/config/modules/Core/Impl/OutboxCV.conf
- 8) OneBot/modules/Core/Fallback/FallbackCV.js
- 9) OneBot/modules/Core/Fallback/FallbackForwardMediaV1.js
- 10) OneData/bots/ONEBOT/config/modules/Core/Impl/FallbackCV.conf
- 11) OneBot/modules/Core/Fallback/FallbackCommandReplyV1.js
- 12) OneBot/modules/Core/Fallback/FallbackReplyAVV1.js
- 13) OneBot/modules/Core/Fallback/FallbackReplyMediaV1.js

If you resend any of these, the response is rejected.

B) FULL REPO SCAN REQUIRED

Before proposing more edits, scan the full repo and PRINT:

- scanned roots

- `git rev-parse --short HEAD`
- `git status --porcelain`
- active pointers (Hub.conf -> impl -> implConf) for any module you will edit next

C) OUTPUT FORMAT (MANUAL COPY/PASTE)

- ONE FILE PER CODE BLOCK (click Copy).
- FULL FILE CONTENT ONLY (no diffs, no @@, no +/-).
- Code blocks contain RAW FILE CONTENT ONLY (no "Path:" inside, no "===== FILE" i
- Path line must be outside the code block.
- MAX 5 FILES PER ROUND. If more required, stop and wait for next round.

D) REMAINING REQUIRED FEATURES / BUGS

- 1) Forward AV (audio/video/ptt) from customer -> control group (inline, no artificial delay)
- 2) Reply from control group -> customer:
 - quote reply preferred (map by quoted ticket message)
 - also support `!r <ticketId>`
 - NEVER expose ticketId to customer
 - support reply text + image + doc/file + video + audio
- 3) Ticket grouping: one ticket per album/window; avoid spam/retry loops and duplicates
- 4) Ensure no sends happen before WhatsApp READY (queue-not-drop).

TASK NOW (NEXT ROUND)

- Continue scanning and fix the NEXT most critical files beyond the 13 already done
- Prioritize quote reply parsing/mapping + AV forward handler + album collector (
- Include .conf if needed (append-only, no duplicates).
- Output up to 5 NEW files only (not the 13 above).

Plain text



BM ringkas

- Ini akan paksa Codex sambung cari fail lain (contoh: `FallbackForwardAVV1.js`, `FallbackQuoteReplyV1.js`, `FallbackQuoteParseV1.js`, `FallbackAlbumCollectorV1.js` kalau ada, Shared helpers yang simpan mapping reply, dsb).
- Dia juga tak boleh ulang resend 13 file yang dah ada.

Nota kecil: beberapa file upload lama dalam chat kadang "expired" untuk aku buka semula. Tapi untuk prompt kepada Codex, tak perlu aku buka. Kalau nanti awak nak aku audit content mana-mana file, paste file content itu dekat sini.



Compare with Claude ▾

OK DENGAN MASALAH YANG KITA HADAPI DAN FEATURES YANG AKU NAK, DIA DAH BAGI 7 FILE NI, SEKARANG AKU BELUM UPDATE LAGI, CUMA KITA MASIH BERANGGAPAN MASALAH SAMA BELUM SELESAI SELAGI DIA TAK SCAN SEMUA FILE DAN FIX KESELURUHAN FILE YANG WAJIB, DIA WAJIB SAMBUNG HANTAR FILE LAIN SELAIN DARI 7 FILE NI DULU, LEPAS DAH HABIS, BARU AKU UPDATE REPO IKUT LIVE SERVER YANG AKU GUNA, KALAU TAK NANTI CODEX AKAN ULANG FIX SCRIPT SAMA KALAU TAK REMARK APA YANG DIA DAH BAGI DAN DIA WAJIB SEMAK FILE LAIN DENGAN MASALAH TERAKHIR YANG KITA HADAPI

1)

OneBot/modules/Core/SendQueue/SendQueueConfigV1.js

2)

OneBot/modules/Core/SendQueue/SendQueuePumpV1.js

3)

OneBot/modules/Core/SendQueue/SendQueueServiceV1.js

4)

OneBot/modules/Core/SendQueue/SendQueueTransportAdapterV1.js

5)

OneBot/modules/Core/OutboundGateway/OutboundGatewayV1.js

6) OneBot/modules/Core/Outbox/OutboxV1.js

7)

OneData/bots/ONEBOT/config/modules/Core/Impl/OutboxCV.conf+

8) OneBot/modules/Core/Fallback/FallbackCV.js

9)

OneBot/modules/Core/Fallback/FallbackForwardMediaV1.js

10)

OneData/bots/ONEBOT/config/modules/Core/Impl/FallbackCV.conf

11)

OneBot/modules/Core/Fallback/FallbackCommandReplyV1.js

12) OneBot/modules/Core/Fallback/FallbackReplyAVV1.js

13)

OneBot/modules/Core/Fallback/FallbackReplyMediaV1.js

14)

OneBot/modules/Core/Fallback/FallbackForwardAvV1.js

15)

OneBot/modules/Core/Fallback/FallbackMediaForwardQueueV1.js

16)

OneBot/modules/Core/Fallback/FallbackQuoteParseV1.js

17)

OneBot/modules/Core/Fallback/FallbackReplyRouterV1.js

Thought for 21s >

Ok, sekarang kita **lock** lagi sekali: **Codex dah bagi FULL** sampai **17 file** (awak belum apply — bagus, jangan apply dulu).

 **DO NOT RESEND / DO NOT RE-EDIT** (17 file yang DAH DIBERI FULL):

1. OneBot/modules/Core/SendQueue/SendQueueConfigV1.js
2. OneBot/modules/Core/SendQueue/SendQueuePumpV1.js
3. OneBot/modules/Core/SendQueue/SendQueueServiceV1.js
4. OneBot/modules/Core/SendQueue/SendQueueTransportAdapterV1.js
5. OneBot/modules/Core/OutboundGateway/OutboundGatewayV1.js
6. OneBot/modules/Core/Outbox/OutboxV1.js
7. OneData/bots/ONEBOT/config/modules/Core/Impl/OutboxCV.conf
8. OneBot/modules/Core/Fallback/FallbackCV.js
9. OneBot/modules/Core/Fallback/FallbackForwardMediaV1.js
10. OneData/bots/ONEBOT/config/modules/Core/Impl/FallbackCV.conf
11. OneBot/modules/Core/Fallback/FallbackCommandReplyV1.js
12. OneBot/modules/Core/Fallback/FallbackReplyAVV1.js
13. OneBot/modules/Core/Fallback/FallbackReplyMediaV1.js
14. OneBot/modules/Core/Fallback/FallbackForwardAvV1.js
15. OneBot/modules/Core/Fallback/FallbackMediaForwardQueueV1.js
16. OneBot/modules/Core/Fallback/FallbackQuoteParseV1.js
17. OneBot/modules/Core/Fallback/FallbackReplyRouterV1.js

Sekarang arahan seterusnya kepada Codex: **dia wajib sambung** scan & hantar **file lain selain 17 ni**, 5 file sekali (batch), sampai habis.

PROMPT (English) untuk paste dekat Codex

(Ini versi yang akan "ikat tangan" dia supaya tak ulang file sama dan tak bagi list kosong.)

PERMANENT RULES (MUST FOLLOW)

A) DO NOT RESEND THESE 17 FILES (ALREADY DELIVERED IN FULL)

- 1) OneBot/modules/Core/SendQueue/SendQueueConfigV1.js
- 2) OneBot/modules/Core/SendQueue/SendQueuePumpV1.js
- 3) OneBot/modules/Core/SendQueue/SendQueueServiceV1.js
- 4) OneBot/modules/Core/SendQueue/SendQueueTransportAdapterV1.js
- 5) OneBot/modules/Core/OutboundGateway/OutboundGatewayV1.js
- 6) OneBot/modules/Core/Outbox/OutboxV1.js
- 7) OneData/bots/ONEBOT/config/modules/Core/Impl/OutboxCV.conf
- 8) OneBot/modules/Core/Fallback/FallbackCV.js
- 9) OneBot/modules/Core/Fallback/FallbackForwardMediaV1.js
- 10) OneData/bots/ONEBOT/config/modules/Core/Impl/FallbackCV.conf
- 11) OneBot/modules/Core/Fallback/FallbackCommandReplyV1.js
- 12) OneBot/modules/Core/Fallback/FallbackReplyAVV1.js

```
13) OneBot/modules/Core/Fallback/FallbackReplyMediaV1.js
14) OneBot/modules/Core/Fallback/FallbackForwardAvV1.js
15) OneBot/modules/Core/Fallback/FallbackMediaForwardQueueV1.js
16) OneBot/modules/Core/Fallback/FallbackQuoteParseV1.js
17) OneBot/modules/Core/Fallback/FallbackReplyRouterV1.js
If you resend or re-edit any of these, the response is rejected.
```

B) FULL REPO SCAN REQUIRED

Before editing anything else, scan the full repo and PRINT:

- scanned roots
- git rev-parse --short HEAD
- git status --porcelain
- active pointers (Hub.conf -> impl -> implConf) for any module you will edit next

C) OUTPUT FORMAT (MANUAL COPY/PASTE)

- ONE FILE PER CODE BLOCK (so I can click Copy per file).
- FULL FILE CONTENT ONLY (no diffs, no @@, no +/-).
- Code blocks contain RAW FILE CONTENT ONLY (no "Path:" inside, no "===== FILE" i
- Path line must be outside the code block.
- MAX 5 FILES PER ROUND. If more are needed, stop and wait for next round.

Exact output per file:

```
Path: /repo/relative/path\
```

</> Plain text



For .conf use ``conf.

D) REMAINING REQUIRED FEATURES / BUGS

1. Reply from control group to customer MUST work reliably:
 - quote reply preferred (map ticket by quoted message)
 - also support !r <ticketId>
 - NEVER expose ticketId to customer outbound
 - support reply text + image + doc/file + video + audio/ptt
2. Ticket grouping: one ticket per album/window; avoid spam/retry loops.
3. Ensure fallback/manual staff messaging is not blocked by RateLimit windows (RateLimit is for followup/auto only).
4. Add clear logs for send failures with full error detail (not blank or truncated).

TASK NOW (NEXT ROUND)

- Continue scanning and fix the NEXT most critical files beyond the 17 already delivered.
- Prioritize: quote-reply mapping end-to-end + customer-safe reply (strip ticket) + anti-spam.

- Include .conf if needed (append-only, no duplicates).
- Output up to 5 NEW files only (not the 17 above).

Start now.

Nota penting (BM)

- Kalau dia masih bagi "Path list je" tanpa isi file → terus reject, sebab output
- Kalau kau nak aku ****audit**** isi 17 file yang dah dia bagi (untuk detect conflic

</> Code



Compare with Claude ▾

OK DENGAN MASALAH YANG KITA HADAPI DAN FEATURES YANG AKU NAK, DIA DAH BAGI 7 FILE NI, SEKARANG AKU BELUM UPDATE LAGI, CUMA KITA MASIH BERANGGAPAN MASALAH SAMA BELUM SELESAI SELAGI DIA TAK SCAN SEMUA FILE DAN FIX KESELURUHAN FILE YANG WAJIB, DIA WAJIB SAMBUNG HANTAR FILE LAIN SELAIN DARI 7 FILE NI DULU, LEPAS DAH HABIS, BARU AKU UPDATE REPO IKUT LIVE SERVER YANG AKU GUNA, KALAU TAK NANTI CODEX AKAN ULANG FIX SCRIPT SAMA KALAU TAK REMARK APA YANG DIA DAH BAGI DAN DIA WAJIB SEMAK FILE LAIN DENGAN MASALAH TERAKHIR YANG KITA HADAPI

1)

OneBot/modules/Core/SendQueue/SendQueueConfigV1.js

2)

OneBot/modules/Core/SendQueue/SendQueuePumpV1.js

3)

OneBot/modules/Core/SendQueue/SendQueueServiceV1.js

4)

OneBot/modules/Core/SendQueue/SendQueueTransportAdapterV1.js

- 5)
OneBot/modules/Core/OutboundGateway/OutboundGatewayV1.js
- 6) OneBot/modules/Core/Outbox/OutboxV1.js
- 7)
OneData/bots/ONEBOT/config/modules/Core/Impl/OutboxCV.conf+
- 8) OneBot/modules/Core/Fallback/FallbackCV.js
- 9)
OneBot/modules/Core/Fallback/FallbackForwardMediaV1.js
- 10)
OneData/bots/ONEBOT/config/modules/Core/Impl/FallbackCV.conf
- 11)
OneBot/modules/Core/Fallback/FallbackCommandReplyV1.js
- 12) OneBot/modules/Core/Fallback/FallbackReplyAVV1.js
- 13)
OneBot/modules/Core/Fallback/FallbackReplyMediaV1.js
- 14)
OneBot/modules/Core/Fallback/FallbackForwardAvV1.js
- 15)
OneBot/modules/Core/Fallback/FallbackMediaForwardQueueV1.js
- 16)
OneBot/modules/Core/Fallback/FallbackQuoteParseV1.js
- 17)
OneBot/modules/Core/Fallback/FallbackReplyRouterV1.js
- 18)
OneBot/modules/Core/Fallback/FallbackForwardTextV1.js

1 pembetulan je dia bagi ni, mintak lagi suruh scan, dan ikut masalah lama yang berlaku tadi supaya dia scan dalam file lain, file yang dia dah bagi jangan ulang

Thought for 8s >

Ok, jelas: sekarang **DAH DIBERI FULL** jadi **18 file** (tambah `FallbackForwardTextV1.js`). Dan betul — bila Codex bagi "1 pembetulan je", kita kena paksa dia **scan lagi** dan **bagi batch baru**, tapi **JANGAN** ulang file yang dah diberi.

✅ **DO NOT RESEND / DO NOT RE-EDIT** (18 file yang dah diberi full):

1. `OneBot/modules/Core/SendQueue/SendQueueConfigV1.js`
2. `OneBot/modules/Core/SendQueue/SendQueuePumpV1.js`
3. `OneBot/modules/Core/SendQueue/SendQueueServiceV1.js`
4. `OneBot/modules/Core/SendQueue/SendQueueTransportAdapterV1.js`
5. `OneBot/modules/Core/OutboundGateway/OutboundGatewayV1.js`
6. `OneBot/modules/Core/Outbox/OutboxV1.js`
7. `OneData/bots/ONEBOT/config/modules/Core/Impl/OutboxCV.conf`
8. `OneBot/modules/Core/Fallback/FallbackCV.js`
9. `OneBot/modules/Core/Fallback/FallbackForwardMediaV1.js`
10. `OneData/bots/ONEBOT/config/modules/Core/Impl/FallbackCV.conf`
11. `OneBot/modules/Core/Fallback/FallbackCommandReplyV1.js`
12. `OneBot/modules/Core/Fallback/FallbackReplyAVV1.js`
13. `OneBot/modules/Core/Fallback/FallbackReplyMediaV1.js`
14. `OneBot/modules/Core/Fallback/FallbackForwardAvV1.js`

15. OneBot/modules/Core/Fallback/FallbackMediaForwardQueueV1.js
16. OneBot/modules/Core/Fallback/FallbackQuoteParseV1.js
17. OneBot/modules/Core/Fallback/FallbackReplyRouterV1.js
18. OneBot/modules/Core/Fallback/FallbackForwardTextV1.js

PROMPT (English) — "scan lagi, ikut masalah lama, jangan ulang 18 file, bagi 5 file baru"

Copy paste ini dekat Codex:

PERMANENT RULES (MUST FOLLOW)

A) DO NOT RESEND / DO NOT RE-EDIT THESE 18 FILES (ALREADY DELIVERED IN FULL)

- 1) OneBot/modules/Core/SendQueue/SendQueueConfigV1.js
- 2) OneBot/modules/Core/SendQueue/SendQueuePumpV1.js
- 3) OneBot/modules/Core/SendQueue/SendQueueServiceV1.js
- 4) OneBot/modules/Core/SendQueue/SendQueueTransportAdapterV1.js
- 5) OneBot/modules/Core/OutboundGateway/OutboundGatewayV1.js
- 6) OneBot/modules/Core/Outbox/OutboxV1.js
- 7) OneData/bots/ONEBOT/config/modules/Core/Impl/OutboxCV.conf
- 8) OneBot/modules/Core/Fallback/FallbackCV.js
- 9) OneBot/modules/Core/Fallback/FallbackForwardMediaV1.js
- 10) OneData/bots/ONEBOT/config/modules/Core/Impl/FallbackCV.conf
- 11) OneBot/modules/Core/Fallback/FallbackCommandReplyV1.js
- 12) OneBot/modules/Core/Fallback/FallbackReplyAVV1.js
- 13) OneBot/modules/Core/Fallback/FallbackReplyMediaV1.js
- 14) OneBot/modules/Core/Fallback/FallbackForwardAvV1.js
- 15) OneBot/modules/Core/Fallback/FallbackMediaForwardQueueV1.js
- 16) OneBot/modules/Core/Fallback/FallbackQuoteParseV1.js
- 17) OneBot/modules/Core/Fallback/FallbackReplyRouterV1.js
- 18) OneBot/modules/Core/Fallback/FallbackForwardTextV1.js

If you resend or re-edit any of these, the response is rejected.

B) FULL REPO SCAN REQUIRED (AGAIN)

You MUST scan the full repo and PRINT:

- scanned roots
 - git rev-parse --short HEAD
 - git status --porcelain
 - active pointers (Hub.conf -> impl -> implConf) for any module you will edit next
- You must also list which files you inspected (at least 15 paths) to prove you scanned

C) OUTPUT FORMAT (MANUAL COPY/PASTE)

- ONE FILE PER CODE BLOCK (click Copy).
- FULL FILE CONTENT ONLY (no diffs, no @@, no +/-).
- Code blocks contain RAW FILE CONTENT ONLY (no "Path:" inside, no "===== FILE" i
- Path line must be outside the code block.

- EXACTLY 5 NEW FILES MAX this round.
- If you cannot output full contents for all 5 new files, output NOTHING.

Exact output per file:


Path: <repo relative path>

```
```js
```

Plain text



ChatGPT 5.2 Thinking



## D) CONTINUE FIXING BASED ON THE LAST KNOWN PROBLEMS (OLD ISSUES)

- Reply from control group to customer still unreliable:
  - quote reply preferred (map by quoted message / ticket context)
  - also support !r <ticketId>
  - NEVER expose ticketId to customer
  - support reply text + image + doc/file + video + audio/ptt
- Ticket grouping: one ticket per album/window; avoid spam/retry loops and duplicate sends.
- Fallback/manual staff messaging must be 24/7 (RateLimit is only for followup/auto).
- Add real error reason logs for send failures (no blank / truncated).

## TASK NOW

- Find the next 5 files outside the 18 already delivered that must be fixed to complete the features above.
- Include .conf if required (append-only, no duplicates).
- Output only the 5 full files as code blocks.

Start now.

```

```

```
BM ringkas
```

- Prompt ni paksa dia **\*\*scan lagi\*\*** dan **\*\*bagi 5 file baru\*\*** (bukan 1).
- Dia **\*\*tak boleh ulang 18 file\*\*** yang dah ada.
- Dia kena ikut isu lama: **\*\*reply quote\*\***, **\*\*hide ticketId\*\***, **\*\*ticket bundling\*\***

```

```

Code



    ... Compare with Claude ▾

OK DENGAN MASALAH YANG KITA HADAPI DAN FEATURES YANG AKU NAK, DIA DAH BAGI 7 FILE NI, SEKARANG AKU BELUM UPDATE LAGI, CUMA KITA MASIH BERANGGAPAN MASALAH SAMA BELUM SELESAI SELAGI DIA TAK SCAN SEMUA FILE DAN FIX KESELURUHAN FILE YANG WAJIB, DIA WAJIB SAMBUNG HANTAR FILE LAIN SELAIN DARI 7 FILE NI DULU, LEPAS DAH HABIS, BARU AKU UPDATE REPO IKUT LIVE SERVER YANG AKU GUNA, KALAU TAK NANTI CODEX AKAN ULANG FIX SCRIPT SAMA KALAU TAK REMARK APA YANG DIA DAH BAGI DAN DIA WAJIB SEMAK FILE LAIN DENGAN MASALAH TERAKHIR YANG KITA HADAPI

- 1)  
OneBot/modules/Core/SendQueue/SendQueueConfigV1.js
- 2)  
OneBot/modules/Core/SendQueue/SendQueuePumpV1.js
- 3)  
OneBot/modules/Core/SendQueue/SendQueueServiceV1.js
- 4)  
OneBot/modules/Core/SendQueue/SendQueueTransportAdapterV1.js
- 5)  
OneBot/modules/Core/OutboundGateway/OutboundGatewayV1.js
- 6) OneBot/modules/Core/Outbox/OutboxV1.js
- 7)  
OneData/bots/ONEBOT/config/modules/Core/Impl/OutboxCV.conf+
- 8) OneBot/modules/Core/Fallback/FallbackCV.js
- 9)  
OneBot/modules/Core/Fallback/FallbackForwardMediaV1.js
- 10)  
OneData/bots/ONEBOT/config/modules/Core/Impl/FallbackCV.conf
- 11)



OneBot/modules/Core/Fallback/FallbackCommandReplyV1.js  
 12) OneBot/modules/Core/Fallback/FallbackReplyAVV1.js  
 13)  
 OneBot/modules/Core/Fallback/FallbackReplyMediaV1.js  
 14)  
 OneBot/modules/Core/Fallback/FallbackForwardAvV1.js  
 15)  
 OneBot/modules/Core/Fallback/FallbackMediaForwardQueueV1.js  
 16)  
 OneBot/modules/Core/Fallback/FallbackQuoteParseV1.js  
 17)  
 OneBot/modules/Core/Fallback/FallbackReplyRouterV1.js  
 18)  
 OneBot/modules/Core/Fallback/FallbackForwardTextV1.js  
 19)  
 OneBot/modules/Core/BootAnnounce/BootAnnounceV1.js  
 20)  
 OneBot/modules/Core/Fallback/FallbackForwardingV1.js  
 21) OneBot/modules/Core/Fallback/FallbackTypeUtilV1.js  
 22) OneBot/modules/Core/Shared/SharedSafeSendV1.js  
 23)  
 OneData/bots/ONEBOT/config/modules/Core/Impl/BootAnnounceCV.conf

dan aku ada perasan kenapa  
 controlGroupId=120363402608825006@g.us ni ada di  
 pelbagai .conf sepatutnya ia berada dalam global config  
 supaya tak buat kerja berulang

Thought for 39s >

Ok—kita **lock** dulu status semasa:

✅ Codex dah bagi FULL (dan jangan ulang / jangan re-edit) 23 file ini:

1. OneBot/modules/Core/SendQueue/SendQueueConfigV1.js
2. OneBot/modules/Core/SendQueue/SendQueuePumpV1.js
3. OneBot/modules/Core/SendQueue/SendQueueServiceV1.js
4. OneBot/modules/Core/SendQueue/SendQueueTransportAdapterV1.js
5. OneBot/modules/Core/OutboundGateway/OutboundGatewayV1.js

6. OneBot/modules/Core/Outbox/OutboxV1.js
7. OneData/bots/ONEBOT/config/modules/Core/Impl/OutboxCV.conf
8. OneBot/modules/Core/Fallback/FallbackCV.js
9. OneBot/modules/Core/Fallback/FallbackForwardMediaV1.js
10. OneData/bots/ONEBOT/config/modules/Core/Impl/FallbackCV.conf
11. OneBot/modules/Core/Fallback/FallbackCommandReplyV1.js
12. OneBot/modules/Core/Fallback/FallbackReplyAVV1.js
13. OneBot/modules/Core/Fallback/FallbackReplyMediaV1.js
14. OneBot/modules/Core/Fallback/FallbackForwardAvV1.js
15. OneBot/modules/Core/Fallback/FallbackMediaForwardQueueV1.js
16. OneBot/modules/Core/Fallback/FallbackQuoteParseV1.js
17. OneBot/modules/Core/Fallback/FallbackReplyRouterV1.js
18. OneBot/modules/Core/Fallback/FallbackForwardTextV1.js
19. OneBot/modules/Core/BootAnnounce/BootAnnounceV1.js
20. OneBot/modules/Core/Fallback/FallbackForwardingV1.js
21. OneBot/modules/Core/Fallback/FallbackTypeUtilV1.js
22. OneBot/modules/Core/Shared/SharedSafeSendV1.js
23. OneData/bots/ONEBOT/config/modules/Core/Impl/BootAnnounceCV.conf

Sekarang arahan kepada Codex memang kena: **jangan ulang 23 file ni, scan full repo, dan sambung hantar file lain** (batch 5 file sekali, sampai habis). Baru lepas semua complete, kau update live/repo.

## PROMPT (English) — paste dekat Codex (wajib ikut output rules + batch 5 file)

### PERMANENT RULES (MUST FOLLOW)

A) DO NOT RESEND / DO NOT RE-EDIT THESE 23 FILES (ALREADY DELIVERED IN FULL)

- 1) OneBot/modules/Core/SendQueue/SendQueueConfigV1.js
- 2) OneBot/modules/Core/SendQueue/SendQueuePumpV1.js
- 3) OneBot/modules/Core/SendQueue/SendQueueServiceV1.js
- 4) OneBot/modules/Core/SendQueue/SendQueueTransportAdapterV1.js
- 5) OneBot/modules/Core/OutboundGateway/OutboundGatewayV1.js
- 6) OneBot/modules/Core/Outbox/OutboxV1.js
- 7) OneData/bots/ONEBOT/config/modules/Core/Impl/OutboxCV.conf
- 8) OneBot/modules/Core/Fallback/FallbackCV.js
- 9) OneBot/modules/Core/Fallback/FallbackForwardMediaV1.js
- 10) OneData/bots/ONEBOT/config/modules/Core/Impl/FallbackCV.conf

```

11) OneBot/modules/Core/Fallback/FallbackCommandReplyV1.js
12) OneBot/modules/Core/Fallback/FallbackReplyAVV1.js
13) OneBot/modules/Core/Fallback/FallbackReplyMediaV1.js
14) OneBot/modules/Core/Fallback/FallbackForwardAvV1.js
15) OneBot/modules/Core/Fallback/FallbackMediaForwardQueueV1.js
16) OneBot/modules/Core/Fallback/FallbackQuoteParseV1.js
17) OneBot/modules/Core/Fallback/FallbackReplyRouterV1.js
18) OneBot/modules/Core/Fallback/FallbackForwardTextV1.js
19) OneBot/modules/Core/BootAnnounce/BootAnnounceV1.js
20) OneBot/modules/Core/Fallback/FallbackForwardingV1.js
21) OneBot/modules/Core/Fallback/FallbackTypeUtilV1.js
22) OneBot/modules/Core/Shared/SharedSafeSendV1.js
23) OneData/bots/ONEBOT/config/modules/Core/Impl/BootAnnounceCV.conf
If you resend or re-edit any of these, the response is rejected.

```

#### B) FULL REPO SCAN REQUIRED (PROVE IT)

Before changing anything else, scan the full repo and PRINT:

- scanned roots
- git rev-parse --short HEAD
- git status --porcelain
- active pointers (Hub.conf -> impl -> implConf) for any module you will edit next
- list at least 20 inspected file paths (not only the Fallback folder)

#### C) OUTPUT FORMAT (MANUAL COPY/PASTE)

- ONE FILE PER CODE BLOCK (click Copy per file).
- FULL FILE CONTENT ONLY (no diffs, no @@, no +/-).
- Code blocks contain RAW FILE CONTENT ONLY (no "Path:" inside, no "===== FILE" i
- Path line must be outside the code block.
- EXACTLY 5 NEW FILES MAX this round.
- If you cannot output full contents for all 5, output NOTHING.

Exact output per file:

Path: <repo relative path>

</> Plain text



For .conf use ``conf.

#### D) REMAINING PROBLEMS / FEATURES TO COMPLETE

1. Control group reply -> customer must work reliably:
  - quote reply preferred (map by quoted ticket message / context)
  - also support !r <ticketId>
  - NEVER expose ticketId to customers
  - support reply: text + image + doc/file + video + audio/ptt
2. Ticket grouping: one ticket per album/window; avoid spam/retry loops.
3. Fallback/manual staff messaging must be 24/7 (RateLimit is for followup/auto only).
4. Media/AV send failures must log real reason (not blank/truncated).

## E) NOTE ABOUT controlGroupId DUPLICATION

- You must NOT introduce a new global config system unless asked.
- If you find mismatched controlGroupId values across .conf files, fix them so they are consistent (same value everywhere) and add a validator log to detect mismatch early.

## TASK NOW (NEXT ROUND)

- Continue scanning and output the next 5 NEW files (not in the 23 above) needed to complete the remaining features.

Start now.

---

## Tentang `controlGroupId` banyak tempat (.conf) – betul kau perasan, tapi ada t  
 \*\*Kenapa jadi banyak?\*\* Sebab design sekarang “per-module impl conf” (setiap modu

\*\*Kalau kau betul-betul nak global single source-of-truth\*\*, itu boleh–tapi akan  
 - 1 config global + 1 service/helper baca global  
 - ubah banyak module supaya baca global (atau fallback bila key tak ada)

Itu “projek” separate dan tambah fail (kau selalu tak nak sampah/extra). Jadi bua  
 ✅ \*\*biar duplicate, tapi semua mesti sama\*\* + \*\*ada log validator kalau mismatch

Kalau kau nak aku paksa Codex buat global config approach nanti, cakap je–aku tul

---

Kalau Codex lepas ni masih bagi “path list je tanpa isi file”, reply dia dengan s  
 > “Rejected: you did not output full file contents in code blocks. Re-output exac

</> Code



... Compare with Claude v

OK DENGAN MASALAH YANG KITA HADAPI DAN  
 FEATURES YANG AKU NAK, DIA DAH BAGI 7 FILE NI,  
 SEKARANG AKU BELUM UPDATE LAGI, CUMA KITA MASIH  
 BERANGGAPAN MASALAH SAMA BELUM SELESAI SELAGI  
 DIA TAK SCAN SEMUA FILE DAN FIX KESELURUHAN FILE  
 YANG WAJIB,

DIA WAJIB SAMBUNG HANTAR FILE LAIN SELAIN DARI 7 FILE NI DULU, LEPAS DAH HABIS, BARU AKU UPDATE REPO IKUT LIVE SERVER YANG AKU GUNA, KALAU TAK NANTI CODEX AKAN ULANG FIX SCRIPT SAMA KALAU TAK REMARK APA YANG DIA DAH BAGI DAN DIA WAJIB SEMAK FILE LAIN DENGAN MASALAH TERAKHIR YANG KITA HADAPI

1)

OneBot/modules/Core/SendQueue/SendQueueConfigV1.js

2)

OneBot/modules/Core/SendQueue/SendQueuePumpV1.js

3)

OneBot/modules/Core/SendQueue/SendQueueServiceV1.js

4)

OneBot/modules/Core/SendQueue/SendQueueTransportAdapterV1.js

5)

OneBot/modules/Core/OutboundGateway/OutboundGatewayV1.js

6) OneBot/modules/Core/Outbox/OutboxV1.js

7)

OneData/bots/ONEBOT/config/modules/Core/Impl/OutboxCV.conf+

8) OneBot/modules/Core/Fallback/FallbackCV.js

9)

OneBot/modules/Core/Fallback/FallbackForwardMediaV1.js

10)

OneData/bots/ONEBOT/config/modules/Core/Impl/FallbackCV.conf

11)

OneBot/modules/Core/Fallback/FallbackCommandReplyV1.js

12) OneBot/modules/Core/Fallback/FallbackReplyAVV1.js

13)

OneBot/modules/Core/Fallback/FallbackReplyMediaV1.js

14)

OneBot/modules/Core/Fallback/FallbackForwardAvV1.js

15)

OneBot/modules/Core/Fallback/FallbackMediaForwardQueueV1.js

16)  
 OneBot/modules/Core/Fallback/FallbackQuoteParseV1.js  
 17)  
 OneBot/modules/Core/Fallback/FallbackReplyRouterV1.js  
 18)  
 OneBot/modules/Core/Fallback/FallbackForwardTextV1.js  
 19)  
 OneBot/modules/Core/BootAnnounce/BootAnnounceV1.js  
 20)  
 OneBot/modules/Core/Fallback/FallbackForwardingV1.js  
 21) OneBot/modules/Core/Fallback/FallbackTypeUtilV1.js  
 22) OneBot/modules/Core/Shared/SharedSafeSendV1.js  
 23)  
 OneData/bots/ONEBOT/config/modules/Core/Impl/BootAnnounceCV.conf

masih stuck di 23 file dan di bawah ni dia bagi report saja  
 Summary

Committed changes as dd3dfa9 and created a PR titled  
 "Harden fallback routing and sync fallback config fields"  
 via the make\_pr tool.

Updated FallbackV1 to (a) choose send handlers from  
 sendPrefer/send, (b) accept either direct send or  
 outbox.send availability at init, and (c) attempt direct send  
 with manualReply + allowOutsideWindow before falling  
 back to outbox.send with logging.

Reworked FallbackV2 around shared helpers: DM inbound  
 now resolves ticket IDs via SharedTicketCoreV2 and  
 forwards [ticket] body to control group through  
 SharedSafeSend; control-group messages with parsed  
 ticket IDs resolve customer chat IDs from jsonstore and  
 relay back through SharedSafeSend.

Enhanced message ID extraction to support wrapped send  
 results (res) and id.\_serialized objects, improving ticket-  
 map compatibility with more send result shapes.

Synced fallback config keys to current runtime  
 expectations by setting sendPrefer to end with send and  
 using timeoutMs in both impl configs.

## Testing

✅ node --check

OneBot/modules/Core/Fallback/FallbackV1.js

✅ node --check

OneBot/modules/Core/Fallback/FallbackV2.js

✅ node --check

OneBot/modules/Core/Shared/SharedMessageTicketMapV1.js

✅ git status --short

## Files (29)

BootAnnounceV1.js

OneBot/modules/Core/BootAnnounce/BootAnnounceV1.js

+16

-3

FallbackCV.js

OneBot/modules/Core/Fallback/FallbackCV.js

+35

-23

FallbackCommandReplyV1.js

OneBot/modules/Core/Fallback/FallbackCommandReplyV1

.js

+66

-73

FallbackForwardAvV1.js

OneBot/modules/Core/Fallback/FallbackForwardAvV1.js

+59

-54

FallbackForwardMediaV1.js

OneBot/modules/Core/Fallback/FallbackForwardMediaV1.j

s

+7

-17

FallbackForwardTextV1.js

OneBot/modules/Core/Fallback/FallbackForwardTextV1.js

+10

-4

FallbackForwardingV1.js

OneBot/modules/Core/Fallback/FallbackForwardingV1.js

+9

-13

FallbackMediaForwardQueueV1.js

OneBot/modules/Core/Fallback/FallbackMediaForwardQueueV1.js

+1

-6

FallbackQuoteParseV1.js

OneBot/modules/Core/Fallback/FallbackQuoteParseV1.js

+70

-37

FallbackReplyAVV1.js

OneBot/modules/Core/Fallback/FallbackReplyAVV1.js

+12

-10

FallbackReplyMediaV1.js

OneBot/modules/Core/Fallback/FallbackReplyMediaV1.js

+12

-10

FallbackReplyRouterV1.js

OneBot/modules/Core/Fallback/FallbackReplyRouterV1.js

+81

-104

FallbackTypeUtilV1.js

OneBot/modules/Core/Fallback/FallbackTypeUtilV1.js

+3

-5



FallbackV1.js

OneBot/modules/Core/Fallback/FallbackV1.js

+22

-33

FallbackV2.js

OneBot/modules/Core/Fallback/FallbackV2.js

+77

-102

OutboundGatewayV1.js

OneBot/modules/Core/OutboundGateway/OutboundGatewayV1.js

+22

-2

OutboxV1.js

OneBot/modules/Core/Outbox/OutboxV1.js

+45

-1

SendQueueConfigV1.js

OneBot/modules/Core/SendQueue/SendQueueConfigV1.js

+1

-1

SendQueuePumpV1.js

OneBot/modules/Core/SendQueue/SendQueuePumpV1.js

+26

-3

SendQueueServiceV1.js

OneBot/modules/Core/SendQueue/SendQueueServiceV1.js

+13

-1

SendQueueTransportAdapterV1.js

OneBot/modules/Core/SendQueue/SendQueueTransportAdapterV1.js

+29

-9

SharedMessageTicketMapV1.js

OneBot/modules/Core/Shared/SharedMessageTicketMapV1.js

+13

-1

SharedSafeSendV1.js

OneBot/modules/Core/Shared/SharedSafeSendV1.js

+3

-3

BootAnnounceCV.conf

OneData/bots/ONEBOT/config/modules/Core/Impl/BootAnnounceCV.conf

+8

-7

FallbackCV.conf

OneData/bots/ONEBOT/config/modules/Core/Impl/FallbackCV.conf

+4

-1

FallbackV1.conf

OneData/bots/ONEBOT/config/modules/Core/Impl/FallbackV1.conf

+2

-2

FallbackV2.conf

OneData/bots/ONEBOT/config/modules/Core/Impl/FallbackV2.conf

+2

-2

OutboxCV.conf

OneData/bots/ONEBOT/config/modules/Core/Impl/OutboxCV.conf

+3

-0

RateLimitCV.conf

OneData/bots/ONEBOT/config/modules/Core/Impl/RateLi  
mitCV.conf  
+35  
-35

dia tak ada bagi script baru..

Thought for 40s >

Ya, ini memang masalah "repeat pattern" Codex: dia **buat PR + list 29 files changed**, tapi **tak dump full script** langsung. Kalau macam ni, memang kau tak boleh apply apa-apa, dan dia akan terus "berpusing".

Sekarang paling penting: **jangan bagi Codex edit lagi**. Kita **lock commit/PR** dia (dd3dfa9 / PR title tu) sebagai "baseline sementara", dan paksa dia buat **DUMP FILE CONTENT**

**SAHAJA — 5 file sekali**, sambung 5 lagi sampai habis 29. Lepas semua lengkap baru kau update repo/live.

Di bawah ni aku bagi prompt yang memang "ikat tangan" dia.

## PROMPT untuk Codex (English) — "Freeze changes, dump 5 files per message until all 29 delivered"

Copy paste bulat-bulat:

STOP EDITING. You already created a PR (commit dd3dfa9) with Files(29). I cannot

HARD RULES (PERMANENT)

- 1) NO NEW CHANGES. NO NEW COMMITS. NO NEW PRs. Re-output only.
- 2) Output MUST be "ONE FILE PER CODE BLOCK" so I can click Copy.
- 3) Output MUST be FULL FILE CONTENT ONLY (no diffs, no @@, no +/-, no summaries,
- 4) The file path must be on a plain text line ABOVE the code block:

Path: <repo relative path>

```js or ```conf

</> Plain text



Do NOT put "Path:" or "==== FILE" inside the code block.

- 5) EXACTLY 5 FILES PER MESSAGE. Not 4, not 6.
- 6) You MUST maintain a running "DELIVERED FILES" list and a "REMAINING FILES" list.
- 7) If you cannot output all 5 full files, output NOTHING.

TASK

You must now DUMP the full contents for the Files(29) in commit dd3dfa9, 5 at a time, in the same order as your "Files (29)" list.

BATCH 1 (first 5 files in your Files(29) list):

1. OneBot/modules/Core/BootAnnounce/BootAnnounceV1.js
2. OneBot/modules/Core/Fallback/FallbackCV.js
3. OneBot/modules/Core/Fallback/FallbackCommandReplyV1.js
4. OneBot/modules/Core/Fallback/FallbackForwardAvV1.js
5. OneBot/modules/Core/Fallback/FallbackForwardMediaV1.js

OUTPUT REQUIREMENT

- Output ONLY those 5 files as 5 separate code blocks following the exact format above.
- Then print:
DELIVERED FILES: <list of 5 paths>
REMAINING FILES: <the other 24 paths, in order>

Do NOT include any other text.

BM: kenapa prompt ni akan “pecahkan” stuck

- Dia ****tak boleh lari**** dengan report/summary lagi.
- Dia ****tak boleh buat PR baru****.
- Dia ****dipaksa dump**** 5 file full content, kemudian senarai baki 24.
- Lepas Batch 1 siap, kau reply “BATCH 2” (atau ulang prompt sama, tukar list 5 b

Cara sambung lepas Batch 1

Bila dia dah bagi Batch 1, kau reply (English, ringkas):

</> Code



Ulang sampai habis 29.

Nota penting

Sekarang Codex dah “melebar” sampai 29 files (termasuk `FallbackV1.js` , `FallbackV2.js` , `RateLimitCV.conf` etc). **Jangan apply separuh**. Kau buat betul: **kumpul semua dulu**, baru apply.

Kalau kau nak aku bantu “control” supaya Codex tak ulang file yang dah diberi, kau cuma paste sini “REMAINING FILES” list yang dia output lepas Batch 1 — aku akan susun prompt Batch 2/3/4 siap-siap untuk kau copy.



Compare with Claude ▾

OK DENGAN MASALAH YANG KITA HADAPI DAN FEATURES YANG AKU NAK, DIA DAH BAGI 7 FILE NI, SEKARANG AKU BELUM UPDATE LAGI, CUMA KITA MASIH BERANGGAPAN MASALAH SAMA BELUM SELESAI SELAGI DIA TAK SCAN SEMUA FILE DAN FIX KESELURUHAN FILE YANG WAJIB, DIA WAJIB SAMBUNG HANTAR FILE LAIN SELAIN DARI 7 FILE NI DULU, LEPAS DAH HABIS, BARU AKU UPDATE REPO IKUT LIVE SERVER YANG AKU GUNA, KALAU TAK NANTI CODEX AKAN ULANG FIX SCRIPT SAMA KALAU TAK REMARK APA YANG DIA DAH BAGI DAN DIA WAJIB SEMAK FILE LAIN DENGAN MASALAH TERAKHIR YANG KITA HADAPI

- 1)
OneBot/modules/Core/SendQueue/SendQueueConfigV1.js
- 2)
OneBot/modules/Core/SendQueue/SendQueuePumpV1.js
- 3)
OneBot/modules/Core/SendQueue/SendQueueServiceV1.js
- 4)
OneBot/modules/Core/SendQueue/SendQueueTransportAdapterV1.js
- 5)
OneBot/modules/Core/OutboundGateway/OutboundGatewayV1.js
- 6) OneBot/modules/Core/Outbox/OutboxV1.js
- 7)
OneData/bots/ONEBOT/config/modules/Core/Impl/OutboxCV.conf+
- 8) OneBot/modules/Core/Fallback/FallbackCV.js
- 9)
OneBot/modules/Core/Fallback/FallbackForwardMediaV1.js
- 10)
OneData/bots/ONEBOT/config/modules/Core/Impl/FallbackCV.conf
- 11)
OneBot/modules/Core/Fallback/FallbackCommandReplyV1.js

12) OneBot/modules/Core/Fallback/FallbackReplyAVV1.js
 13) OneBot/modules/Core/Fallback/FallbackReplyMediaV1.js
 14) OneBot/modules/Core/Fallback/FallbackForwardAvV1.js
 15) OneBot/modules/Core/Fallback/FallbackMediaForwardQueueV1.js
 16) OneBot/modules/Core/Fallback/FallbackQuoteParseV1.js
 17) OneBot/modules/Core/Fallback/FallbackReplyRouterV1.js
 18) OneBot/modules/Core/Fallback/FallbackForwardTextV1.js
 19) OneBot/modules/Core/BootAnnounce/BootAnnounceV1.js
 20) OneBot/modules/Core/Fallback/FallbackForwardingV1.js
 21) OneBot/modules/Core/Fallback/FallbackTypeUtilV1.js
 22) OneBot/modules/Core/Shared/SharedSafeSendV1.js
 23) OneData/bots/ONEBOT/config/modules/Core/Impl/BootAnnounceCV.conf
 24) OneBot/modules/Core/Fallback/FallbackV1.js
 25) OneBot/modules/Core/Fallback/FallbackV2.js
 26) OneBot/modules/Core/Shared/SharedMessageTicketMapV1.js
 27) OneData/bots/ONEBOT/config/modules/Core/Impl/FallbackV1.conf
 28) OneData/bots/ONEBOT/config/modules/Core/Impl/FallbackV2.conf

Thought for 31s >

Ok, sekarang kita **lock** dulu keadaan: Codex dah bagi FULL untuk **28 file** yang kau senaraikan. 

Maksudnya **Codex tak boleh ulang / re-edit / resend** mana-mana 28 file ni lagi — dia **mesti sambung cari file lain** (kalau ada) berdasarkan masalah terakhir + features.

"DO NOT RESEND" list (28 files sudah diberi full)

Aku terima list kau sebagai **baseline terkunci** (1–28) — tepat macam kau tulis.

Prompt (English) untuk Codex — sambung scan & dump file lain selain 28 ni (5 file sekali)

Copy-paste prompt ni dekat Codex:

STOP EDITING. DO NOT CREATE NEW COMMITS/PRS. RE-OUTPUT / DUMP ONLY.

PERMANENT OUTPUT RULES (MUST FOLLOW)

- 1) ONE FILE PER CODE BLOCK (so I can click Copy).
- 2) FULL FILE CONTENT ONLY (no diffs, no @@, no +/-, no summaries).
- 3) Path must be on a plain text line ABOVE the code block:
Path: <repo relative path>

</> Plain text



Do NOT put "Path:" or "==== FILE" inside the code block.

4) EXACTLY 5 FILES PER MESSAGE.

5) After each batch, print:

DELIVERED FILES: <paths delivered in this message>

REMAINING FILES: <paths still remaining>

6) If you cannot output all 5 full files, output NOTHING.

LOCKED: DO NOT RESEND OR RE-EDIT THESE 28 FILES (ALREADY DELIVERED IN FULL)

1. OneBot/modules/Core/SendQueue/SendQueueConfigV1.js
2. OneBot/modules/Core/SendQueue/SendQueuePumpV1.js
3. OneBot/modules/Core/SendQueue/SendQueueServiceV1.js
4. OneBot/modules/Core/SendQueue/SendQueueTransportAdapterV1.js
5. OneBot/modules/Core/OutboundGateway/OutboundGatewayV1.js
6. OneBot/modules/Core/Outbox/OutboxV1.js
7. OneData/bots/ONEBOT/config/modules/Core/Impl/OutboxCV.conf
8. OneBot/modules/Core/Fallback/FallbackCV.js
9. OneBot/modules/Core/Fallback/FallbackForwardMediaV1.js
10. OneData/bots/ONEBOT/config/modules/Core/Impl/FallbackCV.conf
11. OneBot/modules/Core/Fallback/FallbackCommandReplyV1.js

12. OneBot/modules/Core/Fallback/FallbackReplyAVV1.js
13. OneBot/modules/Core/Fallback/FallbackReplyMediaV1.js
14. OneBot/modules/Core/Fallback/FallbackForwardAvV1.js
15. OneBot/modules/Core/Fallback/FallbackMediaForwardQueueV1.js
16. OneBot/modules/Core/Fallback/FallbackQuoteParseV1.js
17. OneBot/modules/Core/Fallback/FallbackReplyRouterV1.js
18. OneBot/modules/Core/Fallback/FallbackForwardTextV1.js
19. OneBot/modules/Core/BootAnnounce/BootAnnounceV1.js
20. OneBot/modules/Core/Fallback/FallbackForwardingV1.js
21. OneBot/modules/Core/Fallback/FallbackTypeUtilV1.js
22. OneBot/modules/Core/Shared/SharedSafeSendV1.js
23. OneData/bots/ONEBOT/config/modules/Core/Impl/BootAnnounceCV.conf
24. OneBot/modules/Core/Fallback/FallbackV1.js
25. OneBot/modules/Core/Fallback/FallbackV2.js
26. OneBot/modules/Core/Shared/SharedMessageTicketMapV1.js
27. OneData/bots/ONEBOT/config/modules/Core/Impl/FallbackV1.conf
28. OneData/bots/ONEBOT/config/modules/Core/Impl/FallbackV2.conf

If you resend any of these, the response is rejected.

TASK NOW

- Scan the FULL repo and identify any OTHER files (JS/CONF) that are still required to solve the remaining issues/features (reply mapping, quote reply, hide ticketId from customers, AV support, no send-before-ready, no RateLimit for fallback/manual staff).
- From those remaining files, output the NEXT 5 files (not in the locked list) as full contents using the required format.
- If there are ZERO remaining files to change, explicitly say: "NO MORE FILES REQUIRED" and explain which existing modules handle each feature, with file paths (no code changes).

Lepas Batch pertama dia dump, kau reply ini (English)

</> Code



Kenapa ini penting

Kalau dia asyik "report saja", atau "list path saja", itu memang **reject** sebab kau tak boleh apply ke live. Prompt ni paksa dia jadi "dump machine".

Nota kecil

Kalau kau nak aku audit isi mana-mana file yang Codex dah bagi (untuk detect conflict/limit/hardcode), paste file content itu dekat sini — sebab sebahagian upload lama dalam chat kadang tak boleh aku buka semula.

    ... Compare with Claude ▾

sebelum aku teruskan dari kita buang masa tak jumpa2,
kalau kita buat 1/1 semula bermula dengan apa yang
connector.js
kernel.js
start.cmd

yang sekarang kita guna ni support tak untuk terima/send
msg maksudnya kita totally freeze dia..
kalau ikutkan sebenarnya permintaan asal aku ialah config
share tu wajib berada dalam global config, apa sahaja
yang share, yang tak share wajib berada dalam config dia
sendiri, dan tiada hardcord..

kalau aku bina semula script untuk fallback guna konsep
golden rules sama, maksudnya rewrite script baru bermula
dengan fallback dulu adakah masalah ni akan selesai?
sebab masalah ni bertindih tindih tak selesai dah setahun,
ni tak masuk akal fix jenis apa macam ni makan tahun

Thought for 59s >

Faham. Kalau nak "1/1 semula" supaya tak bertindih-tindih lagi, cara paling masuk akal memang **freeze foundation dulu** (Connector/Kernel/Start) dan **baru rewrite fallback** ikut Golden Rules.

1) Connector.js / Kernel.js / Start.cmd — boleh freeze ke?

Ya, boleh freeze kalau 3 benda ni lulus "acceptance test" asas (maksudnya memang sudah cukup untuk receive + send). Dari log sebelum ni, `!ping`/`!status` dah jalan, inbound trace pun keluar — itu tanda foundation **dekat** betul.

Tapi untuk "totally freeze" dengan yakin, buat check ringkas ini (sekali je):

Acceptance tests (foundation)

1. Start bot → mesti ada:
 - `[connector] authenticated`
 - `[connector] ready`
2. DM bot "hi" → mesti ada inbound evidence:
 - `[connector][trace] ... stage=received/forward ...`
 - `[msg] info chatId=... text="hi"`
3. Dalam control group, `!ping` → reply "pong" keluar
4. **Tiada spam send sebelum ready:**
 - tak boleh ada error macam `Cannot read properties of null/undefined` (`reading 'evaluate' / 'getChat'`) berulang-ulang sebelum `[connector] ready`

Kalau 4 ni pass, **freeze**:

- `X:\OneBot\Connector.js`
- `X:\OneBot\Kernel.js`
- `X:\OneBot\Start.cmd`

Dan arahan kepada Codex: **JANGAN TOUCH foundation.**

Kalau kau nak aku confirm secara tepat, kau paste/upload **3 file penuh** (`Connector.js`, `Kernel.js`, `Start.cmd`) yang live sekarang. Aku tak boleh tengok `X:\` direct.

2) "Global config untuk benda shared" — betul, tapi kena buat cara yang tak rosakkan architecture

Secara design asal ONEBOT sekarang, banyak module ada `controlGroupId` sebab **per-module impl conf**.

Kalau kau nak ikut rule baru kau:

- **Shared keys** → global config
- **Non-shared** → module config
- **Zero hardcode**

Boleh, tapi kena buat **incremental** supaya tak jadi "projek setahun lagi":

Cara paling selamat (incremental, tak break semua module)

Phase 1 (cepat, low risk):

Kekalkan `controlGroupId` dalam conf masing-masing **buat sementara**, tapi tambah "validator" 1 tempat (contoh `SystemControl/BootAnnounce/Fallback`) yang check semua `controlGroupId` sama — kalau mismatch, log `bug.config.mismatch`.

Phase 2 (betul-betul global):

Buat 1 global conf contoh:

- `OneData/bots/ONEBOT/config/GlobalCV.conf` (ASCII, CONF standard)
Dan 1 service loader `GlobalConfV1` yang expose `get('controlGroupId')`. Lepas tu module yang perlukan shared keys:
- jika `controlGroupId` tak ada dalam impl conf → fallback ambil dari global
- (jadi migration boleh berperingkat, tak perlu ubah 30 file sekali gus)

Kalau kau terus paksa "semua module buang `controlGroupId` sekarang juga", itu memang akan jadi churn gila.

3) Rewrite fallback dari scratch ikut Golden Rules — akan settle ke?

Sangat berkemungkinan ya kalau dibuat macam ni:

- Foundation frozen & proven OK
- Fallback lama "patchwork" dihentikan (switch pointer ke impl baru / atau replace secara bersih)
- Rebuild fallback dengan pipeline yang jelas + log yang konsisten

Sebab masalah kau setahun ni bukan "1 bug", tapi **conflict behavior** (send-before-ready, rate limit gate, ticket map, reply routing, media/AV path berbeza, dsb).

Blueprint fallback yang patut (ikut yang kau nak)

- 4x4 handlers kekal (Forward/Reply × Text/Media/AV)
- **Ticket**: 1 ticket per customer window/album (TTL + album collector)
- **Forward**: DM/customer → control group (text + media + AV) 24/7
- **Reply**: control group → customer (quote reply preferred + `!r <ticketId>` backup)
- **No ticket leak**: customer tak nampak `ticketId`
- **No spam**: dedupe + album collector + backoff on retry
- Semua IDs/text/templates dari config/template (zero hardcode)

4) Prompt untuk Codex (English) — supaya dia tak ulang “report only” & tak edit file sama

Ini kau paste dekat Codex (ini “header tetap” + arah kerja):

PERMANENT RULES (MUST FOLLOW)

- DO NOT EDIT foundation files: OneBot/Connector.js, OneBot/Kernel.js, OneBot/Start.js
- FULL REPO SCAN REQUIRED: print scanned roots + git HEAD + git status + active H
- OUTPUT MUST be copy/paste ready:
 - * ONE FILE PER CODE BLOCK
 - * FULL FILE CONTENT ONLY (no diffs, no @@, no +/-)
 - * Path line OUTSIDE the code block
 - * Exactly 5 files per message
- No “report only”. If you cannot output full files, output NOTHING.

TASK

- 1) Treat Connector/Kernel/Start as frozen (assume they pass accept tests).
- 2) Rebuild fallback cleanly to meet requirements:
 - forward text/media/AV 24/7
 - reply by quote reply + !r <ticketId>
 - never expose ticketId to customer
 - one ticket per album/window (TTL + album collector)
 - anti-spam and clear logs
- 3) Use config/templates only (zero hardcode). If shared keys needed, propose Glob

</> Plain text



Kalau kau setuju flow ni, step next paling cepat:

1. Kau confirm 4 acceptance tests foundation pass (atau paste 3 files untuk aku semak).
2. Baru kita lock target: “Fallback rewrite only” sampai stable, lepas tu barulah global config migration.

Aku boleh bantu kau “lock plan” supaya Codex tak lari lagi, tapi kunci dia memang: **foundation freeze + batch output full files only.**

... Compare with Claude ▾

maksud aku kita bina semula dari 0 fallback tapi masih ikut features yang aku nak, tetap guna nama file sama,

mungkin kita boleh letak terus dalam CV, sebenarnya CV tu bermaksud current version, version yang sedang di gunakan, manakala hub pula ialah sambungan tunggal untuk module berkenaan, kalau kau tengok wabot ni mana perlu bina dulu selepas foundation? adakah fallback dulu atau lain dulu, contoh timezone tu semua kan share.. jadi ia wajib share, begitu juga log.. log ni wajib semua module ada supaya senang nak trace, jadi kalau ikutkan binaan sebenar dah hampir complete wabot aku nak ni cuma ada tambahan features lain selepas ni tapi dok sangkut dekat sini, bincang dulu jangan tulis arahan untuk codex dulu, mungkin kita perlu codex scan apa features yang dah ada dalam repo

Thought for 36s >

Faham maksud kau: **bina semula fallback dari 0**, tapi **ikut spec yang kau nak, kekal nama fail sama**, dan letak terus dalam **CV (current version)** supaya Hub point ke situ — bukan tambah banyak versi/"sampah".

Kalau kita buat macam ni dengan betul, memang masuk akal dan biasanya lagi cepat daripada patch bertindih-tindih.

Prinsip dulu: apa yang patut "freeze" lepas foundation

Kalau **Connector.js + Kernel.js + Start.cmd** dah terbukti:

- boleh authenticated + ready
- inbound masuk (trace/msg)
- outbound basic (ping/status reply)
- tak ada spam "send sebelum ready"

...maka foundation tu boleh **freeze**. Lepas freeze, kita stop semua "fix random" yang mengubah foundation.

Lepas foundation, bina apa dulu: fallback dulu atau shared dulu?

Urutan paling masuk akal untuk elak stuck lagi:

1) Shared core yang "wajib wujud dulu" (minimum set)

Ini bukan sebab cantik, tapi sebab **semua debug & semua module bergantung**:

- **Log** (supaya semua module ada log standard; tanpa ni, kita gelap)
- **TimeZone** (timestamp konsisten; RateLimit/window logic pun guna time)

- **JsonStore** (ticket map / state)
- (Inbound filter/dedupe kalau pipeline inbound dah ada, tapi ini biasanya dah siap)

Kalau benda ni dah stabil (nampak dah hampir), kita **jangan rewrite** benda shared. Kita just **lock contract** (service name, config key canonical) supaya fallback baru tak pening.

2) Outbound pipeline readiness (1 check wajib sebelum fallback rewrite)

Fallback yang “betul” banyak send: text/media/AV. Jadi outbound mesti ada:

- **queue-not-drop**
- **no send-before-ready**
- **error reason jelas**

Kalau outbound masih ada race “send sebelum ready”, fallback baru pun akan nampak rosak walaupun logic betul. Jadi outbound gating ni kena confirm dulu (bukan rewrite besar—just confirm behavior).

3) Baru fallback rewrite (CV) — ini target utama kau

Bila shared + outbound “sihat”, fallback rewrite akan jadi straight.

“Rewrite fallback CV” macam mana supaya masalah setahun tak berulang

Kunci dia bukan “tulis balik code”, tapi **buat fallback jadi satu sistem yang jelas**:

A. Kekal architecture 4x4

- Forward Router (firewall)
- Forward Text
- Forward Media (image/doc)
- Forward AV (audio/video/ptt)
- Reply Router (firewall)
- Reply Text
- Reply Media
- Reply AV

B. Ticketing & grouping (anti spam)

- 1 ticket per customer window/album (TTL + album collector)
- Jangan create ticket baru setiap message kecil
- Retry/backoff bila send fail, bukan spam log/sent berkali-kali

C. Reply dari control group

- Quote reply = primary (paling reliable)

- `!r <ticketId>` sebagai fallback
- Mapping ticket→customer mesti persist (JsonStore), bukan RAM sahaja

D. "No ticket leak"

- TicketId hanya untuk control group
- Customer outbound: strip ticketId dari body/caption

E. "24/7" untuk fallback/manual staff

- RateLimit untuk followup/auto sahaja
- Fallback forward/reply mesti bypass window gating (tapi hanya untuk path internal yang perlu)

Pasal "global config untuk shared keys" (controlGroupId, timezone, log)

Kau betul dari segi design: benda shared patut satu tempat. Tapi aku nampak kenapa project ni jadi lama: bila kita cuba buat "global refactor" sambil tengah firefight bug.

Jadi strategi yang tak buat kau sangkut lagi:

1. **Sekarang:** fokus "fallback rewrite" + stabilkan shared contracts (service names, canonical keys).
2. **Lepas fallback pass DoD:** baru buat migration "global shared config" secara berperingkat (module baca local key dulu, kalau kosong baru fallback ke global). Ini elak ubah 30 conf sekali gus.

Jadi jawapan ringkas: "fallback dulu atau lain dulu?"

- Kalau foundation dah stable: **shared core minimal (log/timezone/jsonstore) → confirm outbound gating → fallback rewrite CV.**
- TimeZone/Log memang "wajib share", tapi kalau dah ada dan OK, **jangan kacau**. Pakai sebagai base.

"Codex scan apa features dah ada dalam repo" — ya, itu langkah bijak sebelum rewrite

Sebelum kita decide rewrite vs reuse, buat "feature inventory":

- Apa handler sudah ada (forward/reply text/media/AV)
- Apa ticket map sudah persist atau masih RAM
- Quote reply parse ada atau belum lengkap
- Outbound gating ready ada atau belum
- RateLimit flags/bypass ada atau tersebar

Bila inventory siap, kita akan nampak:

- mana boleh reuse (jimat masa)
- mana wajib rewrite (yang memang bercelaru)

Kalau kau setuju approach ni, next langkah perbincangan (tanpa prompt Codex lagi) ialah kita tetapkan **Definition of Done** fallback (checklist test) dan "scope rewrite" (fail mana kekal, fail mana diganti).