

1) Add new admins to GRIP dev instance

Add the emails of the new admins you want to add to this file: `cfg/environments/profiles/grip-catalogdev.yaml`

```
47   oidc_ids: []
48   oidc_ids: []
49   authorization:
50     admins:
51       - "bogdan.alov@zuhlke.com"
52       - "cory@corywhiteservices.com"
53       - "edgarmorais@bmd-software.com"
54       - "edwin.peter@ilink-systems.com"
55       - "thulasiraman.subramani@ilink-systems.com"
56       - "selvaprabu@ilink-systems.com"
57       - "arockiaxavierm@ilink-systems.com"
58       - "tarundwivedi@rtctek.com"
59   catalogs:
60     - name: GRIP
61       admins:
62         - "bogdan.alov@zuhlke.com"
63         - "cory@corywhiteservices.com"
64         - "edgarmorais@bmd-software.com"
65         - "edwin.peter@ilink-systems.com"
66         - "thulasiraman.subramani@ilink-systems.com"
67         - "selvaprabu@ilink-systems.com"
68         - "arockiaxavierm@ilink-systems.com"
69         - "tarundwivedi@rtctek.com"
70   llm:
```

Admins added to these lists will be able to create studies and datasets without external approval. Also, admins will be able to create data links to be used in new datasets.

2) Creating a data link

Navigate to the grip instance you want to use and login into your account with your admin user. To create a data link you need to navigate to this url `/dss/swagger/index.html`, using the GRIP instance you're using for your test. For example <https://grip.catalog-dev.grip-research.org/dss/swagger/index.html>. The first thing you need to do is click the authorize button. Since you are already logged in, you can select the option **public (OAuth2, authorization_code with PKCE)** and click authorize.

Available authorizations

public (OAuth2, authorization_code with PKCE)

OpenID Connect URL: `https://grip.catalog-dev.grip-research.org/login/realms/catalogdevgrip/.well-known/openid-configuration`
Authorization URL: `https://grip.catalog-dev.grip-research.org/login/realms/catalogdevgrip/protocol/openid-connect/auth`
Token URL: `https://grip.catalog-dev.grip-research.org/login/realms/catalogdevgrip/protocol/openid-connect/token`
Flow: authorization_code with PKCE

client_id:

client_secret:

Scopes: [select all](#) [select none](#)

☐ offline_access
☐ service_account
☒ openid
☐ profile
☐ grip-defaults
☐ basic

Available authorizations

public (OAuth2, authorization_code with PKCE)

OpenID Connect URL: `https://grip.catalog-dev.grip-research.org/login/realms/catalogdevgrip/.well-known/openid-configuration`
Authorization URL: `https://grip.catalog-dev.grip-research.org/login/realms/catalogdevgrip/protocol/openid-connect/auth`
Token URL: `https://grip.catalog-dev.grip-research.org/login/realms/catalogdevgrip/protocol/openid-connect/token`
Flow: authorization_code with PKCE

client_id:


client_secret:

Scopes: [select all](#) [select none](#)


☐ offline_access
☐ service_account
☒ openid
☐ profile
☐ grip-defaults
☐ basic

[Authorize](#) [Close](#)

Next, you need to go to the **File** section in swagger and execute first this API (Create):

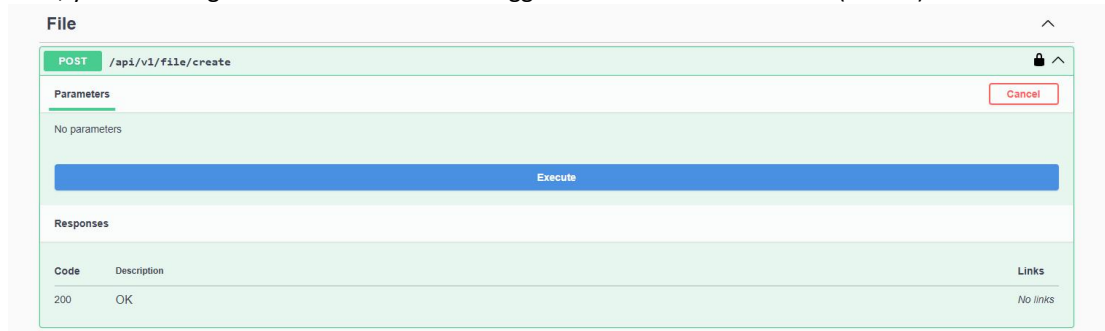

When successful, you should receive a 201 HTTP response with the data link as a response:

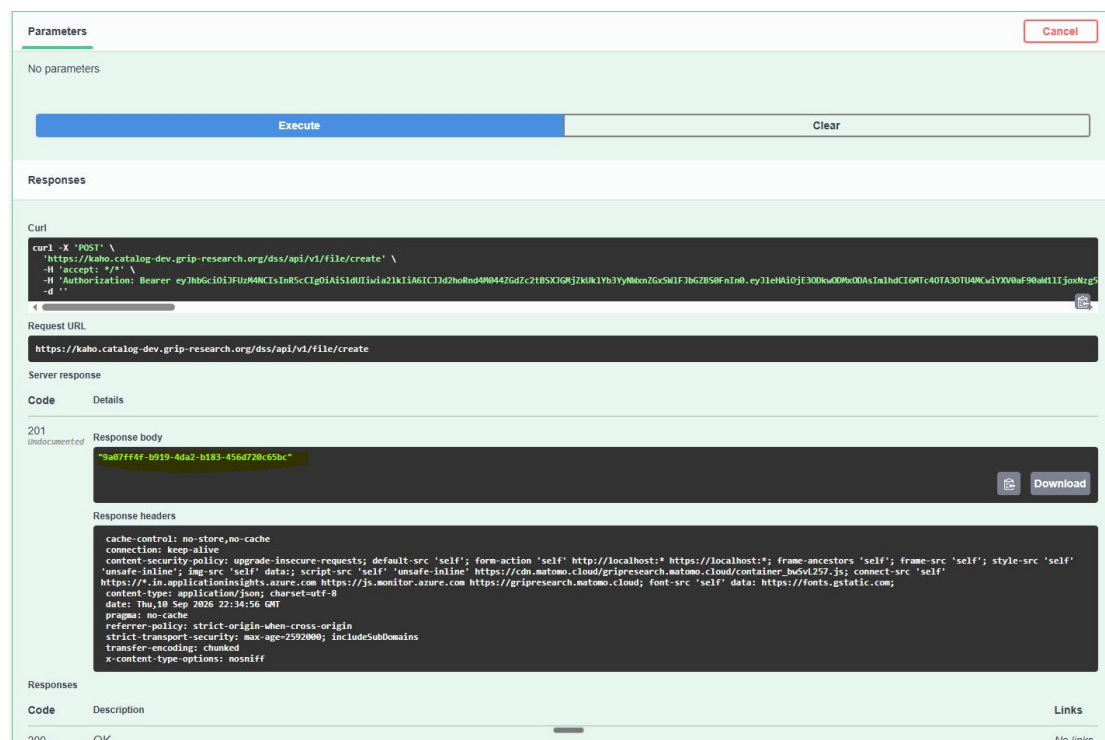

Save this catalog response because it will be needed to the following steps.

The next API you need to execute is this one (Upload):

POST /api/v1/file/{dataContainerId}/upload

Parameters

Name	Description
dataContainerId * required string(\$uuid) (path)	dataContainerId

Request body

multipart/form-data

attachment
string(\$binary) No se eligió ningún archivo

☒ Send empty value

Execute

Responses

Code	Description	Links
204	No Content	No links
400	Bad Request	No links

In this endpoint you need to provide the data container ID you previously saved. For the attachment you need to upload a zip file that contains these files and format.

Nombre	Tipo	Tamaño comprimido	Protegido ...	Tamaño	Relación	Fecha de modificación
Files1	Carpeta de archivos					
dataimport-configuration	Archivo de origen JSON	1 KB	No	1 KB	37%	10-09-2026 16:57

The Json file should have this content. StudyName and DisplayName are costumizable.

```
{
  "$schema": "...../src/specifications/data/schema/dataimport-configuration-v1.schema.json",
  "studyName": "Test Study",
  "advancedSearchEnabled": false,
  "folders": [
    {
      "type": "tableList",
      "displayName": "Test Files",
      "path": "/Files1",
      "tabularSettings": {}
    }
  ]
}
```

The files folder will contain the files you want to upload to this container. When you have all set zip these files and attach it to the “attachment” field in swagger, like this:

POST /api/v1/file/{dataContainerId}/upload

Parameters

Name	Description
dataContainerId * required string(\$uuid) (path)	9a07ff4f-b919-4da2-b183-456d720c65bc

Request body

multipart/form-data

attachment
string(\$binary) dss-test-package.zip

☐ Send empty value

Execute

Responses

Code	Description	Links
204	No Content	No links
400	Bad Request	No links

Click execute to proceed. You should receive a 204 HTTP response code.

Code	Details
204	Response headers <pre>cache-control: no-store,no-cache connection: keep-alive content-security-policy: upgrade-insecure-requests; default-src 'self'; form-action 'self' http://localhost:* https://localhost:*; frame-ancestors 'self'; frame-src 'self'; style-src 'self' 'unsafe-inline'; img-src 'self' data; script-src 'self' 'unsafe-inline' https://cdn.matomo.cloud/gripresearch.matomo.cloud/container_bw6vl257.js; connect-src 'self' https://*.in.applicationinsights.azure.com https://js.monitor.azure.com https://gripresearch.matomo.cloud; font-src 'self' data: https://fonts.gstatic.com; date: Thu, 10 Sep 2020 22:50:46 GMT pragma: no-cache referrer-policy: strict-origin-when-cross-origin strict-transport-security: max-age=2592000; includeSubDomains x-content-type-options: nosniff</pre>

The last step is executing the /runPipeline API:

POST

/api/v1/file/{dataContainerId}/runPipeline



Parameters

Try it out

Name	Description
dataContainerId * required string(\$uuid) (path) dataContainerId	

Responses

Code	Description	Links
204	No Content	No links
400	Bad Request	No links

Here you just need to enter the data container ID you saved before and click execute button. The API should return a 204 HTTP code as a response.

Code	Details
204	Response headers <pre>cache-control: no-store,no-cache connection: keep-alive content-security-policy: upgrade-insecure-requests; default-src 'self'; form-action 'self' http://localhost:* https://localhost:*; frame-ancestors 'self'; frame-src 'self'; style-src 'self' 'unsafe-inline'; img-src 'self' data; script-src 'self' 'unsafe-inline' https://cdn.matomo.cloud/gripresearch.matomo.cloud/container_bw6vl257.js; connect-src 'self' https://*.in.applicationinsights.azure.com https://js.monitor.azure.com https://gripresearch.matomo.cloud; font-src 'self' data: https://fonts.gstatic.com; date: Thu, 10 Sep 2020 22:53:38 GMT pragma: no-cache referrer-policy: strict-origin-when-cross-origin strict-transport-security: max-age=2592000; includeSubDomains x-content-type-options: nosniff</pre>

Now your data link is ready to be used in your dataset data link field, just use the data container ID you saved in the create step. To confirm your data container is working, you can execute this endpoint in the swagger:

Swagger

DataContainer

GET

/api/v1/recorddata/{dataContainerId}

Parameters

Try it out

Name	Description
dataContainerId * required string(\$uuid) (path)	dataContainerId

Just enter the data container ID in the required field and execute. You should receive a 200 HTTP response like this:

Code

Details

200

Response body

```
{
  "version": {
    "versionId": "6f128a32-4ec6-4216-bc2b-501a6dce6f42",
    "dataContainerId": "9a07ff4f-b919-4da2-b183-456d720c65bc",
    "version": "2026-09-10 22:53:38",
    "importHash": "",
    "studyName": "Test Study",
    "changelog": "",
    "advancedSearchEnabled": false,
    "directDownloadEnabled": false,
    "workspaceTransferEnabled": false
  },
  "mainFolders": [
    {
      "id": "b5d08ffe-b201-4670-a855-1deabfc503f0",
      "name": "Test Files",
      "dataFormatType": "tabularData",
      "dataDictionaryVisibility": "authenticated",
      "aggregatedContVisibility": "authenticated",
      "showDataDictionaryOnly": false
    }
  ]
}
```



Download