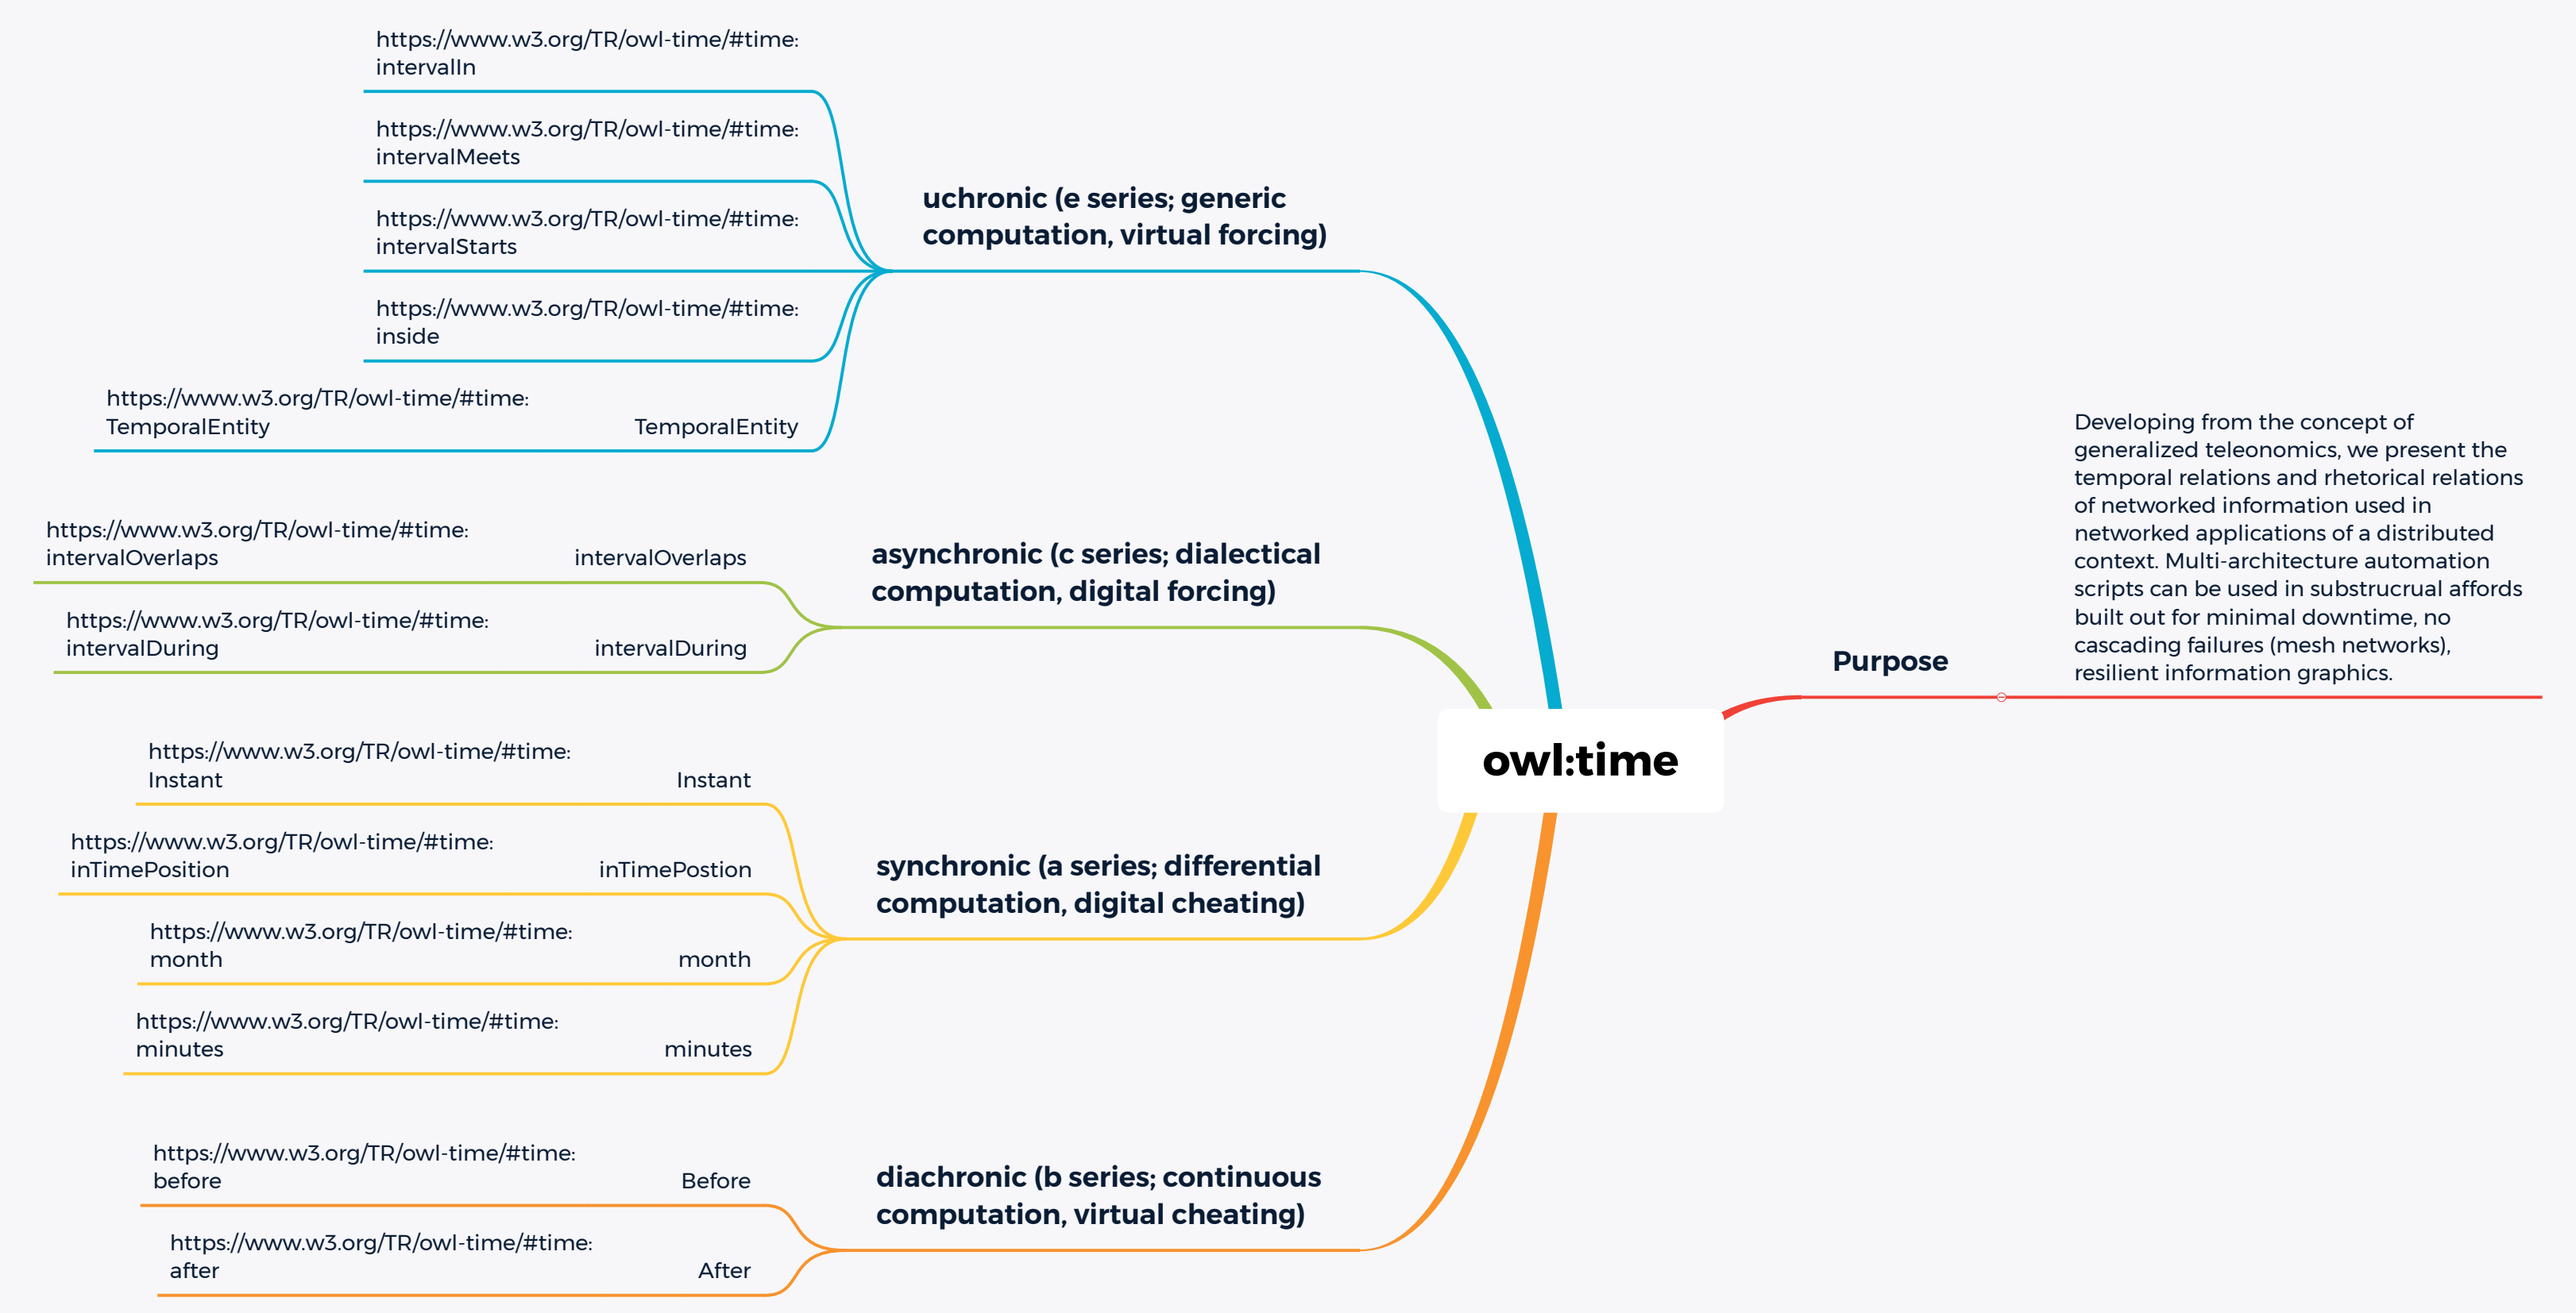
owl:time
Purpose
Developing from the concept of generalized teleonomics, we present the temporal relations and rhetorical relations of networked information used in networked applications of a distributed context. Multi-architecture automation scripts can be used in substrucrual affords built out for minimal downtime, no cascading failures (mesh networks), resilient information graphics.
uchronic (e series; generic computation, virtual forcing)
https://www.w3.org/TR/owl-time/#time:intervalIn
https://www.w3.org/TR/owl-time/#time:intervalMeets
https://www.w3.org/TR/owl-time/#time:intervalStarts
https://www.w3.org/TR/owl-time/#time:inside
https://www.w3.org/TR/owl-time/#time:TemporalEntity TemporalEntity
asynchronic (c series; dialectical computation, digital forcing)
https://www.w3.org/TR/owl-time/#time:intervalOverlaps intervalOverlaps
https://www.w3.org/TR/owl-time/#time:intervalDuring intervalDuring
synchronic (a series; differential computation, digital cheating)
https://www.w3.org/TR/owl-time/#time:Instant Instant
https://www.w3.org/TR/owl-time/#time:inTimePosition inTimePostion
https://www.w3.org/TR/owl-time/#time:month month
https://www.w3.org/TR/owl-time/#time:minutes minutes
diachronic (b series; continuous computation, virtual cheating)
https://www.w3.org/TR/owl-time/#time:before Before
https://www.w3.org/TR/owl-time/#time:after After