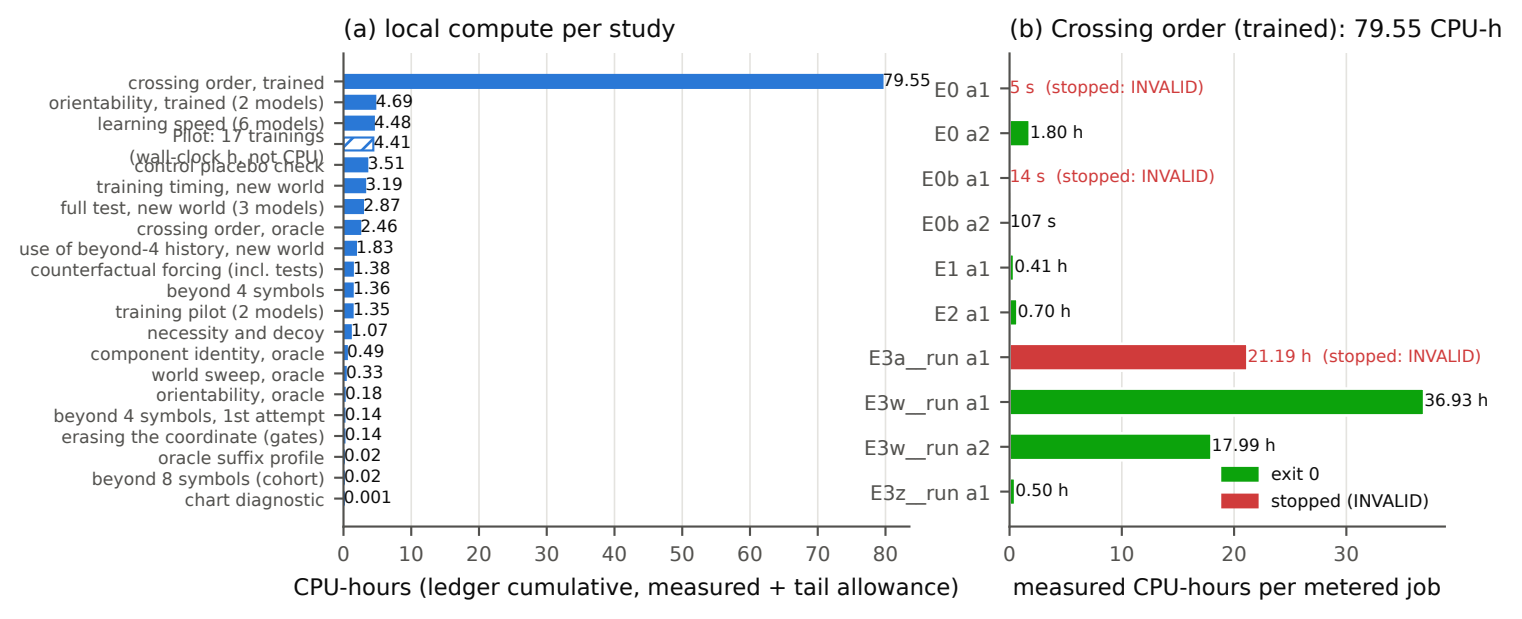
(a) local compute per study
crossing order, trained
orientability, trained (2 models)
learning speed (6 models)
Pilot: 17 trainings
(wall-clock h, not CPU)
control placebo check
training timing, new world
full test, new world (3 models)
crossing order, oracle
use of beyond-4 history, new world
counterfactual forcing (incl. tests)
beyond 4 symbols
training pilot (2 models)
necessity and decoy
component identity, oracle
world sweep, oracle
orientability, oracle
beyond 4 symbols, 1st attempt
erasing the coordinate (gates)
oracle suffix profile
beyond 8 symbols (cohort)
chart diagnostic
79.55
4.69
4.48
4.41
3.51
3.19
2.87
2.46
1.83
1.38
1.36
1.35
1.07
0.49
0.33
0.18
0.14
0.14
0.02
0.02
0.001
0
10
20
30
40
50
60
70
80
CPU-hours (ledger cumulative, measured + tail allowance)
(b) Crossing order (trained): 79.55 CPU-h
E0 a1
E0 a2
E0b a1
E0b a2
E1 a1
E2 a1
E3a__run a1
E3w__run a1
E3w__run a2
E3z__run a1
5 s (stopped: INVALID)
1.80 h
14 s (stopped: INVALID)
107 s
0.41 h
0.70 h
21.19 h (stopped: INVALID)
36.93 h
17.99 h
0.50 h
exit 0
stopped (INVALID)
0
10
30
measured CPU-hours per metered job