

Feature			Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S	
data_tables_new_user	16.315 s	1	0	1	0	7	2	1	4	

FAIL & SKIP SCENARIOS -- 3 --

#	Feature Name	Scenario Name
1	data_tables_new_user	TC_02_data_new_user


TAG	Scenario				Feature				
Name	T	P	F	S	T	P	F	S	
@data_tables_new_user	1	0	1	0	1	0	1	0	

FEATURES SUMMARY -- 5 --



#	Feature Name	T	P	F	S	Duration
1	data_tables_new_user	1	0	1	0	16.315 s

SCENARIOS SUMMARY -- 6

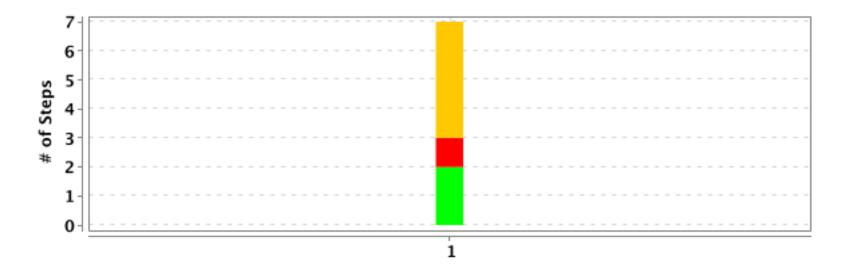


1	# Feature Name	Scenario Name	T	P	F	S	Duration
	data_tables_new_user	TC_02_data_new_user	7	2	1	4	16.312 s

DETAILED SECTION -- 7 --

data_tables_new_user

FAILED	DURATION - 16.315 s	Scenarios		Steps	
		Total - 1		Total - 7	
/ 2:20:55.311 PM //	2:21:11.626 PM /	Pass - 0	1	Pass - 2	7
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 4	

TC_02_data_new_user

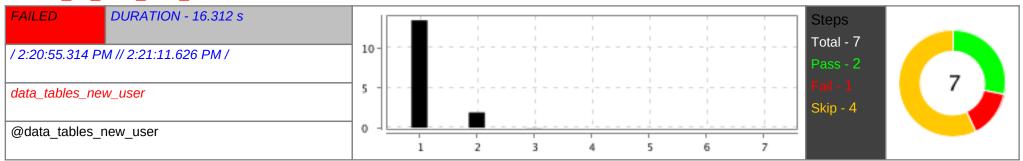

#	Step / Hook Details	Status	Duration
1	Given user on the application "https://editor.datatables.net/"	PASSED	13.466 s
2	And user clicks on the new button	PASSED	1.910 s
3	And user enters the "firstname" and "lastname" and "position" and "startdate" and "salary"	FAILED	0.019 s
	firstnamelastnamepositionstartdatesalaryserdarortacQA2023-06-153000		
	io.cucumber.core.exception.CucumberException: Step [user enters the {string} and {string} and {string} and {string} and {string}] is defined with 5 parameters at 'stepdefinitions.EditorHomeworkStepDefs.user_enters_the_and_and_and_java.lang.String,java.lang.Stri		

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)		
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)		
	at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)		
	$at\ io. cucumber. core. runtime. Rethrowing Throwable Collector. execute And Throw (Rethrowing Throwable Collector. java: 23)$		
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)		
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	$at\ io. cucumber. core. runtime. Cucumber Execution Context. lambda \$run Features \$6 (Cucumber Execution Context. java: 148)$		
	at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163)		
	at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146)		
	at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at org.junit.runner.JUnitCore.run(JUnitCore.java:137)		
	at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69)		
	at com.intellij.rt.junit.ldeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38)		
	at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11)		
	at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35)		
	at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:232)		
	at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:55)		
4	And capture the screenshot	SKIPPED	0.003 s
5	And click on create button	SKIPPED	0.001 s
6	And search for the "firstname"	SKIPPED	0.000 s
7	Then verify the name field contains the "firstname"	SKIPPED	0.002 s

DETAILED SECTION -- 9 --

#	Step / Hook Details	Status	Duration
	AFTER - hooks.Hooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.857 s
	screenshots		
	Create of in minut in min		