



Regular expressions in Java - Tutorial

Table of Contents

1. Regular Expressions
 2. Prerequisites
 3. Rules of writing regular expressions
 4. Using regular expressions with String methods
 5. Pattern and Matcher
 6. Java Regex Examples
 7. Processing regular expressions in Eclipse
 8. Links and Literature
 9. vogella training and consulting support
- Appendix A: Copyright, License and Source code

Lars Vogel, (c) 2007, 2017 vogella GmbH Version 3.1,
05.10.2016

This tutorial introduces the concept of regular expressions and describes their usage in Java. It also provides several Java regular expression examples.

1. Regular Expressions

1.1. What are regular expressions?

A *regular expression* defines a search pattern for strings. The abbreviation for regular expression is *regex*. The search pattern can be anything from a simple character, a fixed string or a complex expression containing special characters describing the pattern. The pattern defined by the regex may match one or several times or not at all for a given string.

Regular expressions can be used to search, edit and manipulate text.

The process of analyzing or modifying a text with a regex is called: *The regular expression is applied to the text/string*. The pattern defined by the regex is applied on the text from left to right. Once a source character has been used in a match, it cannot be reused. For example, the regex `aba` will match `ababababa` only two times (`aba_aba__`).

ONLINE TRAINING

- [Learn more ...](https://learn.vogella.com/)
(https://learn.vogella.com/)

EVENTS

- [25 FEB - RCP Training](http://www.vogella.com/training/25-feb-rcp-training/)
(http://www.vogella.com/training/25-feb-rcp-training/)

QUICK LINKS

- [Onsite Training](http://www.vogella.com/onsite-training/)
(http://www.vogella.com/onsite-training/)
- [Consulting](http://www.vogella.com/consulting/)
(http://www.vogella.com/consulting/)
- [Books](http://www.vogella.com/books/)
(http://www.vogella.com/books/)

SHARE



Qualcomm
developer network

Take XR
development
to the
extreme

Watch our
webinar to bring
photorealistic
visuals and
optimized
rendering to
mobile XR

1.2. Regex examples

A simple example for a regular expression is a (literal) string. For example, the *Hello World* regex matches the "Hello World" string. `.` (dot) is another example for a regular expression. A dot matches any single character; it would match, for example, "a" or "1".

The following tables lists several regular expressions and describes which pattern they would match.

Table 1. Regex example

Regex	Matches
this is text	Matches exactly "this is text"
this\s+is\s+text	Matches the word "this" followed by one or more whitespace characters followed by the word "is" followed by one or more whitespace characters followed by the word "text".
^d+(\.d+)?	^ defines that the patten must start at beginning of a new line. \d+ matches one or several digits. The ? makes the statement in brackets optional. \. matches ".", parentheses are used for grouping. Matches for example "5", "1.5" and "2.21".

1.3. Support for regular expressions in programming languages

Regular expressions are supported by most programming languages, e.g., Java, Perl, Groovy, etc. Unfortunately each language supports regular expressions slightly different.

2. Prerequisites

The following tutorial assumes that you have basic knowledge of the Java programming language.

Some of the following examples use JUnit to validate the result. You should be able to adjust them in case if you do not want to use JUnit. To learn about JUnit please see [JUnit Tutorial](http://www.vogella.com/tutorials/JUnit/article.html) (<http://www.vogella.com/tutorials/JUnit/article.html>).

ONLINE TRAINING

- [Learn more ...](https://learn.vogella.com)
(<https://learn.vogella.com>)

EVENTS


- [25 FEB - RCP Training](http://www.vogella.com)
(<http://www.vogella.com>)

QUICK LINKS

- [Onsite Training](http://www.vogella.com)
(<http://www.vogella.com>)
- [Consulting](http://www.vogella.com)
(<http://www.vogella.com>)
- [Books](http://www.vogella.com)
(<http://www.vogella.com>)

SHARE





SpreadsheetGear
 Performance Spreadsheet Components
[Download Free Trial](#)

NEW RELEASE - Excel 2016 support, 51 new Excel functions, full conditional formatting support, enhanced workbook protection and encryption, cell gradient rendering and more.

3. Rules of writing regular expressions

The following description is an overview of available meta characters which can be used in regular expressions. This chapter is supposed to be a references for the different regex elements.

3.1. Common matching symbols

Regular Expression	Description
.	Matches any character
^regex	Finds regex that must match at the beginning of the line.
regex\$	Finds regex that must match at the end of the line.
[abc]	Set definition, can match the letter a or b or c.
[abc][vz]	Set definition, can match a or b or c followed by either v or z.
[^abc]	When a caret appears as the first character inside square brackets, it negates the pattern. This pattern matches any character except a or b or c.
[a-d1-7]	Ranges: matches a letter between a and d and figures from 1 to 7, but not d1.
X Z	Finds X or Z.
XZ	Finds X directly followed by Z.
\$	Checks if a line end follows.

3.2. Meta characters

The following meta characters have a pre-defined meaning and make certain common patterns easier to use, e.g., `\d` instead of `[0-9]`.

Regular Expression	Description
<code>\d</code>	Any digit, short for <code>[0-9]</code>
<code>\D</code>	A non-digit, short for <code>[^0-9]</code>

ONLINE TRAINING

- [Learn more ...](https://learn.vogella.com/)
(<https://learn.vogella.com/>)

EVENTS

- [25 FEB - RCP Training](http://www.vogella.com/2018/02/25-feb-rcp-training.html)
(<http://www.vogella.com/2018/02/25-feb-rcp-training.html>)

QUICK LINKS

- [Onsite Training](http://www.vogella.com/2018/02/25-feb-rcp-training.html)
(<http://www.vogella.com/2018/02/25-feb-rcp-training.html>)
- [Consulting](http://www.vogella.com/2018/02/25-feb-rcp-training.html)
(<http://www.vogella.com/2018/02/25-feb-rcp-training.html>)
- [Books](http://www.vogella.com/2018/02/25-feb-rcp-training.html)
(<http://www.vogella.com/2018/02/25-feb-rcp-training.html>)

SHARE



Regular Expression	Description
\s	A whitespace character, short for [\t\n\x0b\r\f]
\S	A non-whitespace character, short for
\w	A word character, short for [a-zA-Z_0-9]
\W	A non-word character [^\w]
\S+	Several non-whitespace characters
\b	Matches a word boundary where a word character is [a-zA-Z_0-9]



These meta characters have the same first letter as their representation, e.g., digit, space, word, and boundary. Uppercase symbols define the opposite.

ONLINE TRAINING

- [Learn more ...](https://learn.vogella.com)
(<https://learn.vogella.com>)

EVENTS

- [25 FEB - RCP Training](http://www.vogella.com/2018/02/25-feb-rdp-training.html)
(<http://www.vogella.com/2018/02/25-feb-rdp-training.html>)

QUICK LINKS

- [Onsite Training](http://www.vogella.com/2018/02/25-feb-rdp-training.html)
(<http://www.vogella.com/2018/02/25-feb-rdp-training.html>)
- [Consulting](http://www.vogella.com/2018/02/25-feb-rdp-training.html)
(<http://www.vogella.com/2018/02/25-feb-rdp-training.html>)
- [Books](http://www.vogella.com/2018/02/25-feb-rdp-training.html)
(<http://www.vogella.com/2018/02/25-feb-rdp-training.html>)

SHARE



3.3. Quantifier

A quantifier defines how often an element can occur. The symbols ?, *, + and {} define the quantity of the regular expressions

Regular Expression	Description	Examples
*	Occurs zero or more times, is short for {0,}	X* finds no or several letter X, <sbr /> .* finds any character sequence
+	Occurs one or more times, is short for {1,}	X+- Finds one or several letter X
?	Occurs no or one times, ? is short for {0,1} .	X? finds no or exactly one letter X

Regular Expression	Description	Examples
{X}	Occurs X number of times, {} describes the order of the preceding liberal	\d{3} searches for three digits, .{10} for any character sequence of length 10.
{X,Y}	Occurs between X and Y times,	\d{1,4} means \d must occur at least once and at a maximum of four.
*?	? after a quantifier makes it a <i>reluctant quantifier</i> . It tries to find the smallest match. This makes the regular expression stop at the first match.	

ONLINE TRAINING

- [Learn more ...](https://learn.vogella.com)
(https://learn.vogella.com)

EVENTS

- [25 FEB - RCP Training](http://www.vogella.com/2018/02/25-feb-rdp-training.html)
(http://www.vogella.com/2018/02/25-feb-rdp-training.html)

QUICK LINKS

- [Onsite Training](http://www.vogella.com/2018/02/25-feb-rdp-training.html)
(http://www.vogella.com/2018/02/25-feb-rdp-training.html)
- [Consulting](http://www.vogella.com/2018/02/25-feb-rdp-training.html)
(http://www.vogella.com/2018/02/25-feb-rdp-training.html)
- [Books](http://www.vogella.com/2018/02/25-feb-rdp-training.html)
(http://www.vogella.com/2018/02/25-feb-rdp-training.html)

SHARE



3.4. Grouping and back reference

You can group parts of your regular expression. In your pattern you group elements with round brackets, e.g., (). This allows you to assign a repetition operator to a complete group.

In addition these groups also create a back reference to the part of the regular expression. This captures the group. A back reference stores the part of the String which matched the group. This allows you to use this part in the replacement.

Via the \$ you can refer to a group. \$1 is the first group, \$2 the second, etc.

Let's, for example, assume you want to replace all whitespace between a letter followed by a point or a comma. This would involve that the point or the comma is part of the pattern. Still it should be included in the result.

```
// Removes whitespace between a word character and . or ,
String pattern = "(\\w)(\\s+)([\\.\\,])";
System.out.println(EXAMPLE_TEST.replaceAll(pattern, "$1$3"));
```

JAVA

This example extracts the text between a title tag.

JAVA

```
// Extract the text between the two title elements
pattern = "(?i)(<title.*?>)(.+?)()";
String updated = EXAMPLE_TEST.replaceAll(pattern, "$2");
```

3.5. Negative look ahead

Negative look ahead provides the possibility to exclude a pattern. With this you can say that a string should not be followed by another string.

Negative look ahead are defined via `(?!pattern)`. For example, the following will match "a" if "a" is not followed by "b".

```
a(?!b)
```

JAVA

3.6. Specifying modes inside the regular expression

You can add the mode modifiers to the start of the regex. To specify multiple modes, simply put them together as in `(ismx)`.

- `(?i)` makes the regex case insensitive.
- `(?s)` for "single line mode" makes the dot match all characters, including line breaks.
- `(?m)` for "multi-line mode" makes the caret and dollar match at the start and end of each line in the subject string.

3.7. Backslashes in Java

The backslash `\` is an escape character in Java Strings. That means backslash has a predefined meaning in Java. You have to use double backslash `\\` to define a single backslash. If you want to define `\w`, then you must be using `\\w` in your regex. If you want to use backslash as a literal, you have to type `\\\\` as `\` is also an escape character in regular expressions.

4. Using regular expressions with String methods

4.1. Redefined methods on String for processing regular expressions

Strings in Java have built-in support for regular expressions. Strings have four built-in methods for regular expressions, i.e., the `matches()`, `split()`, `replaceFirst()` and `replaceAll()` methods. The `replace()` method does NOT support regular expressions.

These methods are not optimized for performance. We will later use classes which are optimized for performance.

ONLINE TRAINING

- [Learn more ...](https://learn.vogella.com)
([https://learn.vog](https://learn.vogella.com)

EVENTS

- [25 FEB - RCP Training](http://www.vogella.com)
([http://www.vog](http://www.vogella.com)

QUICK LINKS

- [Onsite Training](http://www.vogella.com)
([http://www.vog](http://www.vogella.com)
- [Consulting](http://www.vogella.com)
([http://www.vog](http://www.vogella.com)
- [Books](http://www.vogella.com)
([http://www.vog](http://www.vogella.com)

SHARE



Method	Description
<code>s.matches("regex")</code>	Evaluates if "regex" matches <code>s</code> . Returns only <code>true</code> if the WHOLE string can be matched.
<code>s.split("regex")</code>	Creates an array with substrings of <code>s</code> divided at occurrence of "regex". "regex" is not included in the result.
<code>s.replaceFirst("regex"), "replacement"</code>	Replaces first occurrence of "regex" with "replacement".
<code>s.replaceAll("regex"), "replacement"</code>	Replaces all occurrences of "regex" with "replacement".

Create for the following example the Java project
`de.vogella.regex.test`.

```

package de.vogella.regex.test;

public class RegexTestStrings {
    public static final String EXAMPLE_TEST = "This is my small
example "
        + "string which I'm going to " + "use for pattern
matching.";

    public static void main(String[] args) {
        System.out.println(EXAMPLE_TEST.matches("\\w.*"));
        String[] splitString = (EXAMPLE_TEST.split("\\s+"));
        System.out.println(splitString.length); // should be 14
        for (String string : splitString) {
            System.out.println(string);
        }
        // replace all whitespace with tabs
        System.out.println(EXAMPLE_TEST.replaceAll("\\s+",
"\t"));
    }
}

```

JAVA

4.2. Examples

The following class gives several examples for the usage of regular expressions with strings. See the comment for the purpose.

If you want to test these examples, create for the Java project
`de.vogella.regex.string`.

ONLINE TRAINING

- [Learn more ...](https://learn.vogella.de/)
(<https://learn.vogella.de/>)

EVENTS

- [25 FEB - RCP Training](http://www.vogella.de/tutorials/JavaRegularExpressions/article.html)
(<http://www.vogella.de/tutorials/JavaRegularExpressions/article.html>)

QUICK LINKS

- [Onsite Training](http://www.vogella.de/tutorials/JavaRegularExpressions/article.html)
(<http://www.vogella.de/tutorials/JavaRegularExpressions/article.html>)
- [Consulting](http://www.vogella.de/tutorials/JavaRegularExpressions/article.html)
(<http://www.vogella.de/tutorials/JavaRegularExpressions/article.html>)
- [Books](http://www.vogella.de/tutorials/JavaRegularExpressions/article.html)
(<http://www.vogella.de/tutorials/JavaRegularExpressions/article.html>)

SHARE



```

package de.vogella.regex.string;

public class StringMatcher {
    // returns true if the string matches exactly "true"
    public boolean isTrue(String s){
        return s.matches("true");
    }
    // returns true if the string matches exactly "true" or
    "True"
    public boolean isTrueVersion2(String s){
        return s.matches("[tT]rue");
    }

    // returns true if the string matches exactly "true" or
    "True"
    // or "yes" or "Yes"
    public boolean isTrueOrYes(String s){
        return s.matches("[tT]rue|[yY]es");
    }

    // returns true if the string contains exactly "true"
    public boolean containsTrue(String s){
        return s.matches(".*true.*");
    }

    // returns true if the string contains of three letters
    public boolean isThreeLetters(String s){
        return s.matches("[a-zA-Z]{3}");
        // simpler from for
    //    return s.matches("[a-Z][a-Z][a-Z]");
    }

    // returns true if the string does not have a number at the
    beginning
    public boolean isNoNumberAtBeginning(String s){
        return s.matches("^[^\\d].*");
    }

    // returns true if the string contains a arbitrary number of
    characters except b
    public boolean isIntersection(String s){
        return s.matches("(\\w&&[^b])");
    }

    // returns true if the string contains a number less than 300
    public boolean isLessThenThreeHundred(String s){
        return s.matches("[^0-9]*[12]?[0-9]{1,2}[^0-9]*");
    }
}

```

And a small JUnit Test to validates the examples.

ONLINE TRAINING

- [Learn more ...](https://learn.vogella.com)
(https://learn.vogella.com)

EVENTS

- [25 FEB - RCP Training](http://www.vogella.com)
(http://www.vogella.com)

QUICK LINKS

- [Onsite Training](http://www.vogella.com)
(http://www.vogella.com)
- [Consulting](http://www.vogella.com)
(http://www.vogella.com)
- [Books](http://www.vogella.com)
(http://www.vogella.com)

SHARE




```

package de.vogella.regex.string;

import org.junit.Before;
import org.junit.Test;

import static org.junit.Assert.assertFalse;
import static org.junit.Assert.assertTrue;

public class StringMatcherTest {
    private StringMatcher m;

    @Before
    public void setup(){
        m = new StringMatcher();
    }

    @Test
    public void testIsTrue() {
        assertTrue(m.isTrue("true"));
        assertFalse(m.isTrue("true2"));
        assertFalse(m.isTrue("True"));
    }

    @Test
    public void testIsTrueVersion2() {
        assertTrue(m.isTrueVersion2("true"));
        assertFalse(m.isTrueVersion2("true2"));
        assertTrue(m.isTrueVersion2("True"));
    }

    @Test
    public void testIsTrueOrYes() {
        assertTrue(m.isTrueOrYes("true"));
        assertTrue(m.isTrueOrYes("yes"));
        assertTrue(m.isTrueOrYes("Yes"));
        assertFalse(m.isTrueOrYes("no"));
    }

    @Test
    public void testContainsTrue() {
        assertTrue(m.containsTrue("thetruewithin"));
    }

    @Test
    public void testIsThreeLetters() {
        assertTrue(m.isThreeLetters("abc"));
        assertFalse(m.isThreeLetters("abcd"));
    }

    @Test
    public void testisNoNumberAtBeginning() {
        assertTrue(m.isNoNumberAtBeginning("abc"));
        assertFalse(m.isNoNumberAtBeginning("1abcd"));
        assertTrue(m.isNoNumberAtBeginning("a1bcd"));
        assertTrue(m.isNoNumberAtBeginning("asdfsdf"));
    }

    @Test
    public void testisIntersection() {
        assertTrue(m.isIntersection("1"));
        assertFalse(m.isIntersection("abcksdskfsdfsdf"));

        assertTrue(m.isIntersection("skdskfjsmcnxmvjwque484242"));
    }

```

ONLINE TRAINING

- [Learn more ...](https://learn.vogella.com/)
(<https://learn.vogella.com/>)

EVENTS

- [25 FEB - RCP Training](http://www.vogella.com/2018/02/25-feb-rdp-training.html)
(<http://www.vogella.com/2018/02/25-feb-rdp-training.html>)

QUICK LINKS

- [Onsite Training](http://www.vogella.com/2018/02/25-feb-rdp-training.html)
(<http://www.vogella.com/2018/02/25-feb-rdp-training.html>)
- [Consulting](http://www.vogella.com/2018/02/25-feb-rdp-training.html)
(<http://www.vogella.com/2018/02/25-feb-rdp-training.html>)
- [Books](http://www.vogella.com/2018/02/25-feb-rdp-training.html)
(<http://www.vogella.com/2018/02/25-feb-rdp-training.html>)

SHARE



```

@Test
public void testLessThanThreeHundred() {
    assertTrue(m.isLessThanThreeHundred("288"));
    assertFalse(m.isLessThanThreeHundred("3288"));
    assertFalse(m.isLessThanThreeHundred("328 8"));
    assertTrue(m.isLessThanThreeHundred("1"));
    assertTrue(m.isLessThanThreeHundred("99"));
    assertFalse(m.isLessThanThreeHundred("300"));
}
}

```

ONLINE TRAINING

- [Learn more ...](https://learn.vogella.com)
([https://learn.vog](https://learn.vogella.com)

EVENTS

- 25 FEB - RCP



5. Pattern and Matcher

For advanced regular expressions the `java.util.regex.Pattern` and `java.util.regex.Matcher` classes are used.

You first create a `Pattern` object which defines the regular expression. This `Pattern` object allows you to create a `Matcher` object for a given string. This `Matcher` object then allows you to do regex operations on a `String`.

- [Onsite Training](http://www.vogella.com)
([http://www.vog](http://www.vogella.com)
- [Consulting](http://www.vogella.com)
([http://www.vog](http://www.vogella.com)
- [Books](http://www.vogella.com)
([http://www.vog](http://www.vogella.com)

SHARE



```

package de.vogella.regex.test;

import java.util.regex.Matcher;
import java.util.regex.Pattern;

public class RegexTestPatternMatcher {
    public static final String EXAMPLE_TEST = "This is my small
example string which I'm going to use for pattern matching.";

    public static void main(String[] args) {
        Pattern pattern = Pattern.compile("\\w+");
        // in case you would like to ignore case sensitivity,
        // you could use this statement:
        // Pattern pattern = Pattern.compile("\\s+",
Pattern.CASE_INSENSITIVE);
        Matcher matcher = pattern.matcher(EXAMPLE_TEST);
        // check all occurrence
        while (matcher.find()) {
            System.out.print("Start index: " + matcher.start());
            System.out.print(" End index: " + matcher.end() + "
");
            System.out.println(matcher.group());
        }
        // now create a new pattern and matcher to replace
whitespace with tabs
        Pattern replace = Pattern.compile("\\s+");
        Matcher matcher2 = replace.matcher(EXAMPLE_TEST);
        System.out.println(matcher2.replaceAll("\t"));
    }
}

```

JAVA

6. Java Regex Examples

The following lists typical examples for the usage of regular expressions. I hope you find similarities to your real-world problems.

6.1. Or

Task: Write a regular expression which matches a text line if this text line contains either the word "Joe" or the word "Jim" or both.

Create a project `de.vogella.regex.eitheror` and the following class.

```
package de.vogella.regex.eitheror;                                     JAVA

import org.junit.Test;

import static org.junit.Assert.assertFalse;
import static org.junit.Assert.assertTrue;

public class EitherOrCheck {
    @Test
    public void testSimpleTrue() {
        String s = "humbapumpa jim";
        assertTrue(s.matches(".*(jim|joe).*"));
        s = "humbapumpa jom";
        assertFalse(s.matches(".*(jim|joe).*"));
        s = "humbaPumpa joe";
        assertTrue(s.matches(".*(jim|joe).*"));
        s = "humbapumpa joe jim";
        assertTrue(s.matches(".*(jim|joe).*"));
    }
}
```

6.2. Phone number

Task: Write a regular expression which matches any phone number.

A phone number in this example consists either out of 7 numbers in a row or out of 3 number, a (white)space or a dash and then 4 numbers.

ONLINE TRAINING

- [Learn more ...](https://learn.vogella.com/)
(<https://learn.vogella.com/>)

EVENTS

- [25 FEB - RCP Training](http://www.vogella.com/events/25-FEB-RCP-Training)
(<http://www.vogella.com/events/25-FEB-RCP-Training>)

QUICK LINKS

- [Onsite Training](http://www.vogella.com/onsite-training)
(<http://www.vogella.com/onsite-training>)
- [Consulting](http://www.vogella.com/consulting)
(<http://www.vogella.com/consulting>)
- [Books](http://www.vogella.com/books)
(<http://www.vogella.com/books>)

SHARE



```

package de.vogella.regex.phonenumber;

import org.junit.Test;

import static org.junit.Assert.assertFalse;
import static org.junit.Assert.assertTrue;

public class CheckPhone {

    @Test
    public void testSimpleTrue() {
        String pattern = "\\d\\d\\d([,\\s])?\\d\\d\\d\\d";
        String s = "1233323322";
        assertFalse(s.matches(pattern));
        s = "1233323";
        assertTrue(s.matches(pattern));
        s = "123 3323";
        assertTrue(s.matches(pattern));
    }
}

```

6.3. Check for a certain number range

The following example will check if a text contains a number with 3 digits.

Create the Java project `de.vogella.regex.numbermatch` and the following class.

ONLINE TRAINING

- [Learn more ...](https://learn.vogella.com)
(<https://learn.vogella.com>)

EVENTS

- [25 FEB - RCP Training](http://www.vogella.com)
(<http://www.vogella.com>)

QUICK LINKS

- [Onsite Training](http://www.vogella.com)
(<http://www.vogella.com>)
- [Consulting](http://www.vogella.com)
(<http://www.vogella.com>)
- [Books](http://www.vogella.com)
(<http://www.vogella.com>)

SHARE



```

package de.vogella.regex.numbermatch;
import java.util.regex.Matcher;
import java.util.regex.Pattern;

import org.junit.Test;

import static org.junit.Assert.assertFalse;
import static org.junit.Assert.assertTrue;

public class CheckNumber {

    @Test
    public void testSimpleTrue() {
        String s= "1233";
        assertTrue(test(s));
        s= "0";
        assertFalse(test(s));
        s = "29 Kasdkf 2300 Kdsdf";
        assertTrue(test(s));
        s = "99900234";
        assertTrue(test(s));
    }

    public static boolean test (String s){
        Pattern pattern = Pattern.compile("\\d{3}");
        Matcher matcher = pattern.matcher(s);
        if (matcher.find()){
            return true;
        }
        return false;
    }
}

```

6.4. Building a link checker

The following example allows you to extract all valid links from a webpage. It does not consider links which start with "javascript:" or "mailto:".

Create a Java project called *de.vogella.regex.weblinks* and the following class:

ONLINE TRAINING

- [Learn more ...](https://learn.vogella.de)
(<https://learn.vogella.de>)

EVENTS

- [25 FEB - RCP Training](http://www.vogella.de)
(<http://www.vogella.de>)

QUICK LINKS

- [Onsite Training](http://www.vogella.de)
(<http://www.vogella.de>)
- [Consulting](http://www.vogella.de)
(<http://www.vogella.de>)
- [Books](http://www.vogella.de)
(<http://www.vogella.de>)

SHARE



```

package de.vogella.regex.weblinks;

import java.io.BufferedReader;
import java.io.IOException;
import java.io.InputStreamReader;
import java.net.MalformedURLException;
import java.net.URL;
import java.util.ArrayList;
import java.util.List;
import java.util.regex.Matcher;
import java.util.regex.Pattern;

public class LinkGetter {
    private Pattern htmltag;
    private Pattern link;

    public LinkGetter() {
        htmltag = Pattern.compile("<a\\b[^>]*href=\"[^>]*>(.*?)</a>");
        link = Pattern.compile("href=\"[^>]*\"");
    }

    public List<String> getLinks(String url) {
        List<String> links = new ArrayList<String>();
        try {
            BufferedReader bufferedReader = new BufferedReader(
                new InputStreamReader(new
URL(url).openStream()));
            String s;
            StringBuilder builder = new StringBuilder();
            while ((s = bufferedReader.readLine()) != null) {
                builder.append(s);
            }

            Matcher tagmatch =
htmltag.matcher(builder.toString());
            while (tagmatch.find()) {
                Matcher matcher = link.matcher(tagmatch.group());
                matcher.find();
                String link =
matcher.group().replaceFirst("href=\"", "")
                    .replaceFirst("\\>", "")
                    .replaceFirst("\"[\\s]?target=\"[a-zA-Z_0-9]*", "");
                if (valid(link)) {
                    links.add(makeAbsolute(url, link));
                }
            }
        } catch (MalformedURLException e) {
            e.printStackTrace();
        } catch (IOException e) {
            e.printStackTrace();
        }
        return links;
    }

    private boolean valid(String s) {
        if (s.matches("javascript:.*|mailto:.*")) {
            return false;
        }
        return true;
    }

    private String makeAbsolute(String url, String link) {
        if (link.matches("http://.*")) {

```

ONLINE TRAINING

- [Learn more ...](https://learn.vogella.com)
(https://learn.vogella.com)

EVENTS

- [25 FEB - RCP Training](http://www.vogella.com)
(http://www.vogella.com)

QUICK LINKS

- [Onsite Training](http://www.vogella.com)
(http://www.vogella.com)
- [Consulting](http://www.vogella.com)
(http://www.vogella.com)
- [Books](http://www.vogella.com)
(http://www.vogella.com)

SHARE



```

        return link;
    }
    if (link.matches("/.*") && url.matches(".*^[^/]")) {
        return url + "/" + link;
    }
    if (link.matches("[^/].*") && url.matches(".*[^/]")) {
        return url + "/" + link;
    }
    if (link.matches("/.*") && url.matches(".*[/]")) {
        return url + link;
    }
    if (link.matches("/.*") && url.matches(".*^[^/]")) {
        return url + link;
    }
    throw new RuntimeException("Cannot make the link
absolute. Url: " + url
        + " Link " + link);
}
}

```

6.5. Finding duplicated words

The following regular expression matches duplicated words.

```
\b(\w+)\s+\1\b
```

JAVA

\b is a word boundary and \1 references to the captured match of the first group, i.e., the first word.

The `(?!-in)\b(\w+)\s+\1\b` finds duplicate words if they do not start with "-in".

TIP: Add `(?s)` to search across multiple lines.

6.6. Finding elements which start in a new line

The following regular expression allows you to find the "title" word, in case it starts in a new line, potentially with leading spaces.

```
(\n\s*)title
```

TEXT

6.7. Finding (Non-Javadoc) statements

Sometimes (Non-Javadoc) are used in Java source code to indicate that the method overrides a super method. As of Java 1.6 this can be done via the `@Override` annotation and it is possible to remove these statements from your code. The following regular expression can be used to identify these statements.

```
(?s) /\* \((non-Javadoc)\).*?\/
```

TEXT

6.7.1. Replacing the DocBook table statement with AsciiDoc

You can replace statements like the following:

ONLINE TRAINING

- [Learn more ...](https://learn.vogella.com)
([https://learn.vog](https://learn.vogella.com)

EVENTS

- [25 FEB - RCP Training](http://www.vogella.com)
([http://www.vog](http://www.vogella.com)

QUICK LINKS

- [Onsite Training](http://www.vogella.com)
([http://www.vog](http://www.vogella.com)
- [Consulting](http://www.vogella.com)
([http://www.vog](http://www.vogella.com)
- [Books](http://www.vogella.com)
([http://www.vog](http://www.vogella.com)

SHARE



```
<programlisting language="java">
  <xi:include xmlns:xi="http://www.w3.org/2001/XInclude"
    parse="text" href="./examples/statements/MyClass.java" />
</programlisting>
```

CONSOLE

Corresponding regex:

```
`\s+<programlisting language="java">\R.\s+<xi:include
xmlns:xi="http://www.w3.org/2001/XInclude" parse="text"
href="./examples/(.*)\s+>\R.\s+</programlisting>`
```

CONSOLE

Target could be your example:

```
`\R[source,java]\R---\R include::res/$1[]\R---
```

CONSOLE

ONLINE TRAINING

- [Learn more ...](https://learn.vogella.com/)
(https://learn.vogella.com/)

EVENTS

- [25 FEB - RCP Training](http://www.vogella.com/2018/02/25-feb-rcp-training.html)
(http://www.vogella.com/2018/02/25-feb-rcp-training.html)

QUICK LINKS

- [Onsite Training](http://www.vogella.com/2018/02/25-feb-rcp-training.html)
(http://www.vogella.com/2018/02/25-feb-rcp-training.html)

Know SQL?

Connect to 80+ data sources (NoSQL, Big Data, SaaS, etc.) through standard SQL queries!

adata

LEARN MORE

ODBC | JDBC | ADO.NET | ODATA


7. Processing regular expressions in Eclipse

The Eclipse IDE allows to perform search and replace across a set of files using regular expressions. In Eclipse use the `Ctrl + H` shortcut to open the *Search* dialog.

Select the *File Search* tab and check the *Regular expression* flag before entering your regular expression. You can also specify the file type and the scope for the search and replace operation.

The following screenshots demonstrate how to search for the `<![CDATA[]]>` XML tag with leading whitespace and how to remove the whitespace.


image::regularexpressioneclipse10.png[Search and replace in Eclipse part 1,pdfwidth=40%]

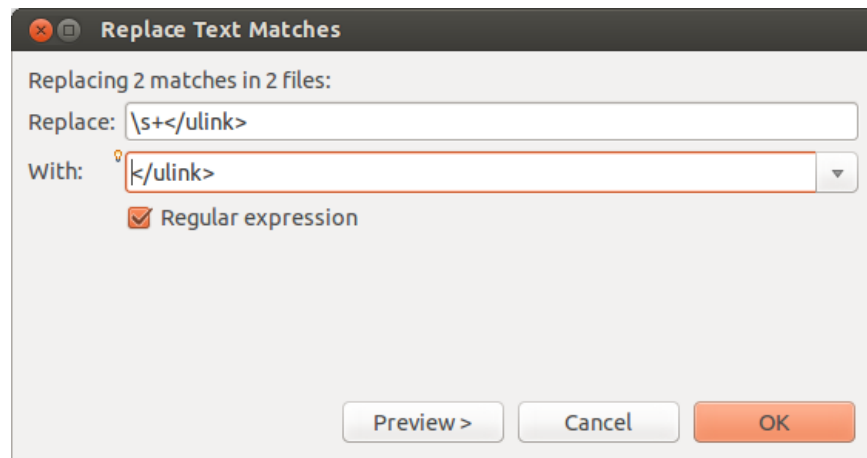

SHARE



The resulting dialog allows you to review the changes and remove elements which should not be replaced. If you press the OK button, the changes are applied.

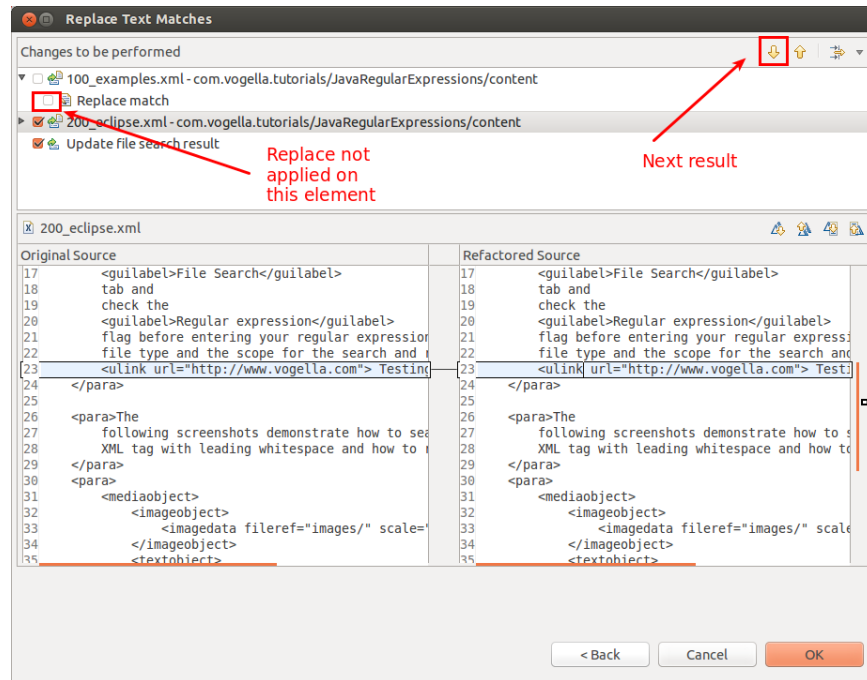

8. Links and Literature

[Regular-Expressions.info on Using Regular Expressions in Java](http://www.regular-expressions.info/java.html)

(<http://www.regular-expressions.info/java.html>)

[Regulare xpressions examples](http://www.regular-expressions.info/examples.html)

(<http://www.regular-expressions.info/examples.html>)


[The Java Tutorials: Lesson: Regular Expressions](http://docs.oracle.com/javase/tutorial/essential/regex/)

(<http://docs.oracle.com/javase/tutorial/essential/regex/>)


9. vogella training and consulting support



(<https://learn.vogella.com/>)



(<http://www.vogella.com/training/>)



(<http://www.vogella.com/consulting/>)

Appendix A: Copyright, License and Source code

Copyright © 2012-2018 vogella GmbH. Free use of the software examples is granted under the terms of the [Eclipse Public License 2.0](https://www.eclipse.org/legal/epl-2.0) (<https://www.eclipse.org/legal/epl-2.0>). This tutorial is published under the [Creative Commons Attribution-NonCommercial-ShareAlike 3.0 Germany](http://creativecommons.org/licenses/by-nc-sa/3.0/de/deed.en) (<http://creativecommons.org/licenses/by-nc-sa/3.0/de/deed.en>) license.

ONLINE TRAINING

- [Learn more ...](https://learn.vogella.com/)
(<https://learn.vogella.com/>)

EVENTS

- [25 FEB - RCP Training](http://www.vogella.com/2018/02/25-feb-rcp-training/)
(<http://www.vogella.com/2018/02/25-feb-rcp-training/>)

QUICK LINKS

- [Onsite Training](http://www.vogella.com/onsite-training/)
(<http://www.vogella.com/onsite-training/>)
- [Consulting](http://www.vogella.com/consulting/)
(<http://www.vogella.com/consulting/>)
- [Books](http://www.vogella.com/books/)
(<http://www.vogella.com/books/>)

SHARE



[Licence](http://www.vogella.com/license.html) (http://www.vogella.com/license.html)

[Source code](http://www.vogella.com/code/index.html) (http://www.vogella.com/code/index.html)

[Support free tutorials](http://www.vogella.com/support.html) (http://www.vogella.com/support.html)

Last updated 2018-10-25 11:38:23 +02:00

ONLINE TRAINING

- [Learn more ...](https://learn.vogella.com)
(https://learn.vogella.com)

EVENTS

- [25 FEB - RCP Training](http://www.vogella.com/events/25-FEB-RCP-Training)
(http://www.vogella.com/events/25-FEB-RCP-Training)

QUICK LINKS

- [Onsite Training](http://www.vogella.com/onsite-training)
(http://www.vogella.com/onsite-training)
- [Consulting](http://www.vogella.com/consulting)
(http://www.vogella.com/consulting)
- [Books](http://www.vogella.com/books)
(http://www.vogella.com/books)

SHARE

