


# Challenge #5: Implementation of head tags

TENNESSE C. SUETA 1 BS INFOSYS-A

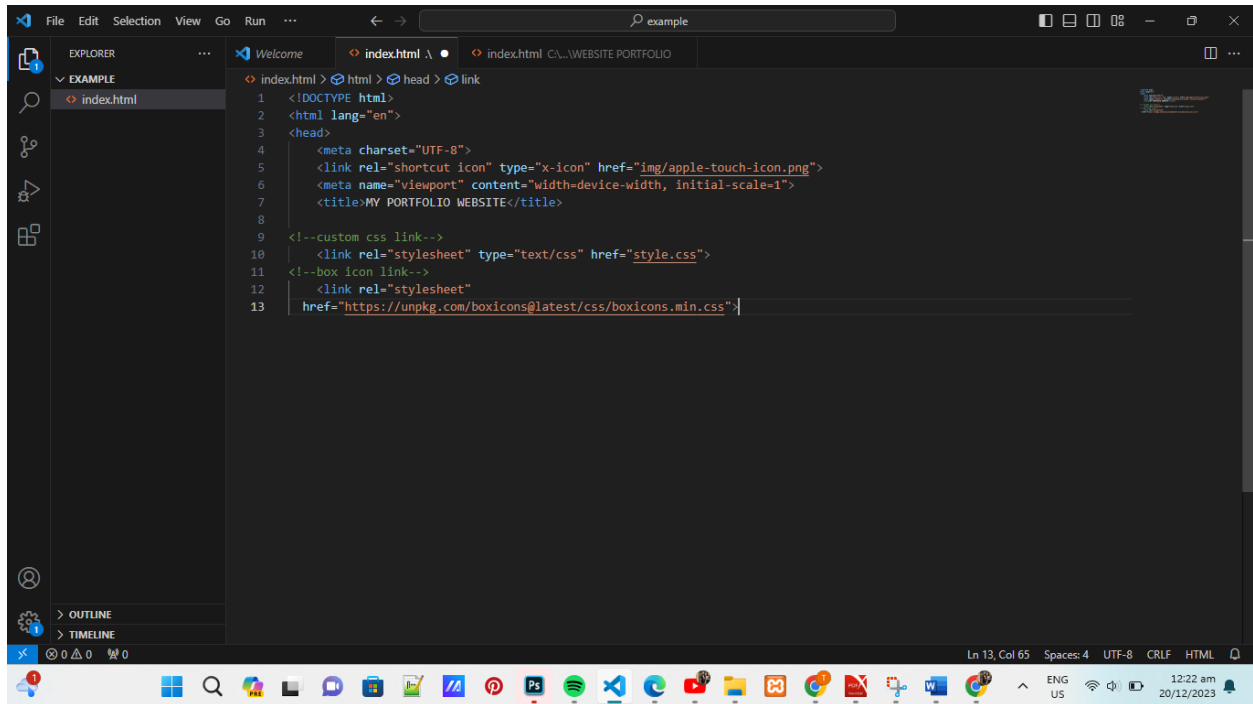

The screenshot shows a code editor with a dark theme. The Explorer panel on the left shows a file named 'index.html'. The main editor area displays the following HTML code:

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8">
5   <link rel="shortcut icon" type="x-icon" href="img/apple-touch-icon.png">
6   <meta name="viewport" content="width=device-width, initial-scale=1">
7   <title>MY PORTFOLIO WEBSITE</title>
8
9   <!-- custom css link -->
10  <link rel="stylesheet" type="text/css" href="style.css">
11  <!-- box icon link -->
12  <link rel="stylesheet"
13    href="https://unpkg.com/boxicons@latest/css/boxicons.min.css">
```

The status bar at the bottom indicates the cursor is at line 13, column 65, with 4 spaces, UTF-8 encoding, CRLF line endings, and HTML document type.



- **<title>**: This tag sets the title of the page that appears in the browser tab and search engine results.
- **<meta charset="UTF-8">**: This tag specifies the character encoding of the page, which is important for displaying special characters correctly.
- **<meta name="viewport" content="width=device-width, initial-scale=1.0">**: This tag sets the viewport meta tag, which is used to control how the page is displayed on different devices. In this case, we're setting it to fit the width of the device and scaling it to 100%.
- **<link rel="stylesheet" href="style.css">**: This tag links an external CSS file to your HTML document, which allows you to apply styles to your page. We're linking a file called "style.css". You can replace this with the path to your own CSS file.