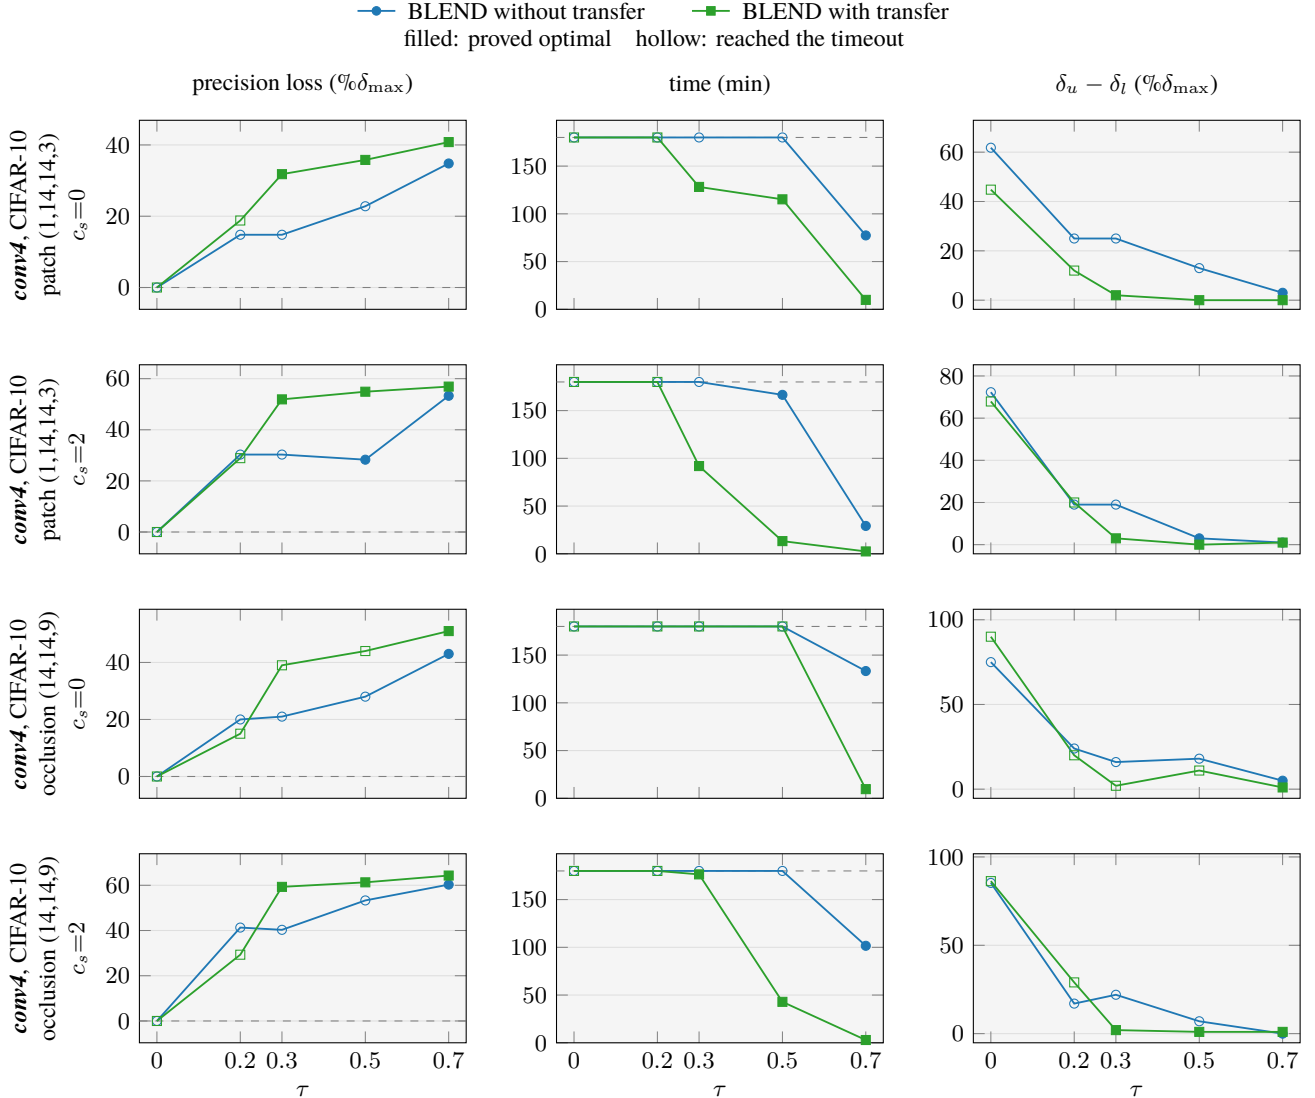

BLEND without transfer
BLEND with transfer
filled: proved optimal
hollow: reached the timeout
precision loss (%$\delta_{\max}$)
time (min)
$\delta_u - \delta_l$ (%$\delta_{\max}$)
conv4, CIFAR-10 patch (1,14,14,3) c_s=0
conv4, CIFAR-10 patch (1,14,14,3) c_s=2
conv4, CIFAR-10 occlusion (14,14,9) c_s=0
conv4, CIFAR-10 occlusion (14,14,9) c_s=2
0
0.2
0.3
0.5
0.7
τ