

Webflux

12 Reactive Redis 이론

Reactive Redis

3.

Webflux

Reactive Redis

key/value nosql database

Reactive Redis

3.

Webflux


Reactive Redis

asynchrononous, nonblocking

Reactive Redis


3.

Webflux

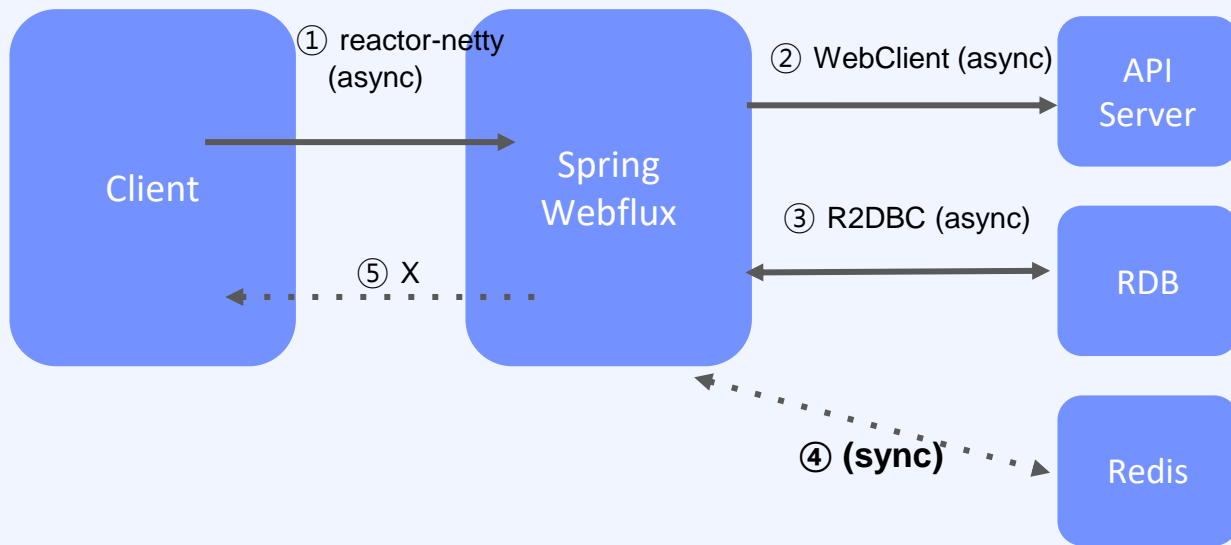

Reactive Redis

- Reactive Stream
- Nonblocking I/O
- Spring Data Reactive Redis
 - **lettuce**

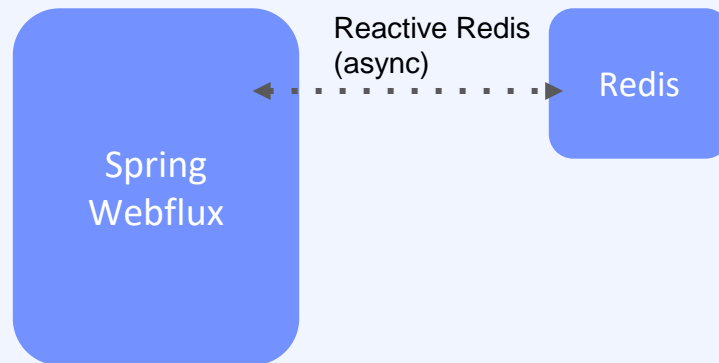

Reactive Redis

3.

Webflux

The screenshot displays the Spring.io project catalog interface. At the top, it says 'Reactive' and 'Press ⌘ for multiple adds'. The catalog lists several projects, each with a title, a category tag, and a description. The project 'Spring Data Reactive Redis' is highlighted with a red rectangular box. The projects listed are:

- Spring Reactive Web** (WEB): Build reactive web applications with Spring WebFlux and Netty.
- Spring Data R2DBC** (SQL): Provides Reactive Relational Database Connectivity to persist data in SQL stores using Spring Data in reactive applications.
- Spring Data Reactive Redis** (NOSQL): Access Redis key-value data stores in a reactive fashion with Spring Data Redis. (This entry is highlighted with a red box)
- Spring Data Reactive for Apache Cassandra** (NOSQL): Access Cassandra NoSQL Database in a reactive fashion.
- Spring Data Reactive Couchbase** (NOSQL): Access Couchbase NoSQL database in a reactive fashion with Spring Data Couchbase.
- Hilla** (WEB): An open source framework that integrates a Spring Boot Java backend with a reactive TypeScript frontend.
- Spring Data Redis (Access+Driver)** (NOSQL): Advanced and thread-safe Java Redis client for synchronous, asynchronous, and reactive usage. Supports

Spring Data Reactive Redis